


TECHNICAL DATA DATA SHEET 5501, REV. A

SERIES TYPE	MIN BREAKDOWN VOLTAGE $V_{(BR)}$ @ $I_{(BR)}$		WORKING PEAK REVERSE VOLTAGE V_{RWM}	MAXIMUM STANDBY CURRENT I_D	MAX. CLAMP. VOLTAGE V_C @ I_{PP} $t_p = 1ms$	MAX. PEAK PULSE CURRENT $t_p = 1ms, t_r = 10\mu s$ I_{PP}	MAX. TEMP. COEFFICIENT $V_{(BR)}$
1500W	Vdc	mA dc	Vdc	μA dc	V(pk)	A(pk)	% / °C
1N5557	54.00	1	49.00	5	78.5	19.0	.096
1N5652A	58.90	1	53.00	5	85.0	17.7	.104
1N5653A	64.60	1	58.10	5	92.0	16.3	.104
1N5654A	71.30	1	64.10	5	103.0	14.6	.105
1N5655A	77.90	1	70.10	5	113.0	13.3	.105
1N5656A	86.50	1	77.80	5	125.0	12.0	.106
1N5657A	95.00	1	85.50	5	137.0	11.0	.106
1N5658A	105.00	1	94.00	5	152.0	9.9	.107
1N5659A	114.00	1	102.00	5	165.0	9.1	.107
1N5660A	124.00	1	111.00	5	179.0	8.4	.107
1N5661A	143.00	1	128.00	5	207.0	7.2	.108

PACKAGE DIMENSIONS (inches/mm)

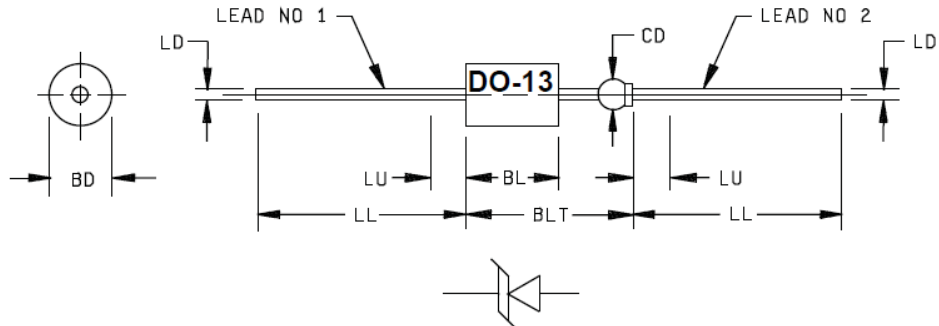

Symbol	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
BD	.215	.235	5.46	5.97	
BL	.293	.357	7.44	9.07	3
BLT		.570		14.48	
CD	.045	.100	1.14	2.54	5
LD	.025	.035	0.64	0.89	
LL	1.000	1.625	25.40	41.28	4
LU		.188		4.78	4

NOTES:

1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. The major diameter is essentially constant along its length.
4. Within this zone, diameter may vary to allow for lead finishes and irregularities.
5. Dimension to allow for pinch or seal deformation anywhere along tubulation.
6. Lead 1 (cathode) shall be electrically connected to the case.
7. In accordance with ASME Y14.5M, diameters are equivalent to Φ x symbology.

PKG: DO-13

TECHNICAL DATA DATA SHEET 5501, REV. A

PART ORDERING INFORMATION

The following part numbers can be screened and tested to the military screening flow. The parts are marked in accordance with the testing performed, example:

Sensitron Screening Level	*Part Number-- Leaded Package (example for 1N5555)
1N	1N5555
JAN	JAN1N5555
JANTX	JANTX1N5555
JANTXV	JANTXV1N5555

DISCLAIMER:

1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).

2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.

3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.

4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.

5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.

6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.

7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.