

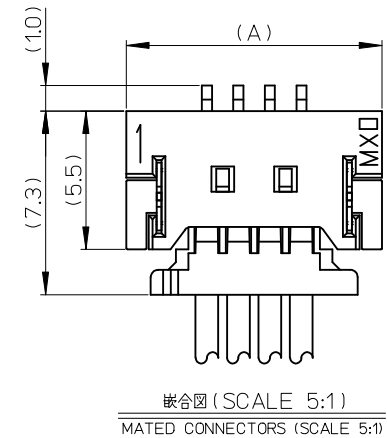


ロック形状図
LOCK CONFIGURATION

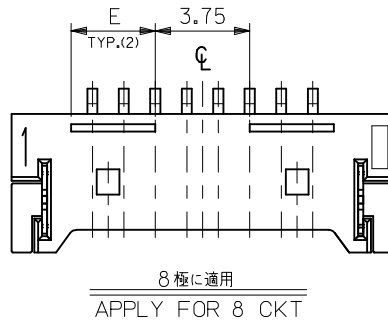

RELEASED	EC NO: J2016-1195 DRWN:QHE31 CHK'D:SAKIYAMA APPR:TKANEKO	2016/05/25 2016/05/25 2016/05/26	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
				0.25 UNDER	UNDER	± 0.03	DRAWN BY	DATE	TITLE 1.25 W/B CONN WAFER ASSY FOR SMT - LOW-HALOGEN - molex				
				0.25 OVER	0.5 UNDER	± 0.05	QHE31	2016/05/25					
				0.5 OVER	1.0 UNDER	± 0.1	CHECKED BY	DATE	DOCUMENT NO. SD-53780-009				
				1.0 OVER	10 UNDER	± 0.2	SAKIYAMA	2016/05/25					
				10 OVER	30 UNDER	± 0.25	APPROVED BY	DATE					
				30 OVER		± 0.3	TKANEKO	2016/05/26	SHEET NO. 2 OF 2				
				ANGULAR ±3 °			MATERIAL NO.						
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A3	SEE CHART					
REV	0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											

10

9

8

7

6

5

4


3

2



1

NOTES

- 梱包数量：1500個/リール
NUMBER OF CONNECTORS : 1500PCS/REEL
- リードテープ長さ LEAD TAPE LENGTH

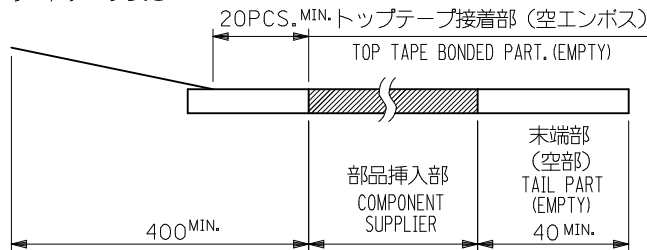引き出し方向
PULL OUT
DIRECTION

- 材料 (MATERIAL)
キャリアテープ (CARRIER TAPE) : ポリプロピレン (POLYPROPYLENE)
トップテープ (TOPTAPE) : PET, PE, PEF
リール (REEL) : ポリスチレン (PS) <リサイクル材を含む>
POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED>
- 53780-87** の詳細寸法については、図面 SD-53780-009 を参照下さい。
RE DETAILED DIMENSIONS, SEE RSD-53780-019.
- ELV 及び RoHS 適合品
ELV AND RoHS COMPLIANT.

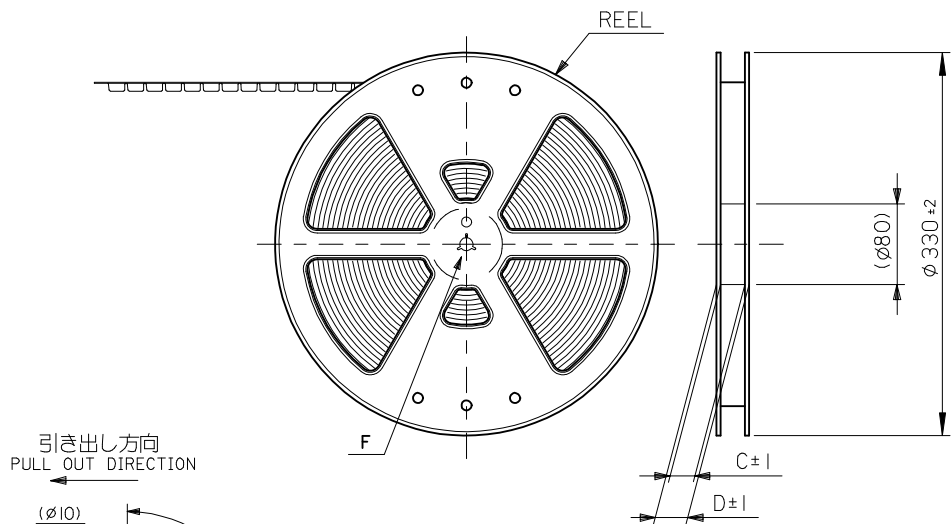引き出し方向
PULL OUT
DIRECTION

DETAIL F

RELEASED EC NO: J2016-1195 DRWN: QHE31 CHKD: SAKIYAMA APPR: TKANEKO	DESCRIPTION REV O	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC		THIRD ANGLE PROJECTION
		0.25 UNDER	UNDER	± 0.03	DRAWN BY	DATE	TITLE			
		0.25 OVER	0.5 UNDER	± 0.05	QHE31	2016/05/25	1.25 W/B CONN WAFER ASSY FOR SMT - LOW-HALOGEN -			
		0.5 OVER	1.0 UNDER	± 0.1	CHECKED BY	DATE				
		1.0 OVER	10 UNDER	± 0.2	SAKIYAMA	2016/05/25				
		10 OVER	30 UNDER	± 0.25	APPROVED BY	DATE				
		30 OVER		± 0.3	TKANEKO	2016/05/26				
		ANGULAR ±3 °			MATERIAL NO.	DOCUMENT NO.		SHEET NO.		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A3	SEE CHART		SD-53780-010	1 OF 2			
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										

1.25 W/B CONN WAFER
ASSY FOR SMT
- LOW-HALOGEN -


molex

SD-53780-010


SHEET NO.
1 OF 2

10 9 8 7 6 5 4 3 2 1

キャリアテープ幅 24mm

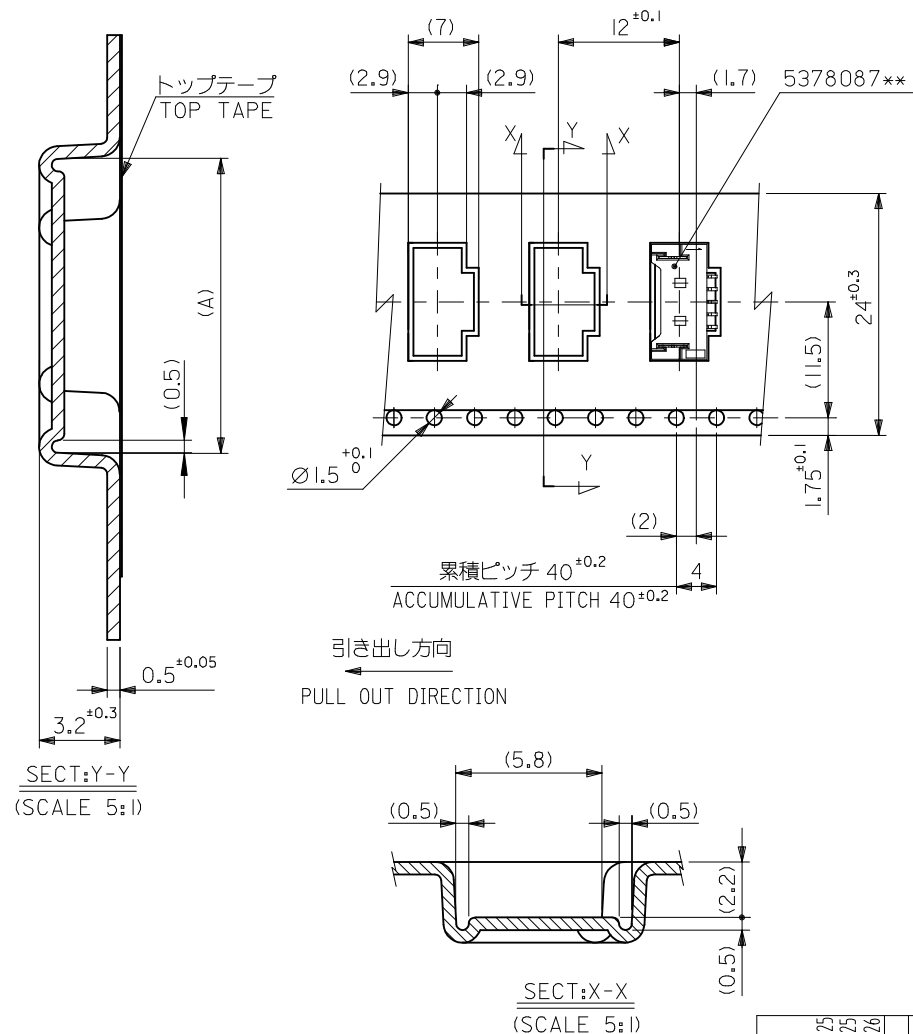

キャリアテープ幅 16mm

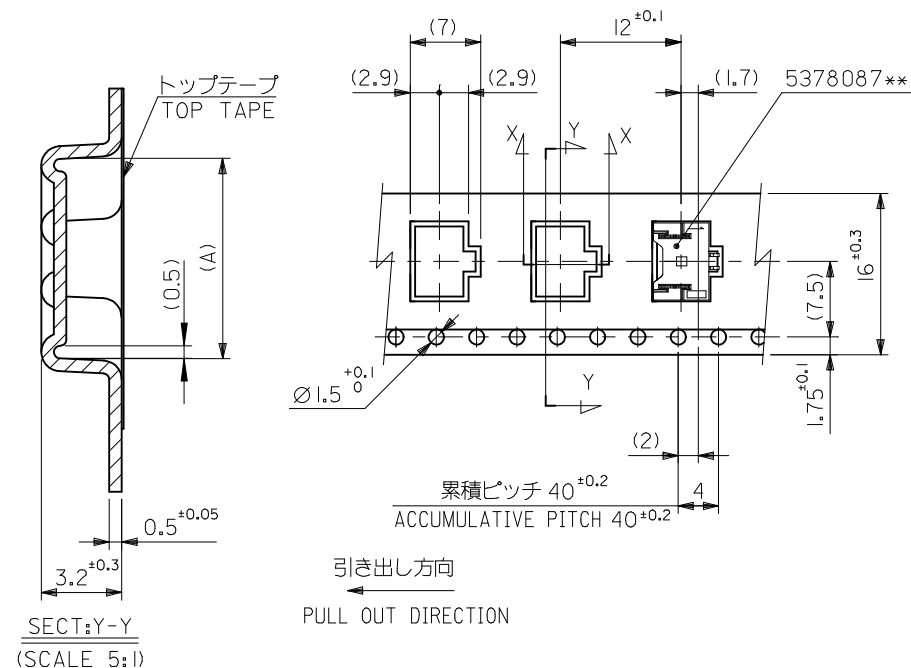

24	29.4	25.4	15.45	537808608	8
			12.95	537808606	6
			11.7	537808605	5
			10.45	537808604	4
16	21.4	17.4	9.2	537808603	3
			7.95	537808602	2
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	(A)	MATERIAL NO.	極数 CKT.

RELEASED EC NO: J2016-1195 DRWN:QHE31 CHKD:SAKIYAMA APPR:TKANEKO O	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
		0.25 UNDER	UNDER	± 0.03	DRAWN BY	DATE	TITLE 1.25 W/B CONN WAFER ASSY FOR SMT - LOW-HALOGEN - molex		
		0.25 OVER	0.5 UNDER	± 0.05	QHE31	2016/05/25			
		0.5 OVER	1.0 UNDER	± 0.1	CHECKED BY	DATE			
		1.0 OVER	10 UNDER	± 0.2	SAKIYAMA	2016/05/25			
		10 OVER	30 UNDER	± 0.25	APPROVED BY	DATE	DOCUMENT NO. SD-53780-010		
		30 OVER		± 0.3	TKANEKO	2016/05/26			
		ANGULAR ±3 °			MATERIAL NO.				
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			SHEET NO. 2 OF 2	