


STRAIN RELIEF OPTION AVAILABILITY	Nbr OF POSITIONS
--------------------------------------	------------------

1/6	04
0/1/2/3/6	06
0/1/2/3/6	08
0/1/2/3/6	10
0/1/2/3/6	14
0/1/2/3/6	16
0/1/2/3/6	18
0/1/2/3/6	20
0/1/3	24
0/1/2/3/6	26
0/1/2/3/6	30
0/1/2/3/6	34
0/1/2/3/6	40
0/1/2/3/6	50
0/1/2/3/6	60
0/1/2/3/6	64


PLATING
0.76µm GOLD ON CONTACT AREA
1.27 µm Ni REMAINDER OF PRODUCT

624
304
204 / 224
004


DASHES NOT
AVAILABLE




WITHOUT STRAIN RELIEF

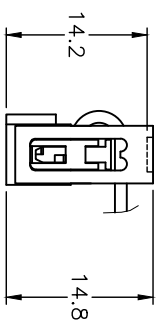


WITH LOW PROFILE STRAIN RELIEF




WITH STANDARD STRAIN RELIEF

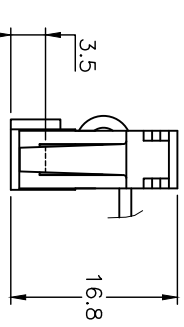


WITH LATCHING STRAIN RELIEF

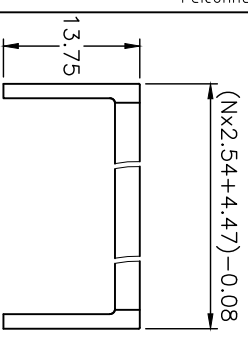

LOW PROFILE
STRAIN RELIEF

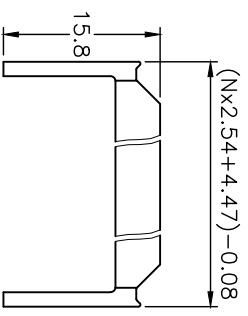

STANDARD
STRAIN RELIEF

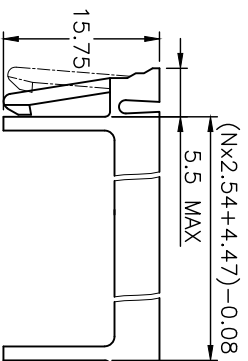

LATCHING STRAIN RELIEF
FOR SLIM HEADER

PRODUCT NUMBER	WITH CENTRAL KEY	WITHOUT STANDARD	WITHOUT WITHOUT	LOW PROFILE	LATCHING
71600-6YY(B)LF	●				●
71600-3YY(B)LF		●			
71600-2YY(B)LF	●				
71600-1YY(B)LF	●		●		
71600-0YY(B)LF	●				

mat'l. code	surface	tolerance	projection	product family
ISO 1302	ISO 406	ISO 1101	mm	QUICKIE
ISO 1302	ISO 406	ISO 1101	mm	IDC RECEIPT
ISO 1302	ISO 406	ISO 1101	mm	DR
ISO 1302	ISO 406	ISO 1101	mm	71600
ISO 1302	ISO 406	ISO 1101	mm	CUSTOMER Drawing
ISO 1302	ISO 406	ISO 1101	mm	size
ISO 1302	ISO 406	ISO 1101	mm	A3
ISO 1302	ISO 406	ISO 1101	mm	sheet 2 of -
ISO 1302	ISO 406	ISO 1101	mm	6