



Construction

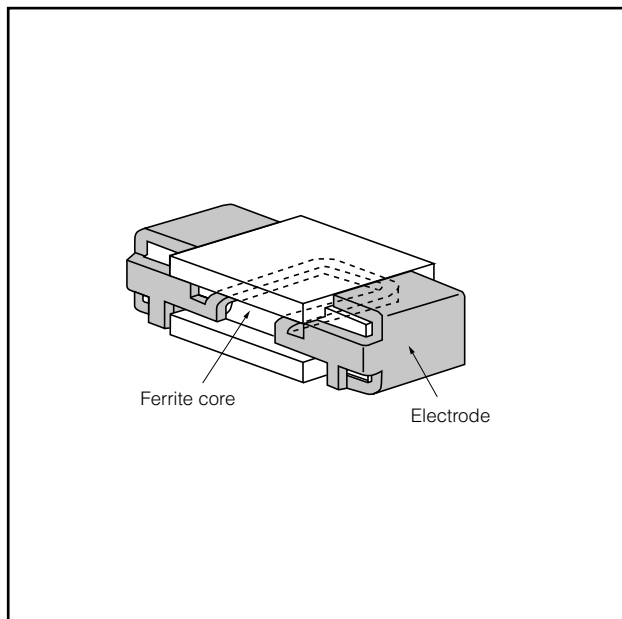


Dimensions in mm (not to scale)

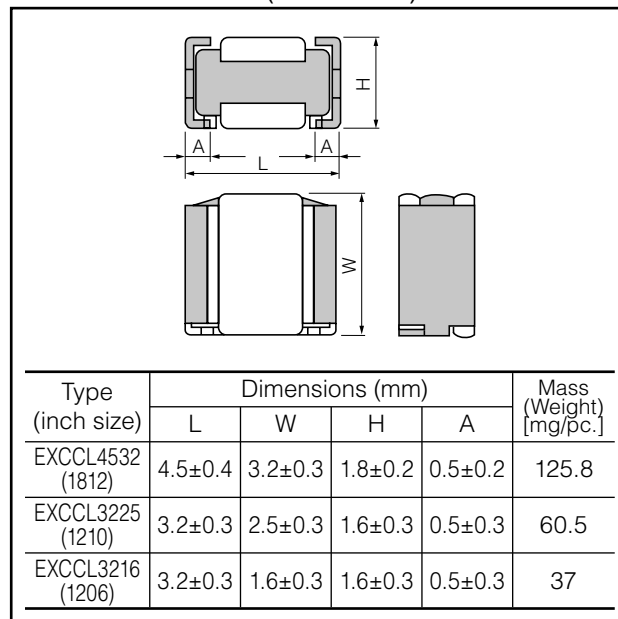


Type: EXCML


Explanation of Part Numbers

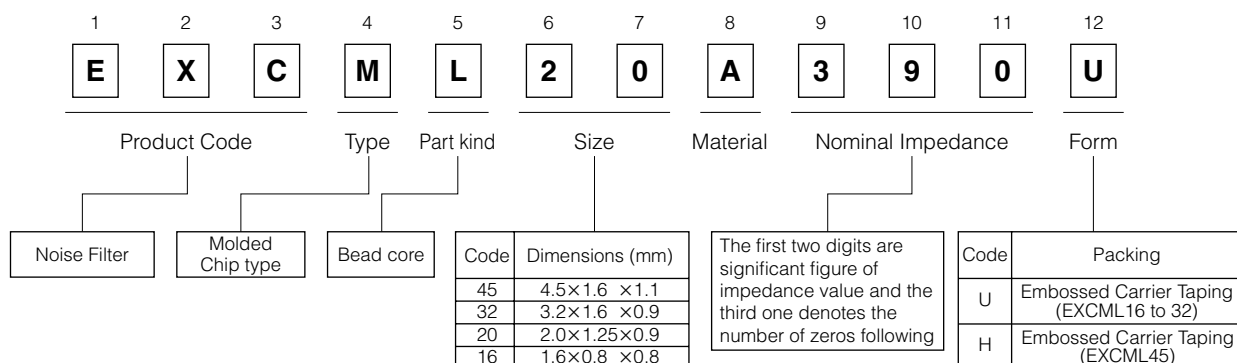

Construction

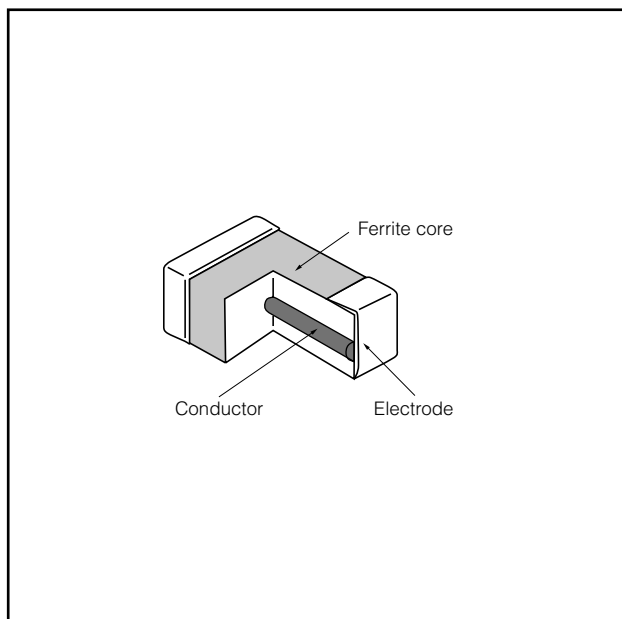


Dimensions in mm (not to scale)

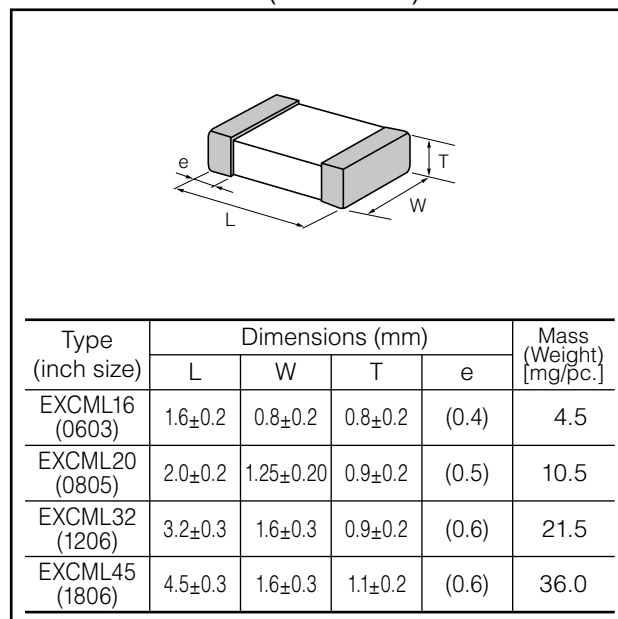


■ Type: EXC3B


● Explanation of Part Numbers

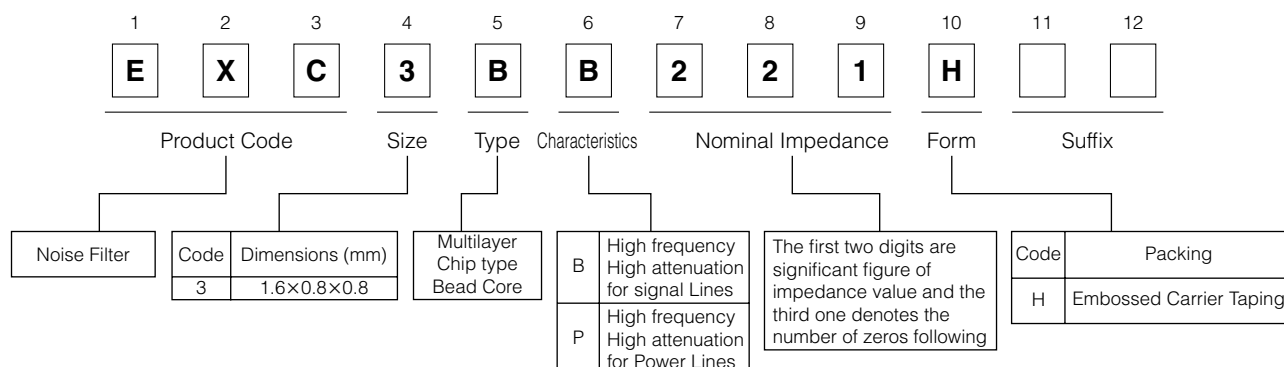

■ Construction

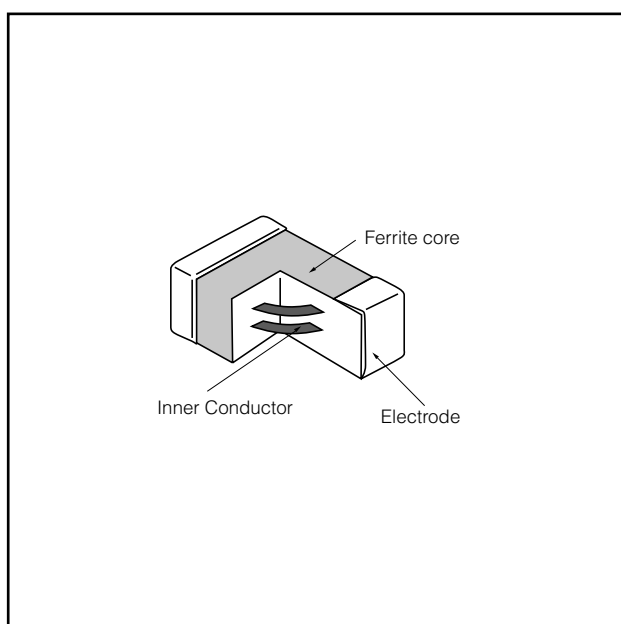

■ Dimensions in mm (not to scale)

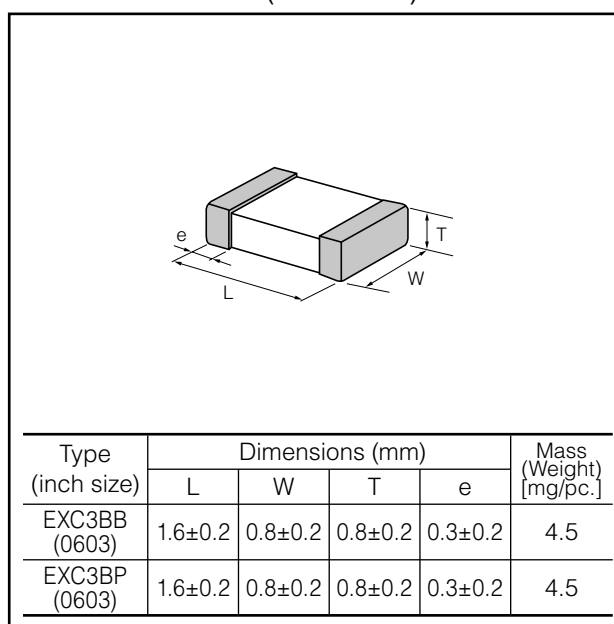

■ Ratings

| Type | Part Number | Impedance | | Rated Current (mA DC) | DC Resistance (Ω) max. |
|------|--------------|----------------|---------|--------------------------|---------------------------|
| | | (Ω) at 100 MHz | tol.(%) | | |
| 4532 | EXCCL4532U1 | 115 | ±25 | 2000 | 0.1 |
| 3225 | EXCCL3225U1 | 45 | | 2000 | 0.05 |
| 3216 | EXCCL3216U1 | 25 | | 2000 | 0.05 |
| 4516 | EXCML45A910H | 91 | | 3000 | 0.016 |
| 3216 | EXCML32A680U | 68 | | 3000 | 0.012 |
| 2012 | EXCML20A390U | 39 | | 4000 | 0.008 |
| 1608 | EXCML16A270U | 27 | | 4000 | 0.006 |
| 1608 | EXC3BP600H | 60 | | 1000 | 0.07 |
| | EXC3BP121H | 120 | | 500 | 0.1 |
| | EXC3BB221H | 220 | | 200 | 0.3 |
| | EXC3BB601H | 600 | | 100 | 0.8 |
| | EXC3BB102H | 1000 | | 50 | 1 |

● Category Temperature Range -25 °C to +85 °C

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

■ Impedance Characteristics (Reference Data)


Measured by HP4291A

|Z| : Impedance


R : Resistance

X : Reactance


●EXCCL4532U1 (4532)

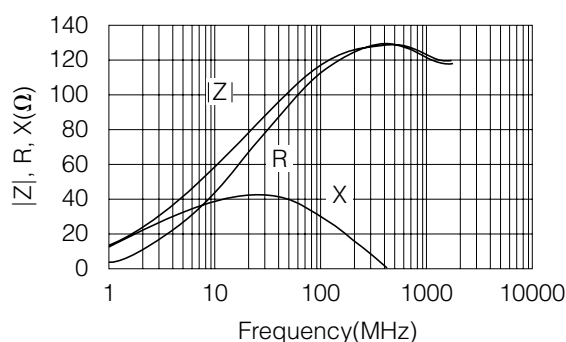


●EXCML16A270U (1608)

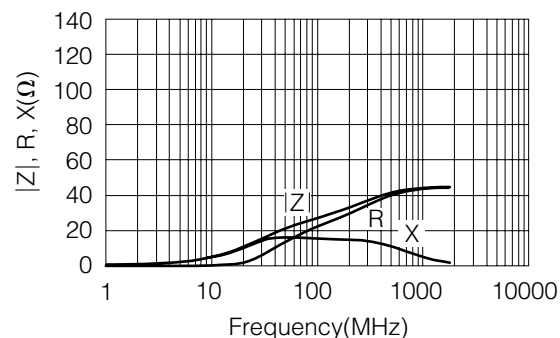


●EXCCL3225U1 (3225)

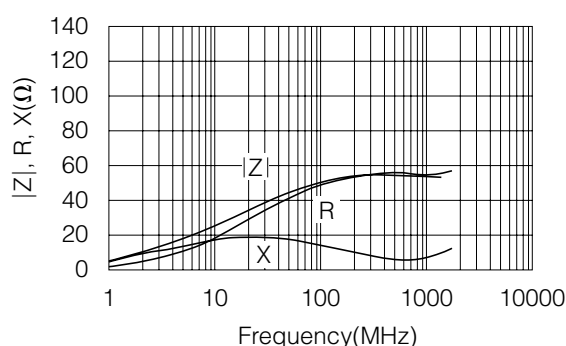


●EXCML20A390U (2012)

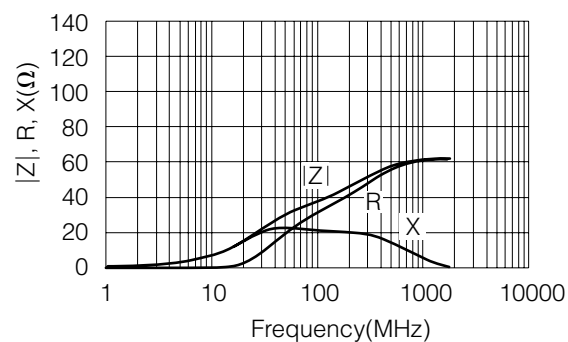


●EXCCL3216U1 (3216)

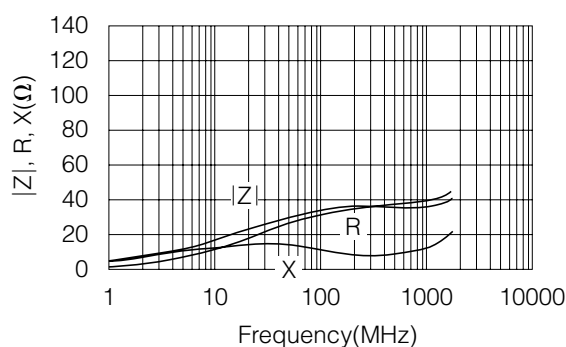

●EXCML32A680U (3216)

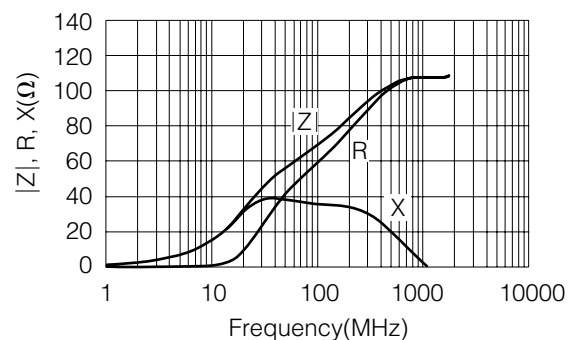

●EXCML45A910H (4516)

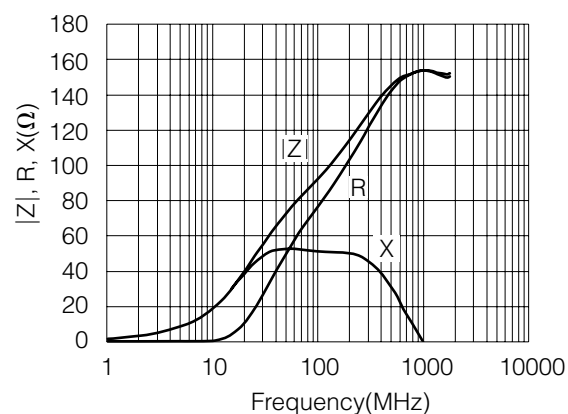

■ Impedance Characteristics (Reference Data)


Measured by HP4291A

|Z| : Impedance


R : Resistance

X : Reactance


●EXC3BB221H (1608)

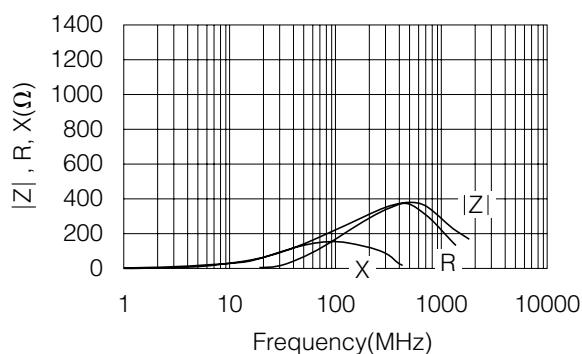


●EXC3BP121H (1608)

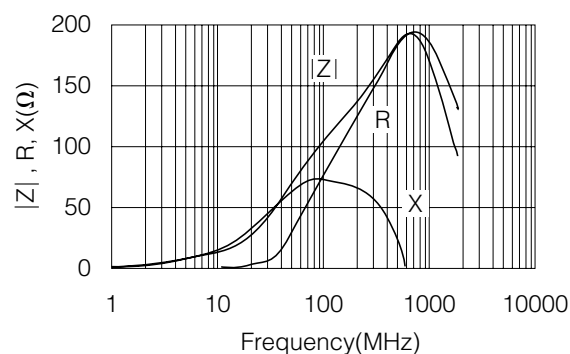


●EXC3BB601H (1608)

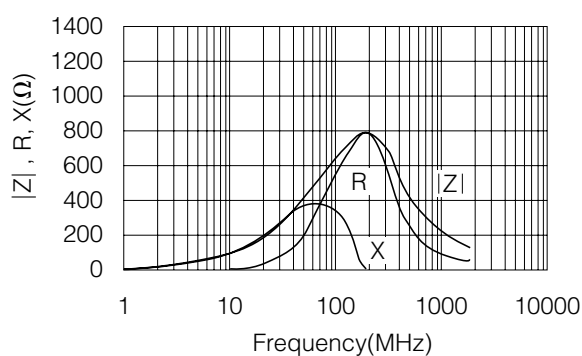

●EXC3BP600H (1608)

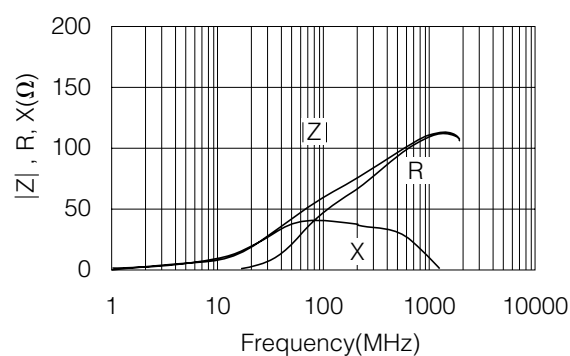

●EXC3BB102H (1608)

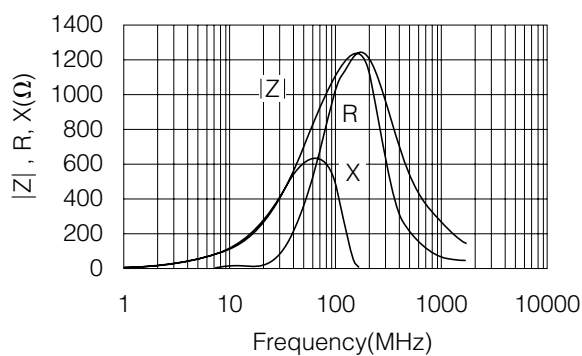


■ Packaging Methods (Taping)


● Standard Quantity

| Part Number | Kind of Taping | Pitch (P ₁) | Quantity |
|--------------|-------------------------|-------------------------|----------------|
| EXCCL4532U1 | Embossed Carrier Taping | 8 mm | 1000 pcs./reel |
| EXCCL3225U1 | | 4 mm | 2000 pcs./reel |
| EXCCL3216U1 | | | |
| EXCML45A910H | | | |
| EXCML32A680U | | 4 mm | 3000 pcs./reel |
| EXCML20A390U | | | |
| EXCML16A270U | | | |
| EXC3B□□□□H | | | 4000 pcs./reel |

● Embossed Carrier Taping

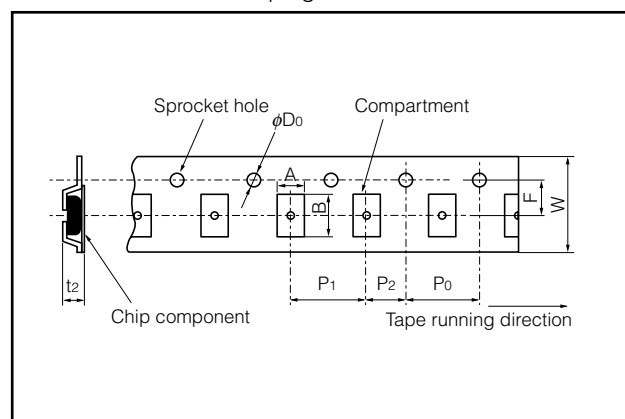

● Taping Reel

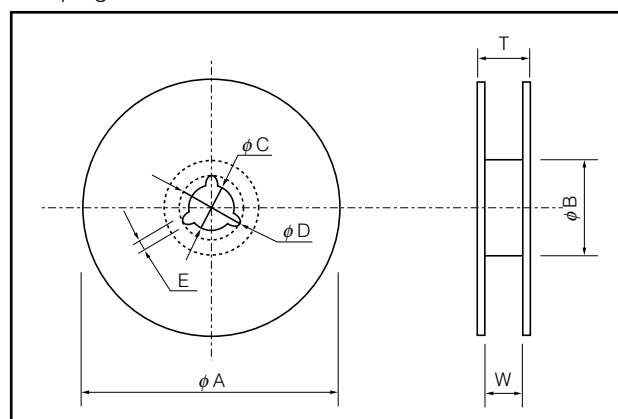

Embossed Carrier Dimensions (mm)

| Part Number | A | B | W | F | P ₁ | P ₂ | P ₀ | ϕD ₀ | t ₂ |
|--------------|---------|---------|----------|---------|----------------|----------------|----------------|-----------------|----------------|
| EXCCL4532U1 | 3.6±0.2 | 4.9±0.2 | 12.0±0.2 | 5.5±0.1 | 8.0±0.1 | 2.0±0.1 | 4.0±0.1 | 1.5±0.1 | 2.4 max. |
| EXCCL3225U1 | 2.9±0.2 | 3.6±0.2 | 8.0±0.2 | 3.5±0.1 | 4.0±0.1 | | | | 2.1 max. |
| EXCCL3216U1 | 2.0±0.2 | 3.6±0.2 | | | | | | | 1.8 max. |
| EXCML45A910H | 1.9±0.2 | 4.8±0.2 | 12.0±0.2 | 5.5±0.1 | | | | | 1.6 max. |
| EXCML32A680U | 1.9±0.2 | 3.5±0.2 | 8.0±0.2 | 3.5±0.1 | | | | | |
| EXCML20A390U | 1.5±0.2 | 2.3±0.2 | | | | | | | |
| EXCML16A270U | 1.0±0.2 | 1.8±0.2 | | | | | | | |
| EXC3B□□□□H | 1.0±0.1 | 1.8±0.1 | | | | | | | |

Standard Reel Dimensions (mm)

| Part Number | ϕA | ϕB | ϕC | ϕD | E | W | T |
|--------------|------------------------------------|----------|----------|----------|---------|----------|-----------|
| EXCCL4532U1 | 180.0 ⁰ _{-3.0} | 60.0±1.0 | 13.0±0.5 | 21.0±0.8 | 2.0±0.5 | 13.0±0.3 | 16.5 max. |
| EXCCL3225U1 | | | | | | 9.0±0.3 | 13 max. |
| EXCCL3216U1 | | | | | | 13.0±0.3 | 16.5 max. |
| EXCML45A910H | | | | | | 9.0±0.3 | 13 max. |
| EXCML32A680U | | | | | | | |
| EXCML20A390U | | | | | | | |
| EXCML16A270U | | | | | | | |
| EXC3B□□□□H | | | | | | | |

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

■ Recommended Land Pattern Dimensions in mm (not to scale)


| (mm) | | | |
|--------------|------------|------------|------------|
| Part Number | A | B | C |
| EXCCL4532U1 | 3 | 5.4 | 2.8 |
| EXCCL3225U1 | 1.7 | 4.1 | 2.1 |
| EXCCL3216U1 | 1.7 | 4.1 | 1.2 |
| EXCML45A910H | 2.6 to 3 | 5.5 to 6.5 | 1.2 to 1.6 |
| EXCML32A680U | 1.6 to 2 | 4 to 5 | 1.2 to 1.6 |
| EXCML20A390U | 0.8 to 1.2 | 3 to 4 | 1 to 1.2 |
| EXCML16A270U | 0.6 to 1 | 2 to 3 | 0.8 to 1 |
| EXC3B□□□□H | 0.8 to 1 | 2 to 2.6 | 0.8 to 1 |

■ Recommended Soldering Conditions

Recommendations and precautions are described below.

● Recommended soldering conditions for reflow

- Reflow soldering shall be performed a maximum of two times.
- Please contact us for additional information when used in conditions other than those specified.
- Please measure the temperature of the terminals and study every kind of solder and printed circuit board for solderability before actual use.

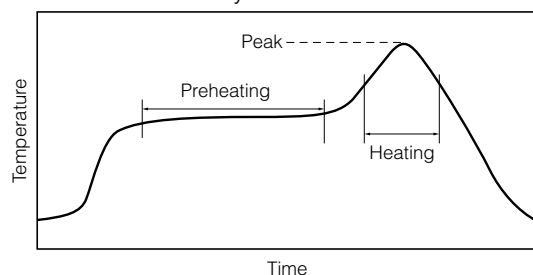

For soldering (Example : Sn-37Pb)

| | Temperature | Time |
|--------------|------------------|---------------|
| Preheating | 140 °C to 160 °C | 60 s to 120 s |
| Main heating | Above 200 °C | 30 s to 40 s |
| Peak | 235 ± 10 °C | max. 10 s |

For lead-free soldering (Example : Sn/3Ag/0.5Cu)

| | Temperature | Time |
|--------------|------------------|---------------|
| Preheating | 150 °C to 170 °C | 60 s to 120 s |
| Main heating | Above 230 °C | 30 s to 40 s |
| Peak | max. 260 °C | max. 10 s |

● Flow soldering

- Flow soldering may cause this product to come off because the adhesiveness of the product element is low. Please consult our sales representative in advance about flow soldering.

<Repair with hand soldering>

- Preheat with a blast of hot air or similar method. Use a soldering iron with a tip temperature of 350 °C or less. Solder each electrode for 3 seconds or less.
- Never touch this product with the tip of a soldering iron.

⚠ Safety Precautions

The following are precautions for individual products. Please also refer to the common precautions for Noise Suppression Device shown on this catalog.

1. Use rosin-based flux or halogen-free flux.
2. For cleaning, use an alcohol-based cleaning agent. Before using any other type, consult with our sales person in advance.
3. Do not apply shock to Chip Bead Cores (hereafter called the bead cores) or pinch them with a hard tool (e.g. pliers and tweezers). Otherwise, their bodies may be chipped, affecting their performance.
Excessive mechanical stress may damage the bead cores. Handle with care.
4. Store the bead cores in a location with a temperature ranging from -5 °C to +40 °C and a relative humidity of 40 % to 60 %, where there are no rapid changes in temperature or humidity.
5. Use the bead cores within a year (EXC3B Type: within half a year) after the date of the outgoing inspection indicated on the packages.