

Resistance Weld SMD Crystal

Model: HC49SDF

RoHS Compliant / Pb Free



Rev. 3/30/2015

Page 2 of 3

http://www.foxonline.com/need_a_sample.htm

Need a
Sample®

• TAPE SPECIFICATIONS (millimeters)								• REEL SPECIFICATIONS (millimeters)							
MODEL	A	B	C	D	E	F	STD Reel QTY	MODEL	G	H	I	J	K	L	M
HC49SDF	Ø1.5	4.0	12.0	11.5	24.0	4.8	1,000	HC49SDF	2.0	Ø13	Ø21	Ø80	Ø330	25.5	2.0

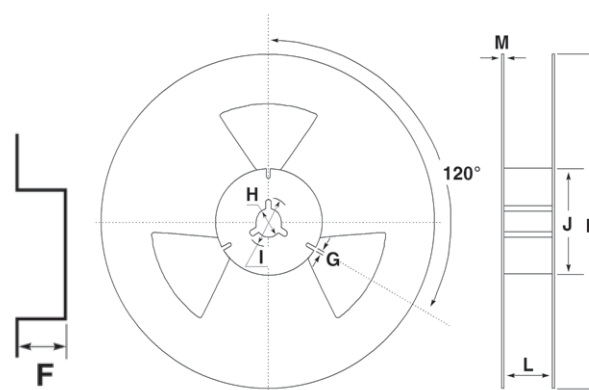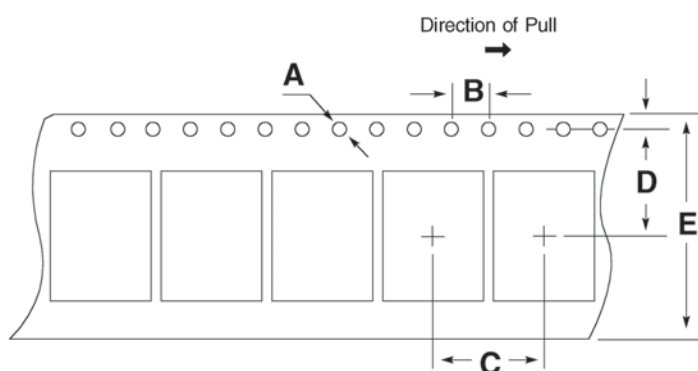



Resistance Weld SMD Crystal

Model: HC49SDLF

RoHS Compliant / Pb Free

Rev. 3/30/2015

Page 3 of 3

http://www.foxonline.com/need_a_sample.htm



All specifications subject to change without notice.

• HC49SDLF Standard Crystals					
Part Number	Frequency	Tolerance	Stability	Temp Range	CL
FOXSDLF/036S	3.579545	+/- 30 ppm	+/- 50 ppm	-20 to +70 C	18pF
FOXSDLF/0368-20	3.686400	+/- 30 ppm	+/- 50 ppm	-20 to +70 C	20pF
FOXSDLF/040	4.000000	+/- 30 ppm	+/- 50 ppm	-20 to +70 C	20pF
FOXSDLF/041	4.194304	+/- 30 ppm	+/- 50 ppm	-20 to +70 C	20pF
FOXSDLF/049-20	4.915200	+/- 30 ppm	+/- 50 ppm	-20 to +70 C	20pF
FOXSDLF/060-20	6.000000	+/- 30 ppm	+/- 50 ppm	-20 to +70 C	20pF
FOXSDLF/073-20	7.372800	+/- 30 ppm	+/- 50 ppm	-20 to +70 C	20pF
FOXSDLF/080-20	8.000000	+/- 30 ppm	+/- 50 ppm	-20 to +70 C	20pF
FOXSDLF/081-20	8.192000	+/- 30 ppm	+/- 50 ppm	-20 to +70 C	20pF
FOXSDLF/100-20	10.000000	+/- 30 ppm	+/- 50 ppm	-20 to +70 C	20pF
FOXSDLF/115-20	11.059200	+/- 30 ppm	+/- 50 ppm	-20 to +70 C	20pF
FOXSDLF/120-20	12.000000	+/- 30 ppm	+/- 50 ppm	-20 to +70 C	20pF
FOXSDLF/128-20	12.288000	+/- 30 ppm	+/- 50 ppm	-20 to +70 C	20pF
FOXSDLF/143-20	14.318180	+/- 30 ppm	+/- 50 ppm	-20 to +70 C	20pF
FOXSDLF/147-20	14.745600	+/- 30 ppm	+/- 50 ppm	-20 to +70 C	20pF
FOXSDLF/160-20	16.000000	+/- 30 ppm	+/- 50 ppm	-20 to +70 C	20pF
FOXSDLF/200-20	20.000000	+/- 30 ppm	+/- 50 ppm	-20 to +70 C	20pF
FOXSDLF/221-20	22.118400	+/- 30 ppm	+/- 50 ppm	-20 to +70 C	20pF
FOXSDLF/240F-20	24.000000	+/- 30 ppm	+/- 50 ppm	-20 to +70 C	20pF
FOXSDLF/245F-20	24.576000	+/- 30 ppm	+/- 50 ppm	-20 to +70 C	20pF
FOXSDLF/250F-20	25.000000	+/- 30 ppm	+/- 50 ppm	-20 to +70 C	20pF
FOXSDLF/0368R-20	3.686400	+/- 30 ppm	+/- 50 ppm	-40 to +85 C	20pF
FOXSDLF/040R	4.000000	+/- 30 ppm	+/- 50 ppm	-40 to +85 C	20pF
FOXSDLF/060R-20	6.000000	+/- 30 ppm	+/- 50 ppm	-40 to +85 C	20pF
FOXSDLF/073R-20	7.372800	+/- 30 ppm	+/- 50 ppm	-40 to +85 C	20pF
FOXSDLF/080R-20	8.000000	+/- 30 ppm	+/- 50 ppm	-40 to +85 C	20pF
FOXSDLF/100R-20	10.000000	+/- 30 ppm	+/- 50 ppm	-40 to +85 C	20pF
FOXSDLF/115R-20	11.059200	+/- 30 ppm	+/- 50 ppm	-40 to +85 C	20pF
FOXSDLF/120R-20	12.000000	+/- 30 ppm	+/- 50 ppm	-40 to +85 C	20pF
FOXSDLF/143R-20	14.318180	+/- 30 ppm	+/- 50 ppm	-40 to +85 C	20pF
FOXSDLF/160R-20	16.000000	+/- 30 ppm	+/- 50 ppm	-40 to +85 C	20pF
FOXSDLF/200R-20	20.000000	+/- 30 ppm	+/- 50 ppm	-40 to +85 C	20pF
FOXSDLF/240FR-20	24.000000	+/- 30 ppm	+/- 50 ppm	-40 to +85 C	20pF
FOXSDLF/245FR-20	24.576000	+/- 30 ppm	+/- 50 ppm	-40 to +85 C	20pF
FOXSDLF/250FR-20	25.000000	+/- 30 ppm	+/- 50 ppm	-40 to +85 C	20pF