

ABSOLUTE MAXIMUM RATINGS (Note 1)

Total Supply Voltage (V^+ to V^-)	18V	Storage Temperature Range	-65°C to 150°C
Input Voltage at Any Pin $V^- - 0.3\text{V} \leq V_{\text{IN}} \leq V^+ + 0.3\text{V}$		Lead Temperature (Soldering, 10 sec)	300°C
Operating Temperature Range			
LTC1062M (OBSOLETE)	$-55^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$		
LTC1062C	$-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$		

PACKAGE/ORDER INFORMATION

TOP VIEW N8 PACKAGE 8-LEAD PDIP $T_J \text{ MAX} = 100^{\circ}\text{C}, \theta_{JA} = 130^{\circ}\text{C/W}$	ORDER PART NUMBER LTC1062CN8	TOP VIEW SW PACKAGE 16-LEAD PLASTIC SO $T_J \text{ MAX} = 150^{\circ}\text{C}, \theta_{JA} = 90^{\circ}\text{C/W}$	ORDER PART NUMBER LTC1062CSW
J8 PACKAGE 8-LEAD CERDIP $T_J \text{ MAX} = 150^{\circ}\text{C}, \theta_{JA} = 100^{\circ}\text{C/W}$ OBSOLETE PACKAGE Consider the N8 Package as an Alternate Source	LTC1062MJ8 LTC1062CJ8		

Consult LTC Marketing for parts specified with wider operating temperature ranges.

ELECTRICAL CHARACTERISTICS

The ● denotes specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^{\circ}\text{C}$. $V^+ = 5\text{V}$, $V^- = -5\text{V}$, unless otherwise specified. AC output measured at Pin 7, Figure 1.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Power Supply Current	C_{0SC} (Pin 5 to V^- , Pin 11 in SW16) = 100pF	●	4.5	7 10	mA mA
Input Frequency Range			0 to 20		kHz
Filter Gain at $f_{\text{IN}} = 0$	$f_{\text{CLK}} = 100\text{kHz}$, Pin 4 (Pin 6 in SW16) at V^+ , $C = 0.01\mu\text{F}$, $R = 25.78\text{k}$		0.00		dB
$f_{\text{IN}} = 0.5f_C$ (Note 2)		●	-0.02	-0.3	dB
$f_{\text{IN}} = f_C$		●	-2	-3.00	dB
$f_{\text{IN}} = 2f_C$		●	-28	-30.00	dB
$f_{\text{IN}} = 4f_C$		●	-52	-60.00	dB
Clock-to-Cutoff Frequency Ratio, f_{CLK}/f_C	$f_{\text{CLK}} = 100\text{kHz}$, Pin 4 (Pin 6 in SW16) at V^+ , $C = 0.01\mu\text{F}$, $R = 25.78\text{k}$		100 $\pm$ 1		%
Filter Gain at $f_{\text{IN}} = 16\text{kHz}$	$f_{\text{CLK}} = 400\text{kHz}$, Pin 4 at V^+ , $C = 0.01\mu\text{F}$, $R = 6.5\text{k}$	●	-43	-52	dB
f_{CLK}/f_C Tempco	$f_{\text{CLK}} = 400\text{kHz}$, Pin 4 at V^+ , $C = 0.01\mu\text{F}$, $R = 6.5\text{k}$		10		ppm/ $^{\circ}\text{C}$
Filter Output (Pin 7, Pin 13 in SW16) DC Swing	Pin 7/Pin13 (SW16) Buffered with an External Op Amp	●	± 3.5	± 3.8	V
Clock Feedthrough			1		mV _{p-p}

ELECTRICAL CHARACTERISTICS

The ● denotes specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^\circ\text{C}$. $V^+ = 5\text{V}$, $V^- = -5\text{V}$, unless otherwise specified, AC output measured at Pin 7, Figure 1.

PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
Internal Buffer						
Bias Current		●		2 170	50 1000	pA pA
Offset Voltage				2	20	mV
Voltage Swing	$R_{\text{LOAD}} = 20\text{k}$	●	± 3.5	± 3.8		V
Short-Circuit Current Source/Sink				40/3		mA
Clock (Note 3)						
Internal Oscillator Frequency	C_{OSC} (Pin 5 to V^- , Pin 11 in SW16) = 100pF	●	25 15	32	50 65	kHz kHz
Max Clock Frequency				4		MHz
Pin 5 (Pin 11 in SW16) Source or Sink Current		●		40	80	μA


Note 1: Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.

Note 2: f_C is the frequency where the gain is -3dB with respect to the input signal.

Note 3: The external or driven clock frequency is divided by either 1, 2 or 4 depending upon the voltage at Pin 4. For the N8 package, when Pin 4 = V^+ , ratio = 1; when Pin 4 = GND, ratio = 2; when Pin 4 = V^- , ratio = 4.


TYPICAL PERFORMANCE CHARACTERISTICS

Amplitude Response Normalized to the Cutoff Frequency

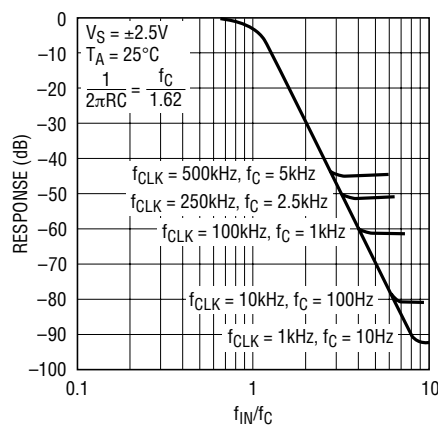


1062 G01

Amplitude Response Normalized to the Cutoff Frequency

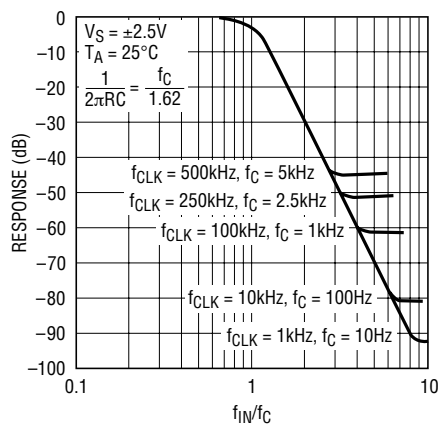


1062 G01

Passband Gain vs Input Frequency

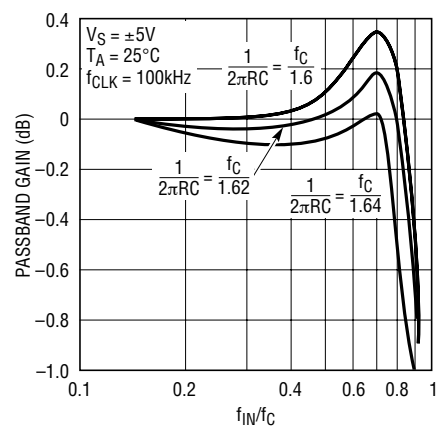


1062 G03

TYPICAL PERFORMANCE CHARACTERISTICS

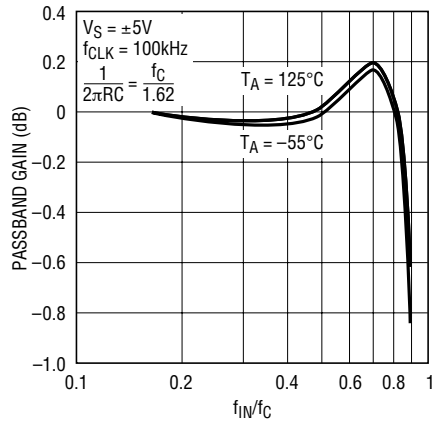
Passband Gain
vs Input Frequency and Temperature

1062 G04

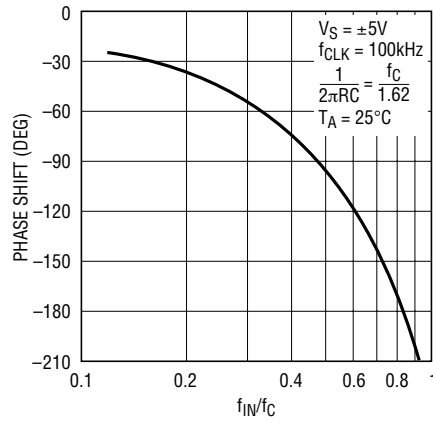
Passband Phase Shift
vs Input Frequency

1062 G05


Filter Noise Spectral Density

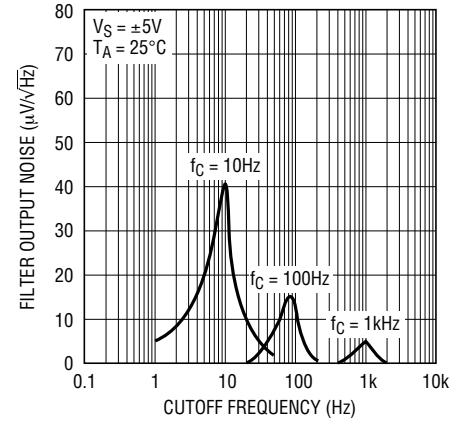


1062 G06

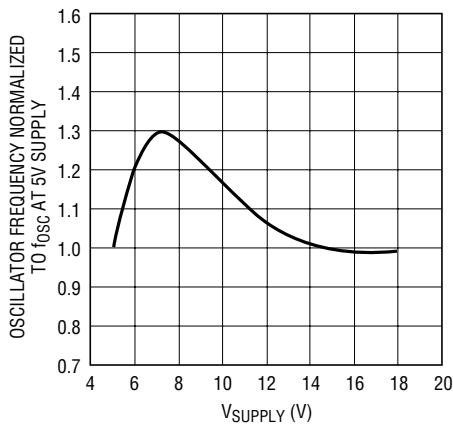Normalized Oscillator Frequency,
 f_{OSC} vs Supply Voltage

1062 G07

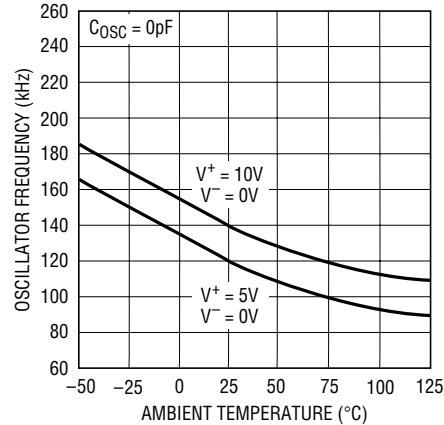Oscillator Frequency, f_{OSC}
vs Ambient Temperature


1062 G08

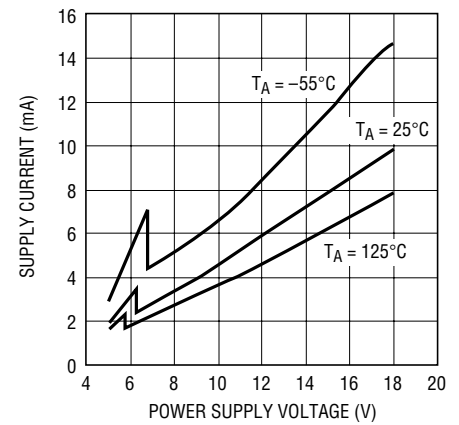Power Supply Current
vs Power Supply Voltage

1062 G09

BLOCK DIAGRAM


For Adjusting Oscillator Frequency, Insert a 50k Pot in Series with C_{OSC} . Use Two Times Calculated C_{OSC}

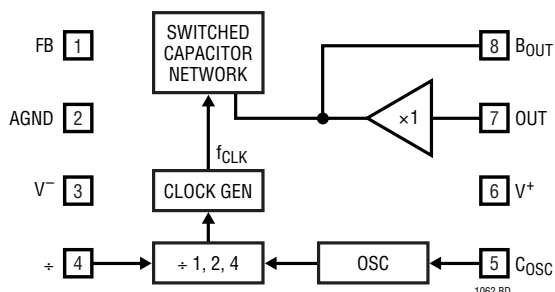

BY CONNECTING PIN 4 TO V^+ , AGND OR V^- , THE OUTPUT FREQUENCY OF THE INTERNAL CLOCK GENERATOR IS THE OSCILLATOR FREQUENCY DIVIDED BY 1, 2, 4. THE (f_{CLK}/f_C) RATIO OF 100:1 IS WITH RESPECT TO THE INTERNAL CLOCK GENERATOR OUTPUT FREQUENCY. PIN 5 CAN BE DRIVEN WITH AN EXTERNAL CMOS LEVEL CLOCK. THE LTC1062 CAN ALSO BE SELF-CLOCKED BY CONNECTING AN EXTERNAL CAPACITOR (C_{OSC}) TO GROUND (OR TO V^- IF C_{OSC} IS POLARIZED). UNDER THIS CONDITION AND WITH $\pm 5V$ SUPPLIES, THE INTERNAL OSCILLATOR FREQUENCY IS:

$$f_{OSC} \approx 140\text{kHz} [33\text{pF}/(33\text{pF} + C_{OSC})]$$

AC TEST CIRCUIT

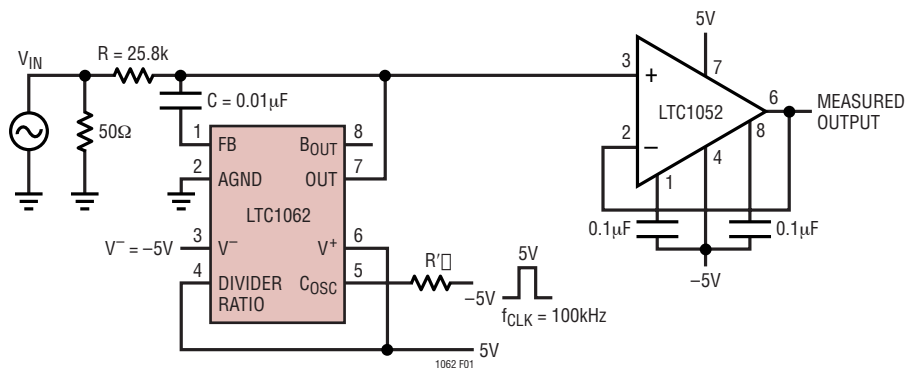

FOR BEST MAX FLAT APPROXIMATION, THE INPUT RC SHOULD BE SUCH AS:

$$\frac{1}{2\pi RC} = \frac{f_{CLK}}{100} \cdot \frac{1}{1.63}$$

A 0.5k RESISTOR, R' , SHOULD BE USED IF THE BIPOLAR EXTERNAL CLOCK IS APPLIED BEFORE THE POWER SUPPLIES TURN ON

Figure 1

APPLICATIONS INFORMATION

Filter Input Voltage Range

Every node of the LTC1062 typically swings within 1V of either voltage supply, positive or negative. With the appropriate external (RC) values, the amplitude response of all the internal or external nodes does not exceed a gain of 0dB with the exception of Pin 1. The amplitude response of the feedback node (Pin 1) is shown in Figure 2. For an input frequency around $0.8 \cdot f_C$, the gain is 1.7V/V and, with $\pm 5V$ supplies, the peak-to-peak input voltage should not exceed 4.7V. If the input voltage goes beyond this value, clipping and distortion of the output waveform occur, but the filter will not get damaged nor will it oscillate. Also, the absolute maximum input voltage should not exceed the power supplies.

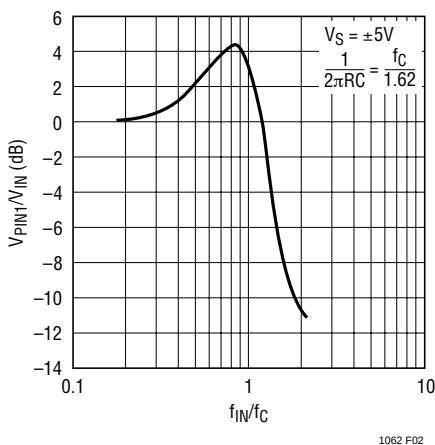


Figure 2. Amplitude Response of Pin 1

Internal Buffer

The internal buffer out (Pin 8) and Pin 1 are part of the signal AC path. Excessive capacitive loading will cause gain errors in the passband, especially around the cutoff frequency. The internal buffer gain at DC is typically 0.006dB. The internal buffer output can be used as a filter output, however, it has a few millivolts of DC offset. The temperature coefficient of the internal buffer is typically $1\mu V/^\circ C$.

Filter Attenuation

The LTC1062 rolloff is typically 30dB/octave. When the clock and the cutoff frequencies increase, the filter's maximum attenuation decreases. This is shown in the

Typical Performance Characteristics. The decrease of the maximum attenuation is due to the rolloff at higher frequencies of the loop gains of the various internal feedback paths and not to the increase of the noise floor. For instance, for a 100kHz clock and 1kHz cutoff frequency, the maximum attenuation is about 64dB. A 4kHz, $1V_{RMS}$ input signal will be predictably attenuated by 60dB at the output. A 6kHz, $1V_{RMS}$ input signal will be attenuated by 64dB and not by 77dB as an ideal 5th order maximum flat filter would have dictated. The LTC1062 output at 6kHz will be about $630\mu V_{RMS}$. The measured RMS noise from DC to 17kHz was $100\mu V_{RMS}$ which is 16dB below the filter output.

C_{OSC}, Pin 5

The C_{OSC}, Pin 5, can be used with an external capacitor, C_{OSC}, connected from Pin 5 to ground. If C_{OSC} is polarized it should be connected from Pin 5 to the negative supply, Pin 3. C_{OSC} lowers the internal oscillator frequency. If Pin 5 is floating, an internal 33pF capacitor plus the external interpin capacitance set the oscillator frequency around 140kHz with $\pm 5V$ supply. An external C_{OSC} will bring the oscillator frequency down by the ratio $(33pF)/(33pF + C_{OSC})$. The Typical Performance Characteristics curves provide the necessary information to get the internal oscillator frequency for various power supply ranges. Pin 5 can also be driven with an external CMOS clock to override the internal oscillator. Although standard 7400 series CMOS gates do not guarantee CMOS levels with the current source and sink requirements of Pin 5, they will, in reality, drive the C_{OSC} pin. CMOS gates conforming to standard B series output drive have the appropriate voltage levels and more than enough output current to simultaneously drive several LTC1062 C_{OSC} pins. The typical trip levels of the internal Schmitt trigger which input is Pin 5, are given in Table 1.

Table 1

V _{SUPPLY}	V _{TH} ⁺	V _{TH} ⁻
±2.5V	0.9V	-1V
±5V	1.3V	-2.1V
±6V	1.7V	-2.5V
±7V	1.75V	-2.9V

APPLICATIONS INFORMATION

Divide By 1, 2, 4 (Pin 4)

By connecting Pin 4 to V^+ , to mid supplies or to V^- , the clock frequency driving the internal switched capacitor network is the oscillator frequency divided by 1, 2, 4 respectively. Note that the f_{CLK}/f_C ratio of 100:1 is with respect to the internal clock generator output frequency. The internal divider is useful for applications where octave tuning is required. The ± 2 threshold is typically $\pm 1V$ from the mid supply voltage.

Transient Response

Figure 3 shows the LTC1062 response to a 1V input step.

Filter Noise

The filter wideband RMS noise is typically $100\mu V_{RMS}$ for $\pm 5V$ supply and it is nearly independent from the value of the cutoff frequency. For single 5V supply the RMS noise is $80\mu V_{RMS}$. Sixty-two percent of the wideband noise is in the passband, that is from DC to f_C . The noise spectral density, unlike conventional active filters, is nearly zero for frequencies below $0.1 \cdot f_C$. This is shown in the Typical Performance Characteristics section. Table 2 shows the LTC1062 RMS noise for different noise bandwidths.

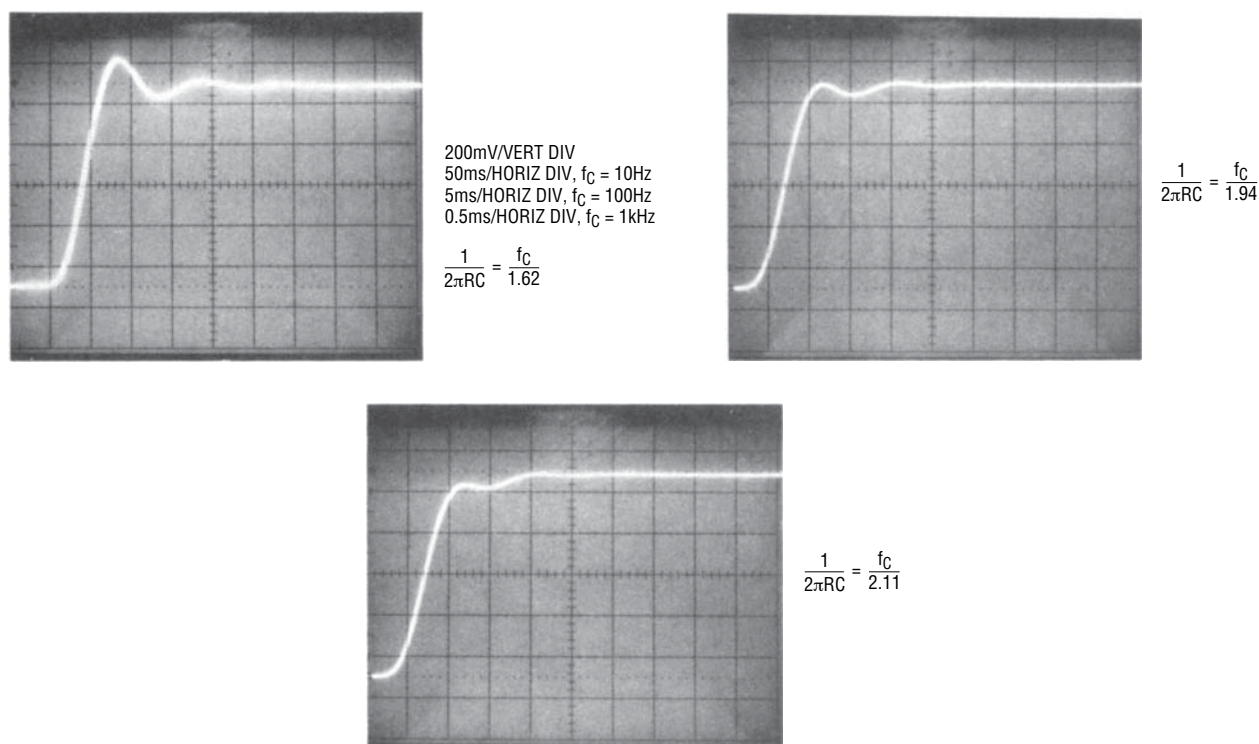
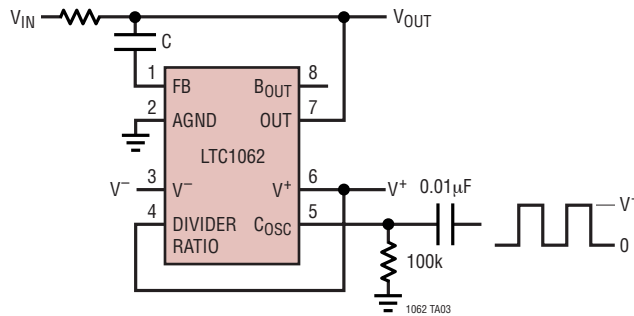
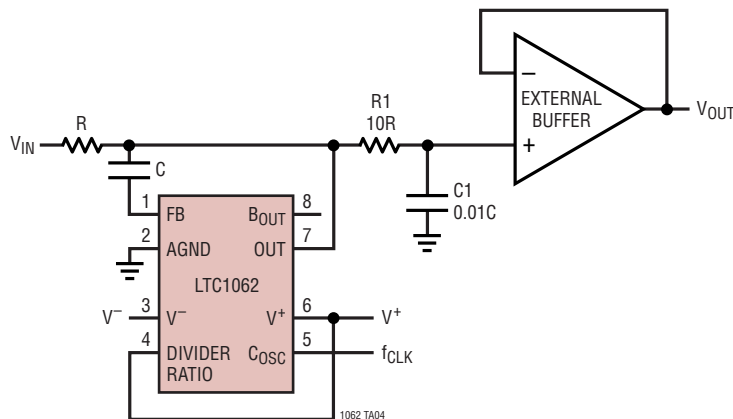


Figure 3. Step Response to a 1V Peak Input Step


Table 2

NOISE BW	RMS NOISE ($V_S = \pm 5V$)
DC – $0.1 \cdot f_C$	$2\mu V$
DC – $0.25 \cdot f_C$	$8\mu V$
DC – $0.5 \cdot f_C$	$20\mu V$
DC – $1 \cdot f_C$	$62\mu V$
DC – $2 \cdot f_C$	$100\mu V$

TYPICAL APPLICATIONS


AC Coupling an External CMOS Clock Powered from a Single Positive Supply, V^+ Adding an External ($R1$, $C1$) to Eliminate the Clock Feedthrough and to Improve the High Frequency Attenuation Floor

Filtering AC Signals from High DC Voltages

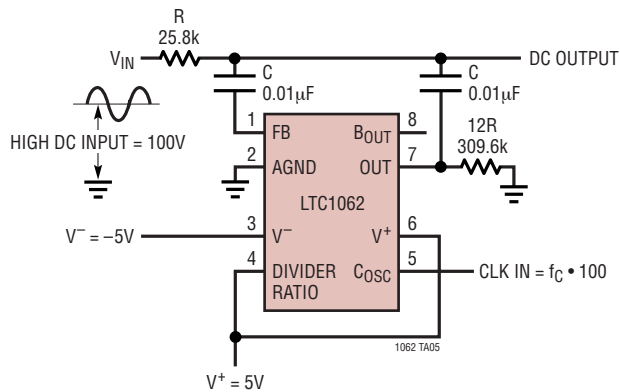


EXAMPLE:
 $f_{CLK} = 100\text{kHz}$, $f_C = 1\text{kHz}$. THE FILTER ACCURATELY PASSES
 THE HIGH DC INPUT AND ACTS AS 5TH ORDER LP FILTER
 FOR THE AC SIGNALS RIDING ON THE DC

Passband Amplitude Response for the High DC Accurate 5th Order Filter

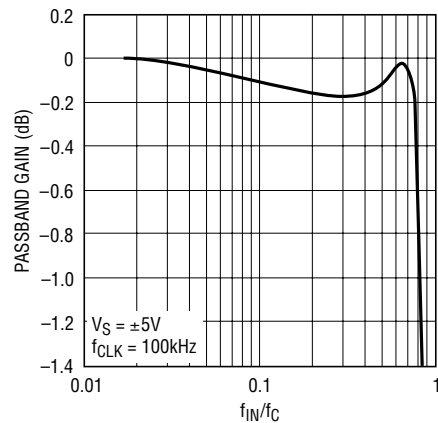


TYPICAL APPLICATIONS

Cascading Two LTC1062s to Form a Very Selective Clock Sweepable Bandpass Filter

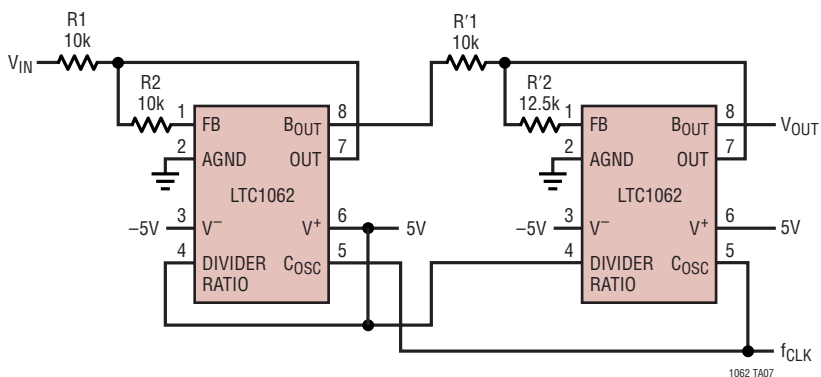


Clock Tunable Notch Filter
For Simplicity Use $R3 = R4 = R5 = 10k$;

$$\frac{R5}{R2} = 1.234, \frac{f_{CLK}}{f_{NOTCH}} = \frac{79.3}{1}$$

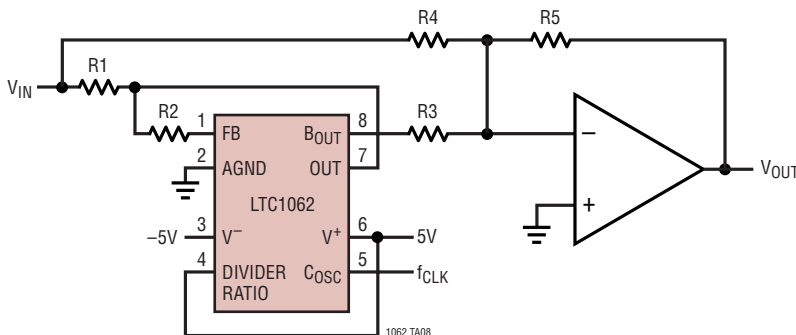


Frequency Response of the Bandpass Filter

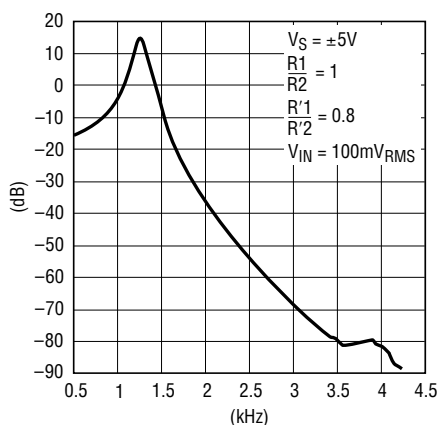

1062 TA09

Frequency Response of the Notch Filter

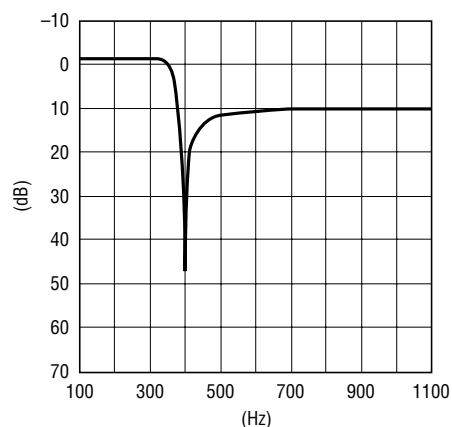


1062 TA10

The circuit diagram illustrates a 10Hz, 10th order DC accurate lowpass filter. It consists of two LTC1062 op-amp blocks and one LTC1052 op-amp block. The input signal V_{IN} is connected to the non-inverting input (pin 3) of the first LTC1062 through a 25.8k resistor. The output of the first LTC1062 (pin 7) is connected to the non-inverting input (pin 3) of the second LTC1062 through a 412k resistor. The output of the second LTC1062 (pin 7) is connected to the non-inverting input (pin 3) of the LTC1052. The LTC1052 is configured as a voltage follower, with its output (pin 6) connected to its inverting input (pin 2). The output of the LTC1052 is labeled "DC ACCURATE OUTPUT". The circuit is powered by a -5V supply (pins 3 and 4 of the LTC1062s, and pin 1 of the LTC1052) and a +5V supply (pins 5 and 6 of the LTC1062s, and pin 7 of the LTC1052). The LTC1062s have a feedback capacitor of 1μF (pin 1 to pin 2) and a divider ratio of 10 (pin 4 to pin 5). The LTC1052 has a feedback capacitor of 0.1μF (pin 1 to pin 2) and a divider ratio of 10 (pin 4 to pin 5). The output of the LTC1052 is filtered by a 0.1μF capacitor (pin 6 to pin 7). The circuit is labeled "10Hz, 10TH ORDER DC ACCURATE LOWPASS FILTER" and "1062 TA11".

 $f_{CLK} = 1\text{kHz}$

TYPICAL APPLICATIONS

7th Order 100Hz Lowpass Filter with Continuous Output Filtering, Output Buffering and Gain Adjustment

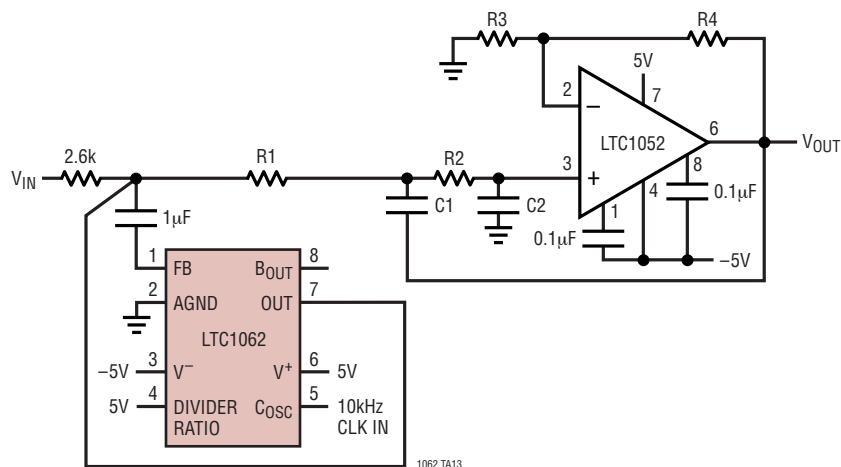


THE LTC1052 IS CONNECTED AS A 2ND ORDER SALLEN KEY LOWPASS FILTER WITH A CUTOFF FREQUENCY EQUAL TO THE CUTOFF FREQUENCY OF THE LTC1062. THE ADDITIONAL FILTERING ELIMINATES ANY 10kHz CLOCK FEEDTHROUGH PLUS DECREASES THE WIDEBAND NOISE OF THE FILTER
 DC OUTPUT OFFSET (REFERRED TO A DC GAIN OF UNITY) = 5 μ V MAX
 WIDEBAND NOISE (REFERRED TO A DC GAIN OF UNITY) = 60 μ V_{RMS}

OUTPUT FILTER COMPONENT VALUES

DC GAIN	R3	R4	R1	R2	C1	C2
1	∞	0	14.3k	53.6k	0.1 μ F	0.033 μ F
10	3.57k	32.4k	46k	274k	0.01 μ F	0.02 μ F

Single 5V Supply 5th Order LP Filter

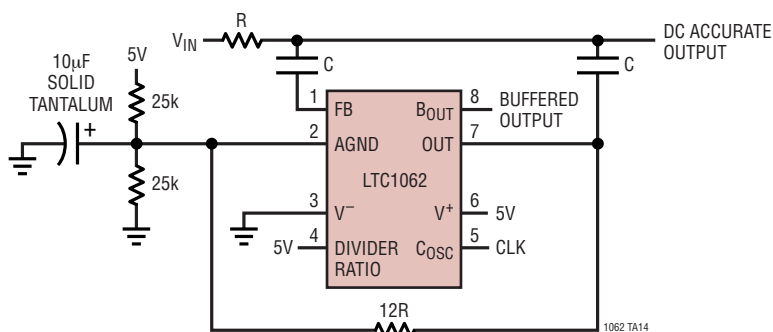

FOR A 10Hz FILTER: $R = 29.4k$, $C = 1\mu F$, $f_{CLK} = 1kHz$

THE FILTER IS MAXIMALLY FLAT FOR $\frac{1}{2\pi RC} = \frac{f_c}{1.84}$

The circuit diagram shows a precision active low-pass filter. It starts with an input voltage V_{IN} connected to a resistor R (9.09k) and a capacitor C (1μF). The input signal is then fed into the non-inverting input of the first op-amp, A1 (1/2 LT1013). The feedback path of A1 consists of a resistor $R2$ (20k) and a resistor $R3$ (20k) in series. The output of A1 is connected to the non-inverting input of the second op-amp, A2 (1/2 LT1013). The feedback path of A2 consists of a resistor $R4$ (10k) and a resistor $R5$ (10k) in series. The output of A2 is connected to the output of the filter, V_{OUT} . The filter is powered by a dual supply V^+ and V^- . The LTC1062 is configured as a precision active low-pass filter with a divider ratio of 100. The clock input $CLK\ IN$ is connected to a 2.84kHz clock signal. The output of the filter is connected to a load consisting of a resistor $R7$ (20k) and a capacitor $C7$ (0.1μF) in parallel.

Component values:

- R : 9.09k
- C : 1μF
- $R2$: 20k
- $R3$: 20k
- $R4$: 10k
- $R5$: 10k
- $R6$: 19.35k
- $R7$: 20k
- $C7$: 0.1μF

Op-amps: A1 (1/2 LT1013), A2 (1/2 LT1013)

IC: LTC1062

Power supply: V^+ , V^-


Output: V_{OUT}

Formula for the filter's time constant:

$$\frac{1}{2\pi RC} = \frac{f_{CLK}}{100 \cdot 1.62}$$

PACKAGE DESCRIPTION


J8 Package 8-Lead Cerdip (Narrow .300 Inch, Hermetic) (Reference LTC DWG # 05-08-1110)

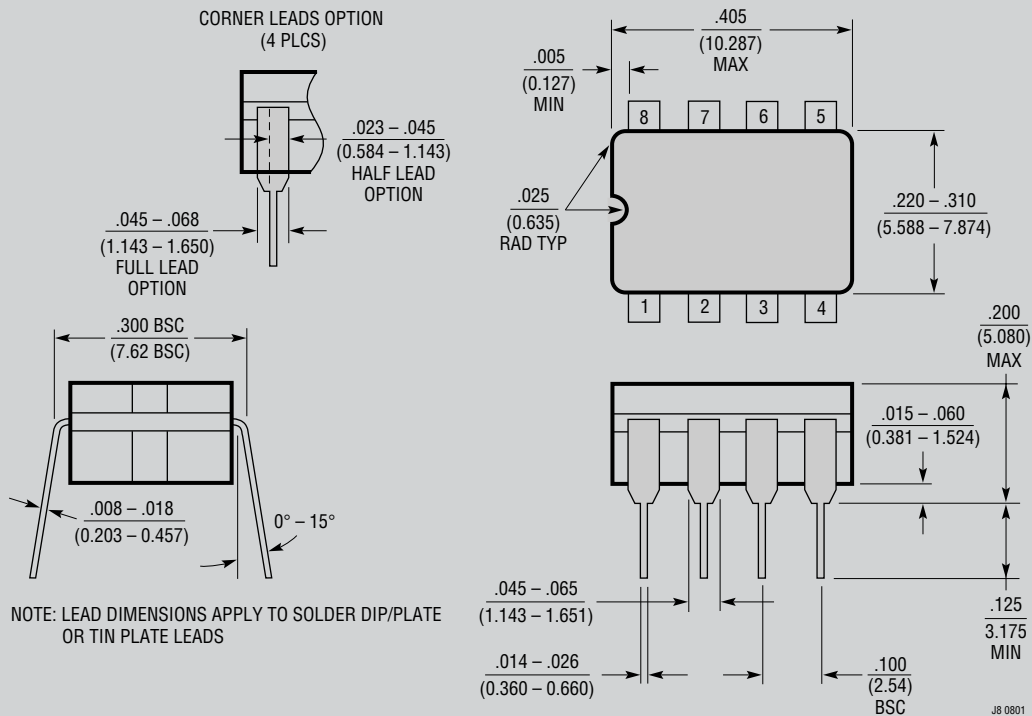

OBsolete PACKAGE

PACKAGE DESCRIPTION

N8 Package 8-Lead PDIP (Narrow .300 Inch) (Reference LTC DWG # 05-08-1510)

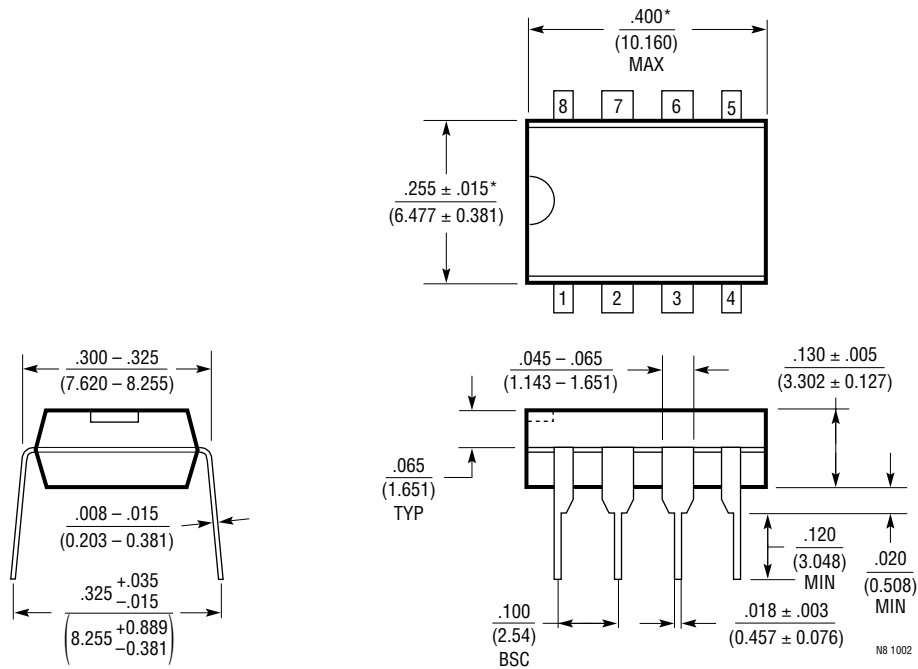


NOTE:
1. DIMENSIONS ARE $\frac{\text{INCHES}}{\text{MILLIMETERS}}$

*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .010 INCH (0.254mm)

PACKAGE DESCRIPTION

SW Package 16-Lead Plastic Small Outline (Wide .300 Inch) (Reference LTC DWG # 05-08-1620)

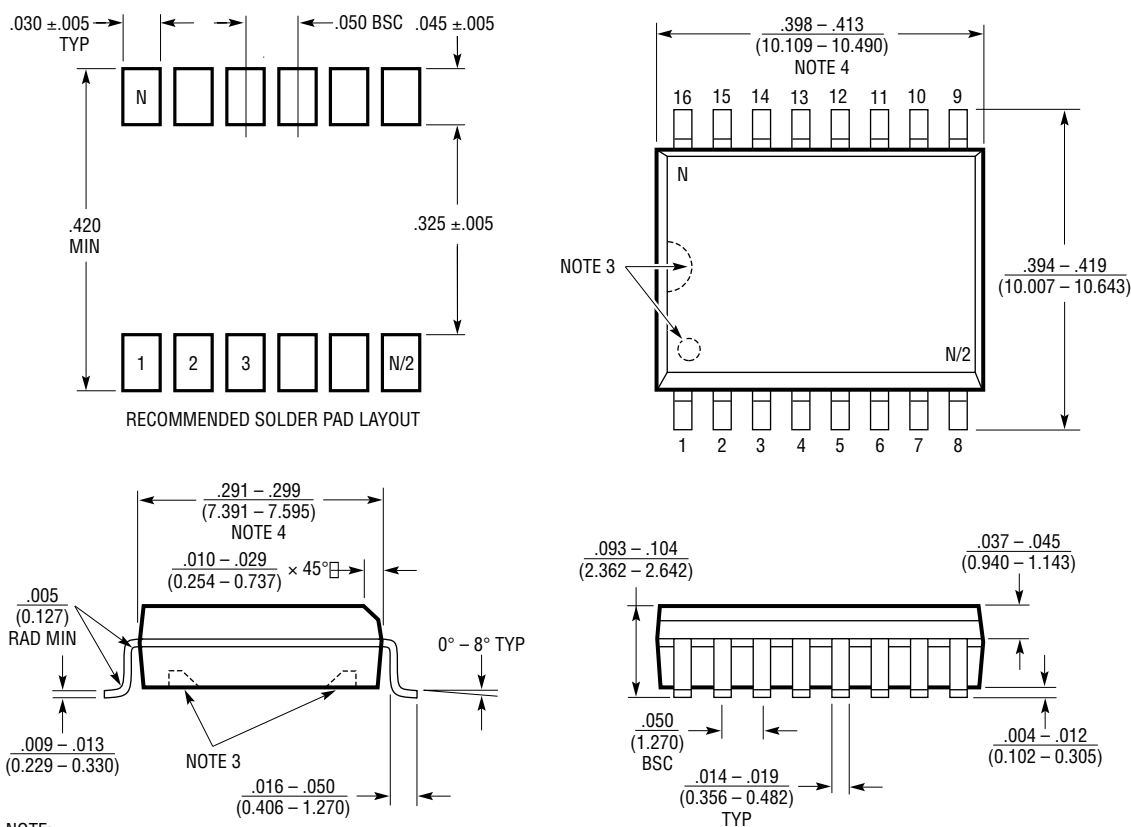


- NOTE:
1. DIMENSIONS IN $\frac{\text{INCHES}}{\text{MILLIMETERS}}$
 2. DRAWING NOT TO SCALE
 3. PIN 1 IDENT, NOTCH ON TOP AND CAVITIES ON THE BOTTOM OF PACKAGES ARE THE MANUFACTURING OPTIONS. THE PART MAY BE SUPPLIED WITH OR WITHOUT ANY OF THE OPTIONS
 4. THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED $.006''$ (0.15mm)

S16 (WIDE) 0502

TYPICAL APPLICATION

A Low Frequency, 5Hz Filter Using Back-to-Back Solid Tantalum Capacitors

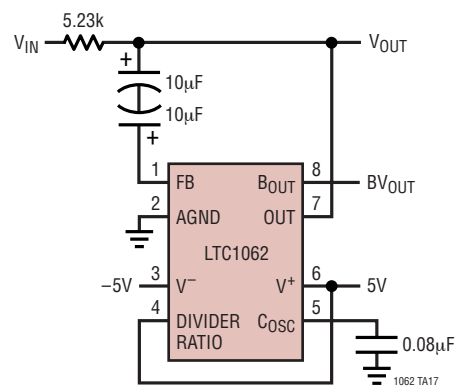

RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LTC1063	5th Order Butterworth Lowpass, DC Accurate	Clock Tunable, No External Components
LTC1065	5th Order Bessel Lowpass, DC Accurate	Clock Tunable, No External Components
LTC1066-1	8th Order Elliptic or Linear Phase, DC Accurate	Clock Tunable, $f_c \leq 120\text{kHz}$
LTC1563-2/ LTC1563-3	Active RC, 4th Order Lowpass	Very Low Noise, $256\text{Hz} \leq f_c \leq 256\text{kHz}$
LTC1564	10kHz to 150kHz Digitally Controlled Lowpass and PGA	Continuous Time, Very High Dynamic Range, PGA Included
LTC1569-6	Linear Phase, DC Accurate, 10th Order	No External Clock Required, $f_c \leq 64\text{kHz}$, S08
LTC1569-7	Linear Phase, DC Accurate, 10th Order	No External Clock Required, $f_c \leq 300\text{kHz}$, S08