

## Absolute Maximum Ratings

Voltage (with Respect to GND)

V+ .....-0.3V to +6V

SCL, SDA, AD0, AD1 ..... 0.3V to +6V

All Other Pins .....-0.3V to (V+ + 0.3V)

P4–P31 Current.....±30mA

GND Current .....800mA

Continuous Power Dissipation

28-Pin PDIP (derate 14.3mW/°C above T<sub>A</sub> = +70°C) ... 1143mW

28-Pin SSOP (derate 9.1mW/°C above T<sub>A</sub> = +70°C)..... 727mW

36-Pin SSOP (derate 11.8mW/°C above T<sub>A</sub> = +70°C)....941mW

40-Pin TQFN (derate 26.3mW/°C above T<sub>A</sub> = +70°C) ..2105mW

Operating Temperature Range

(T<sub>MIN</sub> to T<sub>MAX</sub>) ..... -40°C to +125°C

Junction Temperature.....+150°C

Storage Temperature Range..... -65°C to +150°C

Soldering Temperature (reflow)

Lead(Pb)-free packages .....+260°C

Packages containing lead(Pb).....+240°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## Electrical Characteristics

(Typical Operating Circuit, V+ = 2.5V to 5.5V, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted.) (Note 1)

| PARAMETER                            | SYMBOL                            | CONDITIONS                                                                                              |                                                       | MIN      | TYP | MAX      | UNITS |
|--------------------------------------|-----------------------------------|---------------------------------------------------------------------------------------------------------|-------------------------------------------------------|----------|-----|----------|-------|
| Operating Supply Voltage             | V+                                |                                                                                                         |                                                       | 2.5      |     | 5.5      | V     |
| Shutdown Supply Current              | I <sub>SHDN</sub>                 | All digital inputs at V+ or GND                                                                         | T <sub>A</sub> = +25°C                                | 5.5      |     | 8        | μA    |
|                                      |                                   |                                                                                                         | T <sub>A</sub> = -40°C to +85°C                       | 10       |     |          |       |
|                                      |                                   |                                                                                                         | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> | 11       |     |          |       |
| Operating Supply Current             | I <sub>GPOH</sub>                 | All ports programmed as outputs high, no load, all other inputs at V+ or GND                            | T <sub>A</sub> = +25°C                                | 180      |     | 230      | μA    |
|                                      |                                   |                                                                                                         | T <sub>A</sub> = -40°C to +85°C                       | 250      |     |          |       |
|                                      |                                   |                                                                                                         | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> | 270      |     |          |       |
| Operating Supply Current             | I <sub>GPOL</sub>                 | All ports programmed as outputs low, no load, all other inputs at V+ or GND                             | T <sub>A</sub> = +25°C                                | 170      |     | 210      | μA    |
|                                      |                                   |                                                                                                         | T <sub>A</sub> = -40°C to +85°C                       | 230      |     |          |       |
|                                      |                                   |                                                                                                         | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> | 240      |     |          |       |
| Operating Supply Current             | I <sub>LED</sub>                  | All ports programmed as LED outputs, all LEDs off, no load, all other inputs at V+ or GND               | T <sub>A</sub> = +25°C                                | 110      |     | 135      | μA    |
|                                      |                                   |                                                                                                         | T <sub>A</sub> = -40°C to +85°C                       | 140      |     |          |       |
|                                      |                                   |                                                                                                         | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> | 145      |     |          |       |
| INPUTS AND OUTPUTS                   |                                   |                                                                                                         |                                                       |          |     |          |       |
| Logic-High Input Voltage Port Inputs | V <sub>IH</sub>                   |                                                                                                         |                                                       | 0.7 x V+ |     |          | V     |
| Logic-Low Input Voltage Port Inputs  | V <sub>IL</sub>                   |                                                                                                         |                                                       |          |     | 0.3 x V+ | V     |
| Input Leakage Current                | I <sub>IH</sub> , I <sub>IL</sub> | GPIO inputs without pullup, V <sub>PORT</sub> = V+ to GND                                               |                                                       | -100     | ±1  | +100     | nA    |
| GPIO Input Internal Pullup to V+     | I <sub>PU</sub>                   | V+ = 2.5V                                                                                               |                                                       | 12       | 19  | 30       | μA    |
|                                      |                                   | V+ = 5.5V                                                                                               |                                                       | 80       | 120 | 180      |       |
| Hysteresis Voltage GPIO Inputs       | ΔV <sub>I</sub>                   |                                                                                                         |                                                       | 0.3      |     |          | V     |
| Output High Voltage                  | V <sub>OH</sub>                   | GPIO outputs, I <sub>SOURCE</sub> = 2mA, T <sub>A</sub> = -40°C to +85°C                                |                                                       | V+ - 0.7 |     |          | V     |
|                                      |                                   | GPIO outputs, I <sub>SOURCE</sub> = 1mA, T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> (Note 2) |                                                       | V+ - 0.7 |     |          |       |
| Port Sink Current                    | I <sub>OL</sub>                   | V <sub>PORT</sub> = 0.6V                                                                                |                                                       | 2        | 10  | 18       | mA    |
| Output Short-Circuit Current         | I <sub>OLSC</sub>                 | Port configured output low, shorted to V+                                                               |                                                       | 2.75     | 11  | 20       | mA    |

**Electrical Characteristics (continued)**(Typical Operating Circuit,  $V_+ = 2.5V$  to  $5.5V$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted.) (Note 1)

| PARAMETER                                                       | SYMBOL              | CONDITIONS                                                      | MIN            | TYP  | MAX            | UNITS |
|-----------------------------------------------------------------|---------------------|-----------------------------------------------------------------|----------------|------|----------------|-------|
| Port Drive LED Sink Current,<br>Port Configured as LED Driver   | $I_{DIGIT}$         | $V_+ = 2.5V$ , $V_{LED} = 2.3V$ at maximum LED current          | 9.5            | 13.5 | 18             | mA    |
|                                                                 |                     | $V_+ = 3.3V$ , $V_{LED} = 2.4V$ at maximum LED current (Note 2) | 18.5           | 24   | 27.5           |       |
|                                                                 |                     | $V_+ = 5.5V$ , $V_{LED} = 2.4V$ at maximum LED current          | 19             | 25   | 30             |       |
| Port Drive Logic Sink Current,<br>Port Configured as LED Driver | $I_{DIGIT\_SC}$     | $V_+ = 2.5V$ , $V_{OUT} = 0.6V$ at maximum sink current         | 18.5           | 23   | 28             | mA    |
|                                                                 |                     | $V_+ = 5.5V$ , $V_{OUT} = 0.6V$ at maximum sink current         | 19             | 24   | 28             |       |
| Input High-Voltage SDA, SCL,<br>AD0, AD1                        | $V_{IH}$            |                                                                 | 0.7 x<br>$V_+$ |      |                | V     |
| Input Low-Voltage SDA, SCL,<br>AD0, AD1                         | $V_{IL}$            |                                                                 |                |      | 0.3 x<br>$V_+$ | V     |
| Input Leakage Current SDA, SCL                                  | $I_{IH}$ , $I_{IL}$ |                                                                 | -50            |      | 50             | nA    |
| Input Capacitance                                               |                     | (Note 2)                                                        |                |      | 10             | pF    |
| Output Low-Voltage SDA                                          | $V_{OL}$            | $I_{SINK} = 6mA$                                                |                |      | 0.4            | V     |

**Timing Characteristics (Figure 2)**(V+ = 2.5V to 5.5V,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted.) (Note 1)


| PARAMETER                                             | SYMBOL        | CONDITIONS   | MIN | TYP               | MAX | UNITS   |
|-------------------------------------------------------|---------------|--------------|-----|-------------------|-----|---------|
| Serial Clock Frequency                                | $f_{SCL}$     |              |     |                   | 400 | kHz     |
| Bus Free Time Between a STOP<br>and a START Condition | $t_{BUF}$     |              | 1.3 |                   |     | $\mu s$ |
| Hold Time (Repeated) START<br>Condition               | $t_{HD, STA}$ |              | 0.6 |                   |     | $\mu s$ |
| Repeated START Condition<br>Setup Time                | $t_{SU, STA}$ |              | 0.6 |                   |     | $\mu s$ |
| STOP Condition Setup Time                             | $t_{SU, STO}$ |              | 0.6 |                   |     | $\mu s$ |
| Data Hold Time                                        | $t_{HD, DAT}$ | (Note 3)     | 15  |                   | 900 | ns      |
| Data Setup Time                                       | $t_{SU, DAT}$ |              | 100 |                   |     | ns      |
| SCL Clock Low Period                                  | $t_{LOW}$     |              | 1.3 |                   |     | $\mu s$ |
| SCL Clock High Period                                 | $t_{HIGH}$    |              | 0.7 |                   |     | $\mu s$ |
| Rise Time of Both SDA and SCL<br>Signals, Receiving   | $t_R$         | (Notes 2, 4) |     | 20 +<br>0.1 $C_b$ | 300 | ns      |
| Fall Time of Both SDA and SCL<br>Signals, Receiving   | $t_F$         | (Notes 2, 4) |     | 20 +<br>0.1 $C_b$ | 300 | ns      |
| Fall Time of SDA Transmitting                         | $t_{F, TX}$   | (Notes 2, 5) |     | 20 +<br>0.1 $C_b$ | 250 | ns      |
| Pulse Width of Spike Suppressed                       | $t_{SP}$      | (Notes 2, 6) | 0   |                   | 50  | ns      |
| Capacitive Load for Each Bus<br>Line                  | $C_b$         | (Note 2)     |     |                   | 400 | pF      |

**Note 1:** All parameters tested at  $T_A = +25^\circ C$ . Specifications over temperature are guaranteed by design.**Note 2:** Guaranteed by design.**Note 3:** A master device must provide a hold time of at least 300ns for the SDA signal (referred to  $V_{IL}$  of the SCL signal) in order to bridge the undefined region of SCL's falling edge.**Note 4:**  $C_b$  = total capacitance of one bus line in pF.  $t_R$  and  $t_F$  measured between 0.3V+ and 0.7V+.**Note 5:**  $I_{SINK} \leq 6mA$ .  $C_b$  = total capacitance of one bus line in pF.  $t_R$  and  $t_F$  measured between 0.3V+ and 0.7V+.**Note 6:** Input filters on the SDA and SCL inputs suppress noise spikes less than 50ns.


## Typical Operating Characteristics

( $R_{ISET} = 39k\Omega$ ,  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)


**OPERATING SUPPLY CURRENT  
vs. TEMPERATURE**

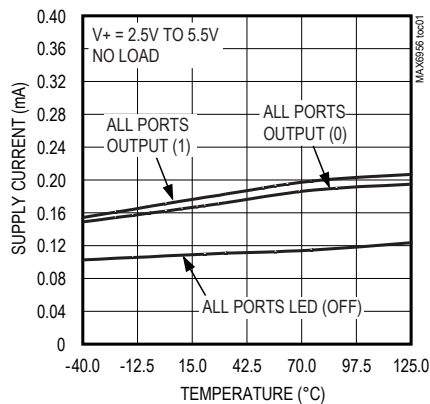


**SHUTDOWN SUPPLY CURRENT  
vs. TEMPERATURE**

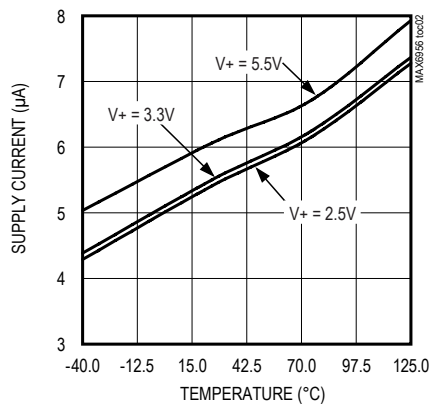


**OPERATING SUPPLY CURRENT vs. V+  
(NO LOADS)**

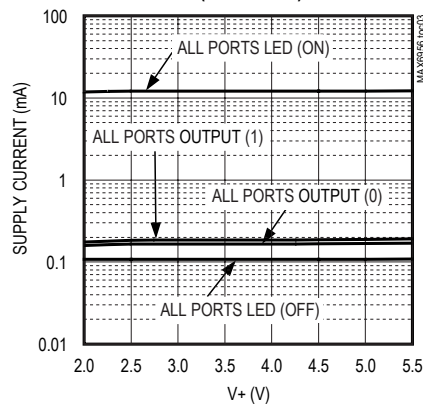


**LED DRIVER SINK CURRENT  
vs. V+**

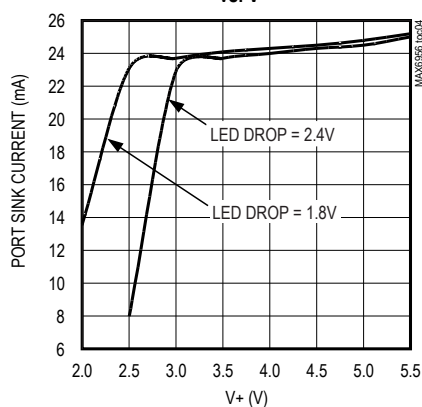


**LED DRIVER SINK CURRENT  
vs. TEMPERATURE**

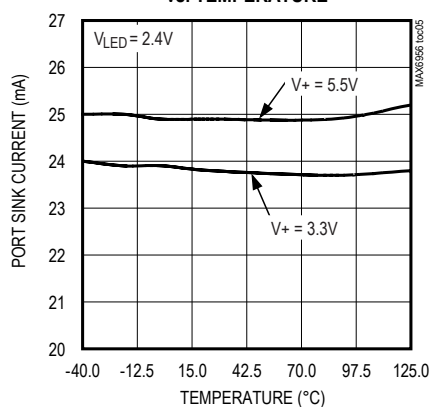


**GPO SINK CURRENT vs. TEMPERATURE  
(OUTPUT = 0)**

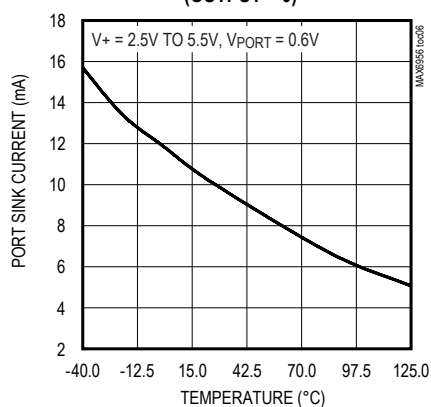


**GPO SOURCE CURRENT vs. TEMPERATURE  
(OUTPUT = 1)**

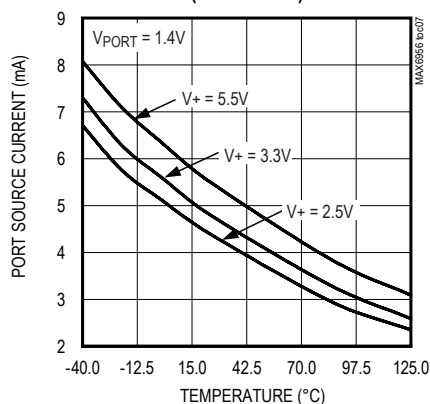

**GPI PULLUP CURRENT  
vs. TEMPERATURE**

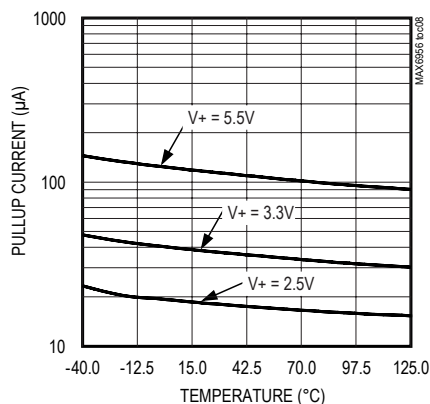

**GPO SHORT-CIRCUIT CURRENT  
vs. TEMPERATURE**

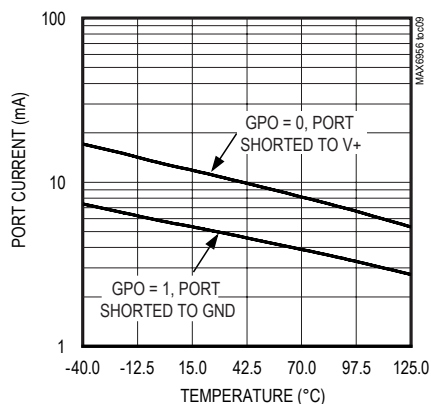

## Pin Description

| PIN      |      |                          | NAME    | FUNCTION                                                                                                                                                       |
|----------|------|--------------------------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SSOP/DIP | SSOP | TQFN                     |         |                                                                                                                                                                |
| 1        | 1    | 36                       | ISET    | Segment Current Setting. Connect ISET to GND through a resistor ( $R_{ISET}$ ) to set the maximum segment current.                                             |
| 2, 3     | 2, 3 | 37, 38, 39               | GND     | Ground                                                                                                                                                         |
| 4        | 4    | 40                       | AD0     | Address Input 0. Sets device slave address. Connect to either GND, V+, SCL, SDA to give four logic combinations. See Table 3.                                  |
| 5–24     | —    | —                        | P12–P31 | LED Segment Drivers and GPIO. P12 to P31 can be configured as CA LED drivers, GPIO outputs, CMOS logic inputs, or CMOS logic inputs with weak pullup resistor. |
| —        | 5–32 | 1–10,<br>12–19,<br>21–30 | P4–P31  | LED Segment Drivers and GPIO. P4 to P31 can be configured as CA LED drivers, GPIO outputs, CMOS logic inputs, or CMOS logic inputs with weak pullup resistor.  |
| —        | —    | 11, 20, 31               | N.C.    | No Connection                                                                                                                                                  |
| 25       | 33   | 32                       | SDA     | I <sup>2</sup> C-Compatible Serial Data I/O                                                                                                                    |
| 26       | 34   | 33                       | SCL     | I <sup>2</sup> C-Compatible Serial Clock Input                                                                                                                 |
| 27       | 35   | 34                       | AD1     | Address Input 1. Sets device slave address. Connect to either GND, V+, SCL, SDA to give four logic combinations. See Table 3.                                  |
| 28       | 36   | 35                       | V+      | Positive Supply Voltage. Bypass V+ to GND with minimum 0.047μF capacitor.                                                                                      |
| —        | —    | —                        | EP      | Exposed Pad (TQFN Only). Not internally connected. Connect EP to ground plane for maximum thermal performance.                                                 |

## Detailed Description

The MAX6956 LED driver/GPIO peripheral provides up to 28 I/O ports, P4 to P31, controlled through an I<sup>2</sup>C-compatible serial interface. The ports can be configured to any combination of constant-current LED drivers, logic inputs and logic outputs, and default to logic inputs on power-up. When fully configured as an LED driver, the MAX6956 controls up to 28 LED segments with individual 16-step adjustment of the constant current through each LED segment. A single resistor sets the maximum segment current for all segments, with a maximum of 24mA per segment. The MAX6956 drives any combination of discrete LEDs and CA digits, including seven-segment and starburst alphanumeric types.

Figure 1 is the MAX6956 functional diagram. Any I/O port can be configured as a push-pull output (sinking 10mA, sourcing 4.5mA), or a Schmitt-trigger logic input. Each input has an individually selectable internal pullup resistor. Additionally, transition detection allows seven ports (P24 through P30) to be monitored in any maskable combination for changes in their logic status. A detected transition is flagged through a status register bit, as well as an interrupt pin (port P31), if desired.

The *Typical Operating Circuit* shows two MAX6956s working together controlling three monochrome 16-seg-

ment-plus-DP displays, with five ports left available for GPIO (P26–P31 of U2).

The port configuration registers set the 28 ports, P4 to P31, individually as either LED drivers or GPIO. A pair of bits in registers 0x09 through 0x0F sets each port's configuration (Tables 1 and 2).

The 36-pin MAX6956AAX has 28 ports, P4 to P31. The 28-pin MAX6956ANI and MAX6956AAI make only 20 ports available, P12 to P31. The eight unused ports should be configured as outputs on power-up by writing 0x55 to registers 0x09 and 0x0A. If this is not done, the eight unused ports remain as unconnected inputs and quiescent supply current rises, although there is no damage to the part.

## Register Control of I/O Ports and LEDs Across Multiple Drivers

The MAX6956 offers 20 or 28 I/O ports, depending on package choice. These can be applied to a variety of combinations of different display types, for example: seven, 7-segment digits (Figure 7). This example requires two MAX6956s, with one digit being driven by both devices, half by one MAX6956, half by the other (digit 4 in this example). The two drivers are static, and therefore do not need to be synchronized. The MAX6956 sees CA digits as multiple discrete LEDs. To simplify access to displays

**Table 1. Port Configuration Map**

| REGISTER                                  | ADDRESS<br>CODE (HEX) | REGISTER DATA |    |     |    |     |    |     |    |
|-------------------------------------------|-----------------------|---------------|----|-----|----|-----|----|-----|----|
|                                           |                       | D7            | D6 | D5  | D4 | D3  | D2 | D1  | D0 |
| Port Configuration for P7, P6, P5, P4     | 0x09                  | P7            |    | P6  |    | P5  |    | P4  |    |
| Port Configuration for P11, P10, P9, P8   | 0x0A                  | P11           |    | P10 |    | P9  |    | P8  |    |
| Port Configuration for P15, P14, P13, P12 | 0x0B                  | P15           |    | P14 |    | P13 |    | P12 |    |
| Port Configuration for P19, P18, P17, P16 | 0x0C                  | P19           |    | P18 |    | P17 |    | P16 |    |
| Port Configuration for P23, P22, P21, P20 | 0x0D                  | P23           |    | P22 |    | P21 |    | P20 |    |
| Port Configuration for P27, P26, P25, P24 | 0x0E                  | P27           |    | P26 |    | P25 |    | P24 |    |
| Port Configuration for P31, P30, P29, P28 | 0x0F                  | P31           |    | P30 |    | P29 |    | P28 |    |

**Table 2. Port Configuration Matrix**

| MODE   | FUNCTION                  | PORT<br>REGISTER<br>(0x20–0x5F)     | PIN BEHAVIOR                                                                                           | ADDRESS<br>CODE (HEX) | PORT<br>CONFIGURATION<br>BIT PAIR |       |
|--------|---------------------------|-------------------------------------|--------------------------------------------------------------------------------------------------------|-----------------------|-----------------------------------|-------|
|        |                           |                                     |                                                                                                        |                       | UPPER                             | LOWER |
| Output | LED Segment Driver        | Register bit = 0                    | High impedance                                                                                         | 0x09 to 0x0F          | 0                                 | 0     |
|        |                           | Register bit = 1                    | Open-drain current sink, with sink current (up to 24mA) determined by the appropriate current register |                       |                                   |       |
| Output | GPIO Output               | Register bit = 0                    | Active-low logic output                                                                                | 0x09 to 0x0F          | 0                                 | 1     |
|        |                           | Register bit = 1                    | Active-high logic output                                                                               |                       |                                   |       |
| Input  | GPIO Input Without Pullup | Register bit =<br>input logic level | Schmitt logic input                                                                                    | 0x09 to 0x0F          | 1                                 | 0     |
| Input  | GPIO Input with Pullup    |                                     | Schmitt logic input with pullup                                                                        | 0x09 to 0x0F          | 1                                 | 1     |

**Note:** The logic is inverted between the two output modes; a high makes the output go low in LED segment driver mode (0x00) to turn that segment on; in GPIO output mode (0x01), a high makes the output go high.

that overlap two MAX6956s, the MAX6956 provides four virtual ports, P0 through P3. To update an overlapping digit, send the same code twice as an eight-port write, once to P28 through P35 of the first driver, and again to P0 through P7 of the second driver. The first driver ignores the last 4 bits and the second driver ignores the first 4 bits.


Two addressing methods are available. Any single port (bit) can be written (set/cleared) at once; or, any sequence of eight ports can be written (set/cleared) in any combination at once. There are no boundaries; it is equally acceptable to write P0 through P7, P1 through P8, or P31 through P38 (P32 through P38 are nonexistent, so the instructions to these bits are ignored).

Using 8-bit control, a seven-segment digit with a decimal point can be updated in a single byte-write, a 14-

segment digit with DP can be updated in two byte-writes, and 16-segment digits with DP can be updated in two byte-writes plus a bit write. Also, discrete LEDs and GPIO port bits can be lit and controlled individually without affecting other ports.

### Shutdown

When the MAX6956 is in shutdown mode, all ports are forced to inputs (which can be read), and the pullup current sources are turned off. Data in the port and control registers remain unaltered, so port configuration and output levels are restored when the MAX6956 is taken out of shutdown. The display driver can still be programmed while in shutdown mode. For minimum supply current in shutdown mode, logic inputs should be at GND or V+ potential. Shutdown mode is exited by setting the S bit in the configuration register (Table 8).

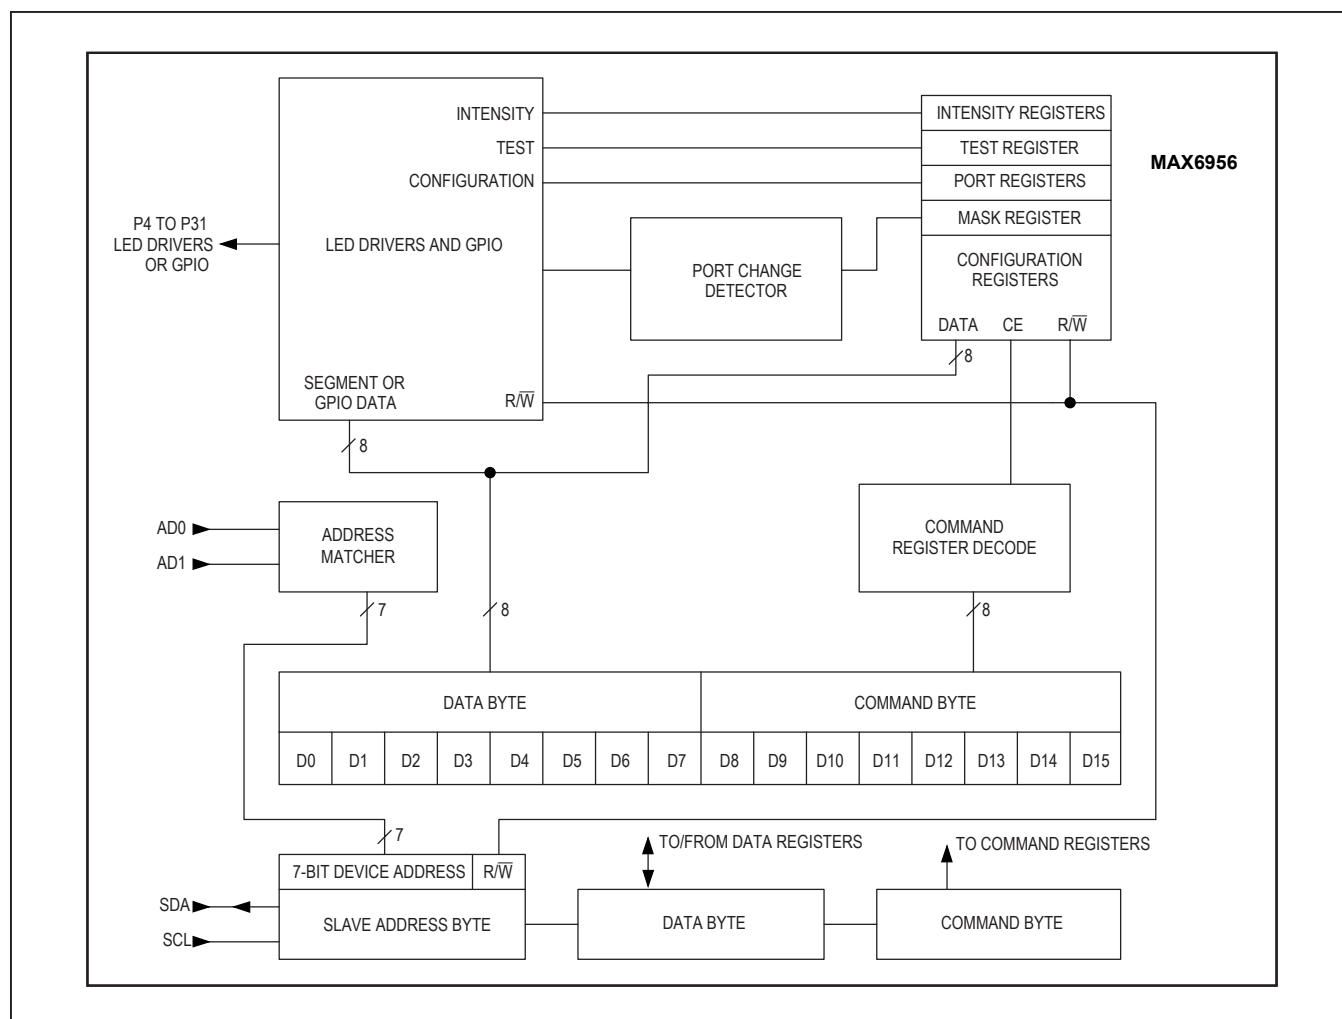

Shutdown mode is temporarily overridden by the display test function.

## Serial Interface

## Serial Addressing

The MAX6956 operates as a slave that sends and receives data through an I<sup>2</sup>C-compatible 2-wire interface. The interface uses a serial data line (SDA) and a serial clock line (SCL) to achieve bidirectional communication between master(s) and slave(s). A master (typically a microcontroller) initiates all data transfers to and from the MAX6956, and generates the SCL clock that synchronizes the data transfer (Figure 2).

The MAX6956 SDA line operates as both an input and an open-drain output. A pullup resistor, typically 4.7kΩ, is

required on SDA. The MAX6956 SCL line operates only as an input. A pullup resistor, typically 4.7kΩ, is required on SCL if there are multiple masters on the 2-wire interface, or if the master in a single-master system has an open-drain SCL output.

Each transmission consists of a START condition (Figure 3) sent by a master, followed by the MAX6956 7-bit slave address plus  $R/\overline{W}$  bit (Figure 6), a register address byte, one or more data bytes, and finally a STOP condition (Figure 3).

## Start and Stop Conditions

Both SCL and SDA remain high when the interface is not busy. A master signals the beginning of a transmission with a START (S) condition by transitioning SDA from high to low while SCL is high. When the master has

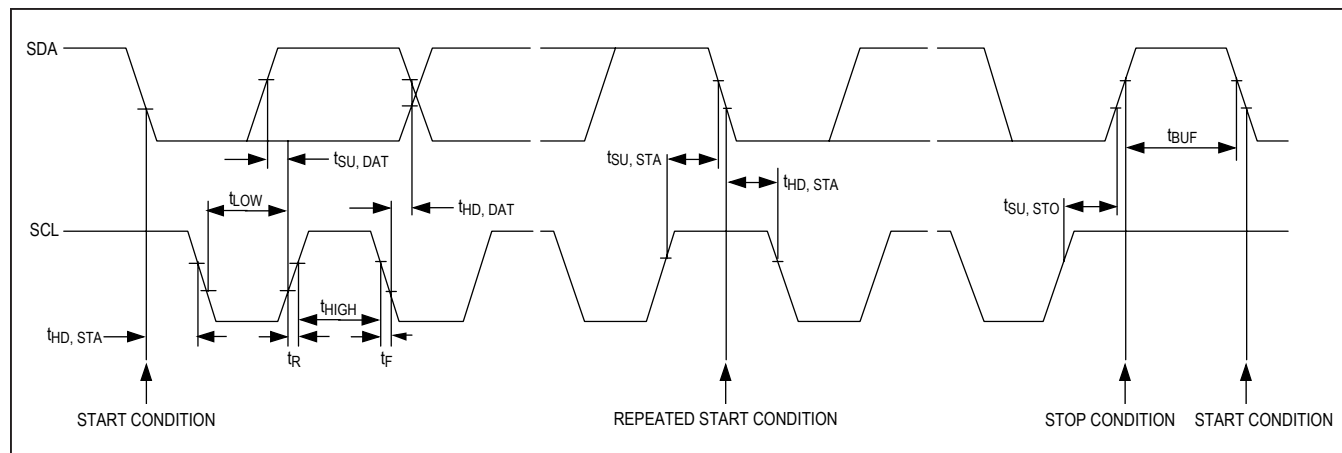


Figure 2. 2-Wire Serial Interface Timing Details

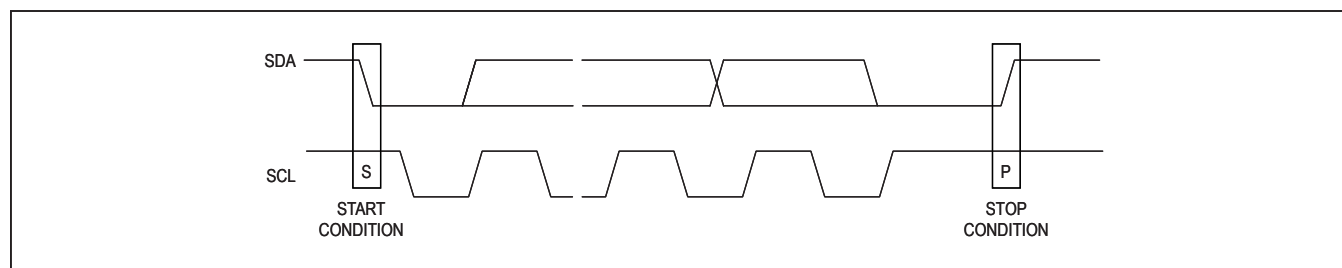


Figure 3. Standard Stop Conditions

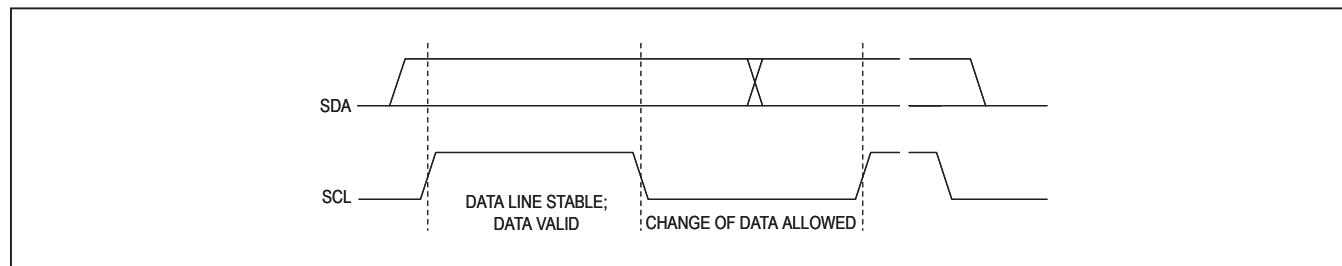


Figure 4. Bit Transfer

finished communicating with the slave, it issues a STOP (P) condition by transitioning SDA from low to high while SCL is high. The bus is then free for another transmission (Figure 3).

### Bit Transfer

One data bit is transferred during each clock pulse. The data on SDA must remain stable while SCL is high (Figure 4).

### Acknowledge

The acknowledge bit is a clocked 9th bit, which the recipient uses to handshake receipt of each byte of data (Figure 5). Thus, each byte transferred effectively requires 9 bits. The master generates the 9th clock pulse, and the recipient pulls down SDA during the acknowledge clock pulse, such that the SDA line is stable low during the high period of the clock pulse. When the master is transmitting to the MAX6956, the MAX6956 generates the acknowledge bit because the MAX6956 is the



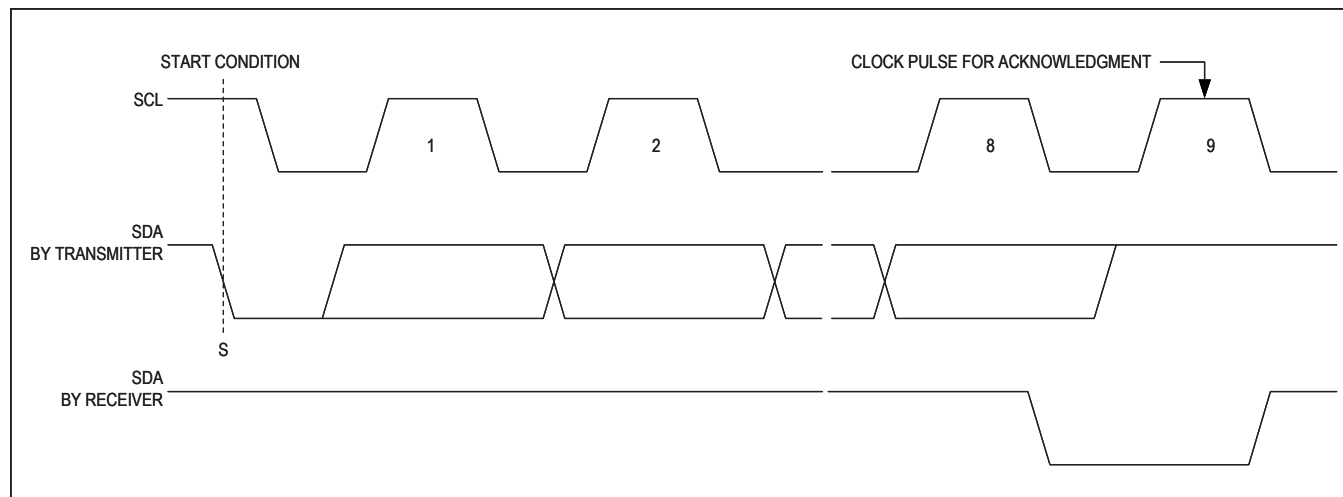


Figure 5. Acknowledge

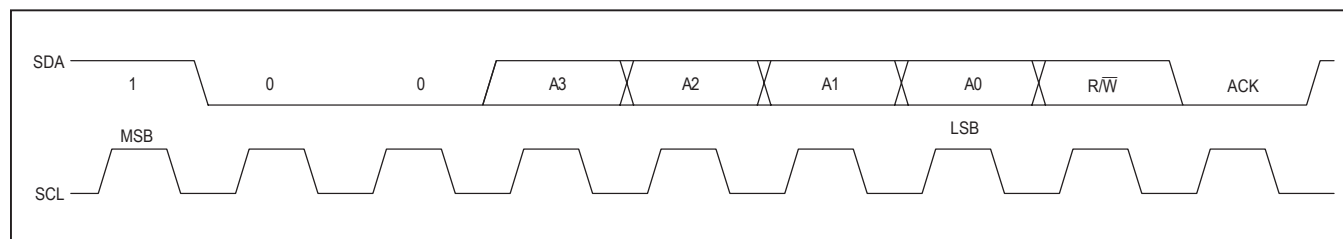


Figure 6. Slave Address

recipient. When the MAX6956 is transmitting to the master, the master generates the acknowledge bit because the master is the recipient.

### Slave Address

The MAX6956 has a 7-bit-long slave address (Figure 6). The eighth bit following the 7-bit slave address is the  $R/\overline{W}$  bit. It is low for a write command, high for a read command.

The first 3 bits (MSBs) of the MAX6956 slave address are always 100. Slave address bits A3, A2, A1, and A0 are selected by address inputs, AD1 and AD0. These two input pins may be connected to GND, V+, SDA, or SCL. The MAX6956 has 16 possible slave addresses (Table 3) and therefore, a maximum of 16 MAX6956 devices may share the same interface.

### Message Format for Writing the MAX6956

A write to the MAX6956 comprises the transmission of the MAX6956's slave address with the  $R/\overline{W}$  bit set to zero, followed by at least 1 byte of information. The first

byte of information is the command byte. The command byte determines which register of the MAX6956 is to be written by the next byte, if received. If a STOP condition is detected after the command byte is received, then the MAX6956 takes no further action (Figure 8) beyond storing the command byte.

Any bytes received after the command byte are data bytes. The first data byte goes into the internal register of the MAX6956 selected by the command byte (Figure 9). If multiple data bytes are transmitted before a STOP condition is detected, these bytes are generally stored in subsequent MAX6956 internal registers because the command byte address generally autoincrements (Table 4).

### Message Format for Reading

The MAX6956 is read using the MAX6956's internally stored command byte as address pointer, the same way the stored command byte is used as address pointer for a write. The pointer generally autoincrements after each data byte is read using the same rules as for a write (Table 4). Thus, a read is initiated by first configuring the MAX6956's command byte by performing a write



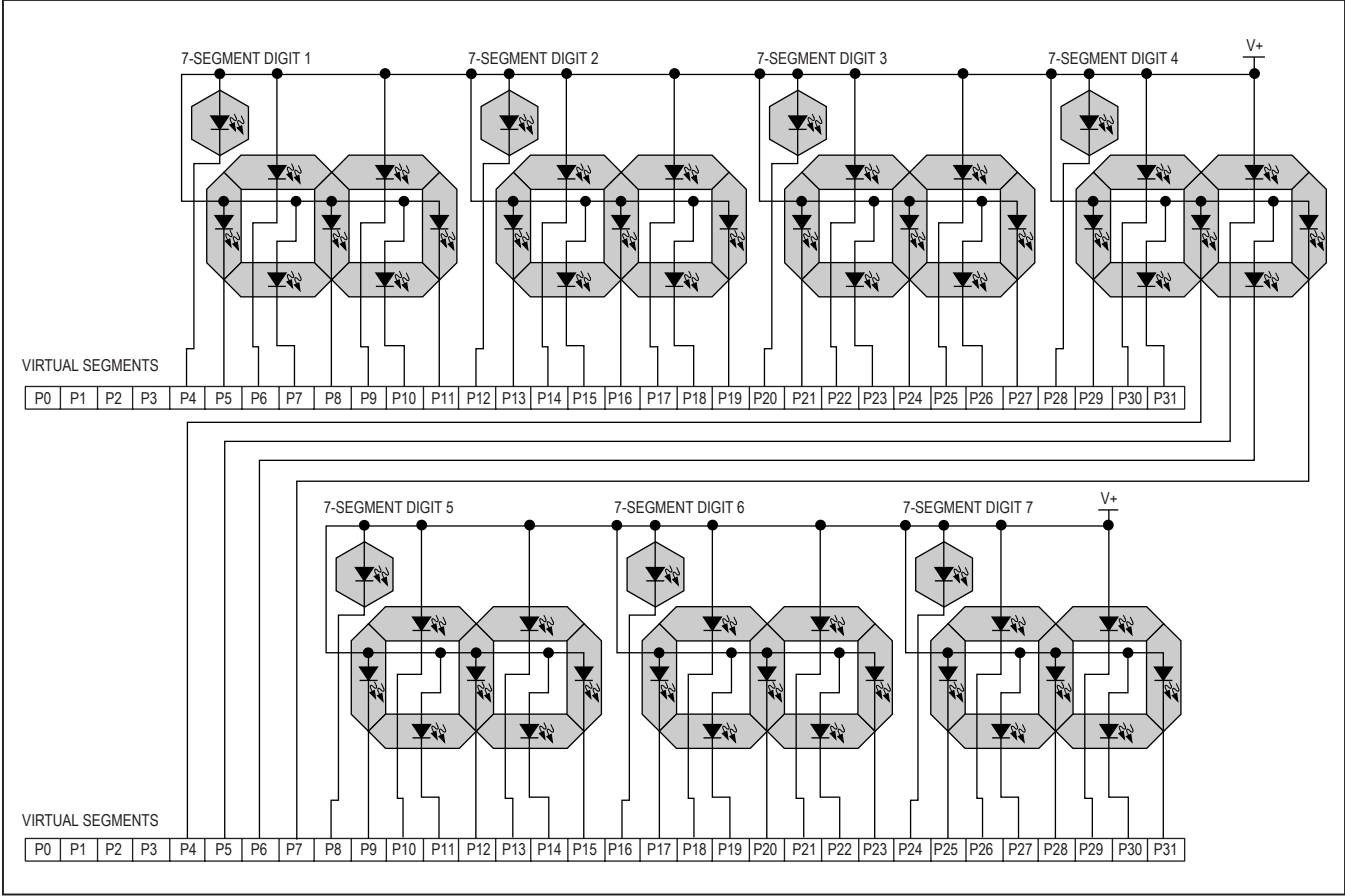


Figure 7. Two MAX6956s Controlling Seven 7-Segment Displays

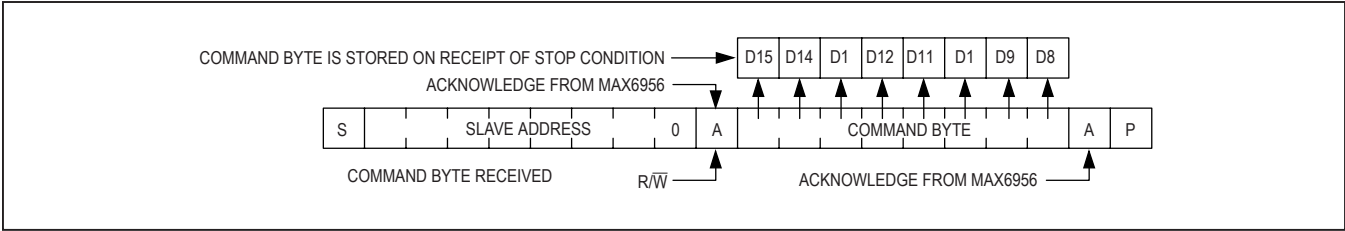


Figure 8. Command Byte Received

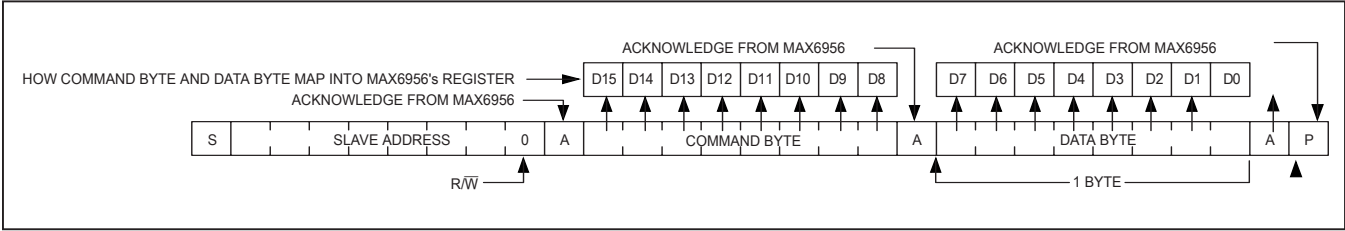


Figure 9. Command and Single Data Byte Received

MAX6956

2-Wire-Interfaced, 2.5V to 5.5V, 20-Port or 28-Port LED Display Driver and I/O Expander

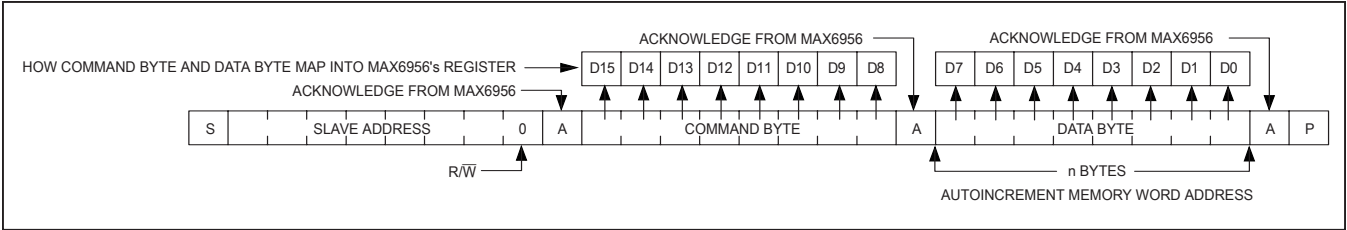


Table 3. MAX6956 Address Map

| PIN CONNECTION |     | DEVICE ADDRESS |    |    |    |    |    |    |
|----------------|-----|----------------|----|----|----|----|----|----|
| AD1            | AD0 | A6             | A5 | A4 | A3 | A2 | A1 | A0 |
| GND            | GND | 1              | 0  | 0  | 0  | 0  | 0  | 0  |
| GND            | V+  | 1              | 0  | 0  | 0  | 0  | 0  | 1  |
| GND            | SDA | 1              | 0  | 0  | 0  | 0  | 1  | 0  |
| GND            | SCL | 1              | 0  | 0  | 0  | 0  | 1  | 1  |
| V+             | GND | 1              | 0  | 0  | 0  | 1  | 0  | 0  |
| V+             | V+  | 1              | 0  | 0  | 0  | 1  | 0  | 1  |
| V+             | SDA | 1              | 0  | 0  | 0  | 1  | 1  | 0  |
| V+             | SCL | 1              | 0  | 0  | 0  | 1  | 1  | 1  |
| SDA            | GND | 1              | 0  | 0  | 1  | 0  | 0  | 0  |
| SDA            | V+  | 1              | 0  | 0  | 1  | 0  | 0  | 1  |
| SDA            | SDA | 1              | 0  | 0  | 1  | 0  | 1  | 0  |
| SDA            | SCL | 1              | 0  | 0  | 1  | 0  | 1  | 1  |
| SCL            | GND | 1              | 0  | 0  | 1  | 1  | 0  | 0  |
| SCL            | V+  | 1              | 0  | 0  | 1  | 1  | 0  | 1  |
| SCL            | SDA | 1              | 0  | 0  | 1  | 1  | 1  | 0  |
| SCL            | SCL | 1              | 0  | 0  | 1  | 1  | 1  | 1  |

Table 4. Autoincrement Rules

| COMMAND BYTE ADDRESS RANGE | AUTO INCREMENT BEHAVIOR                                        |
|----------------------------|----------------------------------------------------------------|
| x0000000 to x1111110       | Command address autoincrements after byte read or written      |
| x1111111                   | Command address remains at x1111111 after byte written or read |

(Figure 8). The master can now read n consecutive bytes from the MAX6956, with the first data byte being read from the register addressed by the initialized command byte. When performing read-after-write verification, remember to reset the command byte's address because the stored control byte address generally has been auto-incremented after the write (Table 4). Table 5 is the register address map.

Operation with Multiple Masters

If the MAX6956 is operated on a 2-wire interface with multiple masters, a master reading the MAX6956 should use a repeated start between the write, which sets the MAX6956's address pointer, and the read(s) that takes the data from the location(s). This is because it is possible for master 2 to take over the bus after master 1 has set up the MAX6956's address pointer but before master 1 has read the data. If master 2 subsequently changes, the

Table 5. Register Address Map

| REGISTER                                    | COMMAND ADDRESS |     |     |     |     |     |    |    | HEX CODE |
|---------------------------------------------|-----------------|-----|-----|-----|-----|-----|----|----|----------|
|                                             | D15             | D14 | D13 | D12 | D11 | D10 | D9 | D8 |          |
| No-Op                                       | X               | 0   | 0   | 0   | 0   | 0   | 0  | 0  | 0x00     |
| Global Current Configuration                | X               | 0   | 0   | 0   | 0   | 0   | 1  | 0  | 0x02     |
| Transition Detect Mask                      | X               | 0   | 0   | 0   | 0   | 1   | 1  | 0  | 0x06     |
| Display Test                                | X               | 0   | 0   | 0   | 0   | 1   | 1  | 1  | 0x07     |
| Port Configuration P7, P6, P5, P4           | X               | 0   | 0   | 0   | 1   | 0   | 0  | 1  | 0x09     |
| Port Configuration P11, P10, P9, P8         | X               | 0   | 0   | 0   | 1   | 0   | 1  | 0  | 0x0A     |
| Port Configuration P15, P14, P13, P12       | X               | 0   | 0   | 0   | 1   | 0   | 1  | 1  | 0x0B     |
| Port Configuration P19, P18, P17, P16       | X               | 0   | 0   | 0   | 1   | 1   | 0  | 0  | 0x0C     |
| Port Configuration P23, P22, P21, P20       | X               | 0   | 0   | 0   | 1   | 1   | 0  | 1  | 0x0D     |
| Port Configuration P27, P26, P25, P24       | X               | 0   | 0   | 0   | 1   | 1   | 1  | 0  | 0x0E     |
| Port Configuration P31, P30, P29, P28       | X               | 0   | 0   | 0   | 1   | 1   | 1  | 1  | 0x0F     |
| Current054                                  | X               | 0   | 0   | 1   | 0   | 0   | 1  | 0  | 0x12     |
| Current076                                  | X               | 0   | 0   | 1   | 0   | 0   | 1  | 1  | 0x13     |
| Current098                                  | X               | 0   | 0   | 1   | 0   | 1   | 0  | 0  | 0x14     |
| Current0BA                                  | X               | 0   | 0   | 1   | 0   | 1   | 0  | 1  | 0x15     |
| Current0DC                                  | X               | 0   | 0   | 1   | 0   | 1   | 1  | 0  | 0x16     |
| Current0FE                                  | X               | 0   | 0   | 1   | 0   | 1   | 1  | 1  | 0x17     |
| Current110                                  | X               | 0   | 0   | 1   | 1   | 0   | 0  | 0  | 0x18     |
| Current132                                  | X               | 0   | 0   | 1   | 1   | 0   | 0  | 1  | 0x19     |
| Current154                                  | X               | 0   | 0   | 1   | 1   | 0   | 1  | 0  | 0x1A     |
| Current176                                  | X               | 0   | 0   | 1   | 1   | 0   | 1  | 1  | 0x1B     |
| Current198                                  | X               | 0   | 0   | 1   | 1   | 1   | 0  | 0  | 0x1C     |
| Current1BA                                  | X               | 0   | 0   | 1   | 1   | 1   | 0  | 1  | 0x1D     |
| Current1DC                                  | X               | 0   | 0   | 1   | 1   | 1   | 1  | 0  | 0x1E     |
| Current1FE                                  | X               | 0   | 0   | 1   | 1   | 1   | 1  | 1  | 0x1F     |
| Port 0 only (virtual port, no action)       | X               | 0   | 1   | 0   | 0   | 0   | 0  | 0  | 0x20     |
| Port 1 only (virtual port, no action)       | X               | 0   | 1   | 0   | 0   | 0   | 0  | 1  | 0x21     |
| Port 2 only (virtual port, no action)       | X               | 0   | 1   | 0   | 0   | 0   | 1  | 0  | 0x22     |
| Port 3 only (virtual port, no action)       | X               | 0   | 1   | 0   | 0   | 0   | 1  | 1  | 0x23     |
| Port 4 only (data bit D0; D7–D1 read as 0)  | X               | 0   | 1   | 0   | 0   | 1   | 0  | 0  | 0x24     |
| Port 5 only (data bit D0; D7–D1 read as 0)  | X               | 0   | 1   | 0   | 0   | 1   | 0  | 1  | 0x25     |
| Port 6 only (data bit D0; D7–D1 read as 0)  | X               | 0   | 1   | 0   | 0   | 1   | 1  | 0  | 0x26     |
| Port 7 only (data bit D0; D7–D1 read as 0)  | X               | 0   | 1   | 0   | 0   | 1   | 1  | 1  | 0x27     |
| Port 8 only (data bit D0; D7–D1 read as 0)  | X               | 0   | 1   | 0   | 1   | 0   | 0  | 0  | 0x28     |
| Port 9 only (data bit D0; D7–D1 read as 0)  | X               | 0   | 1   | 0   | 1   | 0   | 0  | 1  | 0x29     |
| Port 10 only (data bit D0; D7–D1 read as 0) | X               | 0   | 1   | 0   | 1   | 0   | 1  | 0  | 0x2A     |

Table 5. Register Address Map (continued)

| REGISTER                                       | COMMAND ADDRESS |     |     |     |     |     |    |    | HEX CODE |
|------------------------------------------------|-----------------|-----|-----|-----|-----|-----|----|----|----------|
|                                                | D15             | D14 | D13 | D12 | D11 | D10 | D9 | D8 |          |
| Port 11 only (data bit D0; D7–D1 read as 0)    | X               | 0   | 1   | 0   | 1   | 0   | 1  | 1  | 0x2B     |
| Port 12 only (data bit D0; D7–D1 read as 0)    | X               | 0   | 1   | 0   | 1   | 1   | 0  | 0  | 0x2C     |
| Port 13 only (data bit D0; D7–D1 read as 0)    | X               | 0   | 1   | 0   | 1   | 1   | 0  | 1  | 0x2D     |
| Port 14 only (data bit D0; D7–D1 read as 0)    | X               | 0   | 1   | 0   | 1   | 1   | 1  | 0  | 0x2E     |
| Port 15 only (data bit D0; D7–D1 read as 0)    | X               | 0   | 1   | 0   | 1   | 1   | 1  | 1  | 0x2F     |
| Port 16 only (data bit D0; D7–D1 read as 0)    | X               | 0   | 1   | 1   | 0   | 0   | 0  | 0  | 0x30     |
| Port 17 only (data bit D0; D7–D1 read as 0)    | X               | 0   | 1   | 1   | 0   | 0   | 0  | 1  | 0x31     |
| Port 18 only (data bit D0; D7–D1 read as 0)    | X               | 0   | 1   | 1   | 0   | 0   | 1  | 0  | 0x32     |
| Port 19 only (data bit D0; D7–D1 read as 0)    | X               | 0   | 1   | 1   | 0   | 0   | 1  | 1  | 0x33     |
| Port 20 only (data bit D0; D7–D1 read as 0)    | X               | 0   | 1   | 1   | 0   | 1   | 0  | 0  | 0x34     |
| Port 21 only (data bit D0; D7–D1 read as 0)    | X               | 0   | 1   | 1   | 0   | 1   | 0  | 1  | 0x35     |
| Port 22 only (data bit D0; D7–D1 read as 0)    | X               | 0   | 1   | 1   | 0   | 1   | 1  | 0  | 0x36     |
| Port 23 only (data bit D0; D7–D1 read as 0)    | X               | 0   | 1   | 1   | 0   | 1   | 1  | 1  | 0x37     |
| Port 24 only (data bit D0; D7–D1 read as 0)    | X               | 0   | 1   | 1   | 1   | 0   | 0  | 0  | 0x38     |
| Port 25 only (data bit D0; D7–D1 read as 0)    | X               | 0   | 1   | 1   | 1   | 0   | 0  | 1  | 0x39     |
| Port 26 only (data bit D0; D7–D1 read as 0)    | X               | 0   | 1   | 1   | 1   | 0   | 1  | 0  | 0x3A     |
| Port 27 only (data bit D0; D7–D1 read as 0)    | X               | 0   | 1   | 1   | 1   | 0   | 1  | 1  | 0x3B     |
| Port 28 only (data bit D0; D7–D1 read as 0)    | X               | 0   | 1   | 1   | 1   | 1   | 0  | 0  | 0x3C     |
| Port 29 only (data bit D0; D7–D1 read as 0)    | X               | 0   | 1   | 1   | 1   | 1   | 0  | 1  | 0x3D     |
| Port 30 only (data bit D0; D7–D1 read as 0)    | X               | 0   | 1   | 1   | 1   | 1   | 1  | 0  | 0x3E     |
| Port 31 only (data bit D0; D7–D1 read as 0)    | X               | 0   | 1   | 1   | 1   | 1   | 1  | 1  | 0x3F     |
| 4 ports 4–7 (data bits D0–D3; D4–D7 read as 0) | X               | 1   | 0   | 0   | 0   | 0   | 0  | 0  | 0x40     |
| 5 ports 4–8 (data bits D0–D4; D5–D7 read as 0) | X               | 1   | 0   | 0   | 0   | 0   | 0  | 1  | 0x41     |
| 6 ports 4–9 (data bits D0–D5; D6–D7 read as 0) | X               | 1   | 0   | 0   | 0   | 0   | 1  | 0  | 0x42     |
| 7 ports 4–10 (data bits D0–D6; D7 reads as 0)  | X               | 1   | 0   | 0   | 0   | 0   | 1  | 1  | 0x43     |
| 8 ports 4–11 (data bits D0–D7)                 | X               | 1   | 0   | 0   | 0   | 1   | 0  | 0  | 0x44     |
| 8 ports 5–12 (data bits D0–D7)                 | X               | 1   | 0   | 0   | 0   | 1   | 0  | 1  | 0x45     |
| 8 ports 6–13 (data bits D0–D7)                 | X               | 1   | 0   | 0   | 0   | 1   | 1  | 0  | 0x46     |
| 8 ports 7–14 (data bits D0–D7)                 | X               | 1   | 0   | 0   | 0   | 1   | 1  | 1  | 0x47     |
| 8 ports 8–15 (data bits D0–D7)                 | X               | 1   | 0   | 0   | 1   | 0   | 0  | 0  | 0x48     |
| 8 ports 9–16 (data bits D0–D7)                 | X               | 1   | 0   | 0   | 1   | 0   | 0  | 1  | 0x49     |
| 8 ports 10–17 (data bits D0–D7)                | X               | 1   | 0   | 0   | 1   | 0   | 1  | 0  | 0x4A     |
| 8 ports 11–18 (data bits D0–D7)                | X               | 1   | 0   | 0   | 1   | 0   | 1  | 1  | 0x4B     |
| 8 ports 12–19 (data bits D0–D7)                | X               | 1   | 0   | 0   | 1   | 1   | 0  | 0  | 0x4C     |
| 8 ports 13–20 (data bits D0–D7)                | X               | 1   | 0   | 0   | 1   | 1   | 0  | 1  | 0x4D     |
| 8 ports 14–21 (data bits D0–D7)                | X               | 1   | 0   | 0   | 1   | 1   | 1  | 0  | 0x4E     |
| 8 ports 15–22 (data bits D0–D7)                | X               | 1   | 0   | 0   | 1   | 1   | 1  | 1  | 0x4F     |

**Table 5. Register Address Map (continued)**

| REGISTER                                         | COMMAND ADDRESS |     |     |     |     |     |    |    | HEX CODE |
|--------------------------------------------------|-----------------|-----|-----|-----|-----|-----|----|----|----------|
|                                                  | D15             | D14 | D13 | D12 | D11 | D10 | D9 | D8 |          |
| 8 ports 16–23 (data bits D0–D7)                  | X               | 1   | 0   | 1   | 0   | 0   | 0  | 0  | 0x50     |
| 8 ports 17–24 (data bits D0–D7)                  | X               | 1   | 0   | 1   | 0   | 0   | 0  | 1  | 0x51     |
| 8 ports 18–25 (data bits D0–D7)                  | X               | 1   | 0   | 1   | 0   | 0   | 1  | 0  | 0x52     |
| 8 ports 19–26 (data bits D0–D7)                  | X               | 1   | 0   | 1   | 0   | 0   | 1  | 1  | 0x53     |
| 8 ports 20–27 (data bits D0–D7)                  | X               | 1   | 0   | 1   | 0   | 1   | 0  | 0  | 0x54     |
| 8 ports 21–28 (data bits D0–D7)                  | X               | 1   | 0   | 1   | 0   | 1   | 0  | 1  | 0x55     |
| 8 ports 22–29 (data bits D0–D7)                  | X               | 1   | 0   | 1   | 0   | 1   | 1  | 0  | 0x56     |
| 8 ports 23–30 (data bits D0–D7)                  | X               | 1   | 0   | 1   | 0   | 1   | 1  | 1  | 0x57     |
| 8 ports 24–31 (data bits D0–D7)                  | X               | 1   | 0   | 1   | 1   | 0   | 0  | 0  | 0x58     |
| 7 ports 25–31 (data bits D0–D6; D7 reads as 0)   | X               | 1   | 0   | 1   | 1   | 0   | 0  | 1  | 0x59     |
| 6 ports 26–31 (data bits D0–D5; D6–D7 read as 0) | X               | 1   | 0   | 1   | 1   | 0   | 1  | 0  | 0x5A     |
| 5 ports 27–31 (data bits D0–D4; D5–D7 read as 0) | X               | 1   | 0   | 1   | 1   | 0   | 1  | 1  | 0x5B     |
| 4 ports 28–31 (data bits D0–D3; D4–D7 read as 0) | X               | 1   | 0   | 1   | 1   | 1   | 0  | 0  | 0x5C     |
| 3 ports 29–31 (data bits D0–D2; D3–D7 read as 0) | X               | 1   | 0   | 1   | 1   | 1   | 0  | 1  | 0x5D     |
| 2 ports 30–31 (data bits D0–D1; D2–D7 read as 0) | X               | 1   | 0   | 1   | 1   | 1   | 1  | 0  | 0x5E     |
| 1 port 31 only (data bit D0; D1–D7 read as 0)    | X               | 1   | 0   | 1   | 1   | 1   | 1  | 1  | 0x5F     |

**Note:** Unused bits read as 0.

MAX6956's address pointer, then master 1's delayed read may be from an unexpected location.

### Command Address Autoincrementing

Address autoincrementing allows the MAX6956 to be configured with the shortest number of transmissions by minimizing the number of times the command address needs to be sent. The command address stored in the MAX6956 generally increments after each data byte is written or read (Table 4).

### Initial Power-Up

On initial power-up, all control registers are reset, the current registers are set to minimum value, and the MAX6956 enters shutdown mode (Table 6).

### LED Current Control

LED segment drive current can be set either globally or individually. Global control simplifies the operation when all LEDs are set to the same current level, because writing just the global current register sets the current for all ports configured as LED segment drivers. It is also possible to individually control the current drive of each LED segment

driver. Individual/global brightness control is selected by setting the configuration register I bit (Table 9). The global current register (0x02) data are then ignored, and segment currents are set using register addresses 0x12 through 0x1F (Tables 12, 13, and 14). Each segment is controlled by a nibble of one of the 16 current registers.

### Transition (Port Data Change) Detection

Port transition detection allows any combination of the seven ports P24–P30 to be continuously monitored for changes in their logic status (Figure 11). A detected change is flagged on the transition detection mask register INT status bit, D7 (Table 15). If port P31 is configured as an output (Tables 1 and 2), then P31 also automatically becomes an active-high interrupt output (INT), which follows the condition of the INT status bit. Port P31 is set as output by writing bit D7 = 0 and bit D6 = 1 to the port configuration register (Table 1). Note that the MAX6956 does not identify which specific port(s) caused the interrupt, but provides an alert that one or more port levels have changed.

**Table 6. Power-Up Configuration**

| REGISTER<br>FUNCTION          | POWER-UP CONDITION                                                            | ADDRESS<br>CODE<br>(HEX) | REGISTER DATA |    |    |    |    |    |    |    |
|-------------------------------|-------------------------------------------------------------------------------|--------------------------|---------------|----|----|----|----|----|----|----|
|                               |                                                                               |                          | D7            | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Port Register<br>Bits 4 to 31 | LED Off; GPIO Output Low                                                      | 0x24 to<br>0x3F          | X             | X  | X  | X  | X  | X  | X  | 0  |
| Global Current                | 1/16 (minimum on)                                                             | 0x02                     | X             | X  | X  | X  | 0  | 0  | 0  | 0  |
| Configuration<br>Register     | Shutdown Enabled<br>Current Control = Global<br>Transition Detection Disabled | 0x04                     | 0             | 0  | X  | X  | X  | X  | X  | 0  |
| Input Mask<br>Register        | All Clear (Masked Off)                                                        | 0x06                     | X             | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| Display Test                  | Normal Operation                                                              | 0x07                     | X             | X  | X  | X  | X  | X  | X  | 0  |
| Port<br>Configuration         | P7, P6, P5, P4: GPIO Inputs Without Pullup                                    | 0x09                     | 1             | 0  | 1  | 0  | 1  | 0  | 1  | 0  |
| Port<br>Configuration         | P11, P10, P9, P8: GPIO Inputs Without Pullup                                  | 0x0A                     | 1             | 0  | 1  | 0  | 1  | 0  | 1  | 0  |
| Port<br>Configuration         | P15, P14, P13, P12: GPIO Inputs Without Pullup                                | 0x0B                     | 1             | 0  | 1  | 0  | 1  | 0  | 1  | 0  |
| Port<br>Configuration         | P19, P18, P17, P16: GPIO Inputs Without Pullup                                | 0x0C                     | 1             | 0  | 1  | 0  | 1  | 0  | 1  | 0  |
| Port<br>Configuration         | P23, P22, P21, P20: GPIO Inputs Without Pullup                                | 0x0D                     | 1             | 0  | 1  | 0  | 1  | 0  | 1  | 0  |
| Port<br>Configuration         | P27, P26, P25, P24: GPIO Inputs Without Pullup                                | 0x0E                     | 1             | 0  | 1  | 0  | 1  | 0  | 1  | 0  |
| Port<br>Configuration         | P31, P30, P29, P28: GPIO Inputs Without Pullup                                | 0x0F                     | 1             | 0  | 1  | 0  | 1  | 0  | 1  | 0  |
| Current054                    | 1/16 (minimum on)                                                             | 0x12                     | 0             | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| Current076                    | 1/16 (minimum on)                                                             | 0x13                     | 0             | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| Current098                    | 1/16 (minimum on)                                                             | 0x14                     | 0             | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| Current0BA                    | 1/16 (minimum on)                                                             | 0x15                     | 0             | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| Current0DC                    | 1/16 (minimum on)                                                             | 0x16                     | 0             | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| Current0FE                    | 1/16 (minimum on)                                                             | 0x17                     | 0             | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| Current110                    | 1/16 (minimum on)                                                             | 0x18                     | 0             | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| Current132                    | 1/16 (minimum on)                                                             | 0x19                     | 0             | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| Current154                    | 1/16 (minimum on)                                                             | 0x1A                     | 0             | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| Current176                    | 1/16 (minimum on)                                                             | 0x1B                     | 0             | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| Current198                    | 1/16 (minimum on)                                                             | 0x1C                     | 0             | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| Current1BA                    | 1/16 (minimum on)                                                             | 0x1D                     | 0             | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| Current1DC                    | 1/16 (minimum on)                                                             | 0x1E                     | 0             | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| Current1FE                    | 1/16 (minimum on)                                                             | 0x1F                     | 0             | 0  | 0  | 0  | 0  | 0  | 0  | 0  |

X = unused bits; if read, zero results.

**Table 7. Configuration Register Format**

| FUNCTION               | ADDRESS CODE (HEX) | REGISTER DATA |    |    |    |    |    |    |    |
|------------------------|--------------------|---------------|----|----|----|----|----|----|----|
|                        |                    | D7            | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Configuration Register | 0x04               | M             | I  | X  | X  | X  | X  | X  | S  |

**Table 8. Shutdown Control (S Data Bit D0) Format**

| FUNCTION         | ADDRESS CODE (HEX) | REGISTER DATA |    |    |    |    |    |    |    |
|------------------|--------------------|---------------|----|----|----|----|----|----|----|
|                  |                    | D7            | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Shutdown         | 0x04               | M             | I  | X  | X  | X  | X  | X  | 0  |
| Normal Operation | 0x04               | M             | I  | X  | X  | X  | X  | X  | 1  |

**Table 9. Global Current Control (I Data Bit D6) Format**

| FUNCTION                                                                                                                                           | ADDRESS CODE (HEX) | REGISTER DATA |    |    |    |    |    |    |    |
|----------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|---------------|----|----|----|----|----|----|----|
|                                                                                                                                                    |                    | D7            | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Global Constant-current limits for all digits are controlled by one setting in the Global Current register, 0x02                                   | 0x04               | M             | 0  | X  | X  | X  | X  | X  | S  |
| Individual Segment Constant-current limit for each digit is individually controlled by the settings in the Current054 through Current1FE registers | 0x04               | M             | 1  | X  | X  | X  | X  | X  | S  |

**Table 10. Transition Detection Control (M-Data Bit D7) Format**

| FUNCTION | ADDRESS CODE (HEX) | REGISTER DATA |    |    |    |    |    |    |    |
|----------|--------------------|---------------|----|----|----|----|----|----|----|
|          |                    | D7            | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Disabled | 0x04               | 0             | I  | X  | X  | X  | X  | X  | S  |
| Enabled  | 0x04               | 1             | I  | X  | X  | X  | X  | X  | S  |

The mask register contains 7 mask bits, which select which of the seven ports P24–P30 are to be monitored (Table 15). Set the appropriate mask bit to enable that port for transition detect. Clear the mask bit if transitions on that port are to be ignored. Transition detection works regardless of whether the port being monitored is set to input or output, but generally, it is not particularly useful to enable transition detection for outputs.

To use transition detection, first set up the mask register and configure port P31 as an output, as described above. Then enable transition detection by setting the M bit in the

configuration register (Table 10). Whenever the configuration register is written with the M bit set, the MAX6956 updates an internal 7-bit snapshot register, which holds the comparison copy of the logic states of ports P24 through P30. The update action occurs regardless of the previous state of the M bit, so that it is not necessary to clear the M bit and then set it again to update the snapshot register.

When the configuration register is written with the M bit set, transition detection is enabled and remains enabled until either the configuration register is written with the



**Table 11. Global Segment Current Register Format**

| LED DRIVE FRACTION | TYPICAL SEGMENT CURRENT (mA) | ADDRESS CODE (HEX) | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | HEX CODE |
|--------------------|------------------------------|--------------------|----|----|----|----|----|----|----|----|----------|
| 1/16               | 1.5                          | 0x02               | X  | X  | X  | X  | 0  | 0  | 0  | 0  | 0xX0     |
| 2/16               | 3                            | 0x02               | X  | X  | X  | X  | 0  | 0  | 0  | 1  | 0xX1     |
| 3/16               | 4.5                          | 0x02               | X  | X  | X  | X  | 0  | 0  | 1  | 0  | 0xX2     |
| 4/16               | 6                            | 0x02               | X  | X  | X  | X  | 0  | 0  | 1  | 1  | 0xX3     |
| 5/16               | 7.5                          | 0x02               | X  | X  | X  | X  | 0  | 1  | 0  | 0  | 0xX4     |
| 6/16               | 9                            | 0x02               | X  | X  | X  | X  | 0  | 1  | 0  | 1  | 0xX5     |
| 7/16               | 10.5                         | 0x02               | X  | X  | X  | X  | 0  | 1  | 1  | 0  | 0xX6     |
| 8/16               | 12                           | 0x02               | X  | X  | X  | X  | 0  | 1  | 1  | 1  | 0xX7     |
| 9/16               | 13.5                         | 0x02               | X  | X  | X  | X  | 1  | 0  | 0  | 0  | 0xX8     |
| 10/16              | 15                           | 0x02               | X  | X  | X  | X  | 1  | 0  | 0  | 1  | 0xX9     |
| 11/16              | 16.5                         | 0x02               | X  | X  | X  | X  | 1  | 0  | 1  | 0  | 0xXA     |
| 12/16              | 18                           | 0x02               | X  | X  | X  | X  | 1  | 0  | 1  | 1  | 0xXB     |
| 13/16              | 19.5                         | 0x02               | X  | X  | X  | X  | 1  | 1  | 0  | 0  | 0xXC     |
| 14/16              | 21                           | 0x02               | X  | X  | X  | X  | 1  | 1  | 0  | 1  | 0xXD     |
| 15/16              | 22.5                         | 0x02               | X  | X  | X  | X  | 1  | 1  | 1  | 0  | 0xXE     |
| 16/16              | 24                           | 0x02               | X  | X  | X  | X  | 1  | 1  | 1  | 1  | 0xFF     |

X = Don't care bit.

M bit clear, or a transition is detected. The INT status bit (transition detection mask register bit D7) goes low. Port P31 (if enabled as INT output) also goes low, if it was not already low.

Once transition detection is enabled, the MAX6956 continuously compares the snapshot register against the changing states of P24 through P31. If a change on any of the monitored ports is detected, even for a short time (like a pulse), the INT status bit (transition detection mask register bit D7) is set. Port P31 (if enabled as INT output) also goes high. The INT output and INT status bit are not cleared if more changes occur or if the data pattern returns to its original snapshot condition. The only way to clear INT is to access (read or write) the transition detection mask register (Table 15). So if the transition detection mask register is read twice in succession after a transition event, the first time reads with bit D7 set (identifying the event), and the second time reads with bit D7 clear.

Transition detection is a one-shot event. When INT has been cleared after responding to a transition event, transition detection is automatically disabled, even though the M bit in the configuration register remains set (unless cleared by the user). Reenable transition detection by

writing the configuration register with the M bit set, to take a new snapshot of the seven ports P24 to P30.

## Display Test Register

Display test mode turns on all ports configured as LED drivers by overriding, but not altering, all controls and port registers, except the port configuration register (Table 16). Only ports configured as LED drivers are affected. Ports configured as GPIO push-pull outputs do not change state. In display test mode, each port's current is temporarily set to 1/2 the maximum current limit as controlled by R<sub>1SET</sub>.

### Selecting External Component R<sub>1SET</sub> to Set Maximum Segment Current

The MAX6956 uses an external resistor R<sub>1SET</sub> to set the maximum segment current. The recommended value, 39kΩ, sets the maximum current to 24mA, which makes the segment current adjustable from 1.5mA to 24mA in 1.5mA steps.

To set a different segment current, use the formula:

$$R_{1SET} = 936k\Omega / I_{SEG}$$

where I<sub>SEG</sub> is the desired maximum segment current.

**Table 12. Individual Segment Current Registers**

| REGISTER FUNCTION   | ADDRESS CODE (HEX) | D7         | D6 | D5 | D4 | D3         | D2 | D1 | D0 |
|---------------------|--------------------|------------|----|----|----|------------|----|----|----|
| Current054 register | 0x12               | Segment 5  |    |    |    | Segment 4  |    |    |    |
| Current076 register | 0x13               | Segment 7  |    |    |    | Segment 6  |    |    |    |
| Current098 register | 0x14               | Segment 9  |    |    |    | Segment 8  |    |    |    |
| Current0BA register | 0x15               | Segment 11 |    |    |    | Segment 10 |    |    |    |
| Current0DC register | 0x16               | Segment 13 |    |    |    | Segment 12 |    |    |    |
| Current0FE register | 0x17               | Segment 15 |    |    |    | Segment 14 |    |    |    |
| Current110 register | 0x18               | Segment 17 |    |    |    | Segment 16 |    |    |    |
| Current132 register | 0x19               | Segment 19 |    |    |    | Segment 18 |    |    |    |
| Current154 register | 0x1A               | Segment 21 |    |    |    | Segment 20 |    |    |    |
| Current176 register | 0x1B               | Segment 23 |    |    |    | Segment 22 |    |    |    |
| Current198 register | 0x1C               | Segment 25 |    |    |    | Segment 24 |    |    |    |
| Current1BA register | 0x1D               | Segment 27 |    |    |    | Segment 26 |    |    |    |
| Current1DC register | 0x1E               | Segment 29 |    |    |    | Segment 28 |    |    |    |
| Current1FE register | 0x1F               | Segment 31 |    |    |    | Segment 30 |    |    |    |

**Table 13. Even Individual Segment Current Format**

| LED DRIVE FRACTION | SEGMENT CONSTANT CURRENT WITH $R_{SET} = 39k\Omega$ (mA) | ADDRESS CODE (HEX) | D7            | D6 | D5 | D4 | D3 | D2 | D1 | D0 | HEX CODE |
|--------------------|----------------------------------------------------------|--------------------|---------------|----|----|----|----|----|----|----|----------|
| 1/16               | 1.5                                                      | 0x12 to 0x1F       | See Table 14. |    |    |    | 0  | 0  | 0  | 0  | 0xX0     |
| 2/16               | 3                                                        | 0x12 to 0x1F       |               |    |    |    | 0  | 0  | 0  | 1  | 0xX1     |
| 3/16               | 4.5                                                      | 0x12 to 0x1F       |               |    |    |    | 0  | 0  | 1  | 0  | 0xX2     |
| 4/16               | 6                                                        | 0x12 to 0x1F       |               |    |    |    | 0  | 0  | 1  | 1  | 0xX3     |
| 5/16               | 7.5                                                      | 0x12 to 0x1F       |               |    |    |    | 0  | 1  | 0  | 0  | 0xX4     |
| 6/16               | 9                                                        | 0x12 to 0x1F       |               |    |    |    | 0  | 1  | 0  | 1  | 0xX5     |
| 7/16               | 10.5                                                     | 0x12 to 0x1F       |               |    |    |    | 0  | 1  | 1  | 0  | 0xX6     |
| 8/16               | 12                                                       | 0x12 to 0x1F       |               |    |    |    | 0  | 1  | 1  | 1  | 0xX7     |
| 9/16               | 13.5                                                     | 0x12 to 0x1F       |               |    |    |    | 1  | 0  | 0  | 0  | 0xX8     |
| 10/16              | 15                                                       | 0x12 to 0x1F       |               |    |    |    | 1  | 0  | 0  | 1  | 0xX9     |
| 11/16              | 16.5                                                     | 0x12 to 0x1F       |               |    |    |    | 1  | 0  | 1  | 0  | 0xXA     |
| 12/16              | 18                                                       | 0x12 to 0x1F       |               |    |    |    | 1  | 0  | 1  | 1  | 0xXB     |
| 13/16              | 19.5                                                     | 0x12 to 0x1F       |               |    |    |    | 1  | 1  | 0  | 0  | 0xXC     |
| 14/16              | 21                                                       | 0x12 to 0x1F       |               |    |    |    | 1  | 1  | 0  | 1  | 0xXD     |
| 15/16              | 22.5                                                     | 0x12 to 0x1F       |               |    |    |    | 1  | 1  | 1  | 0  | 0xXE     |
| 16/16              | 24                                                       | 0x12 to 0x1F       |               |    |    |    | 1  | 1  | 1  | 1  | 0xFF     |

**Table 14. Odd Individual Segment Current Format**

| LED DRIVE FRACTION | SEGMENT CONSTANT CURRENT WITH $R_{ISET} = 39k\Omega$ (mA) | ADDRESS CODE (HEX) | D7 | D6 | D5 | D4 | D3            | D2 | D1 | D0 | HEX CODE |
|--------------------|-----------------------------------------------------------|--------------------|----|----|----|----|---------------|----|----|----|----------|
| 1/16               | 1.5                                                       | 0x12 to 0x1F       | 0  | 0  | 0  | 0  | See Table 13. |    |    |    | 0x0X     |
| 2/16               | 3                                                         | 0x12 to 0x1F       | 0  | 0  | 0  | 1  |               |    |    |    | 0x1X     |
| 3/16               | 4.5                                                       | 0x12 to 0x1F       | 0  | 0  | 1  | 0  |               |    |    |    | 0x2X     |
| 4/16               | 6                                                         | 0x12 to 0x1F       | 0  | 0  | 1  | 1  |               |    |    |    | 0x3X     |
| 5/16               | 7.5                                                       | 0x12 to 0x1F       | 0  | 1  | 0  | 0  |               |    |    |    | 0x4X     |
| 6/16               | 9                                                         | 0x12 to 0x1F       | 0  | 1  | 0  | 1  |               |    |    |    | 0x5X     |
| 7/16               | 10.5                                                      | 0x12 to 0x1F       | 0  | 1  | 1  | 0  |               |    |    |    | 0x6X     |
| 8/16               | 12                                                        | 0x12 to 0x1F       | 0  | 1  | 1  | 1  |               |    |    |    | 0x7X     |
| 9/16               | 13.5                                                      | 0x12 to 0x1F       | 1  | 0  | 0  | 0  |               |    |    |    | 0x8X     |
| 10/16              | 15                                                        | 0x12 to 0x1F       | 1  | 0  | 0  | 1  |               |    |    |    | 0x9X     |
| 11/16              | 16.5                                                      | 0x12 to 0x1F       | 1  | 0  | 1  | 0  |               |    |    |    | 0xAx     |
| 12/16              | 18                                                        | 0x12 to 0x1F       | 1  | 0  | 1  | 1  |               |    |    |    | 0xBx     |
| 13/16              | 19.5                                                      | 0x12 to 0x1F       | 1  | 1  | 0  | 0  |               |    |    |    | 0xCx     |
| 14/16              | 21                                                        | 0x12 to 0x1F       | 1  | 1  | 0  | 1  |               |    |    |    | 0xDx     |
| 15/16              | 22.5                                                      | 0x12 to 0x1F       | 1  | 1  | 1  | 0  |               |    |    |    | 0xEx     |
| 16/16              | 24                                                        | 0x12 to 0x1F       | 1  | 1  | 1  | 1  |               |    |    |    | 0xFx     |

The recommended value of  $R_{ISET}$  is 39k $\Omega$ .

The recommended value of  $R_{ISET}$  is the minimum allowed value, since it sets the display driver to the maximum allowed segment current.  $R_{ISET}$  can be a higher value to set the segment current to a lower maximum value where desired. The user must also ensure that the maximum current specifications of the LEDs connected to the driver are not exceeded.

The drive current for each segment can be controlled through programming either the Global Current register (Table 11) or Individual Segment Current registers (Tables 12, 13, and 14), according to the setting of the Current Control bit of the Configuration register (Table 9). These registers select the LED's constant-current drive from 16 equal fractions of the maximum segment current. The current difference between successive current steps,  $I_{STEP}$ , is therefore determined by the formula:

$$I_{STEP} = I_{SEG} / 16$$

If  $I_{SEG} = 24\text{mA}$ , then  $I_{STEP} = 24\text{mA} / 16 = 1.5\text{mA}$ .

## Applications Information

### Driving Bicolor and Tricolor LEDs

Bicolor digits group a red and a green die together for each display element, so that the element can be lit red, green (or orange), depending on which die (or both) is lit. The MAX6956 allows each segment's current to be set individually from 1/16th (minimum current and LED intensity) to 16/16th (maximum current and LED intensity), as well as off (zero current). Thus, a bicolor (red-green) segment pair can be set to 289 color/intensity combinations. A discrete or CA tricolor (red-green-yellow or red-green-blue) segment triad can be set to 4913 color/intensity combinations.

### Power Dissipation Issues

Each MAX6956 port can sink a current of 24mA into an LED with a 2.4V forward-voltage drop when operated from a supply voltage of at least 3.0V. The minimum voltage drop across the internal LED drivers is therefore  $(3.0\text{V} - 2.4\text{V}) = 0.6\text{V}$ . The MAX6956 can sink  $28 \times 24\text{mA} = 672\text{mA}$  when all outputs are operating as LED segment



**Table 15. Transition Detection Mask Register**

| FUNCTION      | REGISTER ADDRESS (HEX) | READ/ WRITE | REGISTER DATA |              |              |              |              |              |              |              |
|---------------|------------------------|-------------|---------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
|               |                        |             | D7            | D6           | D5           | D4           | D3           | D2           | D1           | D0           |
| Mask Register | 0x06                   | Read        | INT Status*   | Port 30 mask | Port 29 mask | Port 28 mask | Port 27 mask | Port 26 mask | Port 25 mask | Port 24 mask |
|               |                        | Write       | Unchanged     |              |              |              |              |              |              |              |

\*INT is automatically cleared after it is read.

**Table 16. Display Test Register**

| MODE              | ADDRESS CODE (HEX) | REGISTER DATA |    |    |    |    |    |    |    |
|-------------------|--------------------|---------------|----|----|----|----|----|----|----|
|                   |                    | D7            | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Normal Operation  | 0x07               | X             | X  | X  | X  | X  | X  | X  | 0  |
| Display Test Mode | 0x07               | X             | X  | X  | X  | X  | X  | X  | 1  |

X = Don't care bit

drivers at full current. On a 3.3V supply, a MAX6956 dissipates  $(3.3V - 2.4V) \times 672mA = 0.6W$  when driving 28 of these 2.4V forward-voltage drop LEDs at full current. This dissipation is within the ratings of the 36-pin SSOP package with an ambient temperature up to +98°C. If a higher supply voltage is used or the LEDs used have a lower forward-voltage drop than 2.4V, the MAX6956 absorbs a higher voltage, and the MAX6956's power dissipation increases.

If the application requires high drive current and high supply voltage, consider adding a series resistor to each LED to drop excessive drive voltage off-chip. For example, consider the requirement that the MAX6956 must drive LEDs with a 2.0V to 2.4V specified forward-voltage drop, from an input supply range is  $5V \pm 5\%$  with a maximum LED current of 20mA. Minimum input supply voltage is 4.75V. Maximum LED series resistor value is  $(4.75V - 2.4V - 0.6V)/0.020A = 87.5\Omega$ . We choose  $82\Omega \pm 2\%$ . Worst-case resistor dissipation is at maximum tolerated resistance, i.e.,  $(0.020A)^2 \times (82\Omega \times 1.02) = 34mW$ . The maximum MAX6956 dissipation per LED is at maximum input supply voltage, minimum tolerated resistance, minimum tolerated LED forward-voltage drop, i.e.,  $0.020 \times (5.25V - 2.0V - (0.020A \times 82\Omega \times 0.98)) = 32.86mW$ . Worst-case MAX6956 dissipation is 920mW driving all 28 LEDs at 20mA full current at once, which meets the 941mW dissipation ratings of the 36-pin SSOP package.

### Low-Voltage Operation

The MAX6956 operates down to 2V supply voltage (although the sourcing and sinking currents are not guaranteed), providing that the MAX6956 is powered up initially to at least 2.5V to trigger the device's internal reset.

### Serial Interface Latency

When a MAX6956 register is written through the I<sup>2</sup>C interface, the register is updated on the rising edge of SCL during the data byte's acknowledge bit (Figure 5). The delay from the rising edge of SCL to the internal register being updated can range from 50ns to 350ns.


### PC Board Layout Considerations

Ensure that all of the MAX6956 GND connections are used. A ground plane is not necessary, but may be useful to reduce supply impedance if the MAX6956 outputs are to be heavily loaded. Keep the track length from the ISET pin to the R<sub>ISET</sub> resistor as short as possible, and take the GND end of the resistor either to the ground plane or directly to the GND pins.

### Power-Supply Considerations

The MAX6956 operates with power-supply voltages of 2.5V to 5.5V. Bypass the power supply to GND with a 0.047μF capacitor as close to the device as possible. Add a 1μF capacitor if the MAX6956 is far away from the board's input bulk decoupling capacitor.


## Typical Operating Circuit

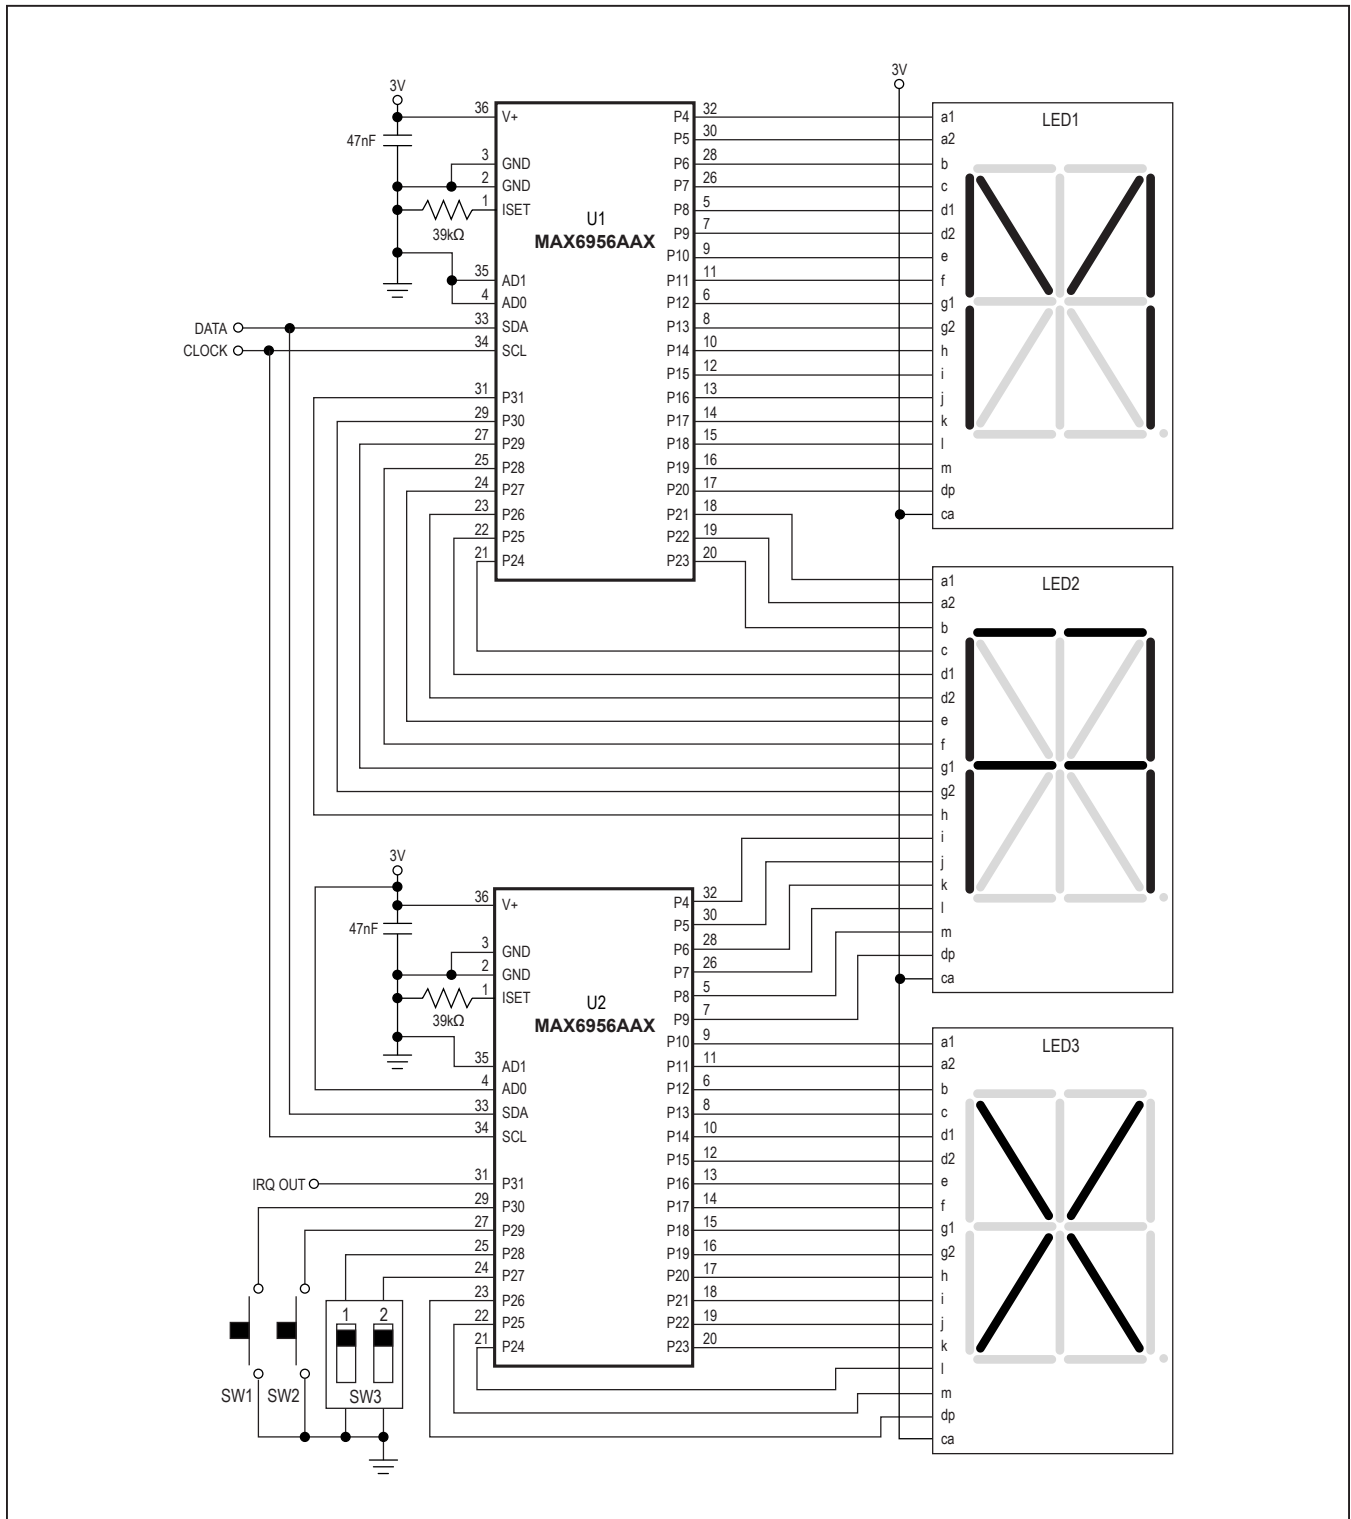

MAX6956

2-Wire-Interfaced, 2.5V to 5.5V, 20-Port or 28-Port LED Display Driver and I/O Expander

Pin Configurations (continued)

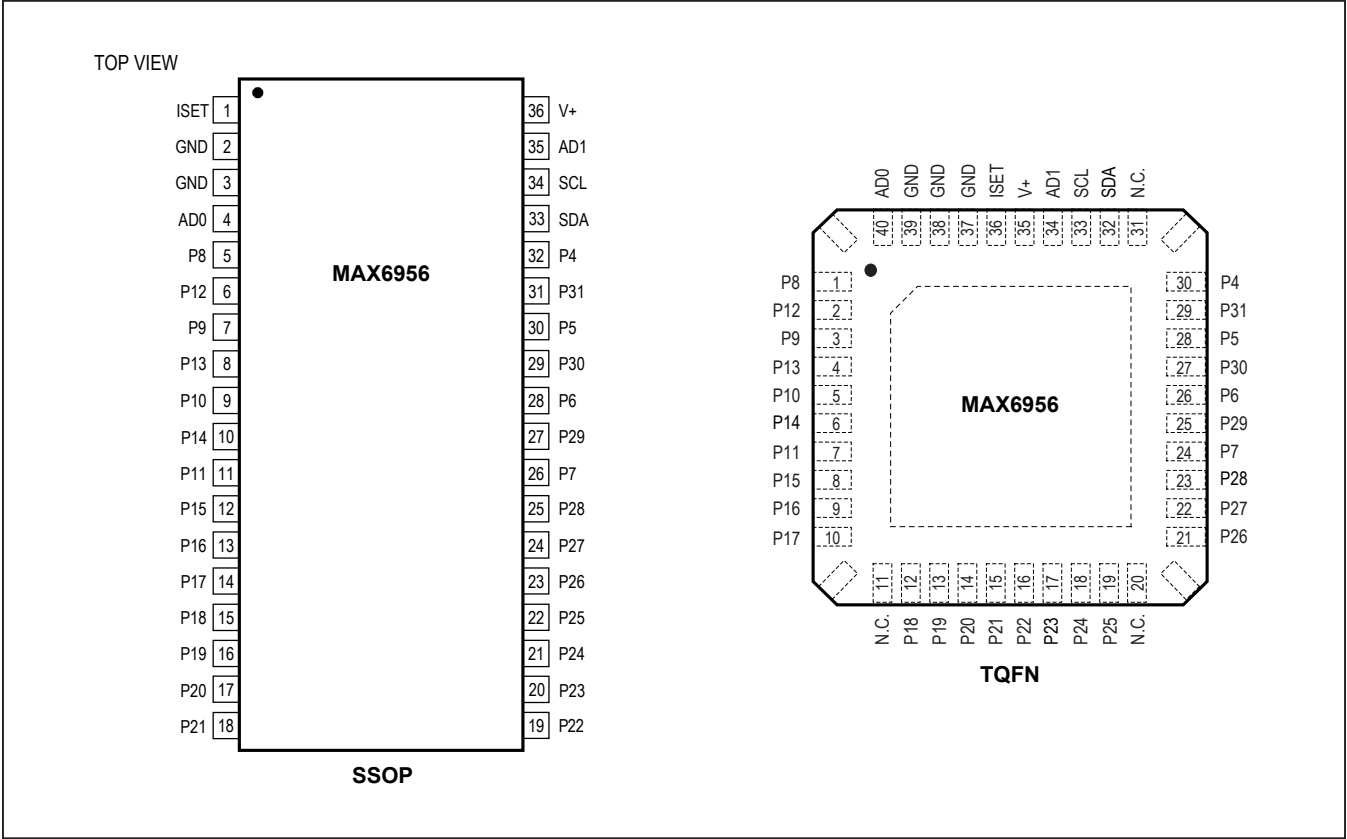

Chip Information

PROCESS: CMOS

**Package Information**

For the latest package outline information and land patterns, go to [www.maximintegrated.com/packages](http://www.maximintegrated.com/packages). Note that a “+”, “#”, or “-” in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE   | PACKAGE CODE | OUTLINE NO.             | LAND PATTERN NO.        |
|----------------|--------------|-------------------------|-------------------------|
| 28 DIP         | N28+2        | <a href="#">21-0043</a> | —                       |
| 28 SSOP        | A28+1        | <a href="#">21-0056</a> | <a href="#">90-0095</a> |
| 36 SSOP        | A36+4        | <a href="#">21-0040</a> | <a href="#">90-0098</a> |
| 40 Thin QFN-EP | T4066+5      | <a href="#">21-0141</a> | <a href="#">90-0055</a> |



MAX6956

2-Wire-Interfaced, 2.5V to 5.5V, 20-Port or  
28-Port LED Display Driver and I/O Expander

## Revision History

| REVISION<br>NUMBER | REVISION<br>DATE | DESCRIPTION                                                                   | PAGES<br>CHANGED |
|--------------------|------------------|-------------------------------------------------------------------------------|------------------|
| 2                  | 11/03            | —                                                                             | —                |
| 3                  | 3/09             | Added exposed pad information and updated <i>packaging information</i>        | 1, 2, 5, 23      |
| 4                  | 6/10             | Added lead-free and automotive qualified parts to <i>Ordering Information</i> | 1                |
| 5                  | 2/21             | Updated <i>Package Information</i>                                            | 23               |

For pricing, delivery, and ordering information, please visit Maxim Integrated's online storefront at <https://www.maximintegrated.com/en/storefront/storefront.html>.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.