




Rectifier				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
V_{RSM}	max. non-repetitive reverse blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				1700	V
V_{RRM}	max. repetitive reverse blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				1600	V
I_R	reverse current	$V_R = 1600\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			500	μA
		$V_R = 1600\text{ V}$	$T_{VJ} = 150^{\circ}\text{C}$			20	mA
V_F	forward voltage drop	$I_F = 300\text{ A}$	$T_{VJ} = 25^{\circ}\text{C}$			1.19	V
		$I_F = 600\text{ A}$				1.40	V
		$I_F = 300\text{ A}$	$T_{VJ} = 125^{\circ}\text{C}$			1.08	V
		$I_F = 600\text{ A}$				1.35	V
I_{FAV}	average forward current	$T_C = 100^{\circ}\text{C}$	$T_{VJ} = 150^{\circ}\text{C}$			270	A
$I_{F(RMS)}$	RMS forward current	180° sine				450	A
V_{F0}	threshold voltage	} for power loss calculation only	$T_{VJ} = 150^{\circ}\text{C}$			0.80	V
r_F	slope resistance					0.6	m Ω
R_{thJC}	thermal resistance junction to case					0.14	K/W
R_{thCH}	thermal resistance case to heatsink				0.04		K/W
P_{tot}	total power dissipation		$T_C = 25^{\circ}\text{C}$			890	W
I_{FSM}	max. forward surge current	t = 10 ms; (50 Hz), sine	$T_{VJ} = 45^{\circ}\text{C}$			9.80	kA
		t = 8,3 ms; (60 Hz), sine	$V_R = 0\text{ V}$			10.6	kA
		t = 10 ms; (50 Hz), sine	$T_{VJ} = 150^{\circ}\text{C}$			8.33	kA
		t = 8,3 ms; (60 Hz), sine	$V_R = 0\text{ V}$			9.00	kA
I^2t	value for fusing	t = 10 ms; (50 Hz), sine	$T_{VJ} = 45^{\circ}\text{C}$			480.2	kA ² s
		t = 8,3 ms; (60 Hz), sine	$V_R = 0\text{ V}$			466.1	kA ² s
		t = 10 ms; (50 Hz), sine	$T_{VJ} = 150^{\circ}\text{C}$			346.9	kA ² s
		t = 8,3 ms; (60 Hz), sine	$V_R = 0\text{ V}$			336.6	kA ² s
C_J	junction capacitance	$V_R = 400\text{ V}; f = 1\text{ MHz}$	$T_{VJ} = 25^{\circ}\text{C}$		381		pF

Package Y1			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
I _{RMS}	RMS current	per terminal			600	A
T _{VJ}	virtual junction temperature		-40		150	°C
T _{op}	operation temperature		-40		125	°C
T _{stg}	storage temperature		-40		125	°C
Weight				680		g
M _D	mounting torque		4.5		7	Nm
M _T	terminal torque		11		13	Nm
d _{Spp/App}	creepage distance on surface striking distance through air	terminal to terminal	16.0			mm
d _{Spb/Apb}		terminal to backside	16.0			mm
V _{ISOL}	isolation voltage	t = 1 second	3600			V
		t = 1 minute	3000			V
			50/60 Hz, RMS; I _{ISOL} ≤ 1 mA			

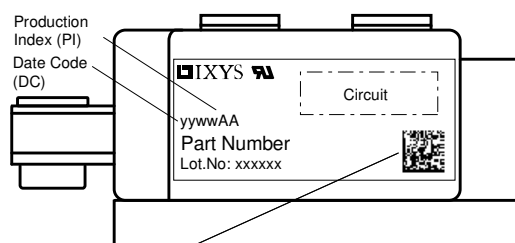


Data Matrix: part no. (1-19), DC + PI (20-25), lot.no.# (26-31), blank (32), serial no.# (33-36)


Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	MDD255-16N1	MDD255-16N1	Box	3	461881

Similar Part	Package	Voltage class
MDD255-12N1	Y1-CU	1200
MDD255-14N1	Y1-CU	1400
MDD255-18N1	Y1-CU	1800
MDD255-20N1	Y1-CU	2000

MDD255-22N1	Y1-CU	2200
-------------	-------	------

Equivalent Circuits for Simulation		* on die level	$T_{VJ} = 150^{\circ}\text{C}$
			
$V_{0\ max}$	threshold voltage	0.8	V
$R_{0\ max}$	slope resistance *	0.4	mΩ

Outlines Y1

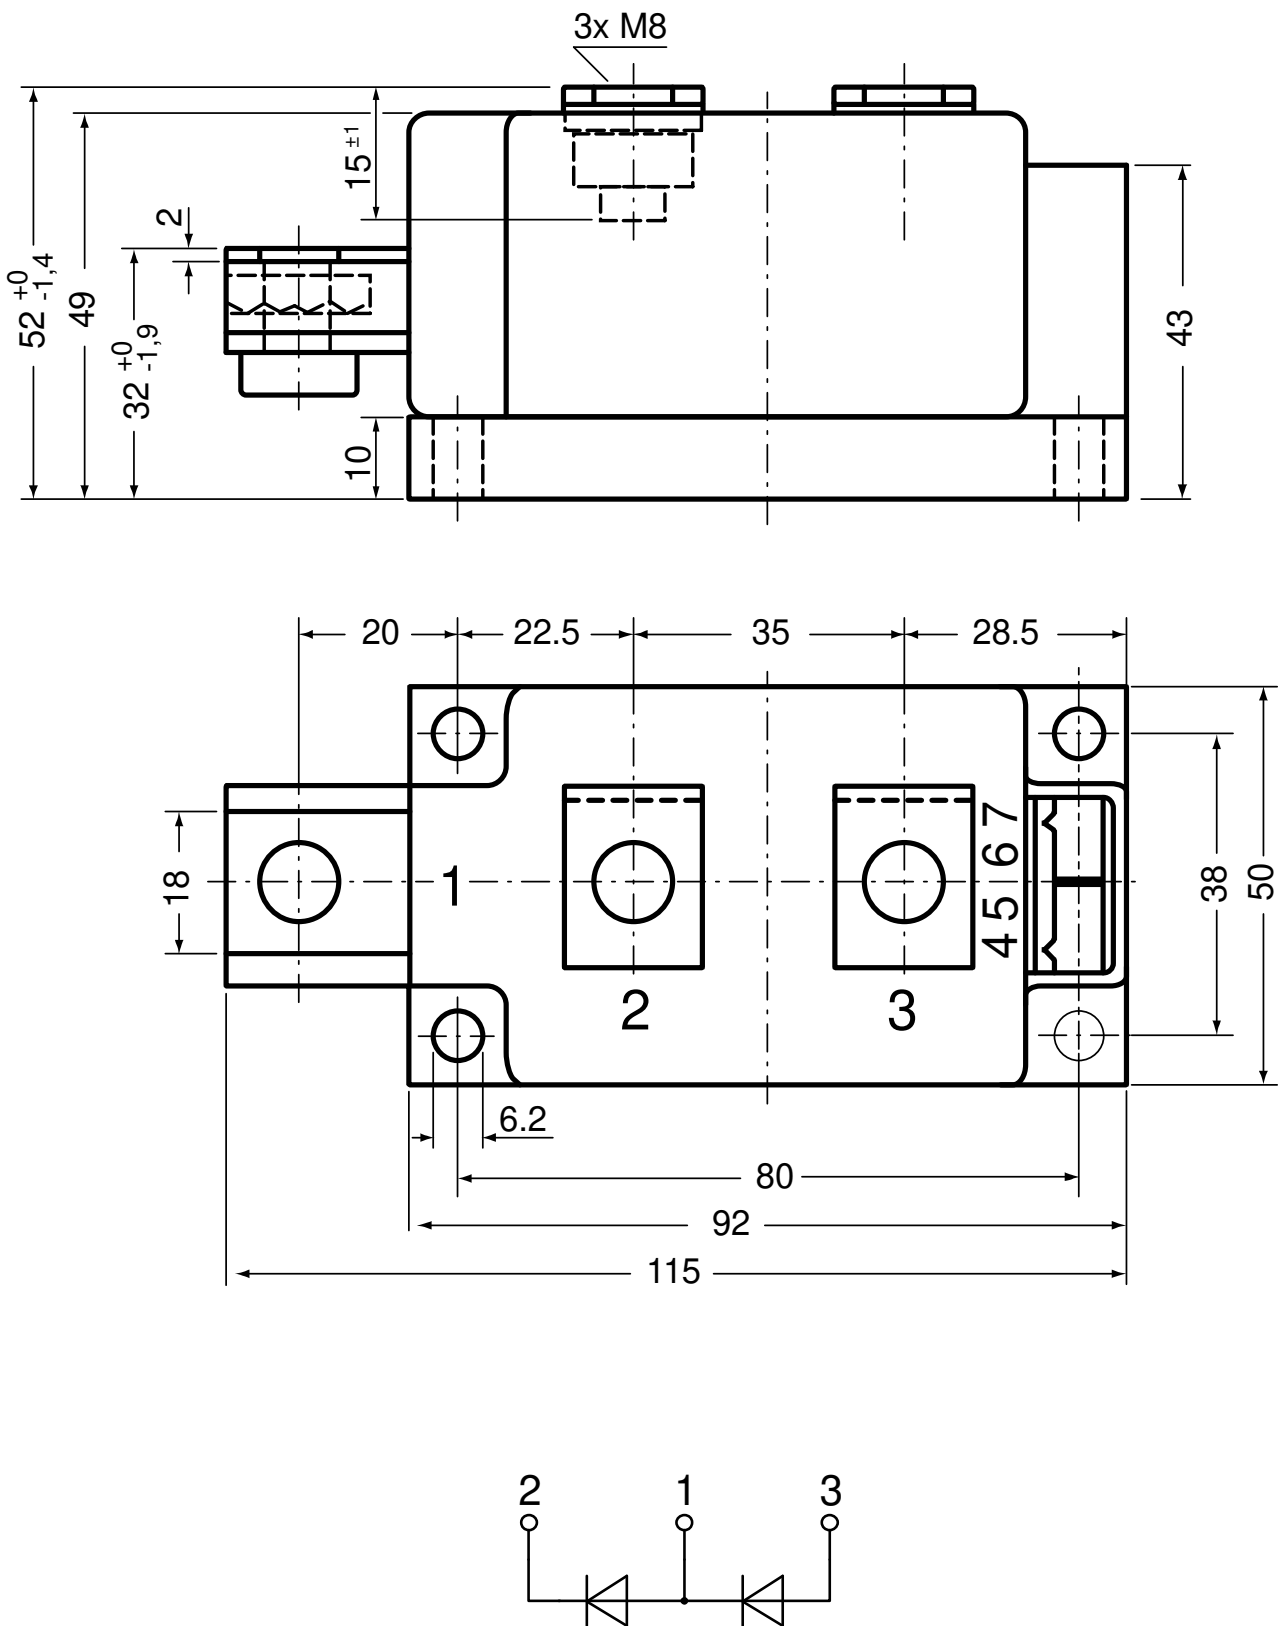

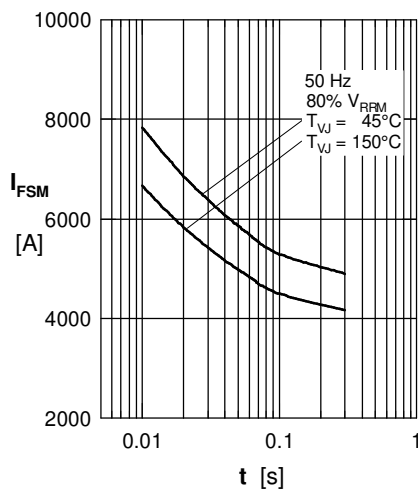
Rectifier


Fig. 1 Surge overload current I_{FSM} : Crest value, t : duration

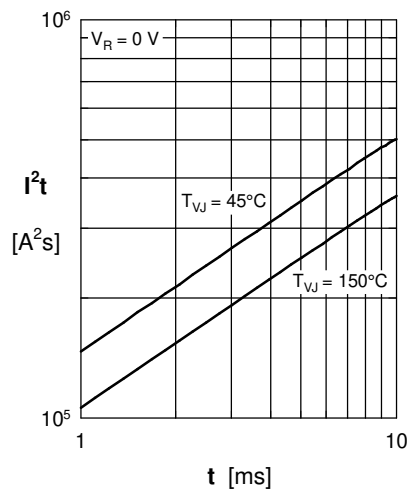


Fig. 2 I^2t versus time (1-10 ms)

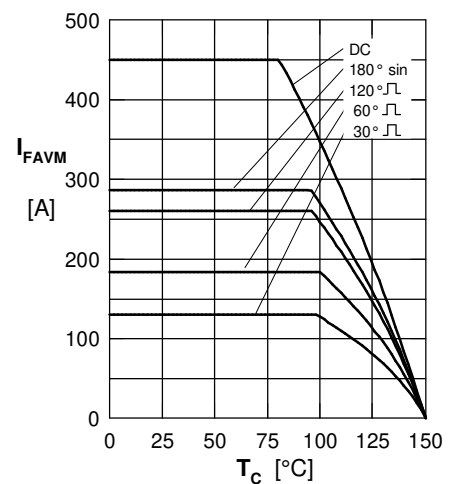


Fig. 3 Max. forward current at case temperature

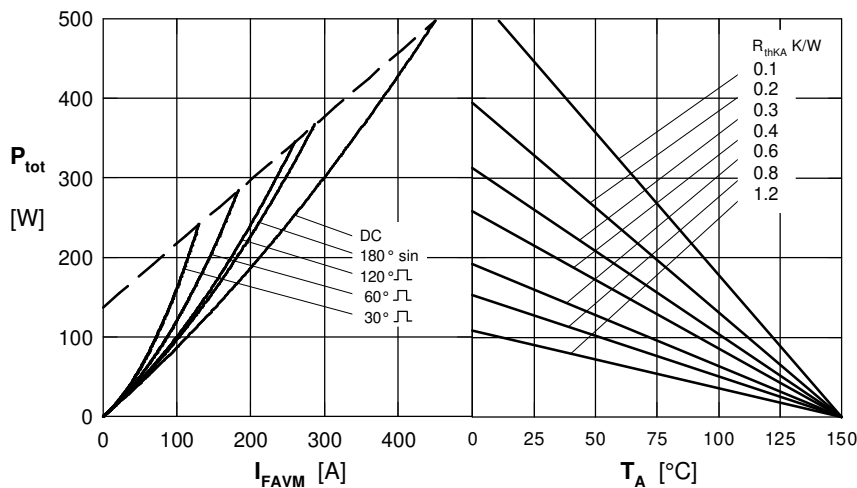


Fig. 4 Power dissipation vs. forward current & ambient temperature (per diode)

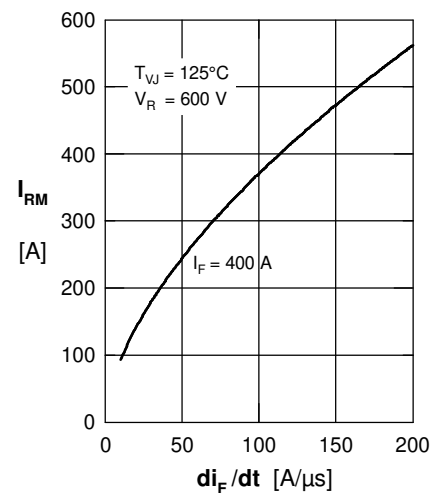


Fig. 5 Typ. peak reverse current I_{RM} versus $-di_F/dt$

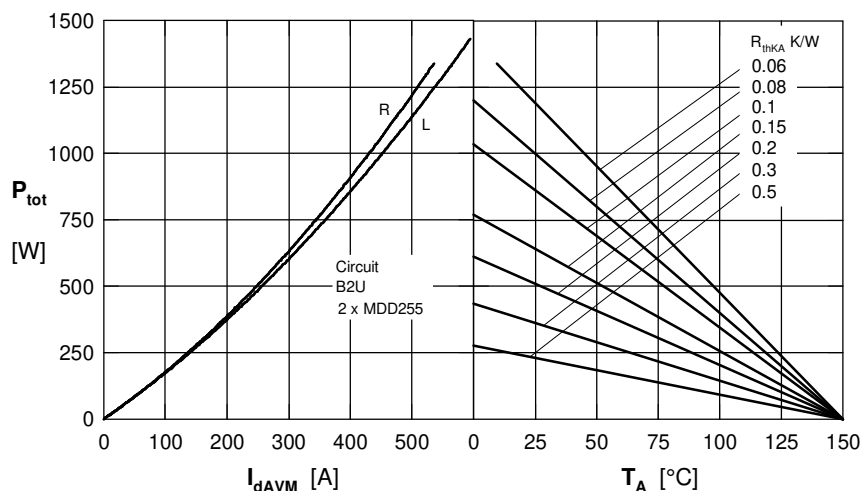


Fig. 6 Single phase rectifier bridge: Power dissipation vs. direct output current & ambient temperature. R = resistive load, L = inductive load

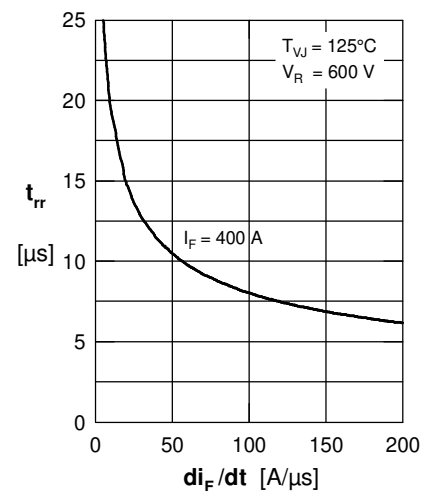


Fig. 7 Typ. recovery time t_{rr} versus $-di_F/dt$

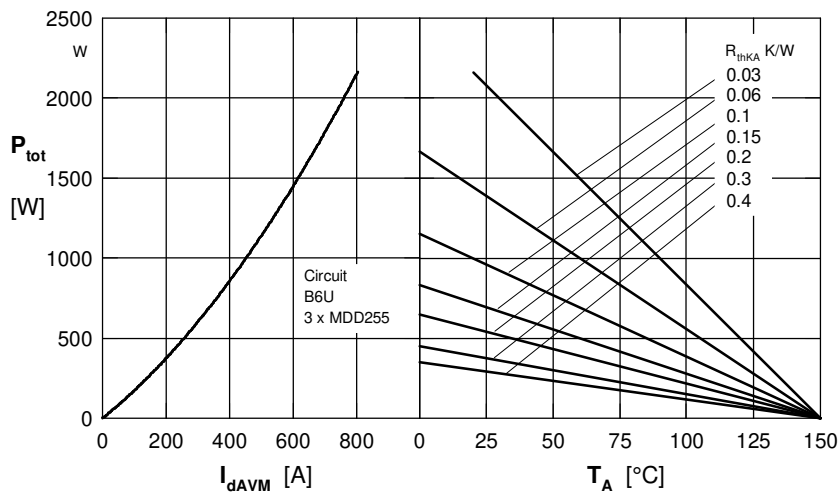
Rectifier


Fig. 8 Three phase rectifier bridge: Power dissipation versus direct output current and ambient temperature

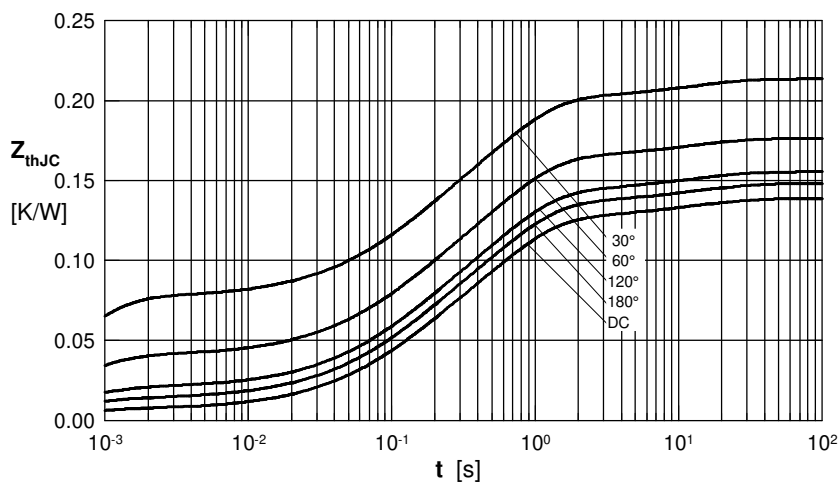


Fig. 9 Transient thermal impedance junction to case (per diode)

R_{thJC} for various conduction angles d :

d	R_{thJC} [K/W]
DC	0.139
180°	0.148
120°	0.156
60°	0.176
30°	0.214

Constants for Z_{thJC} calculation:

i	R_{thi} [K/W]	t_i [s]
1	0.0066	0.00054
2	0.0358	0.09800
3	0.0831	0.54000
4	0.0129	12.0000

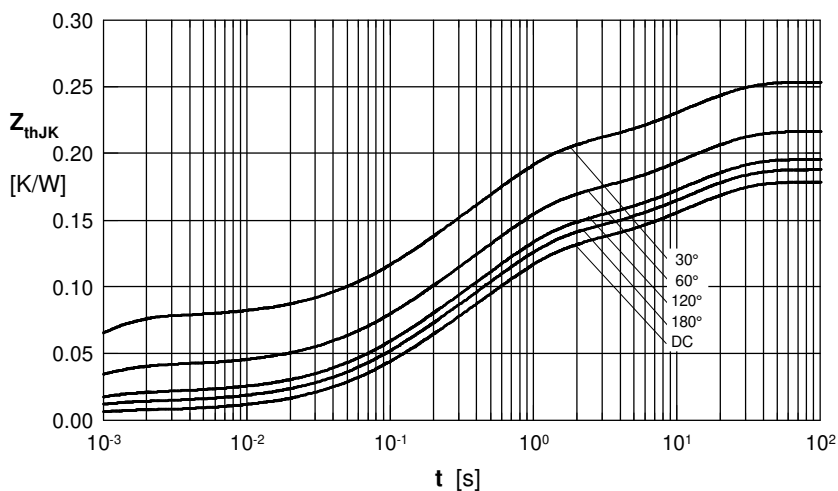


Fig. 10 Transient thermal impedance junction to heatsink (per diode)

R_{thJK} for various conduction angles d :

d	R_{thJK} [K/W]
DC	0.179
180°	0.188
120°	0.196
60°	0.216
30°	0.254

Constants for Z_{thJK} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.0066	0.00054
2	0.0358	0.09800
3	0.0831	0.54000
4	0.0129	12.0000
5	0.0400	12.0000