


Applications

- Mobile Phones
- PC Multimedia
- Toys
- Digital Still Cameras

Product Features

- support for image sizes: VGA (640x480), QVGA (320x240) and CIF (352x288)
- support for horizontal and vertical sub-sampling
- support for output formats: RAW RGB and YUV output with DVP and SPI port
- automatic image control functions:
 - automatic exposure control (AEC)
 - automatic white balance (AWB)
 - automatic black level calibration (ABLC)
- on-chip phase lock loop (PLL)
- image quality controls: defect pixel correction and lens shading correction
- built-in 1.8V regulator for digital block
- support for black sun cancellation
- capable of maintaining register values at software power down
- standard serial SCCB interface
- programmable controls for frame rate, mirror and flip, AEC/AGC, and windowing
- parallel I/O tri-state configurability and programmable polarity

OV7676




Ordering Information

- OV07676-H20A
(color, lead-free, 20-pin CSP5)

Product Specifications

- **active array size:** 640 x 480
- **maximum image transfer rate:**
 - VGA: 30 fps
 - QVGA: 60 fps
 - CIF: 30 fps
- **power supply:**
 - analog: 2.8V $\pm 5\%$
 - core: 1.8VDC $\pm 5\%$ (internal regulator)
 - I/O: 2.8V, 1.8V
- **sensitivity:** 1900 mV/lux-sec
- **power requirements:**
 - I_{DD-A}: 15 mA
 - I_{DD-IO}: 17 mA
 - XSHUTDOWN: <15 μ A
- **shutter:** rolling shutter
- **temperature range:**
 - operating: -30°C to +70°C junction temperature
 - stable image: 0°C to +50°C junction temperature
- **max S/N ratio:** 38 dB
- **dynamic range:** 70.4 dB @ 8x gain
- **output formats:** YUV422, RAW RGB
- **maximum exposure interval:** 506 x t_{ROW}
- **lens size:** 1/7.5"
- **pixel size:** 3 μ m x 3 μ m
- **lens chief ray angle:** 26.6°
- **dark current:** 6 mV/sec @ 60°C junction temperature
- **input clock frequency:** 6 - 27 MHz
- **image area:** 1962 μ m x 1482 μ m
- **scan mode:** progressive
- **package dimensions:**
 - CSP5: 2734 μ m x 2474 μ m

Functional Block Diagram

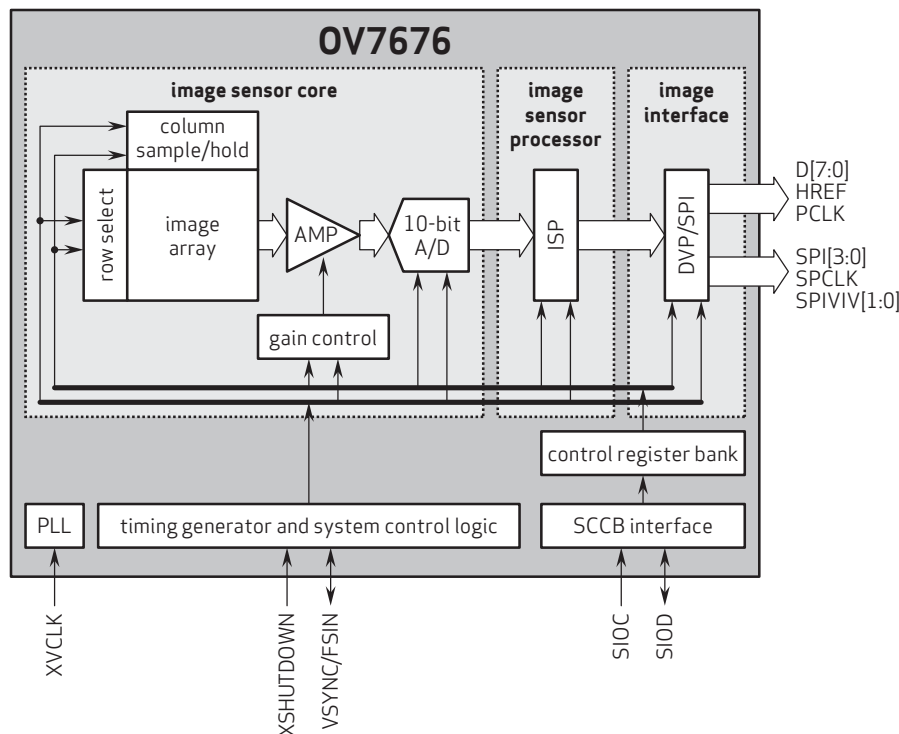

4275 Burton Drive
Santa Clara, CA 95054
USA

Tel: +1 408 567 3000
Fax: +1 408 567 3001
www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision, the OmniVision logo and OmniPixel are registered trademarks of OmniVision Technologies, Inc. OmniPixel3-HS is a trademark of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.



OmniVision

Version 1.4, May, 2015