

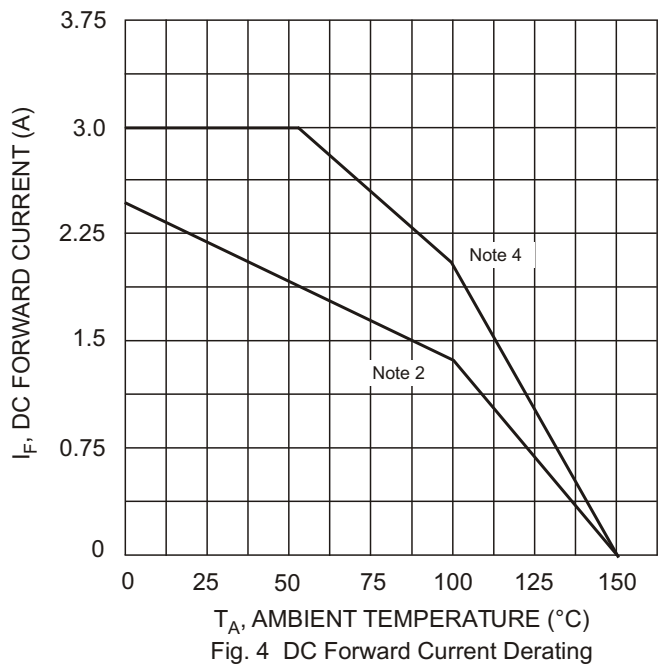
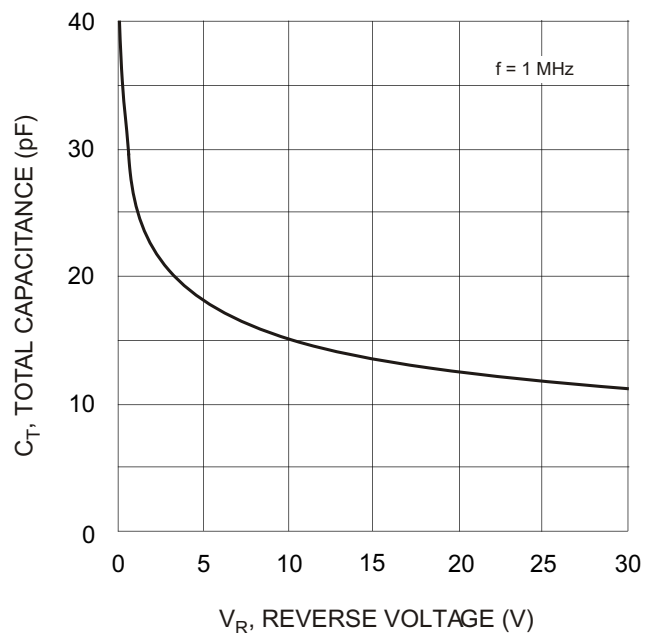
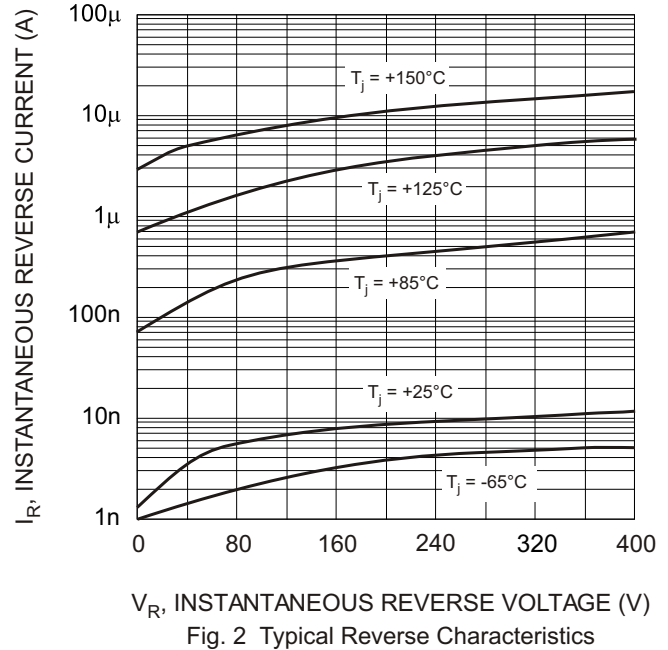
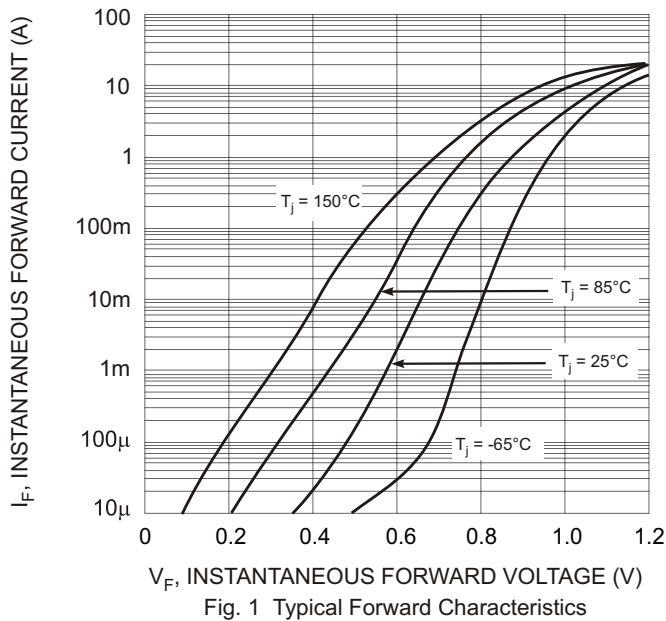


## Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 5)	$V_{(BR)R}$	400			V	$I_R = 10\text{ A}$
Forward Voltage	$V_F$		0.92	1.15	V	$I_F = 3\text{ A}$ , $T_S = 25^\circ\text{C}$
Reverse Leakage Current (Note 5)	$I_R$		0.015 6	10 250	A	$T_S = 25^\circ\text{C}$ , $V_R = 400\text{V}$ $T_S = 125^\circ\text{C}$ , $V_R = 400\text{V}$
Reverse Recovery Time	$t_{rr}$		3.0		s	$I_F = 0.5\text{A}$ , $I_R = 1.0\text{A}$ , $I_{rr} = 0.25\text{A}$

Notes: 5. Short duration test pulse used to minimize self-heating effect.

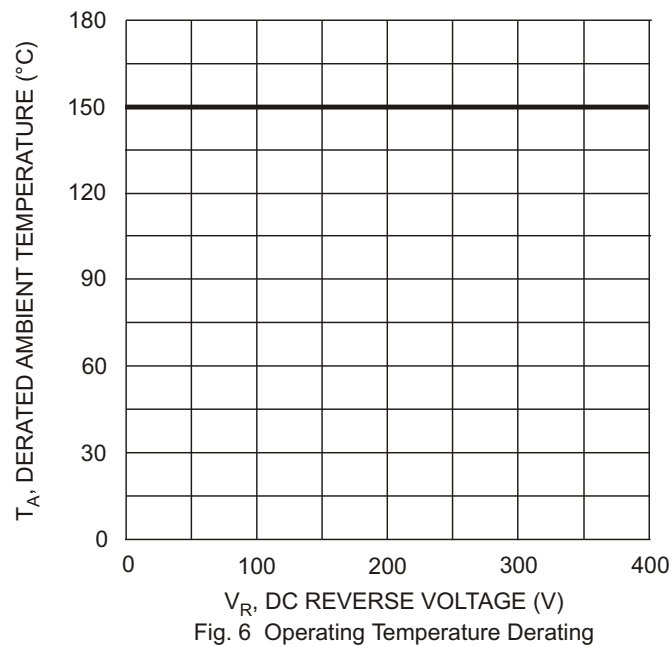

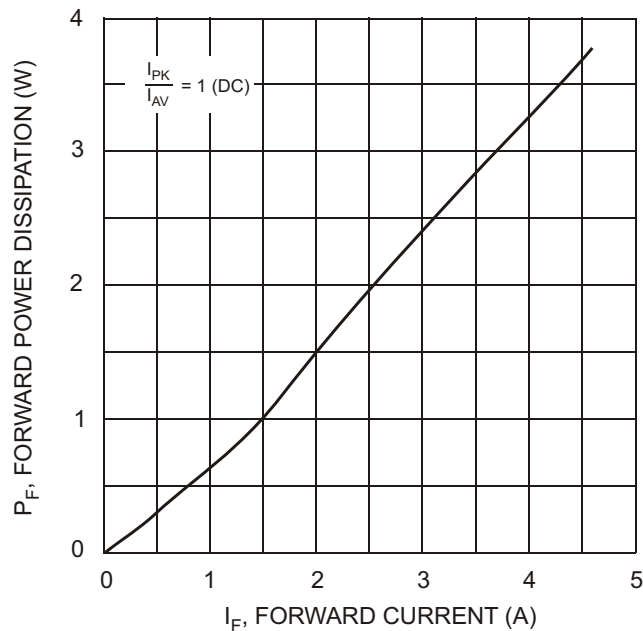

## Ordering Information (Note 6)

Device	Packaging	Shipping
PDR3G-13	PowerDI 5	5000/Tape & Reel

Notes: 6. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

## Marking Information



R3G = Product type marking code  
 011 = Manufacturers' code marking  
 YYWW = Date code marking  
 YY = Last two digits of year ex: 05 for 2005  
 WW = Week code 01 to 52  
 K = Factory Designator

### IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

### LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.