

## Revision History

| Revision | Release Date | Change Description                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1.0.0    | 12/17/2009   | Initial Release of Datasheet.                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 2.0.0    | 3/31/2010    | Reformat of datasheet<br>Inserted ESD data<br>Modified Dropout Voltage and Ground Current values in electrical characteristics table<br>Corrected typographical error in result of calculus in note 8<br>Removed "Gound Current vs Load Current", "Enable Threshold vs Temperature" and "Power Supply Rejection Ratio curves"<br>Updated "Dropout Voltage vs Load Current", "Line Regulation" and "Load Regulation" curves<br>Added "start Up" curve |
| 2.1.0    | 10/19/2010   | Corrected Adjustable Regulator Design paragraph equation                                                                                                                                                                                                                                                                                                                                                                                             |
| 2.2.0    | 12/21/2016   | Updated package specification and ordering information.                                                                                                                                                                                                                                                                                                                                                                                              |
| 2.2.1    | 8/30/2019    | Updated to MaxLinear format. Updated ordering information and moved to end. Obsolete 1.8V version (SPX29300T-L-1-8/TR) removed.                                                                                                                                                                                                                                                                                                                      |
| 2.2.2    | 12/15/2020   | Clarified that package tabs are GND on pinout.                                                                                                                                                                                                                                                                                                                                                                                                       |

# Table of Contents

General Description.....

i

Features.....

i

Applications .....

i

Typical Application Diagram.....

i

Specifications .....

1

Absolute Maximum Ratings.....

1

ESD Ratings .....

1

Operating Ratings .....

1

Electrical Characteristics .....

2

Block Diagram.....

4

Pin Information .....

4

Typical Performance Characteristics.....

5

Theory of Operation .....

6

Thermal Considerations .....

6

TO-263 Design Example .....

6

Capacitor Requirements.....

6

Minimum Load Current.....

6

Adjustable Regulator Design .....

6

Error Flag .....

6

Enable Input .....

6

Typical Application Circuits .....

6

Mechanical Dimensions.....

7

Ordering Information.....

9

List of Figures

Figure 1: SPX29300 and SPX29302 Application Diagrams ..... i

Figure 2: SPX29300, SPX29301, SPX29302 Block Diagram..... 4

Figure 3: SPX29300, SPX29301, SPX29302 Pin Assignments ..... 4

Figure 4: Dropout Voltage vs. Load Current ..... 5

Figure 5: Startup ..... 5

Figure 6: Line Regulation  $I_{OUT} = 10mA$ ,  $V_{OUT} = 3.3V$  ..... 5

Figure 7: Load Regulation  $V_{OUT} = 3.3V$  ..... 5

Figure 8: Mechanical Dimensions, 3-pin and 5-pin TO-263 ..... 7

Figure 9: Mechanical Dimensions, 3-pin and 5-pin TO-263 ..... 8

List of Tables

Table 1: Absolute Maximum Ratings ..... 1

Table 2: ESD Ratings ..... 1

Table 3: Operating Ratings..... 1

Table 4: Electrical Characteristics ..... 2

Table 5: Ordering Information..... 9

## Specifications

### Absolute Maximum Ratings

**Important:** These are stress rating only and functional operation of the device at these ratings or any other above those indicated in the operation sections of the specifications below is not implied. Exposure to absolute maximum ratings conditions for extended periods of time may affect reliability.

**Table 1: Absolute Maximum Ratings**

| Parameter                           | Minimum | Maximum | Units |
|-------------------------------------|---------|---------|-------|
| Input voltage $V_{IN}^{(1)}$        |         | 20.0    | V     |
| Storage temperature                 | -65     | 150     | °C    |
| Lead temperature (soldering, 5 sec) |         | 260     | °C    |

1. Maximum positive supply voltage of 20V must be of limited duration (<100ms) and duty cycle of less than 1%. The maximum continuous supply voltage is 16V.

### ESD Ratings

**Table 2: ESD Ratings**

| Parameter                                 | Value | Units |
|-------------------------------------------|-------|-------|
| HBM (Human Body Model) all pins except EN | 2     | kV    |
| HBM (Human Body Model) EN pin             | 1     | kV    |

### Operating Ratings

**Table 3: Operating Ratings**

| Parameter                           | Value      | Units |
|-------------------------------------|------------|-------|
| Input voltage range $V_{IN}$        | 16         | V     |
| Junction temperature range          | -40 to 125 | °C    |
| Thermal Resistance                  |            |       |
| TO-263-3 junction to ambient        | 31.4       | °C/W  |
| TO-263-5 junction to ambient        | 31.2       | °C/W  |
| TO-263-3, TO-263-5 junction to case | 3          | °C/W  |

## Electrical Characteristics

Specifications with standard type are for an Operating Junction Temperature of  $T_J = T_A = 25^\circ\text{C}$  only; limits applying over the full Operating Junction Temperature range are denoted by a "•". Minimum and Maximum limits are guaranteed through test, design, or statistical correlation. Typical values represent the most likely parametric norm at  $T_J = 25^\circ\text{C}$ , and are provided for reference purposes only. Unless otherwise noted,  $V_{IN} = V_{OUT} + 1\text{V}$  and  $I_{OUT} = 10\text{mA}$ .  $C_{IN} = 6.8\mu\text{F}$ ,  $C_{OUT} = 10\mu\text{F}$ ,  $T_A = 25^\circ\text{C}$ .

**Table 4: Electrical Characteristics**

| Parameter                                                | Test Condition                                                                                                                                                            |   | Minimum | Typical | Maximum | Units             |
|----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---------|---------|---------|-------------------|
| Fixed Voltage Versions                                   |                                                                                                                                                                           |   |         |         |         |                   |
| Output voltage, 2.5V version                             | I <sub>OUT</sub> = 10mA                                                                                                                                                   |   | 2.475   | 2.500   | 2.525   | V                 |
|                                                          | 10mA ≤ I <sub>OUT</sub> ≤ 3A, 3.5V ≤ V <sub>IN</sub> ≤ 16V                                                                                                                | • | 2.450   | 2.500   | 2.550   |                   |
| Output voltage, 3.3V version                             | I <sub>OUT</sub> = 10mA                                                                                                                                                   |   | 3.267   | 3.300   | 3.333   | V                 |
|                                                          | 10mA ≤ I <sub>OUT</sub> ≤ 3A, 4.3V ≤ V <sub>IN</sub> ≤ 16V                                                                                                                | • | 3.234   | 3.300   | 3.366   |                   |
| Output voltage, 5.0V version                             | I <sub>OUT</sub> = 10mA                                                                                                                                                   |   | 4.950   | 5.000   | 5.050   | V                 |
|                                                          | 10mA ≤ I <sub>OUT</sub> ≤ 3A, 6.0V ≤ V <sub>IN</sub> ≤ 16V                                                                                                                | • | 4.900   | 5.000   | 5.100   |                   |
| All Voltage Versions                                     |                                                                                                                                                                           |   |         |         |         |                   |
| Line regulation                                          | I <sub>OUT</sub> = 10mA, (V <sub>OUT</sub> + 1V) ≤ V <sub>IN</sub> ≤ 16V                                                                                                  |   |         | 0.06    | 0.5     | %                 |
| Load regulation                                          | V <sub>IN</sub> = V <sub>OUT</sub> + 1V, 10mA ≤ I <sub>OUT</sub> ≤ I <sub>FL</sub> <sup>(2)</sup>                                                                         |   |         | 0.2     | 1       | %                 |
| ΔV / ΔT                                                  | V <sub>OUT</sub> temp coefficient <sup>(6)</sup>                                                                                                                          | • |         | 20      | 100     | ppm/°C            |
| Dropout voltage <sup>(3)</sup>                           | I <sub>OUT</sub> = 100mA                                                                                                                                                  | • |         | 120     | 300     | mV                |
|                                                          | I <sub>OUT</sub> = 1.5A                                                                                                                                                   |   |         | 380     |         |                   |
|                                                          | I <sub>OUT</sub> = 3A                                                                                                                                                     | • |         | 600     | 800     |                   |
| Ground current <sup>(5)</sup>                            | I <sub>OUT</sub> = 1.5A                                                                                                                                                   | • |         | 30      | 60      | mA                |
|                                                          | I <sub>OUT</sub> = 3A                                                                                                                                                     |   |         | 40      |         |                   |
| Ground pin current at dropout                            | V <sub>IN</sub> = 0.5V less than specified V <sub>OUT</sub> ,<br>I <sub>OUT</sub> = 10mA                                                                                  |   |         | 0.9     |         | mA                |
| Current limit                                            | V <sub>OUT</sub> = 0V <sup>(4)</sup>                                                                                                                                      |   | 3.0     | 4.5     |         | A                 |
| Output noise voltage                                     | 10Hz - 100kHz, I <sub>OUT</sub> = 100mA, C <sub>OUT</sub> = 10μF                                                                                                          |   |         | 400     |         | μV <sub>RMS</sub> |
|                                                          | 10Hz - 100kHz, I <sub>OUT</sub> = 100mA, C <sub>OUT</sub> = 33μF                                                                                                          |   |         | 260     |         |                   |
| Reference voltage temperature coefficient <sup>(7)</sup> |                                                                                                                                                                           |   |         | 20      |         | ppm/°C            |
| Reference Voltage and Adjustable Pin - SPX29302          |                                                                                                                                                                           |   |         |         |         |                   |
| Reference voltage                                        |                                                                                                                                                                           |   | 1.228   | 1.24    | 1.252   | V                 |
|                                                          |                                                                                                                                                                           | • | 1.215   |         | 1.265   |                   |
|                                                          | V <sub>REF</sub> ≤ V <sub>OUT</sub> ≤ (V <sub>IN</sub> - 1), 2.3 ≤ V <sub>IN</sub> ≤ 16V,<br>10mA ≤ I <sub>L</sub> ≤ I <sub>FL</sub> , T <sub>J</sub> < T <sub>JMAX</sub> |   | 1.203   |         | 1.277   |                   |
| Adjust pin bias current                                  |                                                                                                                                                                           |   |         | 40      | 80      | nA                |
|                                                          |                                                                                                                                                                           | • |         |         | 120     |                   |
| Adjust pin bias current temperature coefficient          |                                                                                                                                                                           |   |         | 0.1     |         | nA/°C             |

**Table 4: Electrical Characteristics**

| Parameter                                           | Test Condition                                           |   | Minimum | Typical | Maximum | Units   |
|-----------------------------------------------------|----------------------------------------------------------|---|---------|---------|---------|---------|
| Power Good Flag Output - SPX29301                   |                                                          |   |         |         |         |         |
| Output leakage current                              | $V_{OH} = 16V$                                           |   |         | 0.01    | 1       | $\mu A$ |
|                                                     |                                                          | • |         |         | 2       |         |
| Output low voltage                                  | Device set for 5V, $V_{IN} = 4.5V$ , $I_{OL} = 250\mu A$ |   |         | 220     | 300     | mV      |
|                                                     |                                                          | • |         |         | 400     |         |
| Upper threshold voltage                             | Device set for 5V <sup>(8)</sup>                         |   | 40      | 60      |         | mV      |
|                                                     |                                                          | • | 25      |         |         |         |
| Lower threshold voltage                             | Device set for 5V <sup>(8)</sup>                         |   |         | 75      | 95      | mV      |
|                                                     |                                                          | • |         |         | 140     |         |
| Hysteresis                                          | Device set for 5V <sup>(8)</sup>                         |   |         | 15      |         | mV      |
| Enable Input - SPX29301 / 02                        |                                                          |   |         |         |         |         |
| Input logic voltage low (OFF)                       | $V_{IN} < 10V$                                           | • |         |         | 0.8     | V       |
| Input logic voltage high (ON)                       |                                                          | • | 2.4     |         |         |         |
| Enable input pin                                    | $V_{EN} = 16V$                                           |   |         | 100     | 600     | $\mu A$ |
|                                                     |                                                          | • |         |         | 750     |         |
|                                                     | $V_{EN} = 0.8V$                                          | • |         |         | 1       |         |
|                                                     |                                                          | • |         |         | 2       |         |
| Regulator output current in shutdown <sup>(9)</sup> |                                                          | • |         | 10      | 500     | $\mu A$ |

2. Full load current ( $I_{FL}$ ) is defined as 3.0A.

3. Dropout voltage is defined ( $V_{IN} - V_{OUT}$ ) when the output voltage drops to 99% of its nominal value.

4.  $V_{IN} = V_{OUT(nom)} + 1V$ . Use pulse-testing procedures to minimize temperature rise.

5. Ground pin current is the regulator quiescent current. The total current drawn from the source is the sum of the load current to the ground current.


6. Output voltage temperature coefficient is defined as the worst case voltage change divided by the total temperature range.

7. Thermal regulation is defined as the change in output voltage at time T after a change in power dissipation is applied, excluding load / line regulation effects. Specifications for a 200mA load pulse as  $V_{IN} = 20V$  (a 4W pulse) for  $t = 10ms$ .

8. Comparator threshold is expressed in terms of a voltage differential at the Adjust terminal below the nominal reference voltage measured 6V input. To express these thresholds in terms of output voltage change, multiply the error amplifier gain =  $V_{OUT} / V_{REF} = (R1 + R2) / R2$ . For example, at a programmable output voltage of 5V, the Error output is guaranteed to go low when the output drops by  $95mV \times 5V / 1.240V = 383mV$ . Threshold remains constant as a percent of  $V_{OUT}$  as  $V_{OUT}$  is varied, with the dropout warning occurring at typically 5% below nominal, 7.7% guaranteed.

9.  $V_{EN} \leq 0.8V$  and  $V_{IN} \leq 16V$ ,  $V_{OUT} = 0V$ .

## Pin Information<sup>(1)</sup>



4

# Typical Performance Characteristics

All data taken at  $V_{IN} = V_{OUT} + 1V$ ,  $T_J = T_A = 25^{\circ}C$ , unless otherwise specified.

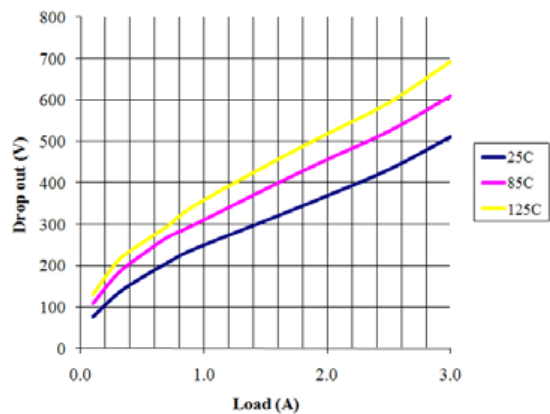


Figure 4: Dropout Voltage vs. Load Current

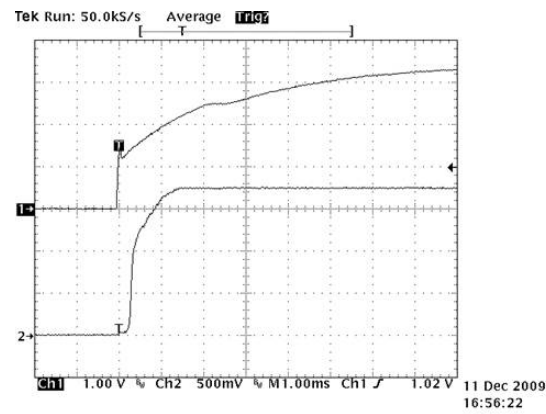


Figure 5: Startup

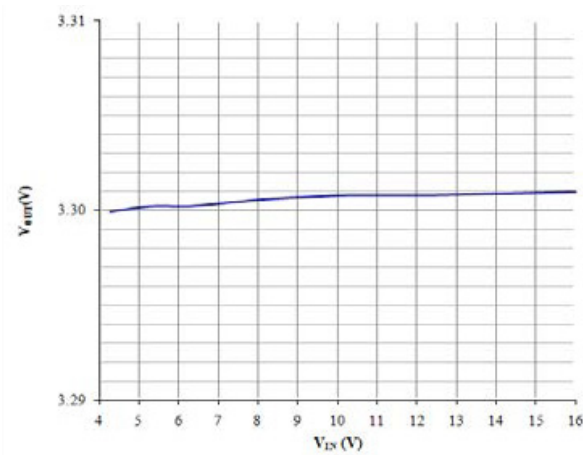


Figure 6: Line Regulation:  $I_{OUT} = 10mA$ ,  $V_{OUT} = 3.3V$

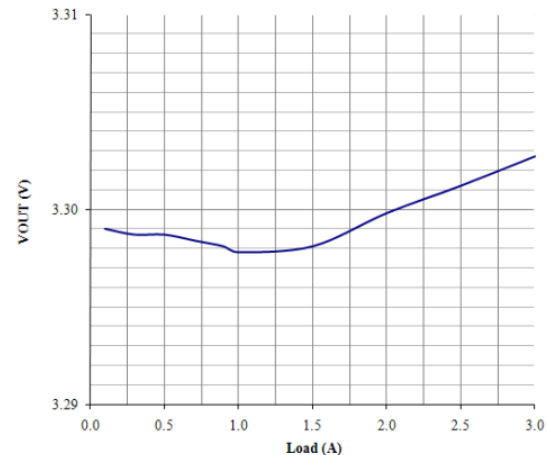


Figure 7: Load Regulation:  $V_{OUT} = 3.3V$

## Theory of Operation

The SPX29300/01/02 incorporates protection against over-current faults, reversed load insertion, over temperature operation, and positive and negative transient voltage.

## Thermal Considerations

Although the SPX29300/01/02 offers limiting circuitry for overload conditions, it is still necessary to insure that the maximum junction temperature is not exceeded in the application. Heat will flow through the lowest resistance path, the junction-to-case path. In order to insure the best thermal flow of the component, proper mounting is required.

## TO-263 Design Example

Assume that  $V_{IN} = 5V$ ,  $V_{OUT} = 3.3V$ ,  $I_{OUT} = 1.0A$ ,  $T_A = 50^\circ C$  and  $\theta_{JA} = 31.4^\circ C/W$ , where:

$T_A$  = ambient temperature,

$\theta_{JA}$  = junction to ambient thermal resistance

The power calculated under these conditions is:

$$P_D = (V_{IN} - V_{OUT}) \times I_{OUT} = 1.7W$$

And the junction temperature is calculated as

$$T_J = T_A + P_D \times \theta_{JA}$$

or

$$T_J = 50 + 1.7 \times 31.4 = 103.4^\circ C$$

Reliable operation is insured.

## Capacitor Requirements

The output capacitor is needed to insure stability and minimize the output noise. The value of the capacitor varies with the load. However, a minimum value of 10 $\mu$ F aluminum capacitor will guarantee stability over all load conditions.

A tantalum capacitor is recommended if a faster load transient response is needed. If the power source has high AC impedance, a 0.1 $\mu$ F ceramic capacitor between input and ground is recommended.

## Minimum Load Current

To ensure a proper behavior of the regulator under light load, a minimum load of 5mA for SPX29300/01/02 is required.

## Adjustable Regulator Design

The SPX29300/01/02 is an adjustable regulator that can be programmed to any value between 1.25V and 16V using 2 external resistors, R1 and R2. The relationship between the resistors and the output voltage is:

$$R_1 = R_2 \times \left( \frac{V_{OUT}}{1.240} - 1 \right)$$

## Error Flag

The SPX29301 features an error flag that indicates either an over current or under current voltage condition. The flag output goes low, sinking 10mA when either condition occurs.

## Enable Input

The SPX29301/02 has an Enable function that switches the regulator on and off. Its thresholds are TTL compatible. When the regulator is active, approximately 20 $\mu$ A flows through the Enable pin.

## Typical Application Circuits


Figure 1 represents the typical implementation for an adjustable output regulator. The values of R1 and R2 set the output voltage value as follows:

$$V_{OUT} = V_{REF} \times \left( 1 + \frac{R_1}{R_2} \right)$$

A minimum value of 10k $\Omega$  is recommended for R2 with a range between 10k $\Omega$  and 47k $\Omega$ .

## Mechanical Dimensions

### 3-pin and 5-pin TO-263

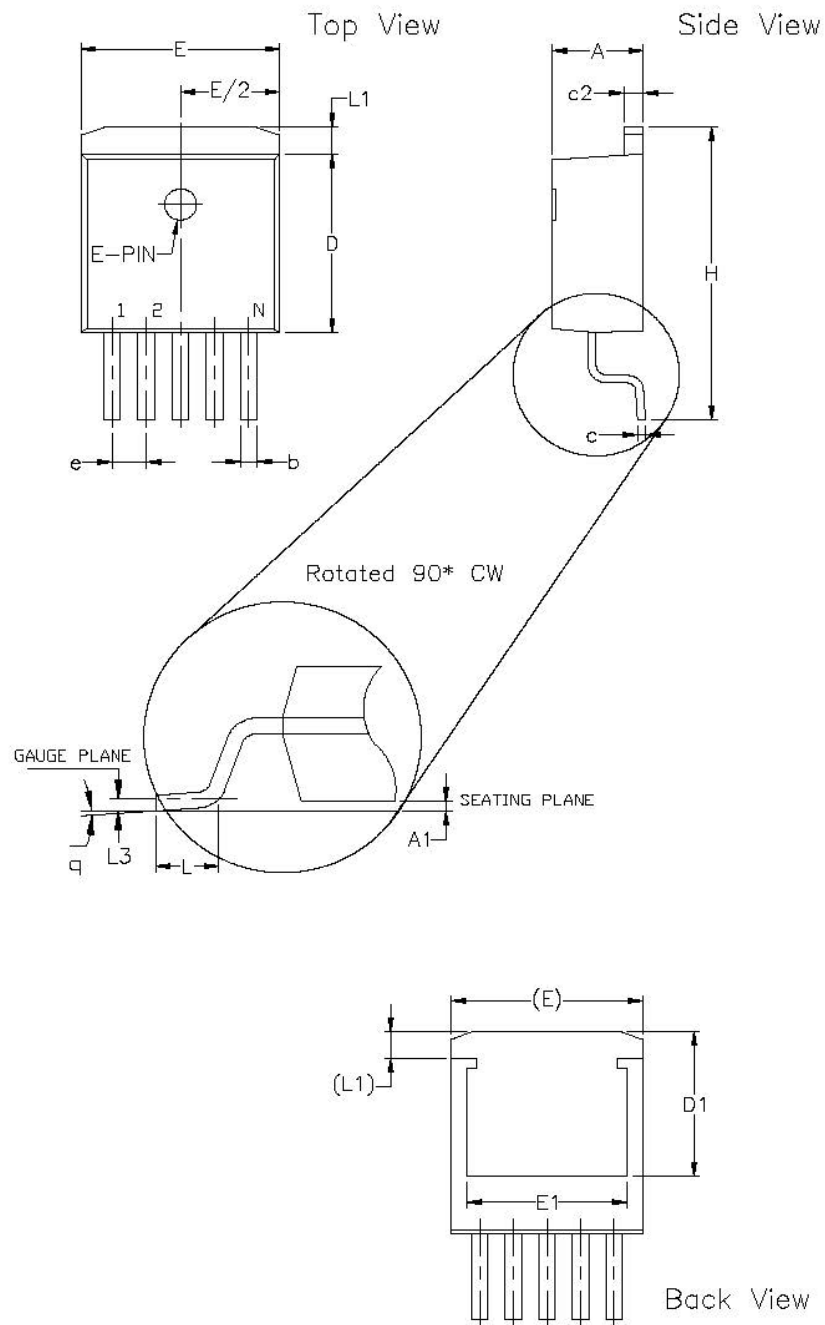

Drawing No: POD-00000021  
Revision: A

**Figure 8: Mechanical Dimensions, 3-pin and 5-pin TO-263**

## Mechanical Dimensions, continued

### 3-pin and 5-pin TO-263, continued

| 3 Pin TO-263 JEDEC TO-263 Variation AA |                                      |     |       |                                      |     |       | 5 Pin TO-263 JEDEC TO-263 Variation BA |                                      |     |       |                                      |     |       |
|----------------------------------------|--------------------------------------|-----|-------|--------------------------------------|-----|-------|----------------------------------------|--------------------------------------|-----|-------|--------------------------------------|-----|-------|
| SYMBOLS                                | DIMENSIONS IN INCH<br>(Control Unit) |     |       | DIMENSIONS IN MM<br>(Reference Unit) |     |       | SYMBOLS                                | DIMENSIONS IN INCH<br>(Control Unit) |     |       | DIMENSIONS IN MM<br>(Reference Unit) |     |       |
|                                        | MIN                                  | NOM | MAX   | MIN                                  | NOM | MAX   |                                        | MIN                                  | NOM | MAX   | MIN                                  | NOM | MAX   |
| A                                      | 0.160                                | —   | 0.190 | 4.06                                 | —   | 4.83  | A                                      | 0.160                                | —   | 0.190 | 4.06                                 | —   | 4.83  |
| A1                                     | 0.000                                | —   | 0.010 | 0.00                                 | —   | 0.25  | A1                                     | 0.000                                | —   | 0.010 | 0.00                                 | —   | 0.25  |
| b                                      | 0.020                                | —   | 0.039 | 0.51                                 | —   | 0.99  | b                                      | 0.020                                | —   | 0.039 | 0.51                                 | —   | 0.99  |
| b2                                     | 0.045                                | —   | 0.070 | 1.14                                 | —   | 1.78  | b2                                     | 0.045                                | —   | 0.065 | 1.14                                 | —   | 1.65  |
| c                                      | 0.015                                | —   | 0.029 | 0.38                                 | —   | 0.74  | c                                      | 0.015                                | —   | 0.029 | 0.38                                 | —   | 0.74  |
| c2                                     | 0.045                                | —   | 0.065 | 1.14                                 | —   | 1.65  | c2                                     | 0.045                                | —   | 0.065 | 1.14                                 | —   | 1.65  |
| D                                      | 0.330                                | —   | 0.380 | 8.38                                 | —   | 9.65  | D                                      | 0.330                                | —   | 0.380 | 8.38                                 | —   | 9.65  |
| D1                                     | 0.270                                | —   | —     | 6.86                                 | —   | —     | D1                                     | 0.270                                | —   | —     | 6.86                                 | —   | —     |
| E                                      | 0.380                                | —   | 0.420 | 9.65                                 | —   | 10.67 | E                                      | 0.380                                | —   | 0.420 | 9.65                                 | —   | 10.67 |
| E1                                     | 0.245                                | —   | —     | 6.22                                 | —   | —     | E1                                     | 0.245                                | —   | —     | 6.22                                 | —   | —     |
| e                                      | 0.100 BSC                            |     |       | 2.54 BSC                             |     |       | e                                      | 0.067 BSC                            |     |       | 1.70 BSC                             |     |       |
| H                                      | 0.575                                | —   | 0.625 | 14.61                                | —   | 15.88 | H                                      | 0.575                                | —   | 0.625 | 14.61                                | —   | 15.88 |
| L                                      | 0.070                                | —   | 0.110 | 1.78                                 | —   | 2.79  | L                                      | 0.070                                | —   | 0.110 | 1.78                                 | —   | 2.79  |
| L1                                     | —                                    | —   | 0.066 | —                                    | —   | 1.68  | L1                                     | —                                    | —   | 0.066 | —                                    | —   | 1.68  |
| L3                                     | 0.010 BSC                            |     |       | 0.25 BSC                             |     |       | L3                                     | 0.010 BSC                            |     |       | 0.25 BSC                             |     |       |
| Q                                      | 0°                                   | —   | 8°    | 0°                                   | —   | 8°    | Q                                      | 0°                                   | —   | 8°    | 0°                                   | —   | 8°    |
| N                                      | 3                                    |     |       | 3                                    |     |       | N                                      | 5                                    |     |       | 5                                    |     |       |

Drawing No: POD-00000021  
Revision: A

**Figure 9: Mechanical Dimensions, 3-pin and 5-pin TO-263, continued**

## Ordering Information

**Table 5: Ordering Information**

| Ordering Part Number | Operating Temperature Range                             | Package      | Packaging Method | Lead-Free <sup>(2)</sup> |
|----------------------|---------------------------------------------------------|--------------|------------------|--------------------------|
| SPX29300T-L-2-5/TR   | $-40^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$ | 3-pin TO-263 | Tape and Reel    | Yes                      |
| SPX29300T-L-3-3/TR   | $-40^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$ | 3-pin TO-263 | Tape and Reel    | Yes                      |
| SPX29300T-L-5-0/TR   | $-40^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$ | 3-pin TO-263 | Tape and Reel    | Yes                      |
| SPX29301T5-L-5-0/TR  | $-40^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$ | 5-pin TO-263 | Tape and Reel    | Yes                      |
| SPX29302T5-L/TR      | $-40^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$ | 5-pin TO-263 | Tape and Reel    | Yes                      |

1. Refer to [www.maxlinear.com/SPX29300](http://www.maxlinear.com/SPX29300), [www.maxlinear.com/SPX29301](http://www.maxlinear.com/SPX29301), and [www.maxlinear.com/SPX29302](http://www.maxlinear.com/SPX29302) for most up-to-date Ordering Information.

2. Visit [www.maxlinear.com](http://www.maxlinear.com) for additional information on Environmental Rating.



MaxLinear, Inc.  
5966 La Place Court, Suite 100  
Carlsbad, CA 92008  
760.692.0711 p.  
760.444.8598 f.  
[www.maxlinear.com](http://www.maxlinear.com)

The content of this document is furnished for informational use only, is subject to change without notice, and should not be construed as a commitment by MaxLinear, Inc. MaxLinear, Inc. assumes no responsibility or liability for any errors or inaccuracies that may appear in the informational content contained in this guide. Complying with all applicable copyright laws is the responsibility of the user. Without limiting the rights under copyright, no part of this document may be reproduced into, stored in, or introduced into a retrieval system, or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), or for any purpose, without the express written permission of MaxLinear, Inc.

MaxLinear, Inc. does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless MaxLinear, Inc. receives, in writing, assurances to its satisfaction that: (a) the risk of injury or damage has been minimized; (b) the user assumes all such risks; (c) potential liability of MaxLinear, Inc. is adequately protected under the circumstances.

MaxLinear, Inc. may have patents, patent applications, trademarks, copyrights, or other intellectual property rights covering subject matter in this document. Except as expressly provided in any written license agreement from MaxLinear, Inc., the furnishing of this document does not give you any license to these patents, trademarks, copyrights, or other intellectual property.

MaxLinear, the MaxLinear logo, and any MaxLinear trademarks, MxL, Full-Spectrum Capture, FSC, G.now, AirPHY, Puma, AnyWAN and the MaxLinear logo are all on the products sold, are all trademarks of MaxLinear, Inc. or one of MaxLinear's subsidiaries in the U.S.A. and other countries. All rights reserved. Other company trademarks and product names appearing herein are the property of their respective owners.

© 2009 - 2020 MaxLinear, Inc. All rights reserved.