


1 Application schematic

Figure 2: Application diagram example (refer to BlueNRG reference design)

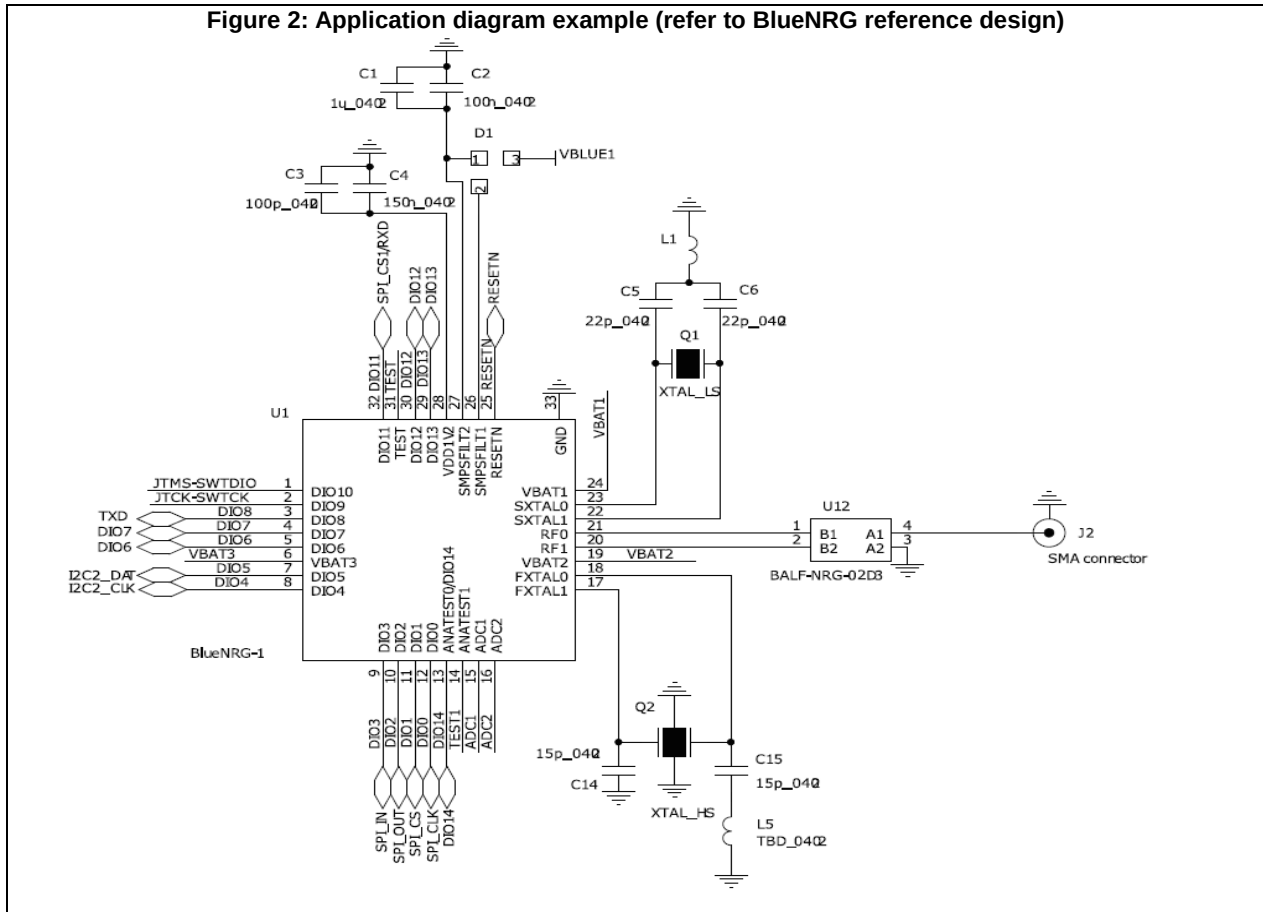

2 Characteristics

Table 1: Absolute maximum ratings (limiting values)

Symbol	Parameter	Value			Unit
		Min.	Typ.	Max.	
P _{IN}	Input power RFIN		-	10	dBm
V _{ESD}	ESD ratings human body model, all I/O one at a time while others connected to GND	2000	-		V
	ESD ratings machine model (MM: C = 200 pF, R = 25 Ω, L = 500 nH)	200	-		
T _{OP}	Operating temperature	-40	-	+105	°C

Table 2: Electrical characteristics (T_{amb} = 25 °C)

Symbol	Definition	Value			Unit
		Min.	Typ.	Max.	
Z _{diff}	Nominal differential impedance	Match to BlueNRG			Ω
Z _{ANT}	Nominal antenna impedance		50		Ω
f	Frequency range (bandwidth)	2400		2500	MHz
I _L	Insertion loss in bandwidth		1.33	1.85	dB
RL _{SE}	Single ended return loss in bandwidth	21	30		
RL _{DIFF}	Differential return loss in bandwidth	17	19		
H2	Second harmonic attenuation (differential mode)	40	49		
H3	Third harmonic attenuation (differential mode)	46	55		
H4	Fourth harmonic attenuation (differential mode)	42	50		
H5	Fifth harmonic attenuation (differential mode)	31	56		
H6	Fifth harmonic attenuation (differential mode)	29	45		
H7	Fifth harmonic attenuation (differential mode)	30	42		
Φ _{imb}	Output phase imbalance	-3.5	0	3.5	°
A _{imb}	Output amplitude imbalance	-1	0	1	dB

2.1 RF measurement

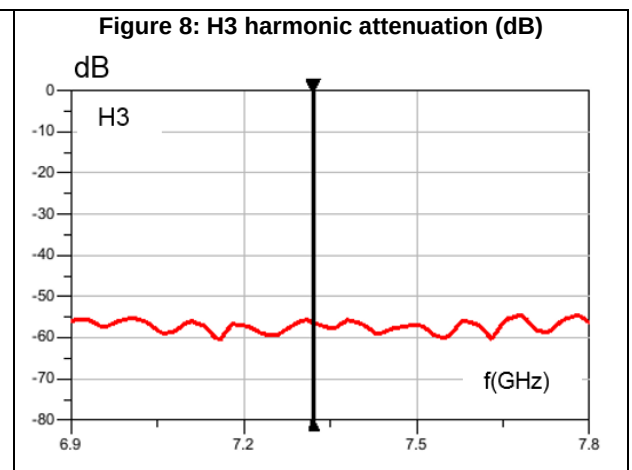
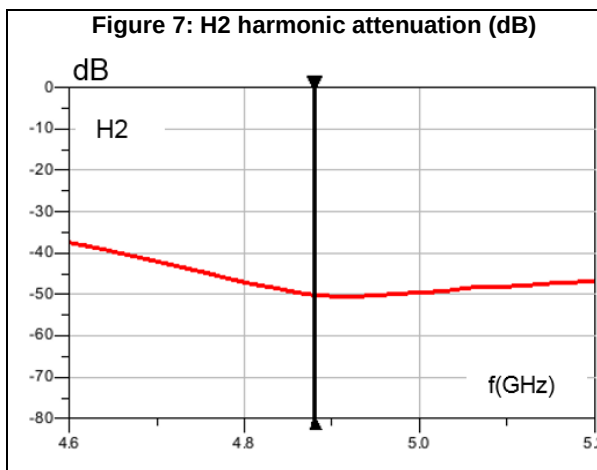
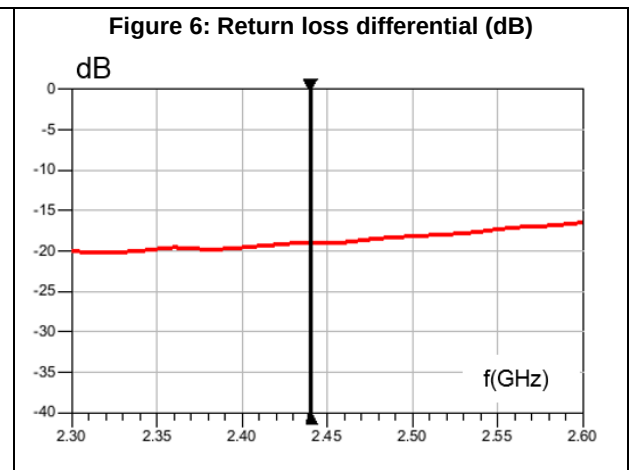
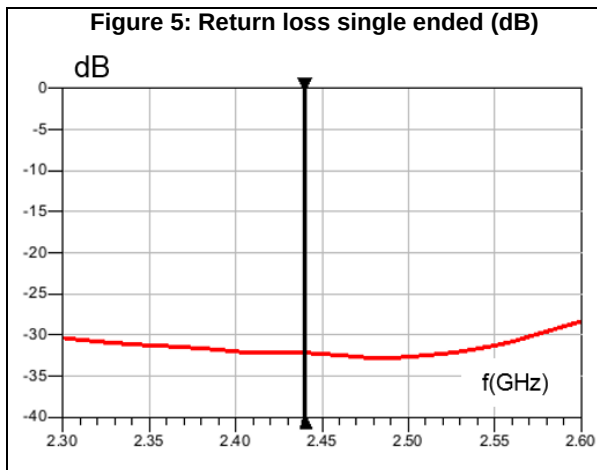
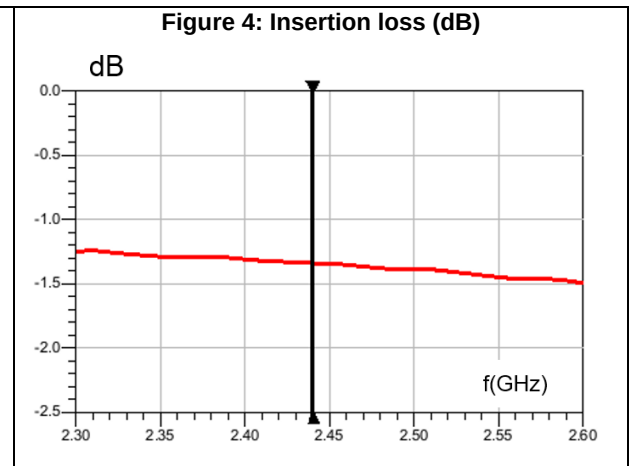
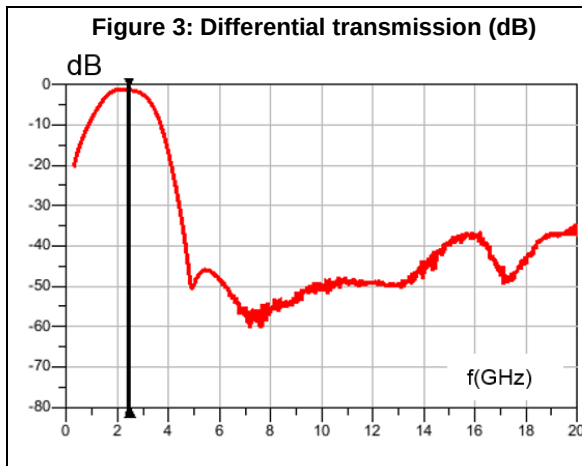


Figure 9: H4 harmonic attenuation (dB)

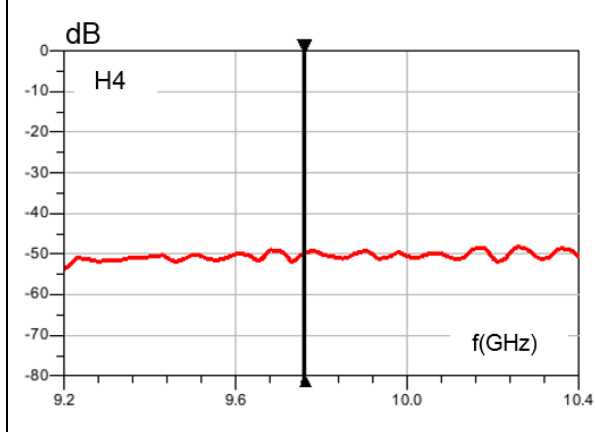


Figure 10: H5 harmonic attenuation (dB)

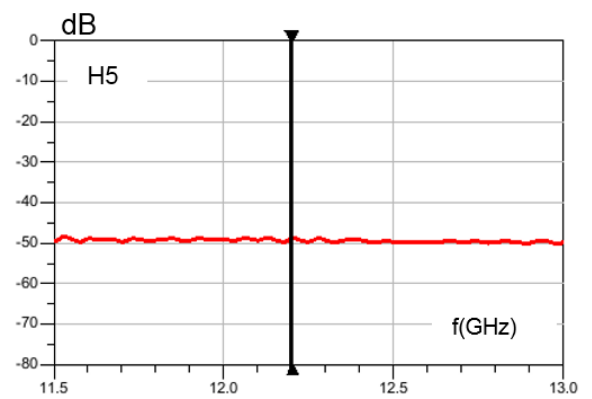


Figure 11: H6 harmonic attenuation (dB)

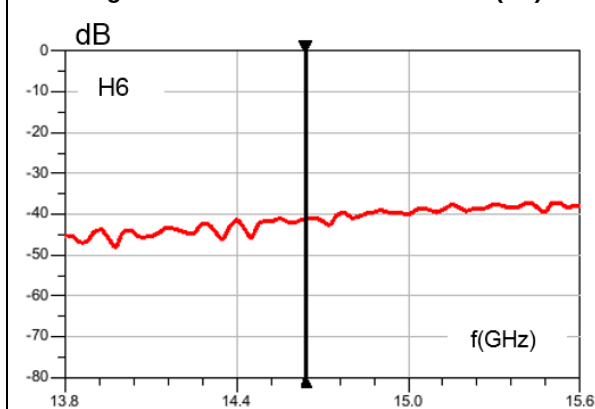


Figure 12: H7 harmonic attenuation (dB)

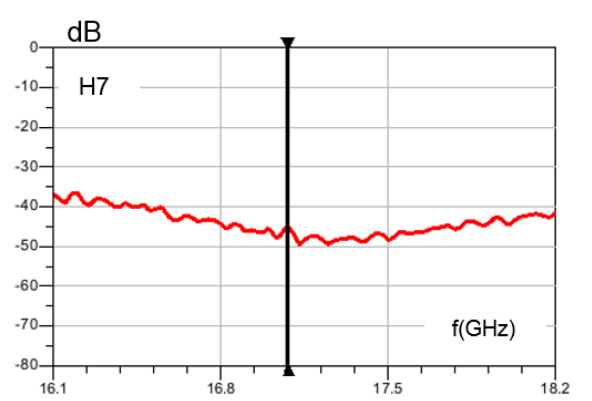


Figure 13: Amplitude imbalance in dB


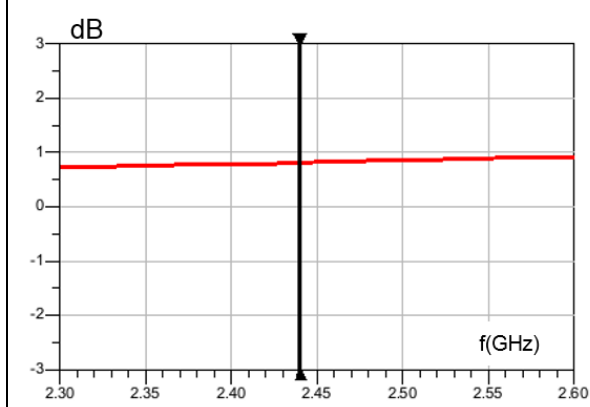



Figure 14: Phase imbalance in deg

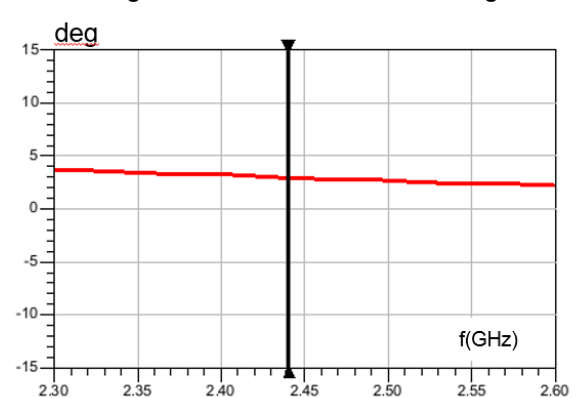

3 Application information

3.1 BALF-NRG-02D3 with BlueNRG

Figure 15: Recommended balun land pattern

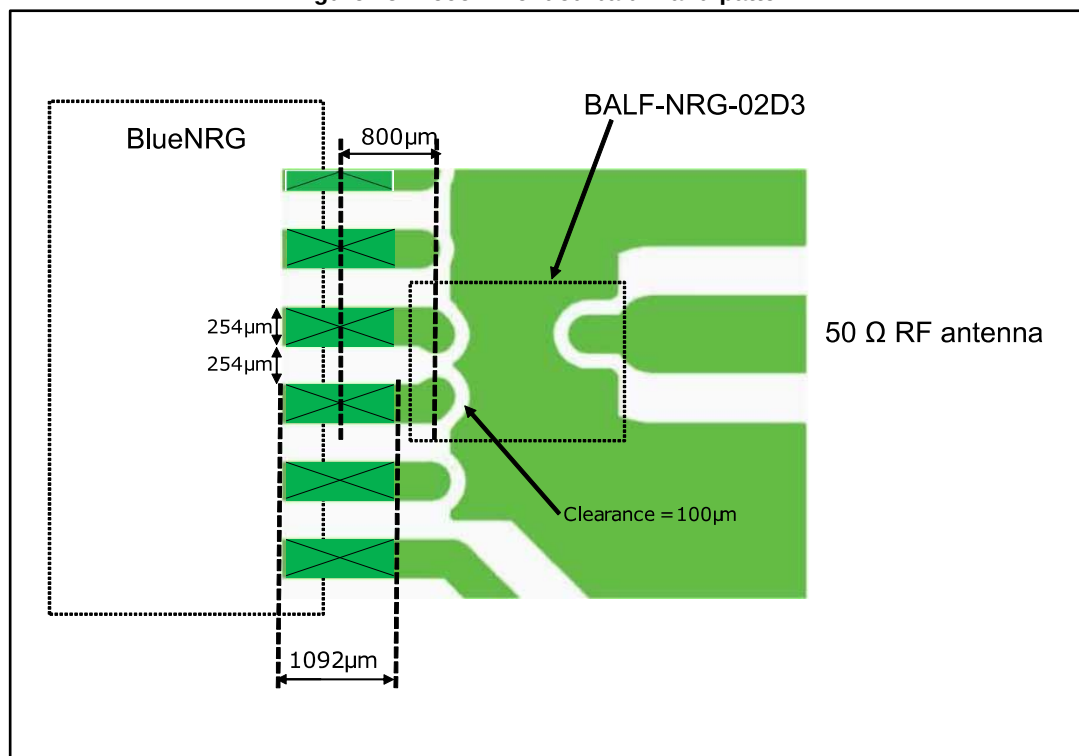

4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

4.1 CSPG 0.4 package information

Figure 16: CSPG package outline (bump view)

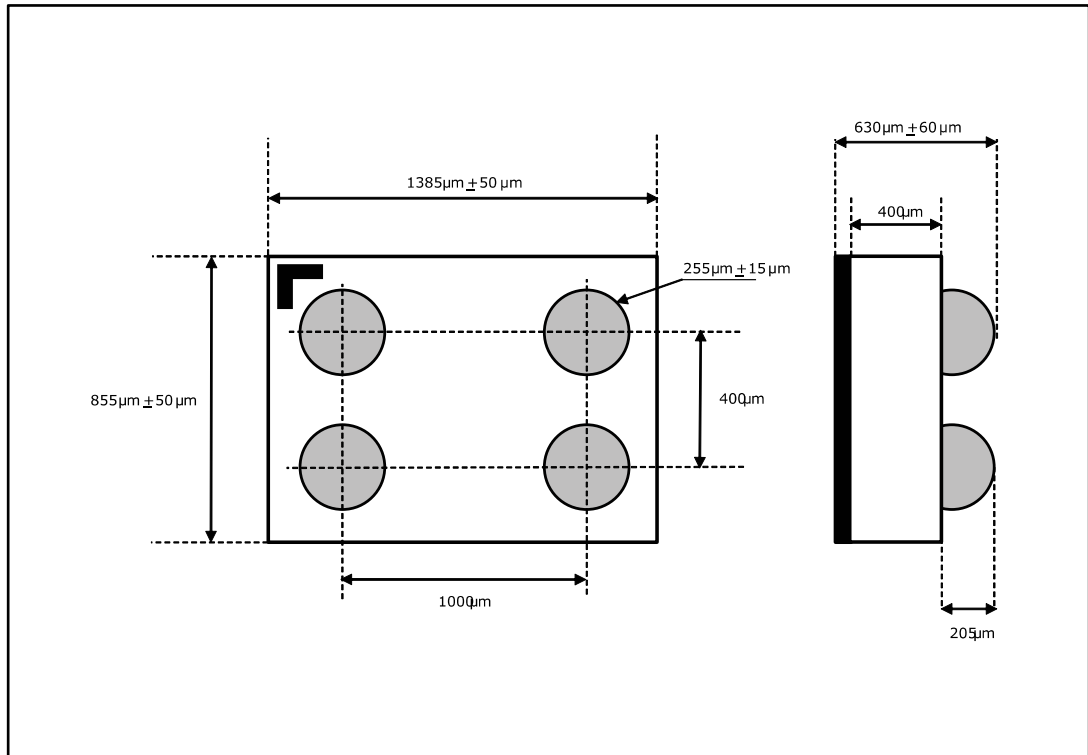



Figure 17: Footprint - 3 mils stencil - non solder mask defined

Copper pad diameter:
220 μm recommended
180 μm minimum
260 μm maximum

Solder mask opening:
320 μm recommended
300 μm minimum
340 μm maximum


Solder stencil opening:
220 μm recommended

**Figure 18: Footprint - 3 mils stencil - solder mask defined**

Solder mask opening:
220 μm recommended
180 μm minimum
260 μm maximum

Copper pad diameter:
320 μm recommended
300 μm minimum

Solder stencil opening:
220 μm recommended


**Figure 19: Footprint - 5 mils stencil - non solder mask defined**

Copper pad diameter:
220 μm recommended
180 μm minimum
260 μm maximum

Solder mask opening:
320 μm recommended
300 μm minimum
340 μm maximum

Solder stencil opening:
330 μm recommended*

*depending on paste, it can go down to 270 μm


**Figure 20: Footprint - 5 mils stencil - solder mask defined**

Solder mask opening:
220 μm recommended
180 μm minimum
260 μm maximum

Copper pad diameter:
320 μm recommended
300 μm minimum

Solder stencil opening:
330 μm recommended*

*depending on paste, it can go down to 270 μm




4.2 CSPG 0.4 packing information

Figure 21: Marking



Figure 22: Flip Chip tape and reel specifications

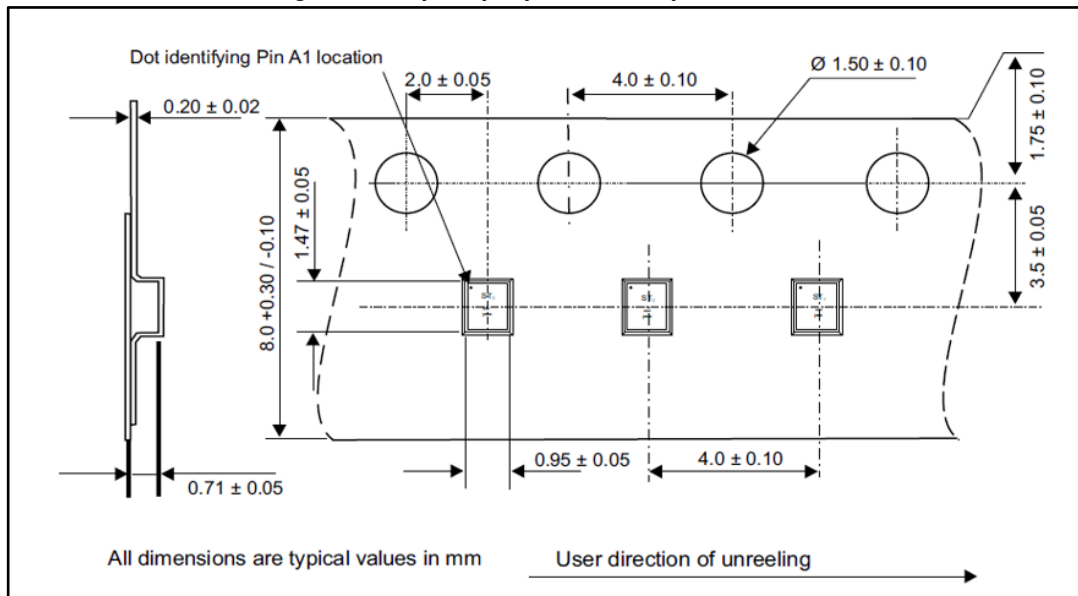

More packing information is available in the application note:

- AN2348 Flip-Chip: "Package description and recommendations for use"

5 Ordering information

Figure 23: Ordering information scheme

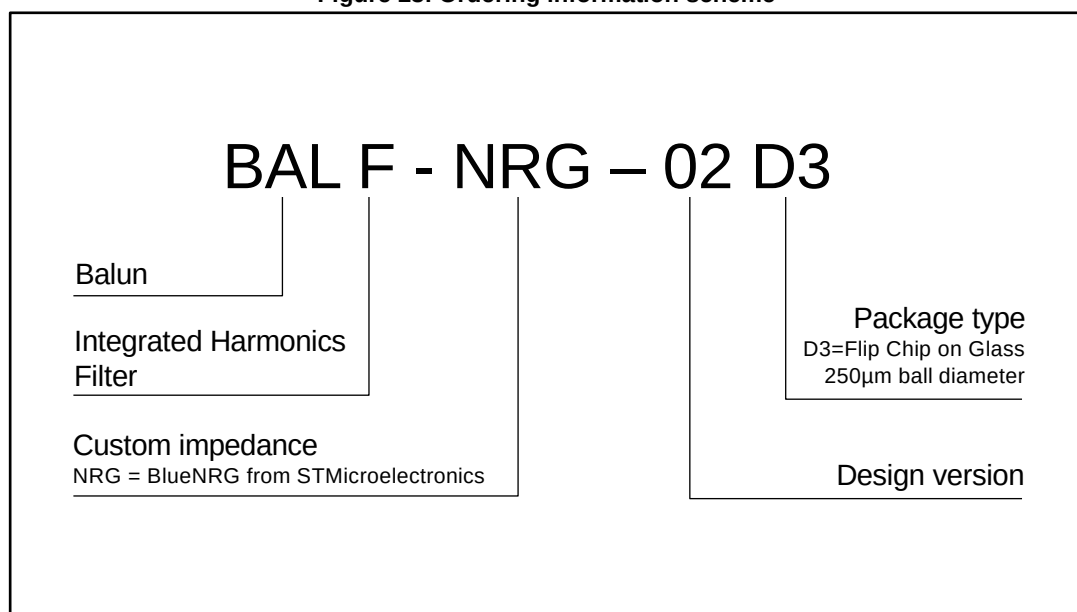


Table 4: Ordering information

Order code	Marking	Package	Weight	Base qty.	Delivery mode
BALF-NRG-02D3	TK	CSPG	1.37 mg	5000	Tape and reel

6 Revision history

Table 5: Document revision history

Date	Revision	Changes
23-Jun-2017	1	Initial release.

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2017 STMicroelectronics – All rights reserved