

# 4 PIN SOP PHOTOTRANSISTOR PHOTOCOUPLER

EL357 Series

## Absolute Maximum Ratings ( $T_a=25^{\circ}\text{C}$ )

Parameter		Symbol	Rating	Unit
Input	Forward current	$I_F$	50	mA
	Peak forward current (1us, pulse)	$I_{FP}$	1	A
	Reverse voltage	$V_R$	6	V
	Power dissipation	$P_D$	70	mW
	Derating factor (above $T_a = 100^{\circ}\text{C}$ )		2.9	mW/ $^{\circ}\text{C}$
Output	Power dissipation	$P_C$	150	mW
	Derating factor (above $T_a = 80^{\circ}\text{C}$ )		3.7	mW/ $^{\circ}\text{C}$
	Collector current	$I_C$	80	mA
	Collector-Emitter voltage	$V_{CEO}$	80	V
	Emitter-Collector voltage	$V_{ECO}$	7	V
Total power dissipation		$P_{TOT}$	200	mW
Isolation voltage <sup>*1</sup>		$V_{ISO}$	3750	V rms
Operating temperature		$T_{OPR}$	-55 ~ +110	$^{\circ}\text{C}$
Storage temperature		$T_{STG}$	-55 ~ +125	$^{\circ}\text{C}$
Soldering temperature <sup>*2</sup>		$T_{SOL}$	260	$^{\circ}\text{C}$

### Notes

\*1 AC for 1 minute, R.H.= 40 ~ 60% R.H. In this test, pins 1 & 2 are shorted together, and pins 3 & 4 are shorted together.

\*2 For 10 seconds.

# 4 PIN SOP PHOTOTRANSISTOR PHOTOCOUPLER

## EL357 Series

### Electrical Characteristics ( $T_a=25^{\circ}\text{C}$ unless specified otherwise)

#### Input

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition
Forward voltage	$V_F$	-	1.2	1.4	V	$I_F = 20\text{mA}$
Reverse current	$I_R$	-	-	10	$\mu\text{A}$	$V_R = 4\text{V}$
Input capacitance	$C_{in}$	-	30	250	pF	$V = 0, f = 1\text{kHz}$

#### Output

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition
Collector-Emitter dark current	$I_{CEO}$	-	-	100	nA	$V_{CE} = 20\text{V}, I_F = 0\text{mA}$
Collector-Emitter breakdown voltage	$BV_{CEO}$	80	-	-	V	$I_C = 0.1\text{mA}$
Emitter-Collector breakdown voltage	$BV_{ECO}$	7	-	-	V	$I_E = 0.1\text{mA}$

### Transfer Characteristics ( $T_a=25^{\circ}\text{C}$ unless specified otherwise)







Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition
Current Transfer ratio	EL357	50	-	600	%	$I_F = 5\text{mA}, V_{CE} = 5\text{V}$
	EL357A	80	-	160		
	EL357B	130	-	260		
	EL357C	200	-	400		
	EL357D	300	-	600		
Collector-Emitter saturation voltage	$V_{CE(sat)}$	-	0.1	0.2	V	$I_F = 20\text{mA}, I_C = 1\text{mA}$
Isolation resistance	$R_{IO}$	$5 \times 10^{10}$	-	-	$\Omega$	$V_{IO} = 500\text{Vdc}, 40 \sim 60\% \text{ R.H.}$
Floating capacitance	$C_{IO}$	-	0.6	1.0	pF	$V_{IO} = 0, f = 1\text{MHz}$
Cut-off frequency	$f_c$	-	80	-	kHz	$V_{CE} = 5\text{V}, I_C = 2\text{mA}$ $R_L = 100\Omega, -3\text{dB}$
Rise time	$t_r$	-	6	18	$\mu\text{s}$	$V_{CE} = 2\text{V}, I_C = 2\text{mA},$ $R_L = 100\Omega$
Fall time	$t_f$	-	8	18	$\mu\text{s}$	

\* Typical values at  $T_a = 25^{\circ}\text{C}$

# 4 PIN SOP PHOTOTRANSISTOR PHOTOCOUPLER

**EL357 Series**

## Typical Performance Curves

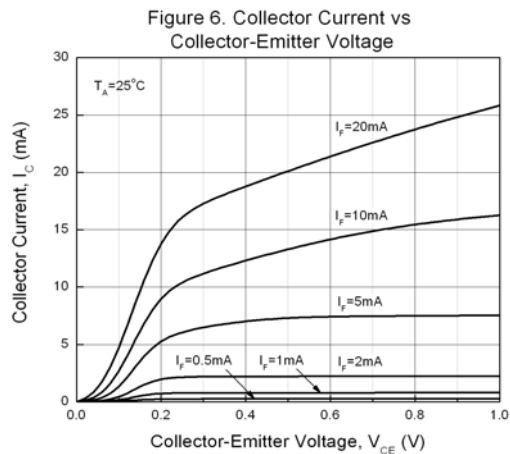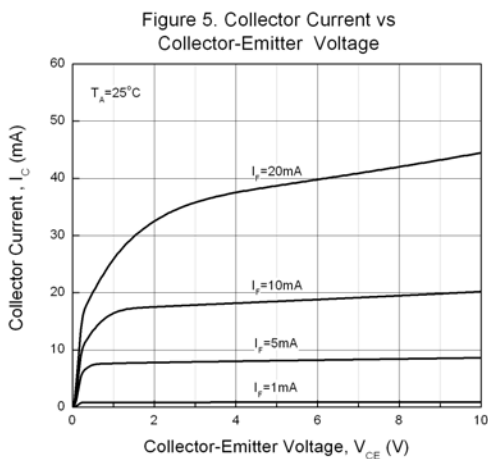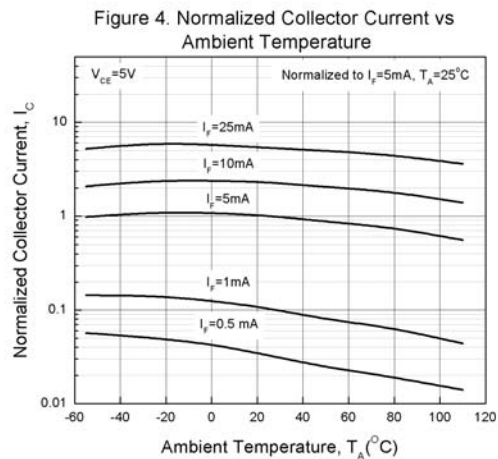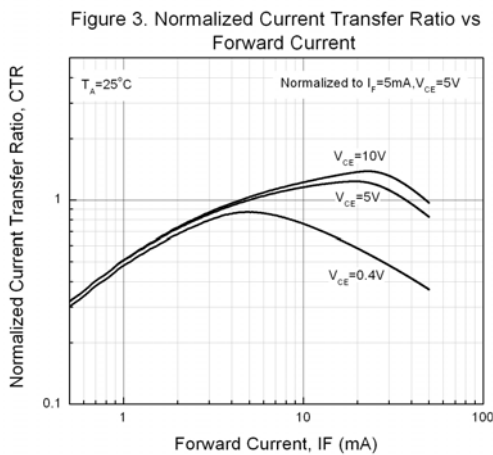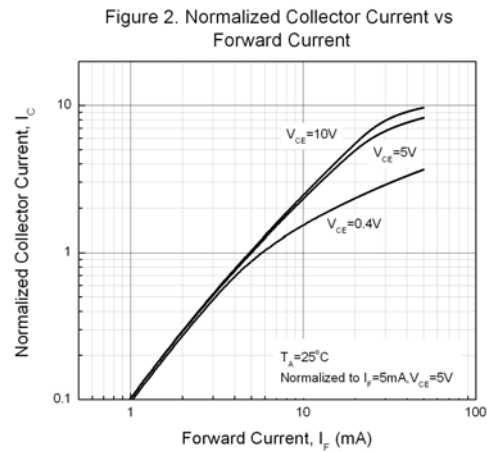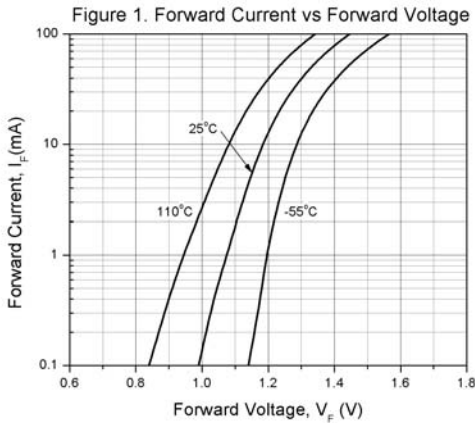

# 4 PIN SOP PHOTOTRANSISTOR PHOTOCOUPLER

**EL357 Series**

Figure 7. Collector Dark Current vs Ambient Temperature

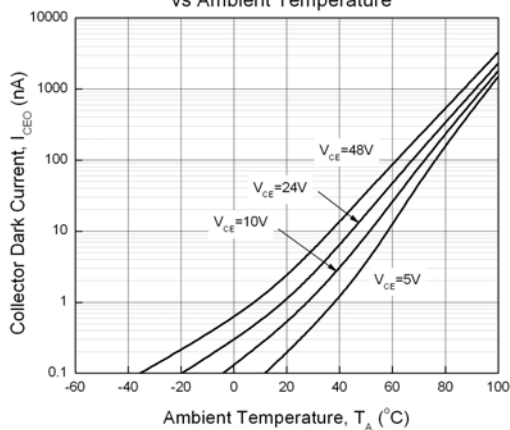


Figure 8. Switching Time vs Load Resistance

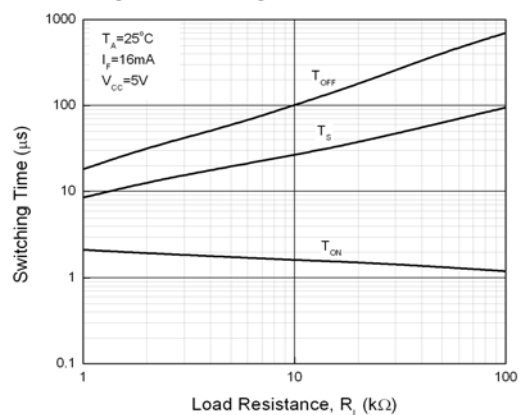


Figure 9. Collector-Emitter Saturation Voltage vs Ambient Temperature



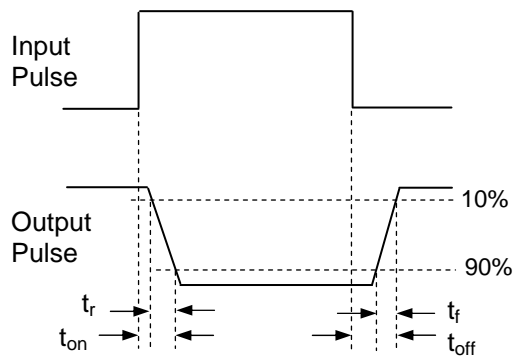


Figure 10. Switching Time Test Circuit & Waveforms

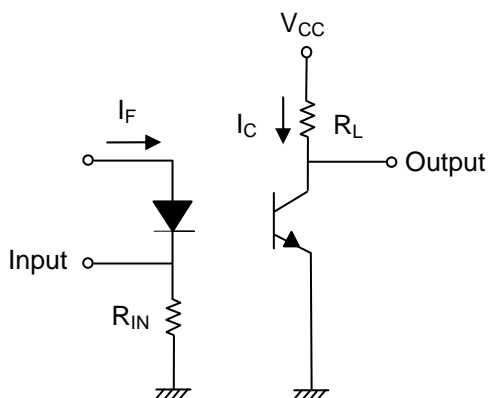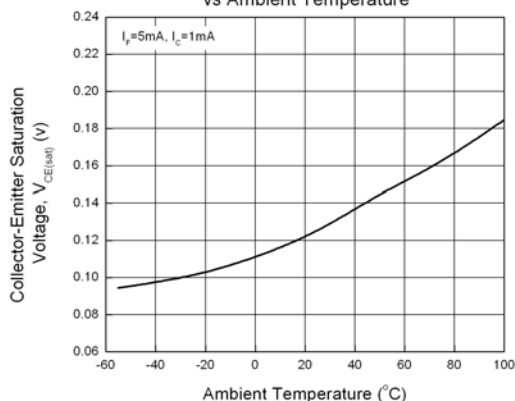

LIGHTING FOREVER

## 4 PIN SOP PHOTOTRANSISTOR PHOTOCOUPLER

**EL357 Series**

### Order Information

#### Part Number

**EL357(X)(Y)-V**

#### Note

X = CTR Rank (A, B, C, D or none)  
YY = Tape and reel option (TA, TB or none).  
V = VDE option


Option	Description	Packing quantity
None	Standard SMD option	100 units per tube
-V	Standard SMD option + VDE	100 units per tube
(TA)	TA Tape & reel option	3000 units per reel
(TB)	TB Tape & reel option	3000 units per reel
(TA)-V	TA Tape & reel option + VDE	3000 units per reel
(TB)-V	TB Tape & reel option + VDE	3000 units per reel

# 4 PIN SOP PHOTOTRANSISTOR PHOTOCOUPLER


**EL357 Series**

## Package Drawing

(Dimensions in mm)

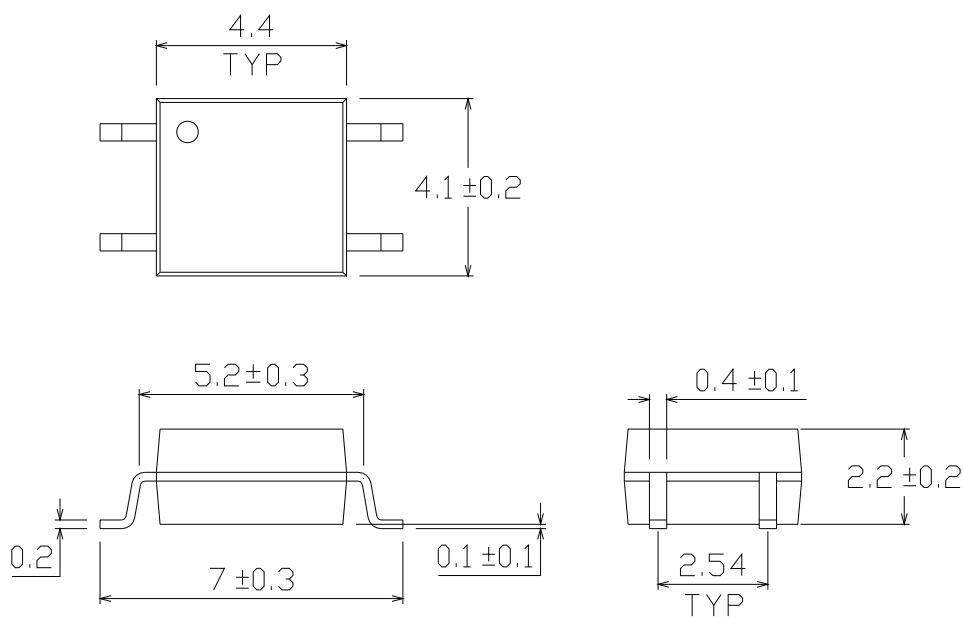

## Recommended pad layout for surface mount leadform

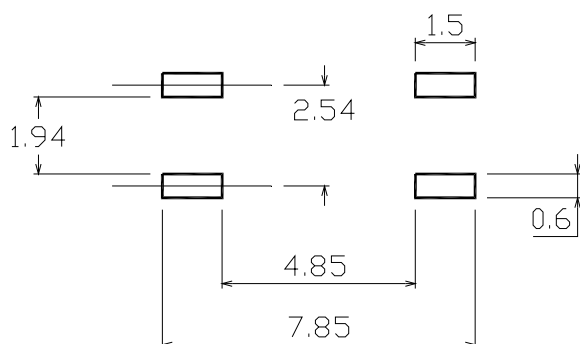

## 4 PIN SOP PHOTOTRANSISTOR PHOTOCOUPLER

**EL357 Series**

### Device Marking



### Notes




EL	denotes Everlight
357	denotes Part Number
R	denotes CTR Rank (A, B, C, D or none)
Y	denotes 1 digit Year code
WW	denotes 2 digit Week code
V	denotes VDE (optional)

# 4 PIN SOP PHOTOTRANSISTOR PHOTOCOUPLER

**EL357 Series**



## Tape & Reel Packing Specifications

**Option TA**

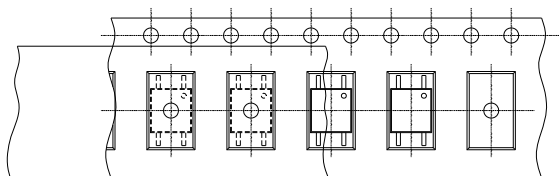


Direction of feed from reel

**Option TB**

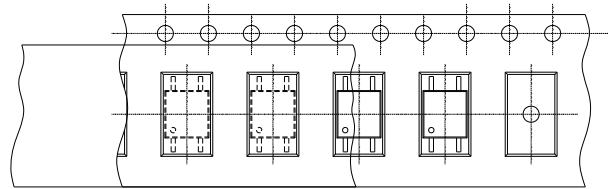

Direction of feed from reel

## Tape dimensions

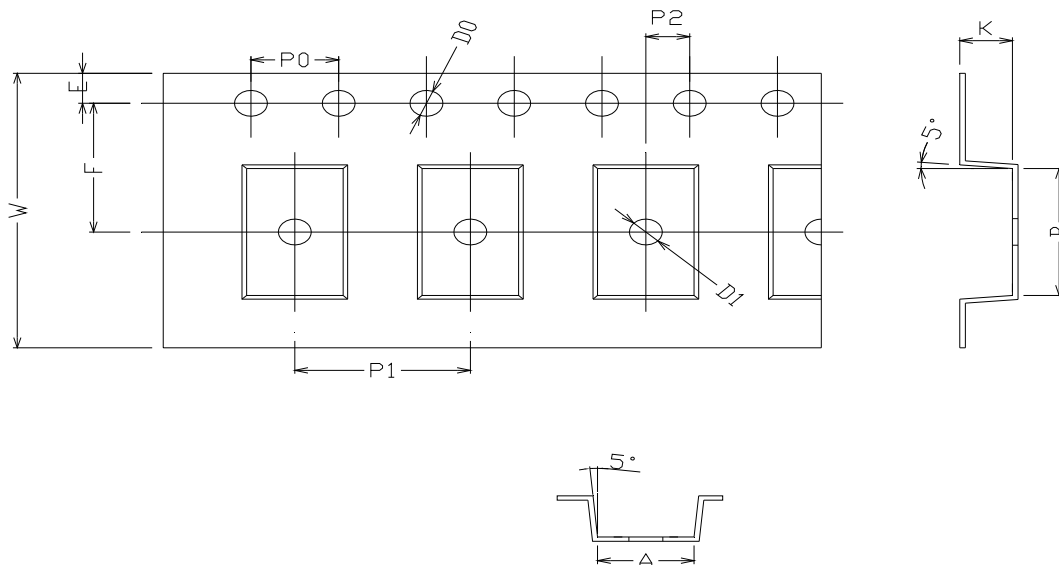


Dimension No.	A	B	Do	D1	E	F
Dimension (mm)	$4.4 \pm 0.1$	$7.4 \pm 0.1$	$1.5 + 0.1/-0$	$1.5 \pm 0.1$	$1.75 \pm 0.1$	$7.5 \pm 0.1$
Dimension No.	Po	P1	P2	t	W	K
Dimension (mm)	$4.0 \pm 0.15$	$8.0 \pm 0.1$	$2.0 \pm 0.1$	$0.25 \pm 0.03$	$16.0 \pm 0.2$	$2.4 \pm 0.1$



## 4 PIN SOP PHOTOTRANSISTOR PHOTOCOUPLER

**EL357 Series**

### Solder Reflow Temperature Profile

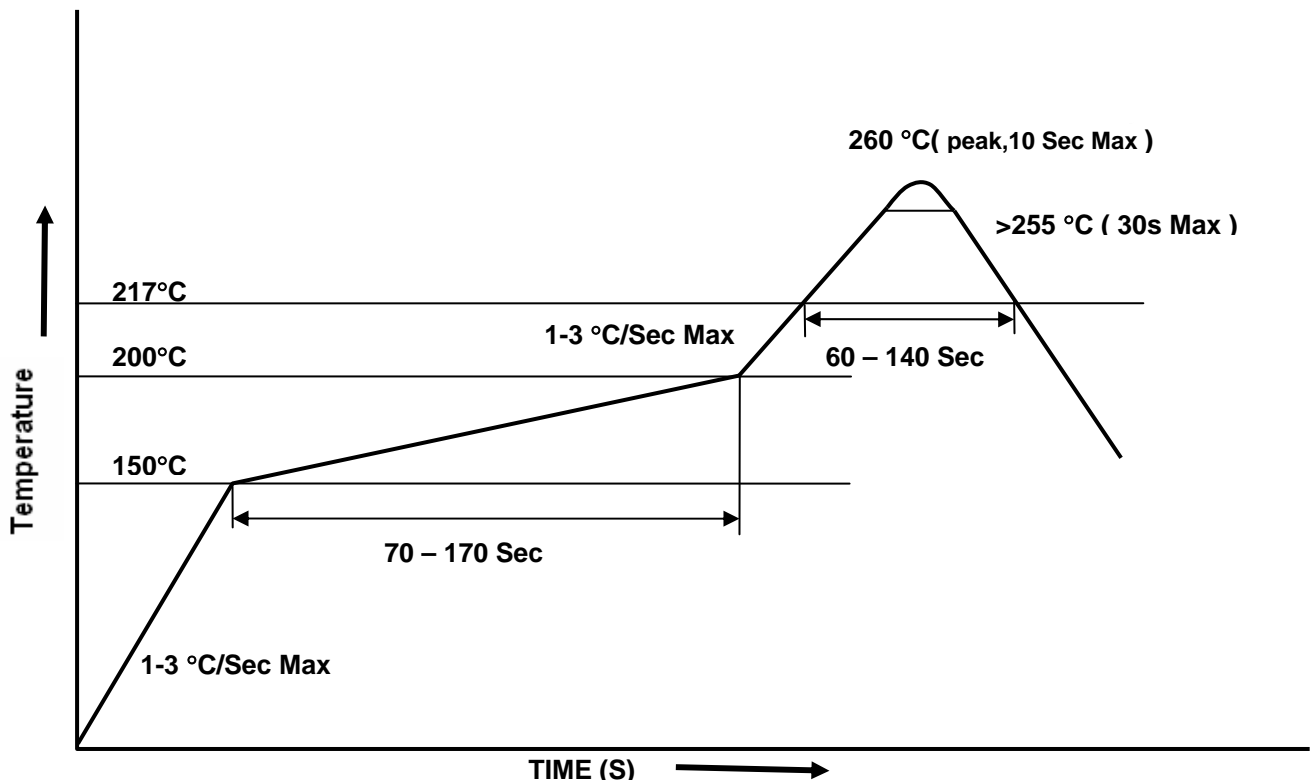

## 4 PIN SOP PHOTOTRANSISTOR PHOTOCOUPLER

**EL357 Series**

---

### DISCLAIMER

1. The specifications in this datasheet may be changed without notice. EVERLIGHT reserves the authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for use as outlined in this datasheet. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in this datasheet.
3. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without the specific consent of EVERLIGHT.