




LT1004

ABSOLUTE MAXIMUM RATINGS (Note 1)

Reverse Breakdown Current	30mA	Operating Temperature Range	
Forward Current	10mA	LT1004M (OBSOLETE)	–55°C to 125°C
Storage Temperature Range	–65°C to 150°C	LT1004I	–40°C to 85°C
Lead Temperature (Soldering, 10 sec)	300°C	LT1004C	0°C to 70°C

PACKAGE/ORDER INFORMATION

BOTTOM VIEW  H PACKAGE 2-LEAD TO-46 METAL CAN $T_{JMAX} = 150^{\circ}\text{C}$, $\theta_{JA} = 440^{\circ}\text{C/W}$, $\theta_{JC} = 80^{\circ}\text{C/W}$	TOP VIEW  S8 PACKAGE 8-LEAD PLASTIC SO $T_{JMAX} = 100^{\circ}\text{C}$, $\theta_{JA} = 150^{\circ}\text{C/W}$		BOTTOM VIEW  Z PACKAGE 3-LEAD PLASTIC TO-92 $T_{JMAX} = 100^{\circ}\text{C}$, $\theta_{JA} = 160^{\circ}\text{C/W}$
ORDER PART NUMBER	ORDER PART NUMBER	S8 PART MARKING	ORDER PART NUMBER
LT1004MH-1.2 LT1004CH-1.2 LT1004MH-2.5 LT1004CH-2.5 OBSOLETE PACKAGE Consider the SO-8 or Z Packages for Alternate Source	LT1004CS8-1.2 LT1004CS8-2.5 LT1004IS8-1.2 LT1004IS8-2.5	0412 0425 0412I 0425I	LT1004CZ-1.2 LT1004CZ-2.5 LT1004IZ-1.2 LT1004IZ-2.5

Consult LTC Marketing for parts specified with wider operating temperature ranges.

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^{\circ}\text{C}$. (Note 2)

SYMBOL	PARAMETER	CONDITIONS	LT1004-1.2			LT1004-2.5			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
V_Z	Reverse Breakdown Voltage	$I_R = 100\mu\text{A}$	1.231	1.235	1.239	2.480	2.500	2.520	V
		LT1004M: $-55^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$ ●	1.220	1.230	1.245	2.460	2.500	2.535	V
		LT1004C: $0^{\circ}\text{C} \leq T_A \leq 70^{\circ}\text{C}$ ●	1.225	1.235	1.245	2.470	2.500	2.530	V
		LT1004I: $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$ ●	1.220	1.230	1.245	2.460	2.500	2.530	V
$\frac{\Delta V_Z}{\Delta \text{Temp}}$	Average Temperature Coefficient	$I_{MIN} \leq I_R \leq 20\text{mA}$ (Note 3)		20		20			ppm/ $^{\circ}\text{C}$
I_{MIN}	Minimum Operating Current		●	8	10	12	20		μA
$\frac{\Delta V_Z}{\Delta I_R}$	Reverse Breakdown Voltage Change with Current	$I_{MIN} \leq I_R \leq 1\text{mA}$	●		1.0			1.0	mV
			●		1.5			1.5	mV
		$1\text{mA} \leq I_R \leq 20\text{mA}$	●		10			10	mV
r_Z	Reverse Dynamic Impedance	$I_R = 100\mu\text{A}$	●	0.2	0.6	0.2	0.6		Ω
			●		1.5		1.5		Ω
e_n	Wide Band Noise (RMS)	$I_R = 100\mu\text{A}$, $10\text{Hz} \leq f \leq 10\text{kHz}$		60		120			μV
$\frac{\Delta V_Z}{\Delta \text{Time}}$	Long Term Stability	$I_R = 100\mu\text{A}$, $T_A = 25^{\circ}\text{C} \pm 0.1^{\circ}\text{C}$		20		20			ppm/kHr

Note 1: Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.


Note 2: All specifications are for $T_A = 25^{\circ}\text{C}$ unless otherwise noted.

Note 3: Selected devices with guaranteed maximum temperature coefficient are available upon request.

For MIL-STD components, please refer to LTC 883C data sheet for test listing and parameters.


TYPICAL PERFORMANCE CHARACTERISTICS (1.2V)

Reverse Characteristics

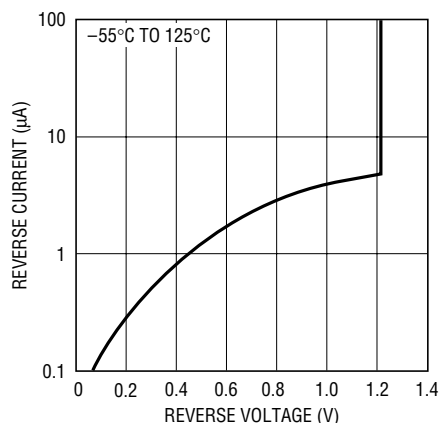


1004 G01

Reverse Voltage Change

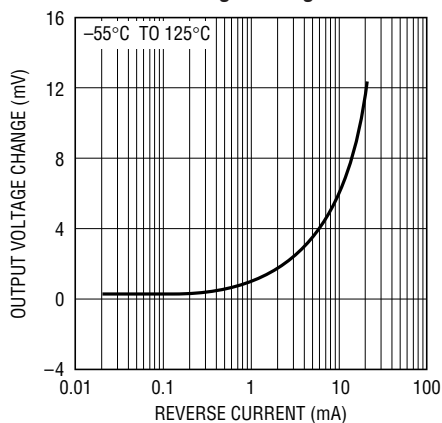


1004 G02

Forward Characteristics

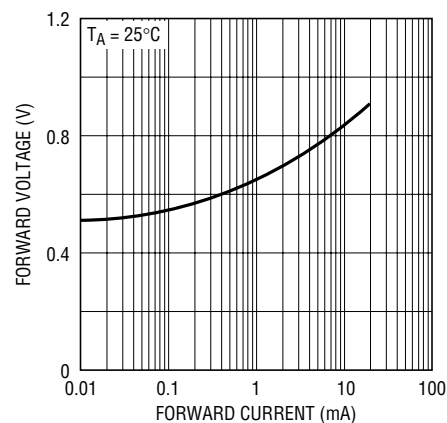


1004 G11

Temperature Drift

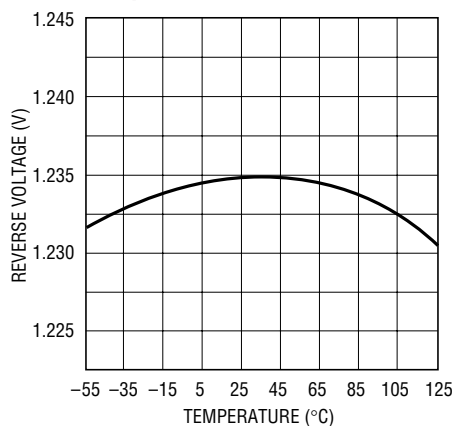


1004 G04

Reverse Dynamic Impedance

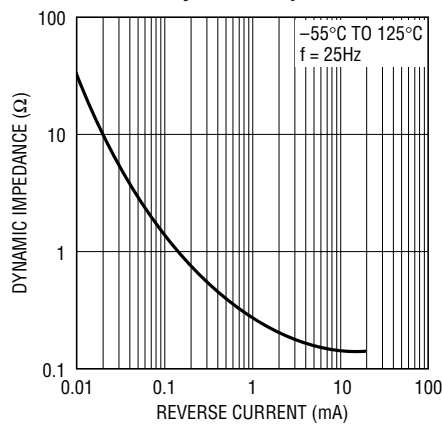


1004 G05

Reverse Dynamic Impedance

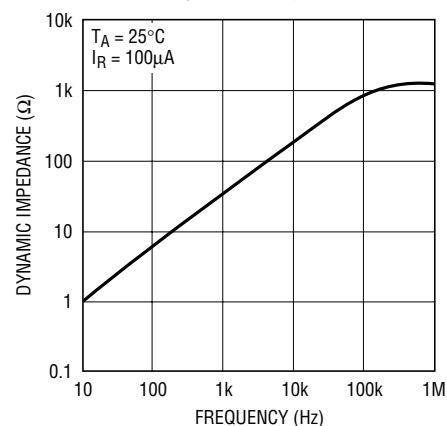


1004 G06

Noise Voltage

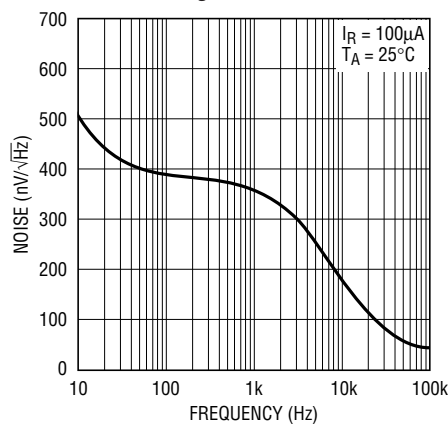


1004 G07

Filtered Output Noise

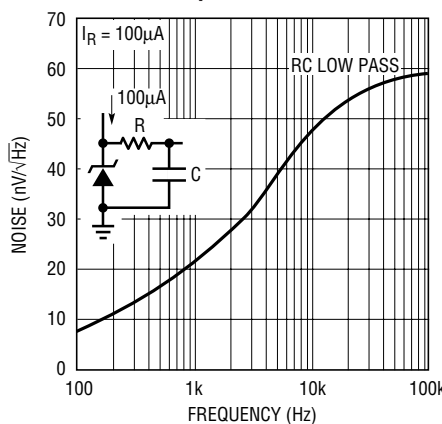

1004 G08


Response Time

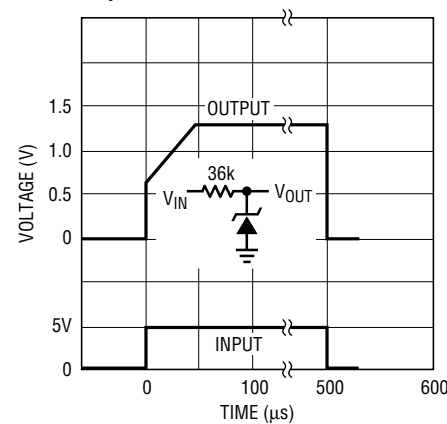

1004 G09


TYPICAL PERFORMANCE CHARACTERISTICS (2.5V)

Reverse Characteristics

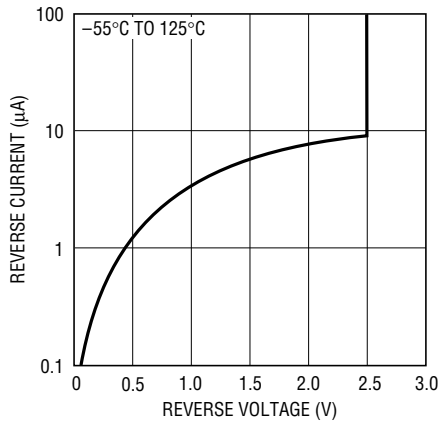


1004 G10

Forward Characteristics

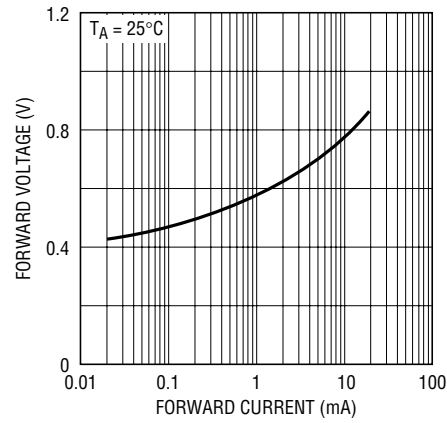


1004 G11

Temperature Drift

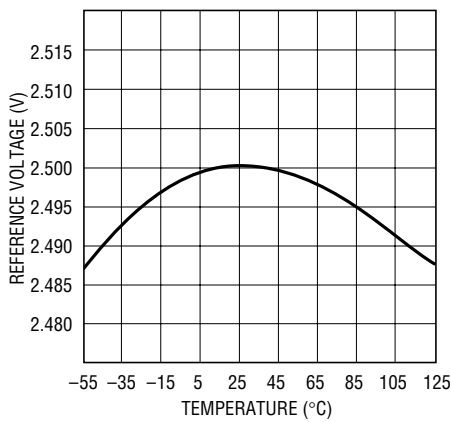


1004 G12

Reverse Dynamic Impedance

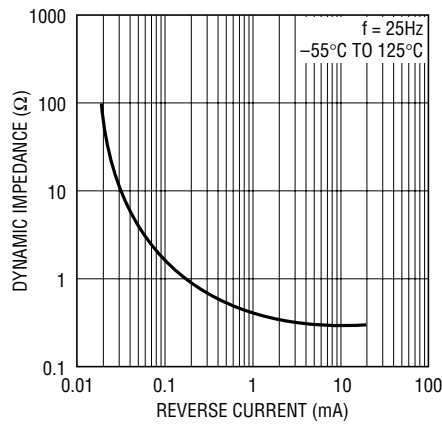


1004 G13

Reverse Dynamic Impedance

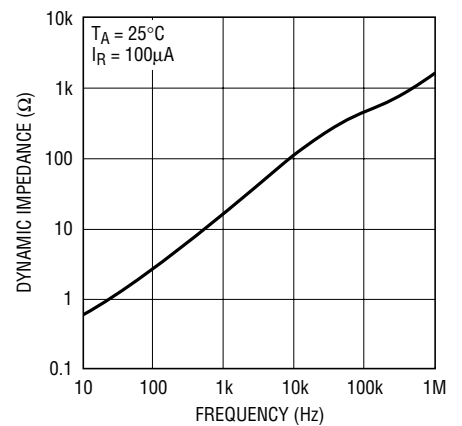


1004 G14

Noise Voltage

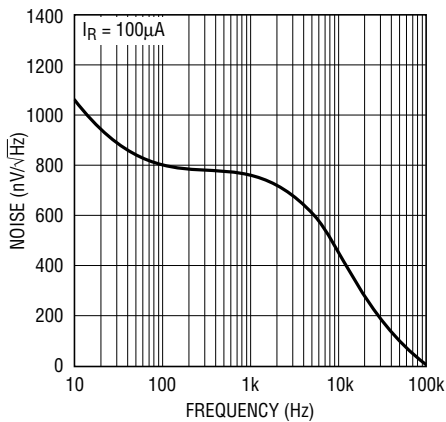


1004 G15

Filtered Output Noise

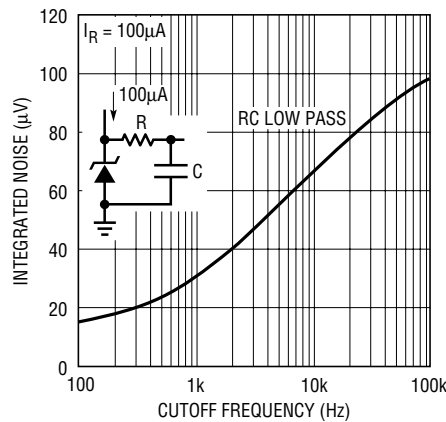

1004 G16


Reponse Time

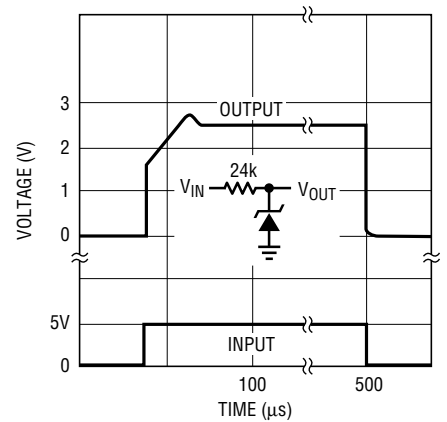


1004 G17

TYPICAL APPLICATIONS


High Stability 5V Regulator

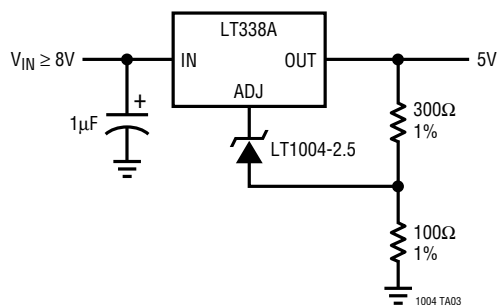


Variable Output Supply

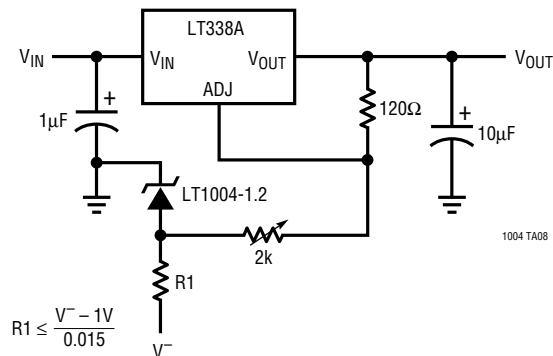


Constant Gain Amplifier Over Temperature

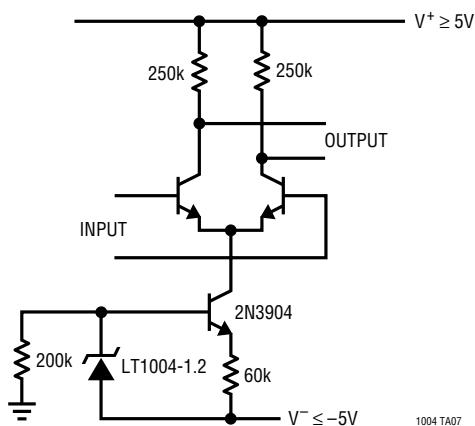


Micropower 5V Reference

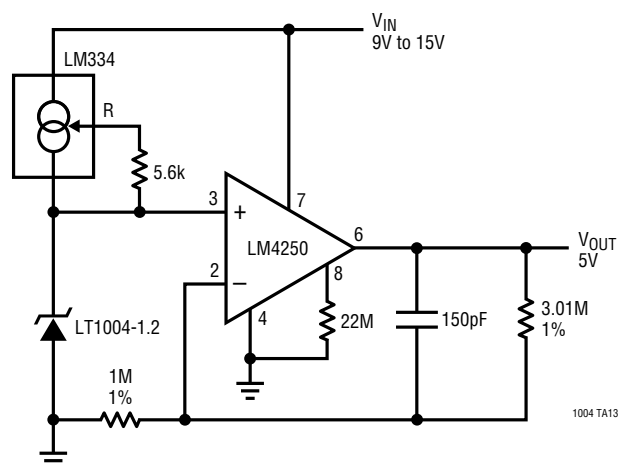

Lead Acid Low-Battery Detector

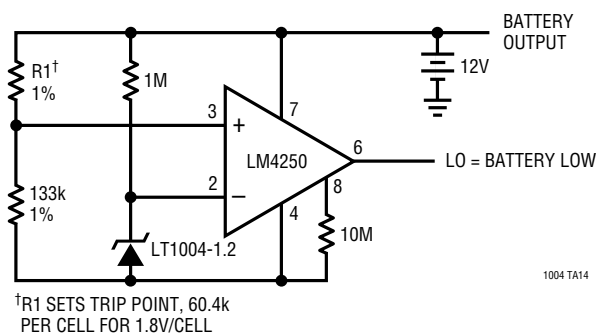

Ground Referenced Current Source

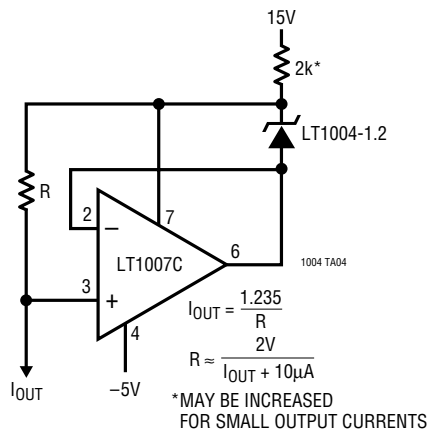

[†]R1 SETS TRIP POINT, 60.4k PER CELL FOR 1.8V/CELL


$$I_{OUT} = \frac{1.235}{R} - \frac{2V}{R}$$

$$R = \frac{1.235}{I_{OUT} + 10\mu A}$$


*MAY BE INCREASED FOR SMALL OUTPUT CURRENTS

TYPICAL APPLICATIONS


VPP Generator for Eeproms — No Trim Required

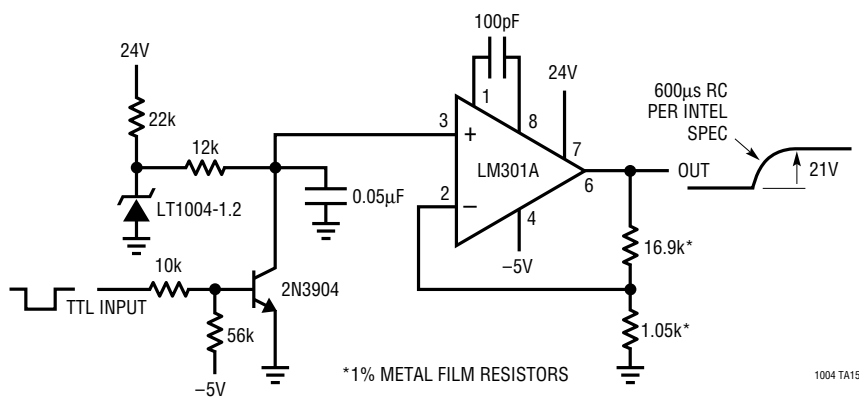


1.2V Reference from 1.5V Battery




Micropower Reference from 9V Battery



2.5V Reference




Low Noise Reference

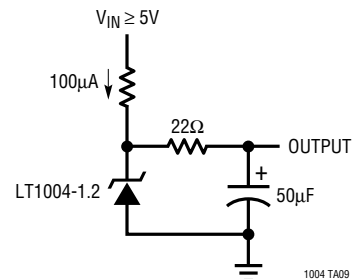


SCHEMATIC DIAGRAMS

LT1004-1.2

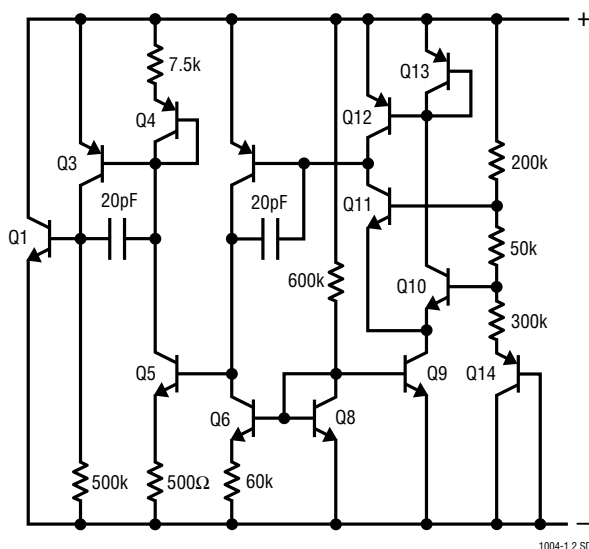


LT1004-2.5

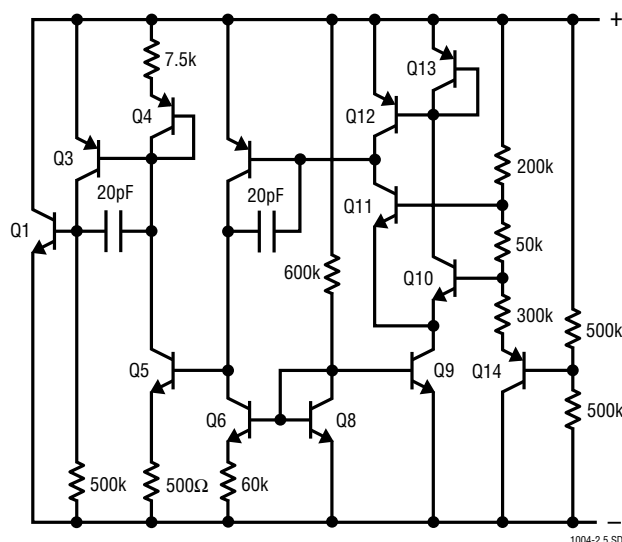


PACKAGE DESCRIPTION

H Package 2-Lead and 3-Lead TO-46 Metal Can (Reference LTC DWG # 05-08-1340)

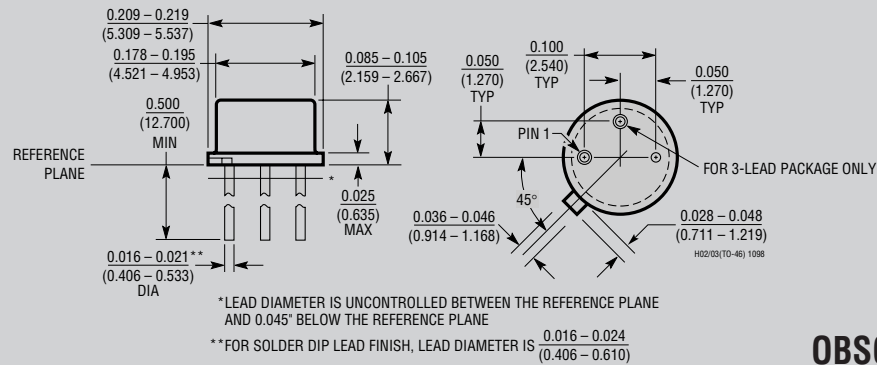


OBsolete PACKAGE

S8 Package 8-Lead Plastic Small Outline (Narrow .150 Inch) (Reference LTC DWG # 05-08-1610)

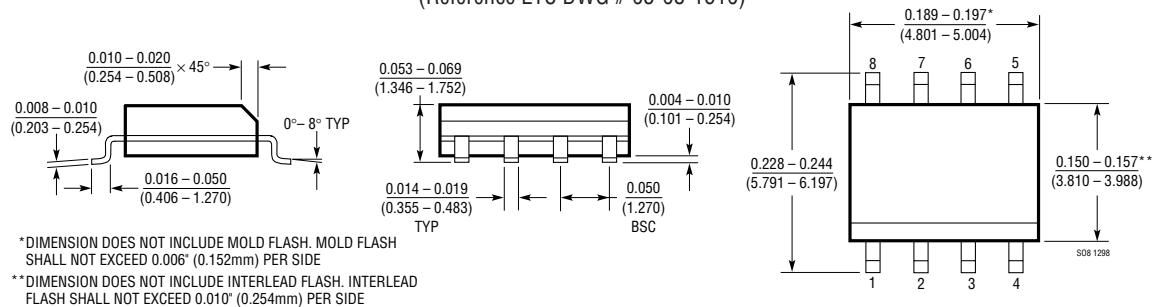


Z Package 3-Lead Plastic TO-92 (Similar to TO-226) (Reference LTC DWG # 05-08-1410)

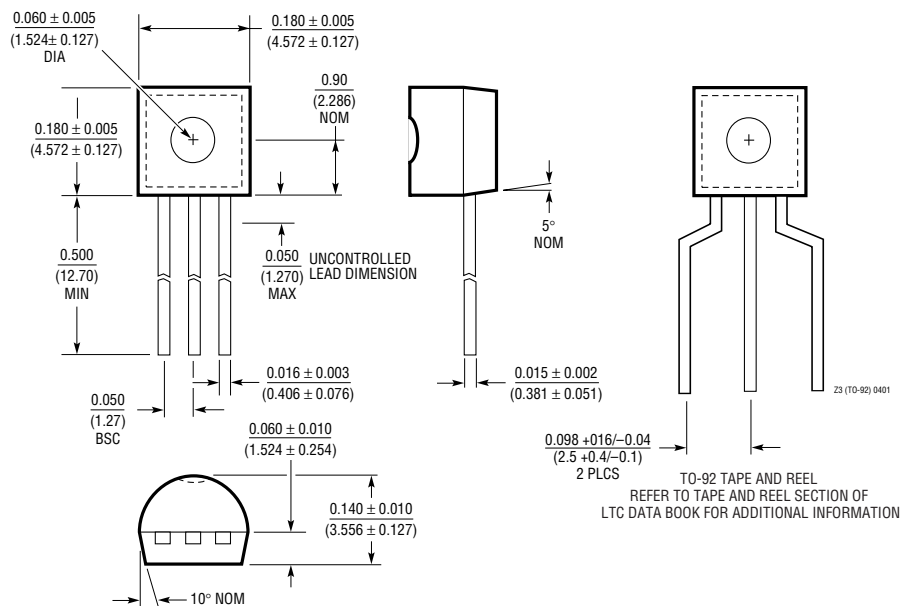


TYPICAL APPLICATIONS

0°C to 100°C Linear Output Thermometer

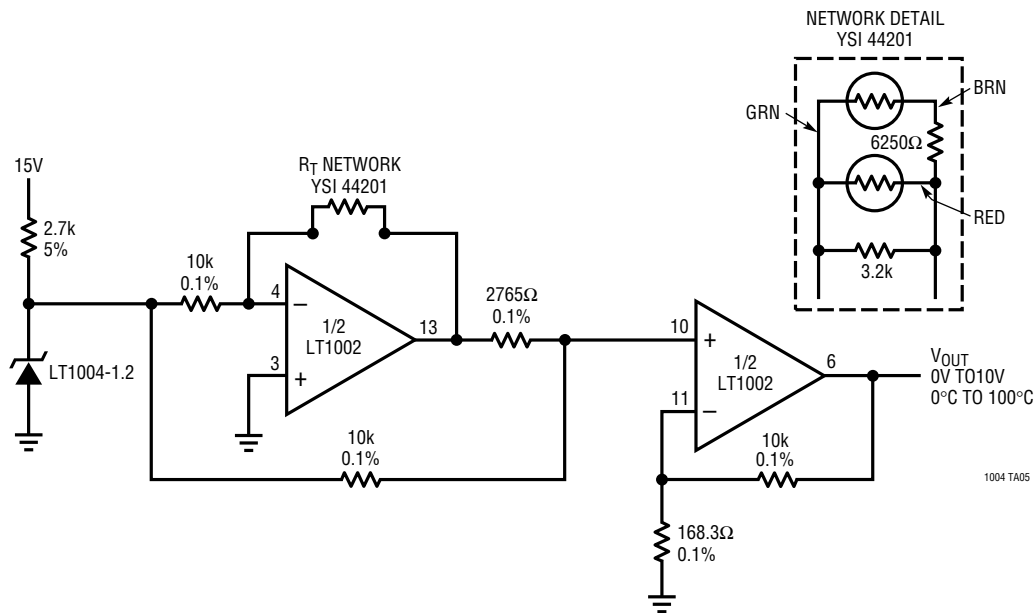

Low Temperature Coefficient
2-Terminal Current Source



RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LT1634	Micropower Precision Shunt Reference	10μA Operating Current, 10ppm/°C Maximum Drift, 0.05% Initial Accuracy
LT1460S3-2.5	Micropower Series Reference in SOT-23	100μA Operating Current, 20ppm/°C Maximum Drift, 0.2% Initial Accuracy
LT1790	Precision Micropower LDO Reference in SOT-23	10ppm/°C Max Drift, 0.05% Initial Accuracy