280611-1 Product Details

Live Product Chat

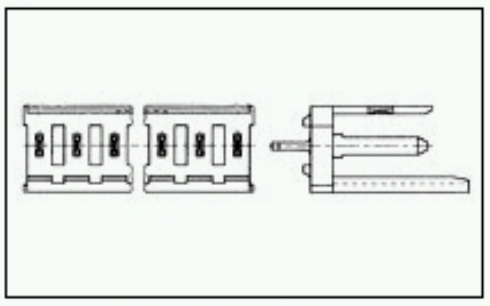

280611-1

TE Part Number: 280611-1
Active
Add to Part List

.156 Inch AMPMODU .031 X .062 Mod I

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:
- Header
- Vertical Mount Angle
- Tin (150) Contact Mating Area Plating Material
- Not Keyed
- Number of Positions = 6

View all Features | Find Similar Products

Quick Links
- Check Pricing & Availability
- Search for Tooling
- Product Feature Selector
- Contact Us About This Product
- Request Samples NEW!

Documentation & Additional Information

Product Drawings:
- AMP MODU MODI STRAIGHT VERSION POST SUPPORT ASSY (PDF, English)

Catalog Pages/Data Sheets:
- None Available

Product Specifications:
- None Available

Application Specifications:
- None Available

Instruction Sheets:
- None Available

CAD Files: (CAD Format & Compression Information)
- 2D Drawing (DXF, Version R)
- 3D Model (IGES, Version R)
- 3D Model (STEP, Version R)

List all Documents

Additional Information:
- Product Line Information

Related Products:
- Tooling

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:
- Product Type = Header
- Mount Angle = Vertical
- Keyed = No
- Number of Positions = 6

Mechanical Attachment:
- Mating Post Length (mm [in]) = 10.00 [0.394]

Termination Related Features:
- Termination End Plating = Tin (150)

Body Related Features:
- Number of Rows = Single
- Centerline (mm [in]) = 3.96 [0.156]

Contact Related Features:
- Contact Mating Area Plating Material = Tin (150)
- Contact Material = Phosphor Bronze

Housing Related Features:
- Housing Material = Polycarbonate
- Housing Color = Green
- Housing Flammability Rating = UL 94V-1

Industry Standards:
- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:
- Terminate To = Printed Circuit Board

Other:
- Brand = AMP

© 2008 Tyco Electronics Corporation All Rights Reserved
Downloaded from Arrow.com.