


Plug Fuses

Fast-Acting

125 Volts, 1/2-30 Amps

Type W



CATALOG SYMBOL: W
 FAST-ACTING
 1/2 TO 30A
 125VAC OR LESS
 U.L. LISTED
 (GUIDE #JEFV, FILE # E12112)

Electrical Ratings (Catalog Symbol and Amperes)
125 Volts


W-1/2	W-5	W-15
W-1	W-6	W-20
W-1-8/10	W-6-1/2	W-25
W-2	W-7	W-30
W-2-1/2	W-8	—
W-3	W-10	—
W-4	W-12	—

Package Quantity and Weight

Ampere Ratings	Quantity		Weight	
	Box	Card	Per Box	Per 5 Cards
15, 20, 25, & 30A	4	1	0.96	1.20

- **Fast-Acting Plug Fuse.**
- For lighting, heating or other circuits that do not contain electric motors.
- Edison base size.
- These fuses thread into fuse receptacles.
- The General Purpose (W) fuse has no time-delay feature and should not be used in circuits that contain motors.

Time-Current Characteristics—Total Clear

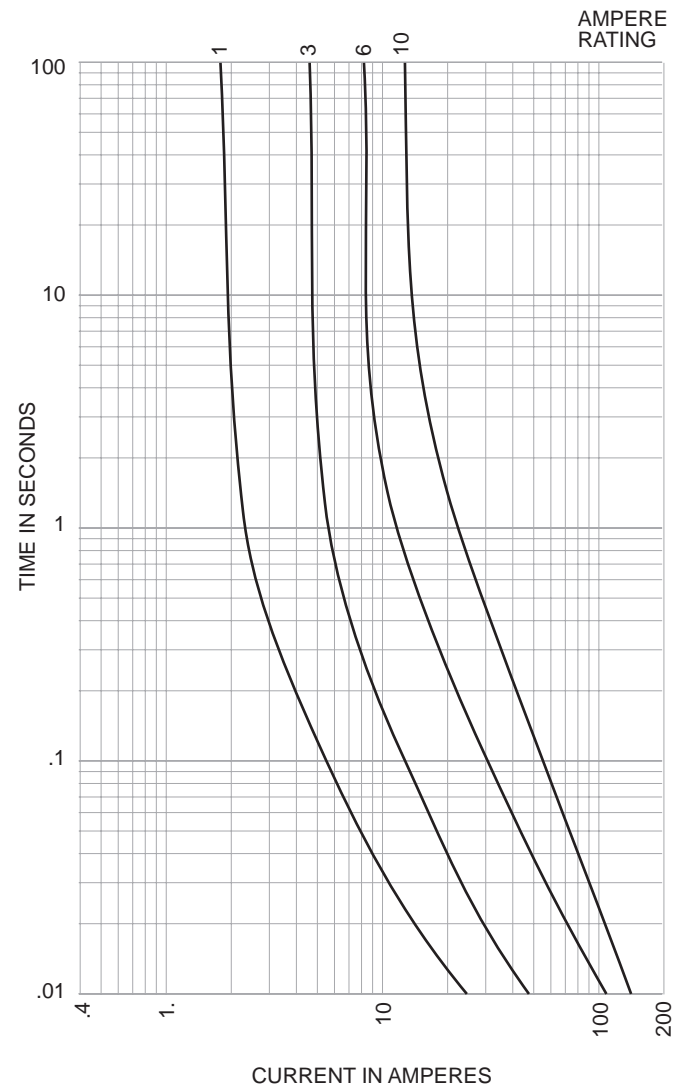

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.