

BZX584C-02V Series



Vishay Semiconductors




Electrical Characteristics

Part number	Marking code	Zener voltage range		Dynamic resistance		Test current	Temp. coefficient of zener voltage		Test current	Reverse leakage current	
		V_Z at 5 mA		r_{zj} at I_{ZT1}	r_{zj} at I_{ZT2}	I_{ZT1}	α_{VZ} at 5 mA		I_{ZT2}	I_R	at V_R
		V		Ω		mA	$10^{-4}/^{\circ}\text{C}$		mA	μA	V
		min	max				min	max			
BZX584C2V4-02V	2	2.2	2.6	70 (≤ 100)	275 (≤ 600)	5	- 9	- 4	1	50	1
BZX584C2V7-02V	3	2.5	2.9	75 (≤ 100)	300 (≤ 600)	5	- 9	- 4	1	20	1
BZX584C3V0-02V	4	2.8	3.2	80 (≤ 95)	325 (≤ 600)	5	- 9	- 3	1	10	1
BZX584C3V3-02V	5	3.1	3.5	85 (≤ 95)	350 (≤ 600)	5	- 8	- 3	1	5	1
BZX584C3V6-02V	6	3.4	3.8	85 (≤ 90)	375 (≤ 600)	5	- 8	- 3	1	5	1
BZX584C3V9-02V	7	3.7	4.1	85 (≤ 90)	400 (≤ 600)	5	- 7	- 3	1	3	1
BZX584C4V3-02V	8	4	4.6	80 (≤ 90)	410 (≤ 600)	5	- 6	- 1	1	3	1
BZX584C4V7-02V	9	4.4	5	50 (≤ 80)	425 (≤ 500)	5	- 5	+ 2	1	3	2
BZX584C5V1-02V	1	4.8	5.4	40 (≤ 60)	400 (≤ 480)	5	- 3	+ 4	1	2	2
BZX584C5V6-02V	0	5.2	6	15 (≤ 40)	80 (≤ 400)	5	- 2	+ 6	1	1	2
BZX584C6V2-02V	1	5.8	6.6	6 (≤ 10)	40 (≤ 150)	5	- 1	+ 7	1	3	4
BZX584C6V8-02V	2	6.4	7.2	6 (≤ 15)	30 (≤ 80)	5	+ 2	+ 7	1	2	4
BZX584C7V5-02V	3	7	7.9	6 (≤ 15)	30 (≤ 80)	5	+ 3	+ 7	1	1	5
BZX584C8V2-02V	4	7.7	8.7	6 (≤ 15)	40 (≤ 80)	5	+ 4	+ 7	1	0.7	5
BZX584C9V1-02V	5	8.5	9.6	6 (≤ 15)	40 (≤ 100)	5	+ 5	+ 8	1	0.5	6
BZX584C10-02V	6	9.4	10.6	8 (≤ 20)	50 (≤ 150)	5	+ 5	+ 8	1	0.2	7
BZX584C11-02V	7	10.4	11.6	10 (≤ 20)	50 (≤ 150)	5	+ 5	+ 9	1	0.1	8
BZX584C12-02V	8	11.4	12.7	10 (≤ 25)	50 (≤ 150)	5	+ 6	+ 9	1	0.1	8
BZX584C13-02V	9	12.4	14.1	10 (≤ 30)	50 (≤ 170)	5	+ 7	+ 9	1	0.1	8
BZX584C15-02V	0	13.8	15.6	10 (≤ 30)	50 (≤ 200)	5	+ 7	+ 9	1	0.1	8
BZX584C16-02V	1	15.3	17.1	10 (≤ 40)	50 (≤ 200)	5	+ 8	+ 9.5	1	0.05	$0.7 V_{Znom}$
BZX584C18-02V	2	16.8	19.1	10 (≤ 45)	50 (≤ 225)	5	+ 8	+ 9.5	1	0.05	$0.7 V_{Znom}$
BZX584C20-02V	3	18.8	21.2	15 (≤ 55)	60 (≤ 225)	5	+ 8	+ 10	1	0.05	$0.7 V_{Znom}$
BZX584C22-02V	4	20.8	23.3	20 (≤ 55)	60 (≤ 250)	5	+ 8	+ 10	1	0.05	$0.7 V_{Znom}$
BZX584C24-02V	5	22.8	25.6	25 (≤ 70)	60 (≤ 250)	5	+ 8	+ 10	1	0.05	$0.7 V_{Znom}$
BZX584C27-02V	6	25.1	28.9	25 (≤ 80)	65 (≤ 300)	2	+ 8	+ 10	0.5	0.05	$0.7 V_{Znom}$
BZX584C30-02V	K	28	32	30 (≤ 80)	70 (≤ 300)	2	+ 8	+ 10	0.5	0.05	$0.7 V_{Znom}$
BZX584C33-02V	q	31	35	35 (≤ 80)	75 (≤ 325)	2	+ 8	+ 10	0.5	0.05	$0.7 V_{Znom}$
BZX584C36-02V	q	34	38	35 (≤ 90)	80 (≤ 350)	2	+ 8	+ 10	0.5	0.05	$0.7 V_{Znom}$
BZX584C39-02V	q	37	41	40 (≤ 130)	80 (≤ 350)	2	+ 10	+ 12	0.5	0.05	$0.7 V_{Znom}$
BZX584C43-02V	J	40	46	45 (≤ 150)	85 (≤ 375)	2	+ 10	+ 12	0.5	0.05	$0.7 V_{Znom}$
BZX584C47-02V	L	44	50	50 (≤ 170)	85 (≤ 375)	2	+ 10	+ 12	0.5	0.05	$0.7 V_{Znom}$
BZX584C51-02V	M	48	54	60 (≤ 180)	85 (≤ 400)	2	+ 10	+ 12	0.5	0.05	$0.7 V_{Znom}$

Package Dimensions in millimeters (inches): SOD-523

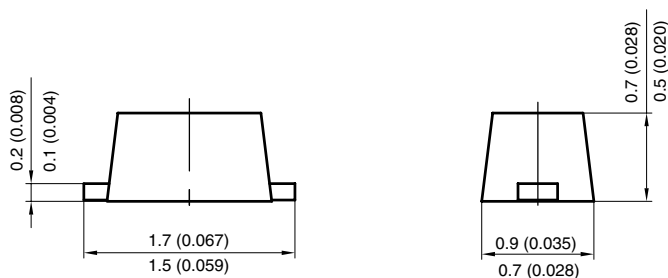

Foot print recommendation:



Document no.: S8-V-3880.02-001
Rev. f - Date: 25. January. 2005
16864



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.