

## RATING AND CHARACTERISTICS CURVES ( 1.5KE6.8 THRU 1.5KE440CA )

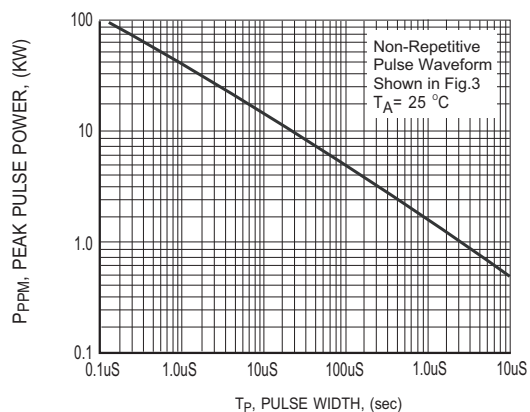


FIG.1 PEAK PULSE POWER RATING CURVE

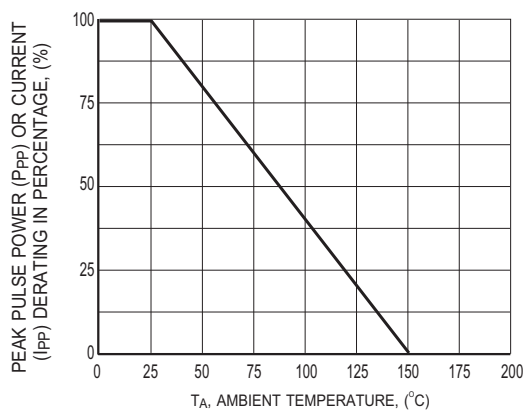


FIG.2 PULSE DERATING CURVE

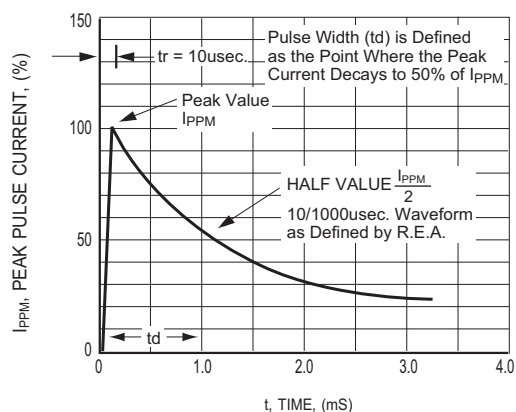


FIG.3 PULSE WAVEFORM

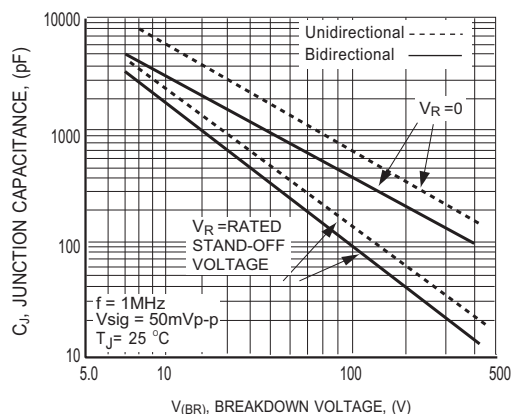


FIG.4 TYPICAL JUNCTION CAPACITANCE BIDIRECTIONAL

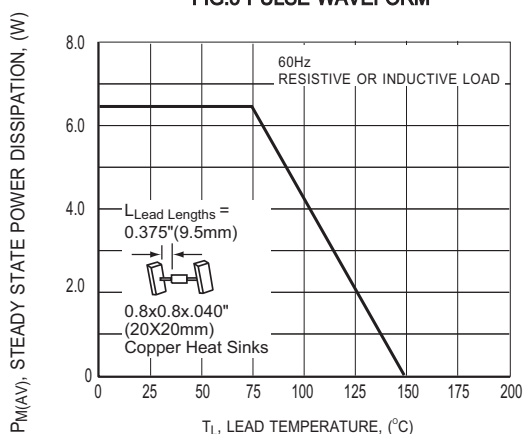


FIG.5 STEADY STATE POWER DERATING CURVE

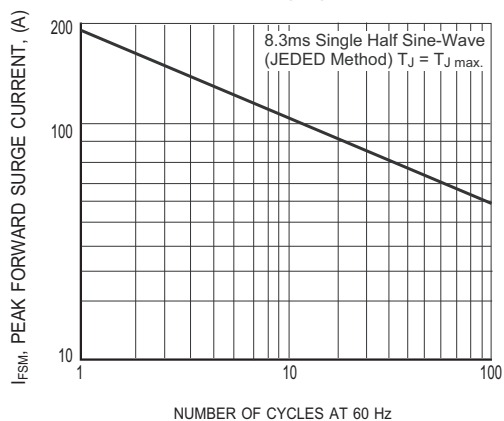


FIG.6 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT UNIDIRECTIONAL

RATING AND CHARACTERISTICS CURVES ( 1.5KE6.8 THRU 1.5KE440CA )

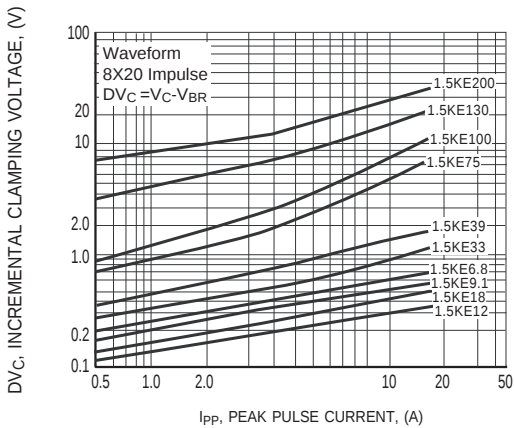


FIG.7 INCREMENTAL CLAMPING VOLTAGE CURVE UNIDIRECTIONAL

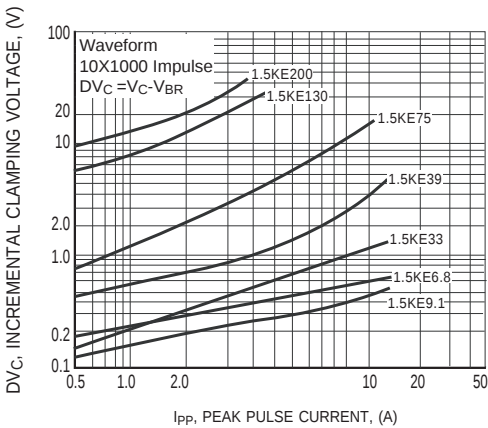


FIG.8 INCREMENTAL CLAMPING VOLTAGE CURVE UNIDIRECTIONAL

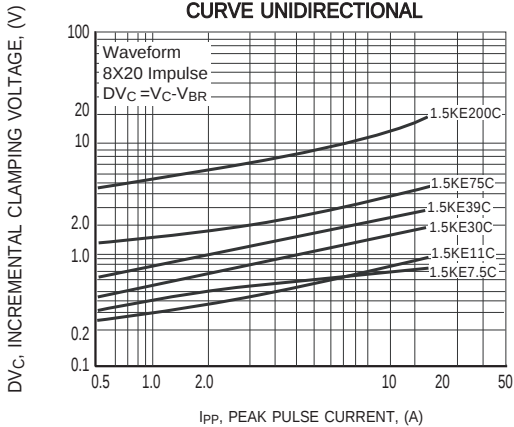


FIG.9 INCREMENTAL CLAMPING VOLTAGE CURVE BIDIRECTIONAL

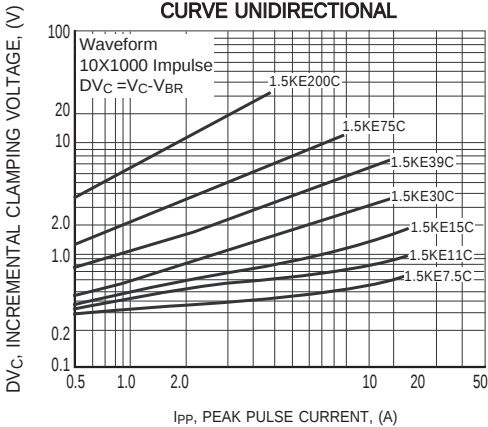


FIG.10 INCREMENTAL CLAMPING VOLTAGE CURVE BIDIRECTIONAL

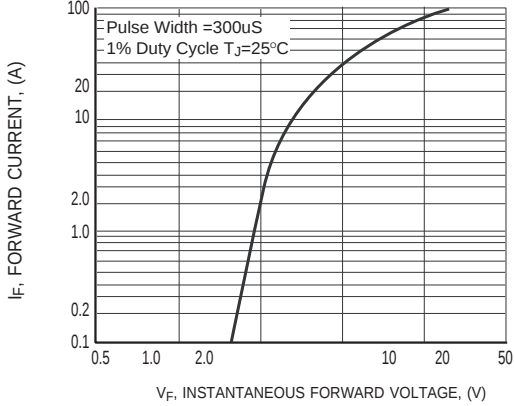


FIG.11 INSTANTANEOUS FORWARD VOLTAGE CHARACTERISTICS CURVE

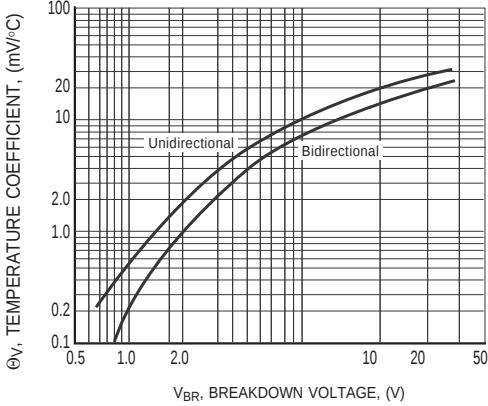


FIG.12 BREAKDOWN VOLTAGE TEMPERATURE COEFFICIENT CURVE



## TRANSIENT VOLTAGE SUPPRESSORS

1500W SERIES TVS DIODES/ 1.5KE ( CASE 10 ) 1500W

| TYPE      | Breakdown Voltage |      |          | Reverse Stand off Voltage<br>VWM (Volts) | Maximum Reverse Leakage at VWM<br>ID(uA) | Maximum Peak Pulse Current<br>Ippm (Amps) | Maximum Clamping Voltage at Ippm<br>VC (Volts) |
|-----------|-------------------|------|----------|------------------------------------------|------------------------------------------|-------------------------------------------|------------------------------------------------|
|           | VBR (Volts)       |      | @IT (mA) |                                          |                                          |                                           |                                                |
|           | MIN.              | MAX. |          |                                          |                                          |                                           |                                                |
| 1.5KE6.8  | 6.12              | 7.48 | 10       | 5.50                                     | 1000                                     | 139                                       | 10.8                                           |
| 1.5KE6.8A | 6.45              | 7.14 | 10       | 5.80                                     | 1000                                     | 143                                       | 10.5                                           |
| 1.5KE7.5  | 6.75              | 8.25 | 10       | 6.05                                     | 500                                      | 128                                       | 11.7                                           |
| 1.5KE7.5A | 7.13              | 7.88 | 10       | 6.40                                     | 500                                      | 133                                       | 11.3                                           |
| 1.5KE8.2  | 7.38              | 9.02 | 10       | 6.63                                     | 200                                      | 120                                       | 12.5                                           |
| 1.5KE8.2A | 7.79              | 8.61 | 10       | 7.02                                     | 200                                      | 124                                       | 12.1                                           |
| 1.5KE9.1  | 8.19              | 10.0 | 1.0      | 7.37                                     | 50                                       | 109                                       | 13.8                                           |
| 1.5KE9.1A | 8.65              | 9.55 | 1.0      | 7.78                                     | 50                                       | 112                                       | 13.4                                           |
| 1.5KE10   | 9.00              | 11.0 | 1.0      | 8.10                                     | 10                                       | 100                                       | 15.0                                           |
| 1.5KE10A  | 9.50              | 10.5 | 1.0      | 8.55                                     | 10                                       | 103                                       | 14.5                                           |
| 1.5KE11   | 9.90              | 12.1 | 1.0      | 8.92                                     | 5.0                                      | 92.6                                      | 16.2                                           |
| 1.5KE11A  | 10.5              | 11.6 | 1.0      | 9.40                                     | 5.0                                      | 96.2                                      | 15.6                                           |
| 1.5KE12   | 10.8              | 13.2 | 1.0      | 9.72                                     | 5.0                                      | 86.7                                      | 17.3                                           |
| 1.5KE12A  | 11.4              | 12.6 | 1.0      | 10.2                                     | 5.0                                      | 89.8                                      | 16.7                                           |
| 1.5KE13   | 11.7              | 14.3 | 1.0      | 10.5                                     | 5.0                                      | 78.9                                      | 19.0                                           |
| 1.5KE13A  | 12.4              | 13.7 | 1.0      | 11.1                                     | 5.0                                      | 82.4                                      | 18.2                                           |
| 1.5KE15   | 13.5              | 16.5 | 1.0      | 12.1                                     | 5.0                                      | 68.2                                      | 22.0                                           |
| 1.5KE15A  | 14.3              | 15.8 | 1.0      | 12.8                                     | 5.0                                      | 70.8                                      | 21.2                                           |
| 1.5KE16   | 14.4              | 17.6 | 1.0      | 12.9                                     | 5.0                                      | 63.8                                      | 23.5                                           |
| 1.5KE16A  | 15.2              | 16.8 | 1.0      | 13.6                                     | 5.0                                      | 66.7                                      | 22.5                                           |
| 1.5KE18   | 16.2              | 19.8 | 1.0      | 14.5                                     | 5.0                                      | 56.6                                      | 26.5                                           |
| 1.5KE18A  | 17.1              | 18.9 | 1.0      | 15.3                                     | 5.0                                      | 59.5                                      | 25.2                                           |
| 1.5KE20   | 18.0              | 22.0 | 1.0      | 16.2                                     | 5.0                                      | 51.5                                      | 29.1                                           |
| 1.5KE20A  | 19.0              | 21.0 | 1.0      | 17.1                                     | 5.0                                      | 54.2                                      | 27.7                                           |
| 1.5KE22   | 19.8              | 24.2 | 1.0      | 17.8                                     | 5.0                                      | 47                                        | 31.9                                           |
| 1.5KE22A  | 20.9              | 23.1 | 1.0      | 18.8                                     | 5.0                                      | 49                                        | 30.6                                           |
| 1.5KE24   | 21.6              | 26.4 | 1.0      | 19.4                                     | 5.0                                      | 43.2                                      | 34.7                                           |
| 1.5KE24A  | 22.8              | 25.2 | 1.0      | 20.5                                     | 5.0                                      | 45.2                                      | 33.2                                           |
| 1.5KE27   | 24.3              | 29.7 | 1.0      | 21.8                                     | 5.0                                      | 38.4                                      | 39.1                                           |
| 1.5KE27A  | 25.7              | 28.4 | 1.0      | 23.1                                     | 5.0                                      | 40                                        | 37.5                                           |
| 1.5KE30   | 27.0              | 33.0 | 1.0      | 24.3                                     | 5.0                                      | 34.5                                      | 43.5                                           |
| 1.5KE30A  | 28.5              | 31.5 | 1.0      | 25.6                                     | 5.0                                      | 36.2                                      | 41.4                                           |
| 1.5KE33   | 29.7              | 36.3 | 1.0      | 26.8                                     | 5.0                                      | 31.4                                      | 47.7                                           |
| 1.5KE33A  | 31.4              | 34.7 | 1.0      | 28.2                                     | 5.0                                      | 32.8                                      | 45.7                                           |
| 1.5KE36   | 32.4              | 39.6 | 1.0      | 29.1                                     | 5.0                                      | 28.8                                      | 52.0                                           |
| 1.5KE36A  | 34.2              | 37.8 | 1.0      | 30.8                                     | 5.0                                      | 30.1                                      | 49.9                                           |
| 1.5KE39   | 35.1              | 42.9 | 1.0      | 31.6                                     | 5.0                                      | 26.6                                      | 56.4                                           |
| 1.5KE39A  | 37.1              | 41.0 | 1.0      | 33.3                                     | 5.0                                      | 27.8                                      | 53.9                                           |
| 1.5KE43   | 38.7              | 47.3 | 1.0      | 34.8                                     | 5.0                                      | 24.2                                      | 61.9                                           |
| 1.5KE43A  | 40.9              | 45.2 | 1.0      | 36.8                                     | 5.0                                      | 25.3                                      | 59.3                                           |
| 1.5KE47   | 42.3              | 51.7 | 1.0      | 38.1                                     | 5.0                                      | 22.1                                      | 67.8                                           |
| 1.5KE47A  | 44.7              | 49.4 | 1.0      | 40.2                                     | 5.0                                      | 23.1                                      | 64.8                                           |
| 1.5KE51   | 45.9              | 56.1 | 1.0      | 41.3                                     | 5.0                                      | 20.4                                      | 73.5                                           |
| 1.5KE51A  | 48.5              | 53.6 | 1.0      | 43.6                                     | 5.0                                      | 21.4                                      | 70.1                                           |
| 1.5KE56   | 50.4              | 61.6 | 1.0      | 45.4                                     | 5.0                                      | 18.6                                      | 80.5                                           |
| 1.5KE56A  | 53.2              | 58.8 | 1.0      | 47.8                                     | 5.0                                      | 19.5                                      | 77.0                                           |



## TRANSIENT VOLTAGE SUPPRESSORS

1500W SERIES TVS DIODES/ 1.5KE ( CASE 10 ) 1500W

| TYPE      | Breakdown Voltage          |      | @I <sub>T</sub><br>(mA) | Reverse<br>Stand off<br>Voltage<br>V <sub>WM</sub><br>(Volts) | Maximum<br>Reverse<br>Leakage<br>at V <sub>WM</sub><br>I <sub>D</sub> (uA) | Maximum<br>Peak Pulse<br>Current<br>I <sub>PPM</sub><br>(Amps) | Maximum<br>Clamping<br>Voltage<br>at I <sub>PPM</sub><br>V <sub>C</sub> (Volts) |
|-----------|----------------------------|------|-------------------------|---------------------------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------------------------|---------------------------------------------------------------------------------|
|           | V <sub>BR</sub><br>(Volts) |      |                         |                                                               |                                                                            |                                                                |                                                                                 |
|           | MIN.                       | MAX. |                         |                                                               |                                                                            |                                                                |                                                                                 |
| 1.5KE62   | 55.8                       | 68.2 | 1.0                     | 50.2                                                          | 5.0                                                                        | 16.9                                                           | 89.0                                                                            |
| 1.5KE62A  | 58.9                       | 65.1 | 1.0                     | 53.0                                                          | 5.0                                                                        | 17.6                                                           | 85.0                                                                            |
| 1.5KE68   | 61.2                       | 74.8 | 1.0                     | 55.1                                                          | 5.0                                                                        | 15.3                                                           | 98.0                                                                            |
| 1.5KE68A  | 64.6                       | 71.4 | 1.0                     | 58.1                                                          | 5.0                                                                        | 16.3                                                           | 92.0                                                                            |
| 1.5KE75   | 67.5                       | 82.5 | 1.0                     | 60.7                                                          | 5.0                                                                        | 13.9                                                           | 109                                                                             |
| 1.5KE75A  | 71.3                       | 78.8 | 1.0                     | 64.1                                                          | 5.0                                                                        | 14.6                                                           | 104                                                                             |
| 1.5KE82   | 73.8                       | 90.2 | 1.0                     | 66.4                                                          | 5.0                                                                        | 12.7                                                           | 118                                                                             |
| 1.5KE82A  | 77.9                       | 86.1 | 1.0                     | 70.1                                                          | 5.0                                                                        | 13.3                                                           | 113                                                                             |
| 1.5KE91   | 81.9                       | 100  | 1.0                     | 73.7                                                          | 5.0                                                                        | 11.5                                                           | 131                                                                             |
| 1.5KE91A  | 86.5                       | 95.5 | 1.0                     | 77.8                                                          | 5.0                                                                        | 12.0                                                           | 125                                                                             |
| 1.5KE100  | 90.0                       | 110  | 1.0                     | 81.0                                                          | 5.0                                                                        | 10.4                                                           | 144                                                                             |
| 1.5KE100A | 95.0                       | 105  | 1.0                     | 85.5                                                          | 5.0                                                                        | 10.9                                                           | 137                                                                             |
| 1.5KE110  | 99.0                       | 121  | 1.0                     | 89.2                                                          | 5.0                                                                        | 9.5                                                            | 158                                                                             |
| 1.5KE110A | 105                        | 116  | 1.0                     | 94.0                                                          | 5.0                                                                        | 9.9                                                            | 152                                                                             |
| 1.5KE120  | 108                        | 132  | 1.0                     | 97.2                                                          | 5.0                                                                        | 8.7                                                            | 173                                                                             |
| 1.5KE120A | 114                        | 126  | 1.0                     | 102                                                           | 5.0                                                                        | 9.1                                                            | 165                                                                             |
| 1.5KE130  | 117                        | 143  | 1.0                     | 105                                                           | 5.0                                                                        | 8.0                                                            | 187                                                                             |
| 1.5KE130A | 124                        | 137  | 1.0                     | 111                                                           | 5.0                                                                        | 8.4                                                            | 179                                                                             |
| 1.5KE150  | 135                        | 165  | 1.0                     | 121                                                           | 5.0                                                                        | 7.0                                                            | 215                                                                             |
| 1.5KE150A | 143                        | 158  | 1.0                     | 128                                                           | 5.0                                                                        | 7.2                                                            | 207                                                                             |
| 1.5KE160  | 144                        | 176  | 1.0                     | 130                                                           | 5.0                                                                        | 6.5                                                            | 230                                                                             |
| 1.5KE160A | 152                        | 168  | 1.0                     | 136                                                           | 5.0                                                                        | 6.8                                                            | 219                                                                             |
| 1.5KE170  | 153                        | 187  | 1.0                     | 138                                                           | 5.0                                                                        | 6.1                                                            | 244                                                                             |
| 1.5KE170A | 162                        | 179  | 1.0                     | 145                                                           | 5.0                                                                        | 6.4                                                            | 234                                                                             |
| 1.5KE180  | 162                        | 198  | 1.0                     | 146                                                           | 5.0                                                                        | 5.8                                                            | 258                                                                             |
| 1.5KE180A | 171                        | 189  | 1.0                     | 154                                                           | 5.0                                                                        | 6.1                                                            | 246                                                                             |
| 1.5KE200  | 180                        | 220  | 1.0                     | 162                                                           | 5.0                                                                        | 5.2                                                            | 287                                                                             |
| 1.5KE200A | 190                        | 210  | 1.0                     | 171                                                           | 5.0                                                                        | 5.5                                                            | 274                                                                             |
| 1.5KE220  | 198                        | 242  | 1.0                     | 175                                                           | 5.0                                                                        | 4.4                                                            | 344                                                                             |
| 1.5KE220A | 209                        | 231  | 1.0                     | 185                                                           | 5.0                                                                        | 4.6                                                            | 328                                                                             |
| 1.5KE250  | 225                        | 275  | 1.0                     | 202                                                           | 5.0                                                                        | 4.2                                                            | 360                                                                             |
| 1.5KE250A | 237                        | 263  | 1.0                     | 214                                                           | 5.0                                                                        | 4.4                                                            | 344                                                                             |
| 1.5KE300  | 270                        | 330  | 1.0                     | 243                                                           | 5.0                                                                        | 3.5                                                            | 430                                                                             |
| 1.5KE300A | 285                        | 315  | 1.0                     | 256                                                           | 5.0                                                                        | 3.6                                                            | 414                                                                             |
| 1.5KE350  | 315                        | 385  | 1.0                     | 284                                                           | 5.0                                                                        | 3.0                                                            | 504                                                                             |
| 1.5KE350A | 333                        | 368  | 1.0                     | 300                                                           | 5.0                                                                        | 3.1                                                            | 482                                                                             |
| 1.5KE400  | 360                        | 440  | 1.0                     | 324                                                           | 5.0                                                                        | 2.6                                                            | 574                                                                             |
| 1.5KE400A | 380                        | 420  | 1.0                     | 342                                                           | 5.0                                                                        | 2.7                                                            | 548                                                                             |
| 1.5KE440  | 396                        | 484  | 1.0                     | 356                                                           | 5.0                                                                        | 2.4                                                            | 631                                                                             |
| 1.5KE440A | 418                        | 462  | 1.0                     | 376                                                           | 5.0                                                                        | 2.5                                                            | 602                                                                             |

- Notes :
1. V<sub>BR</sub> measured after I<sub>T</sub> applied for 300ms. I<sub>T</sub> = square pulse or equivalent.
  2. For bidirectional use C or CA suffixs for all types (ex. 1.5KE6.8C,1.5KE440CA) electrical characteristics apply in both directions.
  3. For bidirectional types having V<sub>WM</sub> of 10 volts and less, the I<sub>D</sub> limit is doubled.
  4. All devices UL listed file# E211196.






## Attachment information about 1.5KEXX (C) A

### 1. Internal Circuit



### 2. Marking on the body

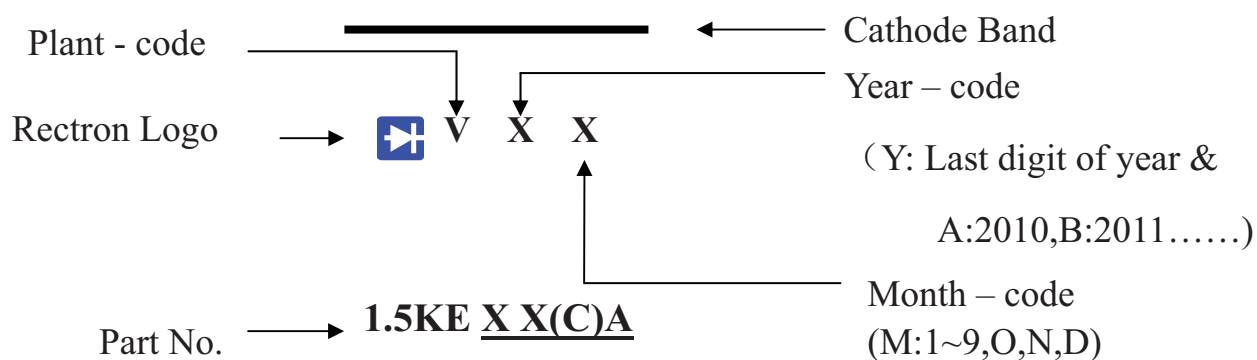

## PACKAGING OF DIODE AND BRIDGE RECTIFIERS

### REEL PACK

| PACKAGE | PACKING CODE | EA PER REEL | EA PER INNER BOX | COMPONENT SPACE (mm) | TAPE SPACE (mm) | REEL DIA (mm) | CARTON SIZE (mm) | EA PER CARTON | GROSS WEIGHT(Kg) |
|---------|--------------|-------------|------------------|----------------------|-----------------|---------------|------------------|---------------|------------------|
| 1.5KE   | -T           | 1,200       | 1,200            | 10.0                 | 52              | 330           | 355*350*335      | 4,800         | 8.05             |

## DISCLAIMER NOTICE

Rectron Inc reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. Rectron Inc or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on RECTRON data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. Rectron Inc does not assume any liability arising out of the application or use of any product or circuit.

Rectron products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of Rectron Inc. Customers using or selling Rectron components for use in such applications do so at their own risk and shall agree to fully indemnify Rectron Inc and its subsidiaries harmless against all claims, damages and expenditures.

