


Ordering Information

Model number	Input voltage	Output voltage	Power
AGQ150-48S05-4L	36 - 75 Vin	5V @ 30A	150W
AGQ150-48S05-6L	36 - 75 Vin	5V @ 30A	150W
AGQ150-48S05B-4L	36 - 75 Vin	5V @ 30A	150W
AGQ150-48S05P-4L	36 - 75 Vin	5V @ 30A	150W
AGQ150-48S05PB-4L	36 - 75 Vin	5V @ 30A	150W

- Standard version is negative enable
- "-6" = 3.8mm pin length
- "-4" = 4.8mm pin length
- "-L" = RoHS6 compliance
- "-P" = Positive enable
- "B" = Baseplate

Mechanical Drawings

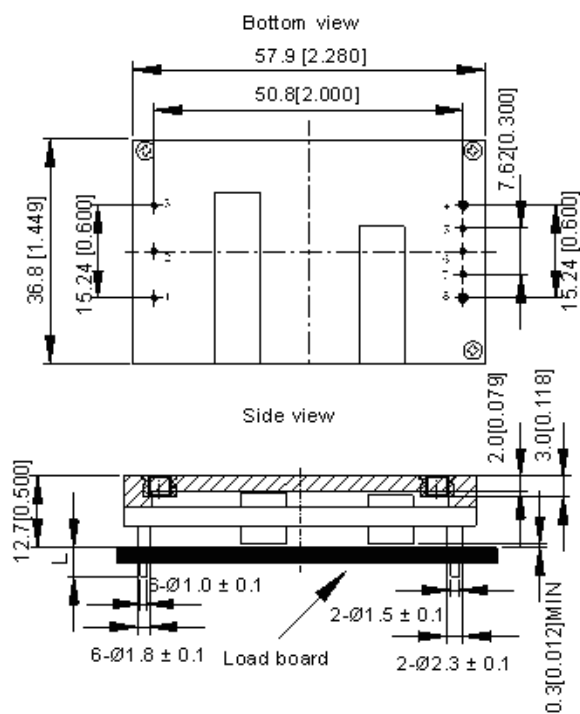

Unit: mm [inch]

Bottom view: pin on upside

Tolerance: X.Xmm ± 0.5mm [X.X in. ± 0.02in.]

X.XXmm ± 0.25mm [X.XX in. ± 0.01in.]

Pin Assignments

Pin #	Function
1	+V in
2	Enable
3	-V in
4	-V out
5	-Sense
6	Trim
7	+Sense
8	+V out

Notes:

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 2 years
3. Label and logo appearance may vary from what is shown on mechanical drawings.

WORLDWIDE OFFICES

Americas

2900 South Diablo Way
Suite B100
Tempe, AZ 85282, USA
+1 888 412 7832

Europe (UK)

Ground Floor Offices, Barberry House
4 Harbour Buildings, Waterfront West
Brierley Hill, West Midlands
DY5 1LN, UK
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYNTM
An Advanced Energy Company

www.artesyn.com

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com
For support: productsupport.ep@artesyn.com