

Table of Contents Page

Why Choose KEMET ..... 3

T491 Series Industrial Grade MnO<sub>2</sub> ..... 5


T489 Series Low DC Leakage MnO<sub>2</sub> ..... 23

T490 Series Consumer Grade MnO<sub>2</sub> ..... 34

Packaging Information..... 44

KEMET Corporation Sales Offices ..... 49

Disclaimer ..... 50

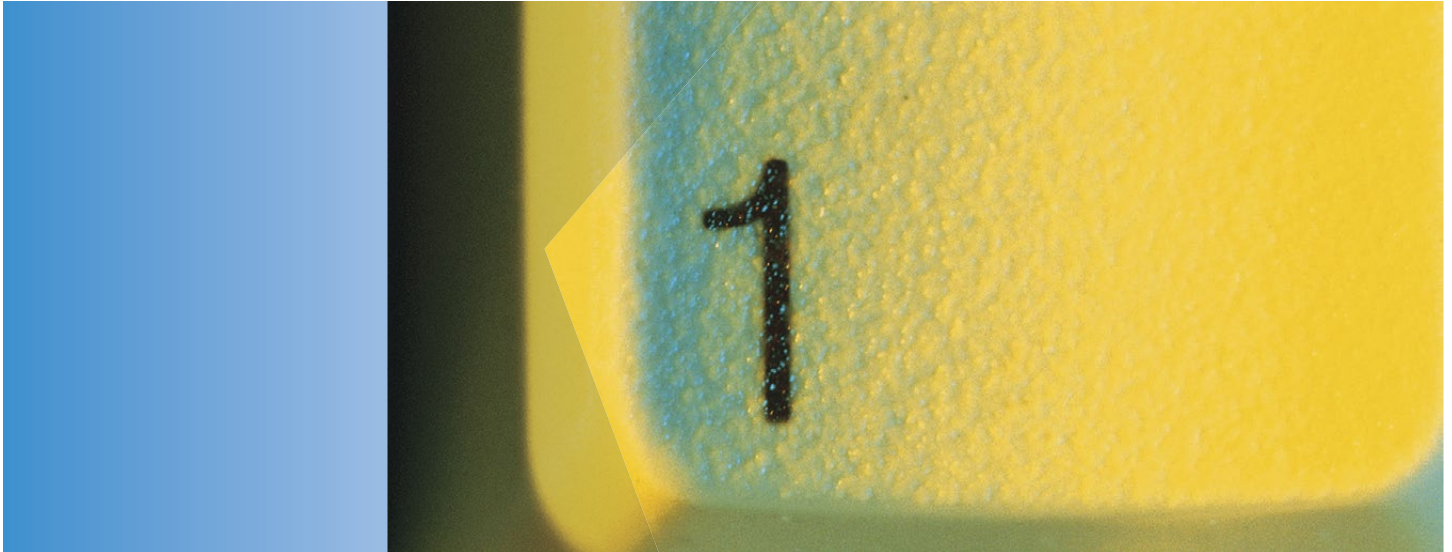

## One world. One source. One KEMET.

When you partner with KEMET, our entire global organization provides you with the coordinated service you need. No bouncing from supplier to supplier. No endless phone calls and web browsing. We're your single, integrated source for electronic component solutions worldwide.

## Less hassles. More solutions.

Our commitment to product quality and on-time delivery has helped customers succeed for over 90 years. There's a reason KEMET components can be found in defense and aerospace equipment. Our reputation is built on a history of consistency, reliability and service.

## The "Easy-to-Buy-From" company.

KEMET offers a level of responsiveness that far surpasses any other supplier. Our passion for customer service is evident throughout our global sales organization, which offers localized support bolstered by our worldwide logistics capabilities. Whether you need rush samples, technical assistance, in-person consultation, accelerated custom design, design collaboration or prototype services, we have a solution.



## Made for you.

When you need custom products delivered on a tight schedule, you can trust KEMET. Get direct design consultation from global experts, who help you get the job done on time and within budget.

## Working for a better world.

KEMET is dedicated to economically, environmentally and socially sustainable development. We've adopted the Electronic Industry Code of Conduct (EICC) to address all aspects of corporate responsibility. Our manufacturing facilities have won numerous environmental excellence awards and recognitions, and our supply chain is certified. We believe doing the right thing is in everyone's interest.

## About KEMET.

KEMET Corporation is a leading global supplier of electronic components. We offer our customers the broadest selection of capacitor technologies in the industry across multiple dielectrics, along with an expanding range of electromechanical devices, and electromagnetic compatibility solutions. Our vision is to be the preferred supplier of electronic component solutions for customers demanding the highest standards of quality, delivery and service.


## Overview

The KEMET T491 Series, designed specifically for today's highly automated surface mount processes and equipment, is the leading choice for surface mount designs. The T491 combines KEMET's proven solid tantalum technology, acclaimed and respected throughout the world, with the latest in materials, processes and automation, resulting in unsurpassed total performance and value. This product meets or exceeds the requirements of EIA standard 535BAAC. This series is classified as MSL (Moisture Sensitivity Level) 1 under J STD 020: unlimited floor life time at ≤30°C / 85% RH. The T491 standard

terminations are available in 100% matte tin and provide excellent wetting characteristics and compatibility with today's surface mount solder systems. Tin/lead (Sn/Pb) terminations are available upon request for any part number. Gold-plated terminations are also available for use with conductive epoxy attachment processes. Standard packaging of these devices is tape and reel in accordance with EIA 481. This system provides perfect compatibility with all tape-fed placement units.

## Benefits

- Meets or exceeds EIA Standard 535BAAC
- Taped and reeled per EIA 481
- Symmetrical, compliant terminations
- Optional gold-plated terminations
- Laser-marked case
- 100% surge current test on C, D, E, U, V, X sizes
- Halogen free epoxy
- Capacitance 0.1 µF to 1,000 µF
- Tolerance ±10%, ±20%
- Voltage 2.5 – 50 VDC
- Extended range values
- Low profile case sizes
- RoHS Compliant and lead-free terminations  
(See [www.kemet.com](http://www.kemet.com) for transition information)
- Operating temperature: -55°C to +125°C

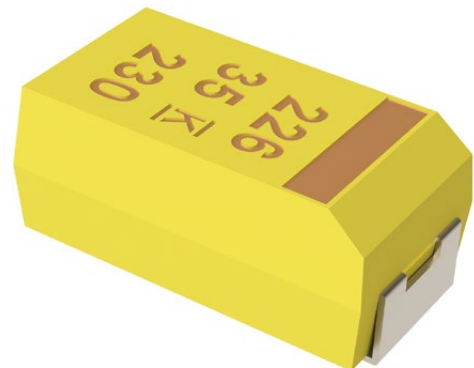

## Environmental Compliance

RoHS Compliant (6/6) according to Directive 2002/95/EC when ordered with 100% Sn solder.



RoHS Compliant

## SPICE

For a detailed analysis of specific part numbers, please visit [www.kemet.com](http://www.kemet.com) for a free download of KEMET's SPICE software. The KEMET SPICE program is freeware intended to aid design engineers in analyzing the performance of these capacitors over frequency, temperature, ripple, and DC bias conditions.

## Applications

Typical applications include decoupling and filtering in industrial and automotive end applications such as DC/DC converters, portable electronics, telecommunications, and control units.

## Ordering Information

| T               | 491        | X                               | 157                                                                                    | K                                | 020                                                                                                                                      | A                   | T                                                                                                                                                                                       |                                    |
|-----------------|------------|---------------------------------|----------------------------------------------------------------------------------------|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|
| Capacitor Class | Series     | Case Size                       | Capacitance Code (pF)                                                                  | Capacitance Tolerance            | Voltage                                                                                                                                  | Failure Rate/Design | Lead Material                                                                                                                                                                           | Packaging (C-Spec)                 |
| T = Tantalum    | Industrial | A, B, C, D, E, S, T, U, V, W, X | First two digits represent significant figures. Third digit specifies number of zeros. | K = $\pm 10\%$<br>M = $\pm 20\%$ | 2R5 = 2.5 V<br>003 = 3 V<br>004 = 4 V<br>006 = 6.3 V<br>010 = 10 V<br>016 = 16 V<br>020 = 20 V<br>025 = 25 V<br>035 = 35 V<br>050 = 50 V | A = N/A             | T = 100% Matte Tin (Sn) Plated*<br>H = Standard Solder Coated (SnPb 5% Pb minimum)<br>G = Gold Plated (A, B, C, D, X only)<br>N = Non-Magnetic 100% Tin (Sn)<br>M = Non-Magnetic (SnPb) | Blank = 7" Reel<br>7280 = 13" Reel |

## Performance Characteristics

| Item                    | Performance Characteristics                                |
|-------------------------|------------------------------------------------------------|
| Operating Temperature   | -55°C to 125°C                                             |
| Rated Capacitance Range | 0.1 – 1,000 $\mu$ F @ 120 Hz/25°C                          |
| Capacitance Tolerance   | K Tolerance (10%), M Tolerance (20%)                       |
| Rated Voltage Range     | 2.5 – 50 V                                                 |
| DF (120 Hz)             | Refer to Part Number Electrical Specification Table        |
| ESR (100 kHz)           | Refer to Part Number Electrical Specification Table        |
| Leakage Current         | $\leq 0.01$ CV ( $\mu$ A) at rated voltage after 5 minutes |


## Qualification

| Test                       | Condition                                                                                                              |       | Characteristics |                              |          |          |
|----------------------------|------------------------------------------------------------------------------------------------------------------------|-------|-----------------|------------------------------|----------|----------|
| Endurance                  | 85°C @ rated voltage, 2,000 hours<br>125°C @ 2/3 rated voltage, 2,000 hours                                            |       | Δ C/C           | Within ±10% of initial value |          |          |
|                            |                                                                                                                        |       | DF              | Within initial limits        |          |          |
|                            |                                                                                                                        |       | DCL             | Within 1.25 x initial limit  |          |          |
|                            |                                                                                                                        |       | ESR             | Within initial limits        |          |          |
| Storage Life               | 125°C @ 0 volts, 2,000 hours                                                                                           |       | Δ C/C           | Within ±10% of initial value |          |          |
|                            |                                                                                                                        |       | DF              | Within initial limits        |          |          |
|                            |                                                                                                                        |       | DCL             | Within 1.25 x initial limit  |          |          |
|                            |                                                                                                                        |       | ESR             | Within initial limits        |          |          |
| Thermal Shock              | MIL–STD–202, Method 107, Condition B, mounted, -55°C to 125° C, 1,000 cycles                                           |       | Δ C/C           | Within ±5% of initial value  |          |          |
|                            |                                                                                                                        |       | DF              | Within initial limits        |          |          |
|                            |                                                                                                                        |       | DCL             | Within 1.25 x initial limit  |          |          |
|                            |                                                                                                                        |       | ESR             | Within initial limits        |          |          |
| Temperature Stability      | Extreme temperature exposure at a succession of continuous steps at +25°C, -55°C, +25°C, +85°C, +125°C, +25°C.         |       | +25°C           | -55°C                        | +85°C    | +125°C   |
|                            |                                                                                                                        | Δ C/C | IL*             | ±10%                         | ±10%     | ±20%     |
|                            |                                                                                                                        | DF    | IL              | IL                           | 1.5 x IL | 1.5 x IL |
|                            |                                                                                                                        | DCL   | IL              | n/a                          | 10 x IL  | 12 x IL  |
| Surge Voltage              | 85°C, 1.32 x rated voltage 1,000 cycles (125°C, 1.2 x rated voltage).                                                  |       | Δ C/C           | Within ±5% of initial value  |          |          |
|                            |                                                                                                                        |       | DF              | Within initial limits        |          |          |
|                            |                                                                                                                        |       | DCL             | Within initial limits        |          |          |
|                            |                                                                                                                        |       | ESR             | Within initial limits        |          |          |
| Mechanical Shock/Vibration | MIL–STD–202, Method 213, Condition I, 100 G peak<br>MIL–STD–202, Method 204, Condition D, 10 Hz to 2,000 Hz, 20 G peak |       | Δ C/C           | Within ±10% of initial value |          |          |
|                            |                                                                                                                        |       | DF              | Within initial limits        |          |          |
|                            |                                                                                                                        |       | DCL             | Within initial limits        |          |          |


\*IL = Initial limit

## Electrical Characteristics

ESR vs. Frequency

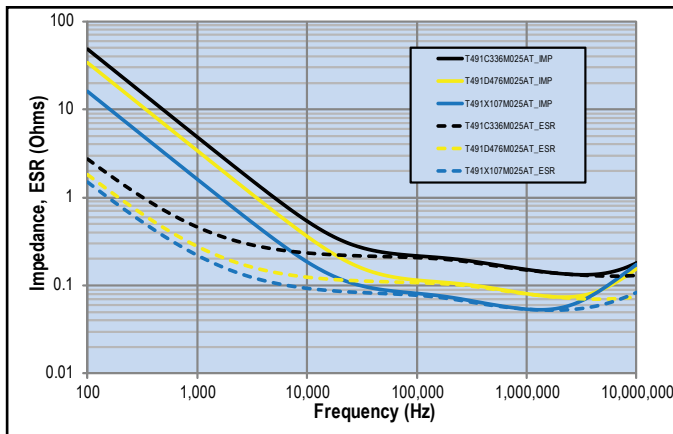


Capacitance vs. Frequency

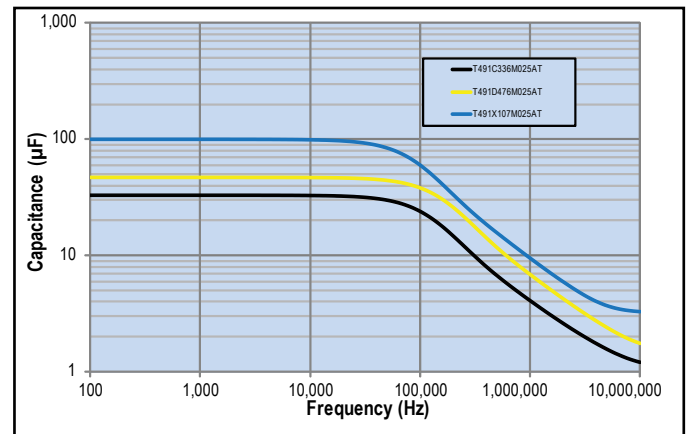


## Dimensions – Millimeters (Inches)

Metric will govern


CATHODE (-) END VIEW




SIDE VIEW



ANODE (+) END VIEW



BOTTOM VIEW

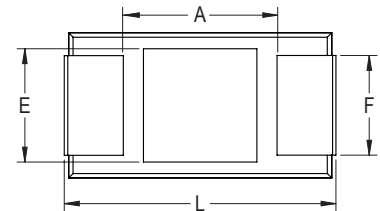

| Case Size |         | Component                  |                            |                            |                    |                    |                         |                              |            |            |             |             |            |            |
|-----------|---------|----------------------------|----------------------------|----------------------------|--------------------|--------------------|-------------------------|------------------------------|------------|------------|-------------|-------------|------------|------------|
| KEMET     | EIA     | L*                         | W*                         | H*                         | F* ±0.1<br>±(.004) | S* ±0.3<br>±(.012) | B* ±0.15<br>(Ref) ±.006 | X (Ref)                      | P (Ref)    | R (Ref)    | T (Ref)     | A (Min)     | G (Ref)    | E (Ref)    |
| A         | 3216-18 | 3.2 ±0.2<br>(0.126 ±0.008) | 1.6 ±0.2<br>(0.063 ±0.008) | 1.6 ±0.2<br>(0.063 ±0.008) | 1.2 (.047)         | 0.8 (.031)         | 0.4 (.016)              | 0.10 ±0.10<br>(0.004 ±0.004) | 0.4 (.016) | 0.4 (.016) | 0.13 (.005) | 0.8 (.31)   | 1.1 (.043) | 1.3 (.051) |
| B         | 3528-21 | 3.5 ±0.2<br>(0.138 ±0.008) | 2.8 ±0.2<br>(0.110 ±0.008) | 1.9 ±0.2<br>(0.075 ±0.008) | 2.2 (.087)         | 0.8 (.031)         | 0.4 (.016)              | 0.10 ±0.10<br>(0.004 ±0.004) | 0.5 (.020) | 1.0 (.039) | 0.13 (.005) | 1.1 (0.043) | 1.8 (.071) | 2.2 (.087) |
| C         | 6032-28 | 6.0 ±0.3<br>(0.236 ±0.03)  | 3.2 ±0.3<br>(0.126 ±0.012) | 2.5 ±0.3<br>(0.098 ±0.012) | 2.2 (.087)         | 1.3 (.051)         | 0.5 (.020)              | 0.10 ±0.10<br>(0.004 ±0.004) | 0.9 (.035) | 1.0 (.039) | 0.13 (.005) | 2.5(.098)   | 2.8 (.110) | 2.4 (.094) |
| D         | 7343-31 | 7.3 ±0.3<br>(0.287 ±0.012) | 4.3 ±0.3<br>(0.169 ±0.012) | 2.8 ±0.3<br>(0.110 ±0.012) | 2.4 (.094)         | 1.3 (.051)         | 0.5 (.020)              | 0.10 ±0.10<br>(0.004 ±0.004) | 0.9 (.035) | 1.0 (.039) | 0.13 (.005) | 3.8 (.150)  | 3.5 (.138) | 3.5 (.138) |
| X         | 7343-43 | 7.3 ±0.3<br>(0.287 ±0.012) | 4.3 ±0.3<br>(0.169 ±0.012) | 4.0 ±0.3<br>(0.157 ±0.012) | 2.4 (.094)         | 1.3 (.051)         | 0.5 (.020)              | 0.10 ±0.10<br>(0.004 ±0.004) | 1.7 (.067) | 1.0 (.039) | 0.13 (.005) | 3.8 (.150)  | 3.5 (.138) | 3.5 (.138) |
| E         | 7360-38 | 7.3 ±0.3<br>(0.287 ±0.012) | 6.0 ±0.3<br>(0.236 ±0.012) | 3.6 ±0.2<br>(0.142 ±0.008) | 4.1 (.161)         | 1.3 (.051)         | 0.5 (.020)              | 0.10 ±0.10<br>(0.004 ±0.004) | n/a        | n/a        | 0.13 (.005) | 3.8 (.150)  | 3.5 (.138) | 3.5 (.138) |
| S         | 3216-12 | 3.2 ±0.2<br>(0.126 ±0.008) | 1.6 ±0.2<br>(0.063 ±0.008) | 1.2 (.047)                 | 1.2 (.047)         | 0.8 (.031)         | n/a                     | 0.05 (0.002)                 | n/a        | n/a        | 0.13 (.005) | 0.8 (.031)  | 1.1 (.043) | 1.3 (.051) |
| T         | 3528-12 | 3.5 ±0.2<br>(0.138 ±0.008) | 2.8 ±0.2<br>(0.110 ±0.008) | 1.2 (.047)                 | 2.2 (.087)         | 0.8 (.031)         | n/a                     | 0.05 (0.002)                 | n/a        | n/a        | 0.13 (.005) | 1.1 (.043)  | 1.8 (.071) | 2.2 (.087) |
| U         | 6032-15 | 6.0 ±0.3<br>(0.236 ±0.012) | 3.2 ±0.2<br>(0.110 ±0.008) | 1.5 (0.059)                | 2.2 (.087)         | 1.3 (.051)         | n/a                     | 0.05 (0.002)                 | n/a        | n/a        | 0.13 (.005) | 2.5(.098)   | 2.8 (.110) | 2.4 (.094) |
| V         | 7343-20 | 7.3 ±0.3<br>(0.287 ±0.012) | 4.3 ±0.3<br>(0.169 ±0.012) | 2.0 (0.079)                | 2.4 (.094)         | 1.3 (.051)         | n/a                     | 0.05 (0.002)                 | n/a        | n/a        | 0.13 (.005) | 3.8 (.150)  | 3.5 (.138) | 3.5 (.138) |
| W         | 7343-15 | 7.3 ±0.3<br>(0.287 ±0.012) | 4.3 ±0.3<br>(0.169 ±0.012) | 1.5 (0.059)                | 2.4 (.094)         | 1.3 (.051)         | n/a                     | 0.05 (0.002)                 | n/a        | n/a        | 0.13 (.005) | 3.8 (.150)  | 3.5 (.138) | 3.5 (.138) |

Notes: (Ref) – Dimensions provided for reference only. No dimensions are provided for B, P or R because low profile cases do not have a bevel or a notch.

\*MIL-PRF-55365/8 specified dimensions



Table 1 – Ratings &amp; Part Number Reference

| Rated Voltage | Rated Cap | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage                          | DF                             | ESR                             | Maximum Allowable Ripple Current |                       |                        | Maximum Operating Temp | MSL                     |
|---------------|-----------|-------------------------|------------------------------|-------------------------------------|--------------------------------|---------------------------------|----------------------------------|-----------------------|------------------------|------------------------|-------------------------|
| VDC @ 85°C    | μF        | KEMET/EIA               | (See below for part options) | μA @ +20°C<br>Maximum/<br>5 Minutes | % @ +20°C<br>120 Hz<br>Maximum | Ω @ +20°C<br>100 kHz<br>Maximum | mA @ +25°C<br>100 kHz            | mA @ +85°C<br>100 kHz | mA @ +125°C<br>100 kHz | °C                     | Reflow Temp<br>≤ 260 °C |
| 2.5           | 100       | T/3528-12               | T491T107(1)2R5A(2)           | 2.5                                 | 24.0                           | 3.9                             | 134                              | 121                   | 54                     | 125                    | 1                       |
| 2.5           | 220       | D/7343-31               | T491D227(1)2R5A(2)           | 5.5                                 | 8.0                            | 0.3                             | 707                              | 636                   | 283                    | 125                    | 1                       |
| 3             | 33        | A/3216-18               | T491A336(1)003A(2)           | 1.0                                 | 6.0                            | 4.0                             | 137                              | 123                   | 55                     | 125                    | 1                       |
| 4             | 3.3       | A/3216-18               | T491A335(1)004A(2)           | 0.5                                 | 6.0                            | 8.0                             | 97                               | 87                    | 39                     | 125                    | 1                       |
| 4             | 4.7       | A/3216-18               | T491A475(1)004A(2)           | 0.5                                 | 6.0                            | 8.0                             | 97                               | 87                    | 39                     | 125                    | 1                       |
| 4             | 6.8       | A/3216-18               | T491A685(1)004A(2)           | 0.5                                 | 6.0                            | 6.0                             | 112                              | 101                   | 45                     | 125                    | 1                       |
| 4             | 6.8       | S/3216-12               | T491S685(1)004A(2)           | 0.5                                 | 6.0                            | 15.0                            | 63                               | 57                    | 25                     | 125                    | 1                       |
| 4             | 10        | B/3528-21               | T491B106(1)004A(2)           | 0.5                                 | 6.0                            | 3.5                             | 156                              | 140                   | 62                     | 125                    | 1                       |
| 4             | 10        | A/3216-18               | T491A106(1)004A(2)           | 0.5                                 | 6.0                            | 4.5                             | 129                              | 116                   | 52                     | 125                    | 1                       |
| 4             | 10        | S/3216-12               | T491S106(1)004A(2)           | 0.5                                 | 6.0                            | 15.0                            | 63                               | 57                    | 25                     | 125                    | 1                       |
| 4             | 15        | B/3528-21               | T491B156(1)004A(2)           | 0.6                                 | 6.0                            | 3.5                             | 156                              | 140                   | 62                     | 125                    | 1                       |
| 4             | 15        | A/3216-18               | T491A156(1)004A(2)           | 0.6                                 | 6.0                            | 4.0                             | 137                              | 123                   | 55                     | 125                    | 1                       |
| 4             | 15        | T/3528-12               | T491T156(1)004A(2)           | 0.6                                 | 6.0                            | 5.0                             | 118                              | 106                   | 47                     | 125                    | 1                       |
| 4             | 15        | S/3216-12               | T491S156(1)004A(2)           | 0.6                                 | 10.0                           | 15.0                            | 63                               | 57                    | 25                     | 125                    | 1                       |
| 4             | 22        | C/6032-28               | T491C226(1)004A(2)           | 0.9                                 | 6.0                            | 1.8                             | 247                              | 222                   | 99                     | 125                    | 1                       |
| 4             | 22        | B/3528-21               | T491B226(1)004A(2)           | 0.9                                 | 6.0                            | 3.0                             | 168                              | 151                   | 67                     | 125                    | 1                       |
| 4             | 22        | A/3216-18               | T491A226(1)004A(2)           | 0.9                                 | 6.0                            | 3.5                             | 137                              | 123                   | 55                     | 125                    | 1                       |
| 4             | 22        | T/3528-12               | T491T226(1)004A(2)           | 0.9                                 | 6.0                            | 5.0                             | 118                              | 106                   | 47                     | 125                    | 1                       |
| 4             | 22        | S/3216-12               | T491S226(1)004A(2)           | 0.9                                 | 10.0                           | 10.0                            | 77                               | 69                    | 31                     | 125                    | 1                       |
| 4             | 33        | C/6032-28               | T491C336(1)004A(2)           | 1.3                                 | 6.0                            | 1.8                             | 247                              | 222                   | 99                     | 125                    | 1                       |
| 4             | 33        | U/6032-15               | T491U336(1)004A(2)           | 1.3                                 | 6.0                            | 1.8                             | 224                              | 202                   | 90                     | 125                    | 1                       |
| 4             | 33        | B/3528-21               | T491B336(1)004A(2)           | 1.3                                 | 6.0                            | 2.5                             | 184                              | 166                   | 74                     | 125                    | 1                       |
| 4             | 33        | A/3216-18               | T491A336(1)004A(2)           | 1.3                                 | 6.0                            | 3.0                             | 137                              | 123                   | 55                     | 125                    | 1                       |
| 4             | 33        | T/3528-12               | T491T336(1)004A(2)           | 1.3                                 | 8.0                            | 5.0                             | 118                              | 106                   | 47                     | 125                    | 1                       |
| 4             | 47        | C/6032-28               | T491C476(1)004A(2)           | 1.9                                 | 6.0                            | 1.6                             | 262                              | 236                   | 105                    | 125                    | 1                       |
| 4             | 47        | U/6032-15               | T491U476(1)004A(2)           | 1.9                                 | 6.0                            | 1.8                             | 224                              | 202                   | 90                     | 125                    | 1                       |
| 4             | 47        | B/3528-21               | T491B476(1)004A(2)           | 1.9                                 | 6.0                            | 2.0                             | 206                              | 185                   | 82                     | 125                    | 1                       |
| 4             | 47        | A/3216-18               | T491A476(M)004A(2)           | 1.9                                 | 10.0                           | 2.5                             | 173                              | 156                   | 69                     | 125                    | 1                       |
| 4             | 47        | T/3528-12               | T491T476(M)004A(2)           | 1.9                                 | 12.0                           | 6.0                             | 108                              | 97                    | 43                     | 125                    | 1                       |
| 4             | 68        | D/7343-31               | T491D686(1)004A(2)           | 2.7                                 | 6.0                            | 0.8                             | 433                              | 390                   | 173                    | 125                    | 1                       |
| 4             | 68        | C/6032-28               | T491C686(1)004A(2)           | 2.7                                 | 6.0                            | 1.5                             | 271                              | 244                   | 108                    | 125                    | 1                       |
| 4             | 68        | U/6032-15               | T491U686(1)004A(2)           | 2.7                                 | 6.0                            | 1.8                             | 224                              | 202                   | 90                     | 125                    | 1                       |
| 4             | 68        | B/3528-21               | T491B686(1)004A(2)           | 2.7                                 | 6.0                            | 1.8                             | 217                              | 195                   | 87                     | 125                    | 1                       |
| 4             | 68        | A/3216-18               | T491A686(1)004A(2)           | 2.7                                 | 30.0                           | 4.0                             | 137                              | 123                   | 55                     | 125                    | 1                       |
| 4             | 100       | D/7343-31               | T491D107(1)004A(2)           | 4.0                                 | 8.0                            | 0.8                             | 433                              | 390                   | 173                    | 125                    | 1                       |
| 4             | 100       | C/6032-28               | T491C107(1)004A(2)           | 4.0                                 | 8.0                            | 1.2                             | 303                              | 273                   | 121                    | 125                    | 1                       |
| 4             | 100       | U/6032-15               | T491U107(1)004A(2)           | 4.0                                 | 10.0                           | 1.8                             | 224                              | 202                   | 90                     | 125                    | 1                       |
| 4             | 100       | B/3528-21               | T491B107(M)004A(2)           | 4.0                                 | 8.0                            | 0.9                             | 307                              | 276                   | 123                    | 125                    | 1                       |
| 4             | 100       | A/3216-18               | T491A107(M)004A(2)           | 4.0                                 | 30.0                           | 4.0                             | 137                              | 123                   | 55                     | 125                    | 1                       |
| 4             | 100       | T/3528-12               | T491T107(M)004A(2)           | 4.0                                 | 30.0                           | 5.0                             | 118                              | 106                   | 47                     | 125                    | 1                       |
| 4             | 150       | D/7343-31               | T491D157(1)004A(2)           | 6.0                                 | 8.0                            | 0.8                             | 433                              | 390                   | 173                    | 125                    | 1                       |
| 4             | 150       | U/6032-15               | T491U157(1)004AT             | 6.0                                 | 8.0                            | 1.3                             | 263                              | 237                   | 105                    | 125                    | 1                       |
| 4             | 150       | V/7343-20               | T491V157(1)004A(2)           | 6.0                                 | 8.0                            | 0.7                             | 423                              | 381                   | 169                    | 125                    | 1                       |
| 4             | 150       | C/6032-28               | T491C157(1)004A(2)           | 6.0                                 | 8.0                            | 1.2                             | 303                              | 273                   | 121                    | 125                    | 1                       |
| 4             | 150       | B/3528-21               | T491B157(M)004A(2)           | 6.0                                 | 12.0                           | 2.0                             | 206                              | 185                   | 82                     | 125                    | 1                       |
| 4             | 220       | V/7343-20               | T491V227(1)004A(2)           | 8.8                                 | 8.0                            | 0.7                             | 423                              | 381                   | 169                    | 125                    | 1                       |
| VDC @ 85°C    | μF        | KEMET/EIA               | (See below for part options) | μA @ +20°C<br>Maximum/<br>5 Minutes | % @ +20°C<br>120 Hz<br>Maximum | Ω @ +20°C<br>100 kHz<br>Maximum | mA @ +25°C<br>100 kHz            | mA @ +85°C<br>100 kHz | mA @ +125°C<br>100 kHz | °C                     | Reflow Temp<br>≤ 260 °C |
| Rated Voltage | Rated Cap | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage                          | DF                             | ESR                             | Maximum Allowable Ripple Current |                       |                        | Maximum Operating Temp | MSL                     |

(1) To complete KEMET part number, insert M for ±20% or K for ±10%. Designates capacitance tolerance.

(2) To complete KEMET part number, insert T = 100% Matte Tin (Sn) Plated, G = Gold Plated, H = Standard Solder coated (SnPb 5% Pb minimum), N = Non-Magnetic 100% Tin (Sn), M = Non-Magnetic (SnPb). Designates Termination Finish.

Refer to Ordering Information for additional detail.

Higher voltage ratings and tighter tolerance product including ESR may be substituted within the same size at KEMET's option. Voltage substitution will be marked with the higher voltage rating. Substitutions can include better than series.



Table 1 – Ratings &amp; Part Number Reference cont'd

| Rated Voltage | Rated Cap | Case Code/ Case Size | KEMET Part Number            | DC Leakage                    | DF                       | ESR                       | Maximum Allowable Ripple Current |                    |                     | Maximum Operating Temp | MSL                  |
|---------------|-----------|----------------------|------------------------------|-------------------------------|--------------------------|---------------------------|----------------------------------|--------------------|---------------------|------------------------|----------------------|
| VDC @ 85°C    | μF        | KEMET/EIA            | (See below for part options) | μA @ +20°C Maximum/ 5 Minutes | % @ +20°C 120 Hz Maximum | Ω @ +20°C 100 kHz Maximum | mA @ +25°C 100 kHz               | mA @ +85°C 100 kHz | mA @ +125°C 100 kHz | °C                     | Reflow Temp ≤ 260 °C |
| 4             | 220       | B/3528-21            | T491B227(M)004A(2)           | 8.8                           | 18.0                     | 0.5                       | 412                              | 371                | 165                 | 125                    | 1                    |
| 4             | 220       | C/6032-28            | T491C227(1)004AT             | 8.8                           | 15.0                     | 1.2                       | 303                              | 273                | 121                 | 125                    | 1                    |
| 4             | 220       | D/7343-31            | T491D227(1)004AT             | 8.8                           | 8.0                      | 0.8                       | 433                              | 390                | 173                 | 125                    | 1                    |
| 4             | 220       | W/7343-15            | T491W227(1)004AT             | 8.8                           | 8.0                      | 0.8                       | 474                              | 427                | 190                 | 125                    | 1                    |
| 4             | 330       | D/7343-31            | T491D337(1)004A(2)           | 13.2                          | 8.0                      | 0.7                       | 463                              | 417                | 185                 | 125                    | 1                    |
| 4             | 330       | V/7343-20            | T491V337(1)004A(2)           | 13.2                          | 12.0                     | 0.7                       | 423                              | 381                | 169                 | 125                    | 1                    |
| 4             | 330       | C/6032-28            | T491C337(1)004A(2)           | 13.2                          | 10.0                     | 0.9                       | 350                              | 315                | 140                 | 125                    | 1                    |
| 4             | 330       | X/7343-43            | T491X337(1)004AT             | 13.2                          | 8.0                      | 0.8                       | 454                              | 409                | 182                 | 125                    | 1                    |
| 4             | 470       | X/7343-43            | T491X477(1)004A(2)           | 18.8                          | 8.0                      | 0.5                       | 574                              | 517                | 230                 | 125                    | 1                    |
| 4             | 470       | D/7343-31            | T491D477(1)004A(2)           | 18.8                          | 8.0                      | 0.8                       | 433                              | 390                | 173                 | 125                    | 1                    |
| 4             | 680       | X/7343-43            | T491X687(1)004A(2)           | 27.2                          | 12.0                     | 0.5                       | 574                              | 517                | 230                 | 125                    | 1                    |
| 4             | 680       | D/7343-31            | T491D687(1)004A(2)           | 27.2                          | 12.0                     | 0.5                       | 548                              | 493                | 219                 | 125                    | 1                    |
| 4             | 1000      | X/7343-43            | T491X108(1)004A(2)           | 40.0                          | 12.0                     | 0.5                       | 574                              | 517                | 230                 | 125                    | 1                    |
| 4             | 1000      | E/7360-38            | T491E108(M)004A(2)           | 40.0                          | 15.0                     | 0.2                       | 1000                             | 900                | 400                 | 125                    | 1                    |
| 6.3           | 2.2       | A/3216-18            | T491A225(1)006A(2)           | 0.5                           | 6.0                      | 8.0                       | 97                               | 87                 | 39                  | 125                    | 1                    |
| 6.3           | 3.3       | A/3216-18            | T491A335(1)006A(2)           | 0.5                           | 6.0                      | 7.0                       | 97                               | 87                 | 39                  | 125                    | 1                    |
| 6.3           | 4.7       | A/3216-18            | T491A475(1)006A(2)           | 0.5                           | 6.0                      | 5.5                       | 112                              | 101                | 45                  | 125                    | 1                    |
| 6.3           | 4.7       | S/3216-12            | T491S475(1)006A(2)           | 0.5                           | 6.0                      | 15.0                      | 63                               | 57                 | 25                  | 125                    | 1                    |
| 6.3           | 6.8       | B/3528-21            | T491B685(1)006A(2)           | 0.5                           | 6.0                      | 3.5                       | 156                              | 140                | 62                  | 125                    | 1                    |
| 6.3           | 6.8       | A/3216-18            | T491A685(1)006A(2)           | 0.5                           | 6.0                      | 6.0                       | 112                              | 101                | 45                  | 125                    | 1                    |
| 6.3           | 6.8       | S/3216-12            | T491S685(1)006A(2)           | 0.5                           | 6.0                      | 15.0                      | 63                               | 57                 | 25                  | 125                    | 1                    |
| 6.3           | 10        | B/3528-21            | T491B106(1)006A(2)           | 0.6                           | 6.0                      | 3.5                       | 156                              | 140                | 62                  | 125                    | 1                    |
| 6.3           | 10        | A/3216-18            | T491A106(1)006A(2)           | 0.6                           | 6.0                      | 4.0                       | 137                              | 123                | 55                  | 125                    | 1                    |
| 6.3           | 10        | T/3528-12            | T491T106(1)006A(2)           | 0.6                           | 6.0                      | 5.0                       | 118                              | 106                | 47                  | 125                    | 1                    |
| 6.3           | 10        | S/3216-12            | T491S106(1)006A(2)           | 0.6                           | 10.0                     | 15.0                      | 63                               | 57                 | 25                  | 125                    | 1                    |
| 6.3           | 15        | C/6032-28            | T491C156(1)006A(2)           | 0.9                           | 6.0                      | 1.8                       | 247                              | 222                | 99                  | 125                    | 1                    |
| 6.3           | 15        | B/3528-21            | T491B156(1)006A(2)           | 0.9                           | 6.0                      | 3.0                       | 168                              | 151                | 67                  | 125                    | 1                    |
| 6.3           | 15        | A/3216-18            | T491A156(1)006A(2)           | 0.9                           | 6.0                      | 3.5                       | 146                              | 131                | 58                  | 125                    | 1                    |
| 6.3           | 15        | T/3528-12            | T491T156(1)006A(2)           | 0.9                           | 6.0                      | 3.5                       | 141                              | 127                | 56                  | 125                    | 1                    |
| 6.3           | 15        | S/3216-12            | T491S156(1)006A(2)           | 0.9                           | 15.0                     | 10.0                      | 77                               | 69                 | 31                  | 125                    | 1                    |
| 6.3           | 22        | C/6032-28            | T491C226(1)006A(2)           | 1.4                           | 6.0                      | 1.8                       | 247                              | 222                | 99                  | 125                    | 1                    |
| 6.3           | 22        | U/6032-15            | T491U226(1)006A(2)           | 1.4                           | 6.0                      | 1.8                       | 224                              | 202                | 90                  | 125                    | 1                    |
| 6.3           | 22        | B/3528-21            | T491B226(1)006A(2)           | 1.4                           | 6.0                      | 2.0                       | 206                              | 185                | 82                  | 125                    | 1                    |
| 6.3           | 22        | A/3216-18            | T491A226(1)006A(2)           | 1.4                           | 6.0                      | 3.0                       | 158                              | 142                | 63                  | 125                    | 1                    |
| 6.3           | 22        | T/3528-12            | T491T226(1)006A(2)           | 1.4                           | 8.0                      | 5.0                       | 118                              | 106                | 47                  | 125                    | 1                    |
| 6.3           | 33        | C/6032-28            | T491C336(1)006A(2)           | 2.1                           | 6.0                      | 1.6                       | 247                              | 222                | 99                  | 125                    | 1                    |
| 6.3           | 33        | U/6032-15            | T491U336(1)006A(2)           | 2.1                           | 6.0                      | 1.8                       | 224                              | 202                | 90                  | 125                    | 1                    |
| 6.3           | 33        | B/3528-21            | T491B336(1)006A(2)           | 2.1                           | 6.0                      | 2.2                       | 168                              | 151                | 67                  | 125                    | 1                    |
| 6.3           | 33        | A/3216-18            | T491A336(1)006A(2)           | 2.1                           | 12.0                     | 2.5                       | 173                              | 156                | 69                  | 125                    | 1                    |
| 6.3           | 33        | T/3528-12            | T491T336(1)006A(2)           | 2.1                           | 12.0                     | 6.0                       | 108                              | 97                 | 43                  | 125                    | 1                    |
| 6.3           | 47        | D/7343-31            | T491D476(1)006A(2)           | 3.0                           | 6.0                      | 0.8                       | 433                              | 390                | 173                 | 125                    | 1                    |
| 6.3           | 47        | C/6032-28            | T491C476(1)006A(2)           | 3.0                           | 6.0                      | 1.5                       | 262                              | 236                | 105                 | 125                    | 1                    |
| 6.3           | 47        | U/6032-15            | T491U476(1)006A(2)           | 3.0                           | 6.0                      | 1.8                       | 224                              | 202                | 90                  | 125                    | 1                    |
| 6.3           | 47        | V/7343-20            | T491V476(1)006AT             | 3.0                           | 6.0                      | 0.7                       | 423                              | 381                | 169                 | 125                    | 1                    |
| 6.3           | 47        | B/3528-21            | T491B476(1)006A(2)           | 3.0                           | 6.0                      | 2.0                       | 206                              | 185                | 82                  | 125                    | 1                    |
| 6.3           | 47        | A/3216-18            | T491A476(M)006A(2)           | 3.0                           | 12.0                     | 3.5                       | 146                              | 131                | 58                  | 125                    | 1                    |
| VDC @ 85°C    | μF        | KEMET/EIA            | (See below for part options) | μA @ +20°C Maximum/ 5 Minutes | % @ +20°C 120 Hz Maximum | Ω @ +20°C 100 kHz Maximum | mA @ +25°C 100 kHz               | mA @ +85°C 100 kHz | mA @ +125°C 100 kHz | °C                     | Reflow Temp ≤ 260 °C |
| Rated Voltage | Rated Cap | Case Code/ Case Size | KEMET Part Number            | DC Leakage                    | DF                       | ESR                       | Maximum Allowable Ripple Current |                    |                     | Maximum Operating Temp | MSL                  |

(1) To complete KEMET part number, insert M for ±20% or K for ±10%. Designates capacitance tolerance.

(2) To complete KEMET part number, insert T = 100% Matte Tin (Sn) Plated, G = Gold Plated, H = Standard Solder coated (SnPb 5% Pb minimum), N = Non-Magnetic 100% Tin (Sn), M = Non-Magnetic (SnPb). Designates Termination Finish.

Refer to Ordering Information for additional detail.

Higher voltage ratings and tighter tolerance product including ESR may be substituted within the same size at KEMET's option. Voltage substitution will be marked with the higher voltage rating. Substitutions can include better than series.

Table 1 – Ratings &amp; Part Number Reference cont'd

| Rated Voltage | Rated Cap | Case Code/ Case Size | KEMET Part Number            | DC Leakage                    | DF                       | ESR                       | Maximum Allowable Ripple Current |                    |                     | Maximum Operating Temp | MSL                  |
|---------------|-----------|----------------------|------------------------------|-------------------------------|--------------------------|---------------------------|----------------------------------|--------------------|---------------------|------------------------|----------------------|
| VDC @ 85°C    | μF        | KEMET/EIA            | (See below for part options) | μA @ +20°C Maximum/ 5 Minutes | % @ +20°C 120 Hz Maximum | Ω @ +20°C 100 kHz Maximum | mA @ +25°C 100 kHz               | mA @ +85°C 100 kHz | mA @ +125°C 100 kHz | °C                     | Reflow Temp ≤ 260 °C |
| 6.3           | 47        | T/3528-12            | T491T476(1)006A(2)           | 3.0                           | 10.0                     | 2.0                       | 187                              | 168                | 75                  | 125                    | 1                    |
| 6.3           | 68        | D/7343-31            | T491D686(1)006A(2)           | 4.3                           | 6.0                      | 0.8                       | 433                              | 390                | 173                 | 125                    | 1                    |
| 6.3           | 68        | C/6032-28            | T491C686(1)006A(2)           | 4.3                           | 6.0                      | 1.2                       | 303                              | 273                | 121                 | 125                    | 1                    |
| 6.3           | 68        | U/6032-15            | T491U686(1)006A(2)           | 4.3                           | 10.0                     | 1.8                       | 224                              | 202                | 90                  | 125                    | 1                    |
| 6.3           | 68        | V/7343-20            | T491V686(1)006AT             | 4.3                           | 6.0                      | 0.7                       | 423                              | 381                | 169                 | 125                    | 1                    |
| 6.3           | 68        | B/3528-21            | T491B686(1)006A(2)           | 4.3                           | 8.0                      | 0.9                       | 307                              | 276                | 123                 | 125                    | 1                    |
| 6.3           | 68        | A/3216-18            | T491A686(1)006A(2)           | 4.3                           | 30.0                     | 4.0                       | 137                              | 123                | 55                  | 125                    | 1                    |
| 6.3           | 100       | D/7343-31            | T491D107(1)006A(2)           | 6.3                           | 8.0                      | 0.8                       | 433                              | 390                | 173                 | 125                    | 1                    |
| 6.3           | 100       | V/7343-20            | T491V107(1)006A(2)           | 6.3                           | 8.0                      | 0.7                       | 423                              | 381                | 169                 | 125                    | 1                    |
| 6.3           | 100       | C/6032-28            | T491C107(1)006A(2)           | 6.3                           | 8.0                      | 0.9                       | 350                              | 315                | 140                 | 125                    | 1                    |
| 6.3           | 100       | U/6032-15            | T491U107(1)006A(2)           | 6.3                           | 10.0                     | 1.8                       | 224                              | 202                | 90                  | 125                    | 1                    |
| 6.3           | 100       | B/3528-21            | T491B107(1)006A(2)           | 6.3                           | 12.0                     | 2.0                       | 206                              | 185                | 82                  | 125                    | 1                    |
| 6.3           | 150       | B/3528-21            | T491B157(M)006A(2)           | 9.5                           | 15.0                     | 3.0                       | 168                              | 151                | 67                  | 125                    | 1                    |
| 6.3           | 150       | D/7343-31            | T491D157(1)006A(2)           | 9.5                           | 8.0                      | 0.7                       | 463                              | 417                | 185                 | 125                    | 1                    |
| 6.3           | 150       | C/6032-28            | T491C157(1)006A(2)           | 9.5                           | 8.0                      | 1.2                       | 303                              | 273                | 121                 | 125                    | 1                    |
| 6.3           | 150       | V/7343-20            | T491V157(1)006A(2)           | 9.5                           | 8.0                      | 0.7                       | 423                              | 381                | 169                 | 125                    | 1                    |
| 6.3           | 150       | U/6032-15            | T491U157(1)006AT             | 9.5                           | 8.0                      | 0.6                       | 387                              | 348                | 155                 | 125                    | 1                    |
| 6.3           | 150       | W/7343-15            | T491W157(1)006AT             | 9.5                           | 8.0                      | 0.8                       | 474                              | 427                | 190                 | 125                    | 1                    |
| 6.3           | 150       | X/7343-43            | T491X157(1)006A(2)           | 9.5                           | 8.0                      | 0.7                       | 486                              | 437                | 194                 | 125                    | 1                    |
| 6.3           | 220       | X/7343-43            | T491X227(1)006A(2)           | 13.9                          | 8.0                      | 0.7                       | 486                              | 437                | 194                 | 125                    | 1                    |
| 6.3           | 220       | D/7343-31            | T491D227(1)006A(2)           | 13.9                          | 8.0                      | 0.7                       | 463                              | 417                | 185                 | 125                    | 1                    |
| 6.3           | 220       | C/6032-28            | T491C227(M)006A(2)           | 13.9                          | 10.0                     | 1.0                       | 332                              | 299                | 133                 | 125                    | 1                    |
| 6.3           | 220       | V/7343-20            | T491V227(1)006A(2)           | 13.9                          | 8.0                      | 0.7                       | 423                              | 381                | 169                 | 125                    | 1                    |
| 6.3           | 220       | W/7343-15            | T491W227(1)006AT             | 13.9                          | 8.0                      | 0.8                       | 474                              | 427                | 190                 | 125                    | 1                    |
| 6.3           | 330       | C/6032-28            | T491C337(1)006A(2)           | 20.8                          | 12.0                     | 1.2                       | 303                              | 273                | 121                 | 125                    | 1                    |
| 6.3           | 330       | V/7343-20            | T491V337(1)006AT             | 20.8                          | 8.0                      | 0.7                       | 423                              | 381                | 169                 | 125                    | 1                    |
| 6.3           | 330       | X/7343-43            | T491X337(1)006A(2)           | 20.8                          | 8.0                      | 0.4                       | 642                              | 578                | 257                 | 125                    | 1                    |
| 6.3           | 330       | D/7343-31            | T491D337(1)006A(2)           | 20.8                          | 8.0                      | 0.4                       | 612                              | 551                | 245                 | 125                    | 1                    |
| 6.3           | 330       | E/7360-38            | T491E337(1)006A(2)           | 20.8                          | 8.0                      | 0.5                       | 632                              | 569                | 253                 | 125                    | 1                    |
| 6.3           | 470       | X/7343-43            | T491X477(1)006A(2)           | 29.6                          | 8.0                      | 0.4                       | 642                              | 578                | 257                 | 125                    | 1                    |
| 6.3           | 470       | D/7343-31            | T491D477(M)006A(2)           | 29.6                          | 12.0                     | 0.4                       | 612                              | 551                | 245                 | 125                    | 1                    |
| 6.3           | 470       | V/7343-20            | T491V477(1)006A(2)           | 29.6                          | 15.0                     | 0.7                       | 423                              | 381                | 169                 | 125                    | 1                    |
| 6.3           | 470       | E/7360-38            | T491E477(1)006A(2)           | 29.6                          | 10.0                     | 0.4                       | 707                              | 636                | 283                 | 125                    | 1                    |
| 6.3           | 680       | X/7343-43            | T491X687(1)006A(2)           | 42.8                          | 15.0                     | 0.6                       | 524                              | 472                | 210                 | 125                    | 1                    |
| 6.3           | 680       | E/7360-38            | T491E687(M)006A(2)           | 42.8                          | 12.0                     | 0.5                       | 524                              | 569                | 253                 | 125                    | 1                    |
| 6.3           | 1000      | X/7343-43            | T491X108(1)006AT             | 63.0                          | 15.0                     | 0.6                       | 524                              | 472                | 210                 | 125                    | 1                    |
| 10            | 1         | A/3216-18            | T491A105(1)010A(2)           | 0.5                           | 4.0                      | 10.0                      | 87                               | 78                 | 35                  | 125                    | 1                    |
| 10            | 1.5       | A/3216-18            | T491A155(1)010A(2)           | 0.5                           | 6.0                      | 8.0                       | 97                               | 87                 | 39                  | 125                    | 1                    |
| 10            | 2.2       | B/3528-21            | T491B225(1)010A(2)           | 0.5                           | 6.0                      | 3.5                       | 156                              | 140                | 62                  | 125                    | 1                    |
| 10            | 2.2       | A/3216-18            | T491A225(1)010A(2)           | 0.5                           | 6.0                      | 7.0                       | 97                               | 87                 | 39                  | 125                    | 1                    |
| 10            | 3.3       | A/3216-18            | T491A335(1)010A(2)           | 0.5                           | 6.0                      | 5.5                       | 117                              | 105                | 47                  | 125                    | 1                    |
| 10            | 3.3       | S/3216-12            | T491S335(1)010A(2)           | 0.5                           | 6.0                      | 15.0                      | 63                               | 57                 | 25                  | 125                    | 1                    |
| 10            | 4.7       | B/3528-21            | T491B475(1)010A(2)           | 0.5                           | 6.0                      | 3.5                       | 156                              | 140                | 62                  | 125                    | 1                    |
| 10            | 4.7       | A/3216-18            | T491A475(1)010A(2)           | 0.5                           | 6.0                      | 4.0                       | 137                              | 123                | 55                  | 125                    | 1                    |
| 10            | 4.7       | S/3216-12            | T491S475(1)010A(2)           | 0.5                           | 6.0                      | 15.0                      | 63                               | 57                 | 25                  | 125                    | 1                    |
| 10            | 6.8       | B/3528-21            | T491B685(1)010A(2)           | 0.7                           | 6.0                      | 3.5                       | 156                              | 140                | 62                  | 125                    | 1                    |
| VDC @ 85°C    | μF        | KEMET/EIA            | (See below for part options) | μA @ +20°C Maximum/ 5 Minutes | % @ +20°C 120 Hz Maximum | Ω @ +20°C 100 kHz Maximum | mA @ +25°C 100 kHz               | mA @ +85°C 100 kHz | mA @ +125°C 100 kHz | °C                     | Reflow Temp ≤ 260 °C |
| Rated Voltage | Rated Cap | Case Code/ Case Size | KEMET Part Number            | DC Leakage                    | DF                       | ESR                       | Maximum Allowable Ripple Current |                    |                     | Maximum Operating Temp | MSL                  |

(1) To complete KEMET part number, insert M for ±20% or K for ±10%. Designates capacitance tolerance.

(2) To complete KEMET part number, insert T = 100% Matte Tin (Sn) Plated, G = Gold Plated, H = Standard Solder coated (SnPb 5% Pb minimum), N = Non-Magnetic 100% Tin (Sn), M = Non-Magnetic (SnPb). Designates Termination Finish.

Refer to Ordering Information for additional detail.

Higher voltage ratings and tighter tolerance product including ESR may be substituted within the same size at KEMET's option. Voltage substitution will be marked with the higher voltage rating. Substitutions can include better than series.

Table 1 – Ratings &amp; Part Number Reference cont'd

| Rated Voltage | Rated Cap | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage                          | DF                             | ESR                             | Maximum Allowable Ripple Current |                       |                        | Maximum Operating Temp | MSL                     |
|---------------|-----------|-------------------------|------------------------------|-------------------------------------|--------------------------------|---------------------------------|----------------------------------|-----------------------|------------------------|------------------------|-------------------------|
| VDC @ 85°C    | μF        | KEMET/EIA               | (See below for part options) | μA @ +20°C<br>Maximum/<br>5 Minutes | % @ +20°C<br>120 Hz<br>Maximum | Ω @ +20°C<br>100 kHz<br>Maximum | mA @ +25°C<br>100 kHz            | mA @ +85°C<br>100 kHz | mA @ +125°C<br>100 kHz | °C                     | Reflow Temp<br>≤ 260 °C |
| 10            | 6.8       | A/3216-18               | T491A685(1)010A(2)           | 0.7                                 | 6.0                            | 4.0                             | 137                              | 123                   | 55                     | 125                    | 1                       |
| 10            | 6.8       | T/3528-12               | T491T685(1)010A(2)           | 0.7                                 | 6.0                            | 5.0                             | 118                              | 106                   | 47                     | 125                    | 1                       |
| 10            | 6.8       | S/3216-12               | T491S685(1)010A(2)           | 0.7                                 | 10.0                           | 15.0                            | 63                               | 57                    | 25                     | 125                    | 1                       |
| 10            | 10        | C/6032-28               | T491C106(1)010A(2)           | 1.0                                 | 6.0                            | 1.8                             | 247                              | 222                   | 99                     | 125                    | 1                       |
| 10            | 10        | B/3528-21               | T491B106(1)010A(2)           | 1.0                                 | 6.0                            | 3.0                             | 156                              | 140                   | 62                     | 125                    | 1                       |
| 10            | 10        | A/3216-18               | T491A106(1)010A(2)           | 1.0                                 | 6.0                            | 3.8                             | 137                              | 123                   | 55                     | 125                    | 1                       |
| 10            | 10        | T/3528-12               | T491T106(1)010A(2)           | 1.0                                 | 6.0                            | 3.0                             | 153                              | 138                   | 61                     | 125                    | 1                       |
| 10            | 10        | S/3216-12               | T491S106(1)010A(2)           | 1.0                                 | 10.0                           | 15.0                            | 63                               | 57                    | 25                     | 125                    | 1                       |
| 10            | 15        | C/6032-28               | T491C156(1)010A(2)           | 1.5                                 | 6.0                            | 1.8                             | 247                              | 222                   | 99                     | 125                    | 1                       |
| 10            | 15        | U/6032-15               | T491U156(1)010A(2)           | 1.5                                 | 6.0                            | 1.8                             | 224                              | 202                   | 90                     | 125                    | 1                       |
| 10            | 15        | B/3528-21               | T491B156(1)010A(2)           | 1.5                                 | 6.0                            | 2.0                             | 206                              | 185                   | 82                     | 125                    | 1                       |
| 10            | 15        | A/3216-18               | T491A156(1)010A(2)           | 1.5                                 | 8.0                            | 6.0                             | 112                              | 101                   | 45                     | 125                    | 1                       |
| 10            | 15        | T/3528-12               | T491T156(1)010A(2)           | 1.5                                 | 6.0                            | 2.8                             | 158                              | 142                   | 63                     | 125                    | 1                       |
| 10            | 22        | D/7343-31               | T491D226(1)010A(2)           | 2.2                                 | 6.0                            | 0.8                             | 433                              | 390                   | 173                    | 125                    | 1                       |
| 10            | 22        | C/6032-28               | T491C226(1)010A(2)           | 2.2                                 | 6.0                            | 1.6                             | 247                              | 222                   | 99                     | 125                    | 1                       |
| 10            | 22        | U/6032-15               | T491U226(1)010A(2)           | 2.2                                 | 6.0                            | 1.8                             | 224                              | 202                   | 90                     | 125                    | 1                       |
| 10            | 22        | B/3528-21               | T491B226(1)010A(2)           | 2.2                                 | 6.0                            | 2.0                             | 206                              | 185                   | 82                     | 125                    | 1                       |
| 10            | 22        | A/3216-18               | T491A226(1)010A(2)           | 2.2                                 | 8.0                            | 3.2                             | 112                              | 101                   | 45                     | 125                    | 1                       |
| 10            | 22        | T/3528-12               | T491T226(1)010A(2)           | 2.2                                 | 12.0                           | 8.0                             | 94                               | 85                    | 38                     | 125                    | 1                       |
| 10            | 33        | D/7343-31               | T491D336(1)010A(2)           | 3.3                                 | 6.0                            | 0.8                             | 433                              | 390                   | 173                    | 125                    | 1                       |
| 10            | 33        | V/7343-20               | T491V336(1)010A(2)           | 3.3                                 | 6.0                            | 0.7                             | 423                              | 381                   | 169                    | 125                    | 1                       |
| 10            | 33        | C/6032-28               | T491C336(1)010A(2)           | 3.3                                 | 6.0                            | 1.5                             | 271                              | 244                   | 108                    | 125                    | 1                       |
| 10            | 33        | U/6032-15               | T491U336(1)010A(2)           | 3.3                                 | 6.0                            | 1.8                             | 224                              | 202                   | 90                     | 125                    | 1                       |
| 10            | 33        | B/3528-21               | T491B336(1)010A(2)           | 3.3                                 | 6.0                            | 1.8                             | 217                              | 195                   | 87                     | 125                    | 1                       |
| 10            | 33        | T/3528-12               | T491T336(1)010A(2)           | 3.3                                 | 24.0                           | 5.0                             | 118                              | 106                   | 47                     | 125                    | 1                       |
| 10            | 33        | A/3216-18               | T491A336(1)010A(2)           | 3.3                                 | 15.0                           | 6.0                             | 112                              | 101                   | 45                     | 125                    | 1                       |
| 10            | 47        | D/7343-31               | T491D476(1)010A(2)           | 4.7                                 | 6.0                            | 0.8                             | 433                              | 390                   | 173                    | 125                    | 1                       |
| 10            | 47        | V/7343-20               | T491V476(1)010A(2)           | 4.7                                 | 6.0                            | 0.7                             | 423                              | 381                   | 169                    | 125                    | 1                       |
| 10            | 47        | C/6032-28               | T491C476(1)010A(2)           | 4.7                                 | 6.0                            | 1.2                             | 303                              | 273                   | 121                    | 125                    | 1                       |
| 10            | 47        | U/6032-15               | T491U476(1)010A(2)           | 4.7                                 | 6.0                            | 1.4                             | 254                              | 229                   | 102                    | 125                    | 1                       |
| 10            | 47        | B/3528-21               | T491B476(1)010A(2)           | 4.7                                 | 8.0                            | 1.0                             | 292                              | 263                   | 117                    | 125                    | 1                       |
| 10            | 68        | D/7343-31               | T491D686(1)010A(2)           | 6.8                                 | 6.0                            | 0.8                             | 433                              | 390                   | 173                    | 125                    | 1                       |
| 10            | 68        | V/7343-20               | T491V686(1)010A(2)           | 6.8                                 | 6.0                            | 0.7                             | 423                              | 381                   | 169                    | 125                    | 1                       |
| 10            | 68        | C/6032-28               | T491C686(1)010A(2)           | 6.8                                 | 6.0                            | 1.0                             | 332                              | 299                   | 133                    | 125                    | 1                       |
| 10            | 68        | W/7343-15               | T491W686(1)010AT             | 6.8                                 | 6.0                            | 1.2                             | 387                              | 348                   | 155                    | 125                    | 1                       |
| 10            | 68        | U/6032-15               | T491U686(1)010A(2)           | 6.8                                 | 10.0                           | 1.8                             | 224                              | 202                   | 90                     | 125                    | 1                       |
| 10            | 68        | B/3528-21               | T491B686(M)010A(2)           | 6.8                                 | 8.0                            | 1.0                             | 292                              | 263                   | 117                    | 125                    | 1                       |
| 10            | 100       | B/3528-21               | T491B107(M)010A(2)           | 10.0                                | 8.0                            | 1.2                             | 266                              | 239                   | 106                    | 125                    | 1                       |
| 10            | 100       | D/7343-31               | T491D107(1)010A(2)           | 10.0                                | 8.0                            | 0.7                             | 463                              | 417                   | 185                    | 125                    | 1                       |
| 10            | 100       | U/6032-15               | T491U107(1)010AT             | 10.0                                | 8.0                            | 0.7                             | 359                              | 323                   | 144                    | 125                    | 1                       |
| 10            | 100       | W/7343-15               | T491W107(1)010AT             | 10.0                                | 8.0                            | 0.8                             | 474                              | 427                   | 190                    | 125                    | 1                       |
| 10            | 100       | C/6032-28               | T491C107(1)010A(2)           | 10.0                                | 8.0                            | 1.0                             | 332                              | 299                   | 133                    | 125                    | 1                       |
| 10            | 100       | V/7343-20               | T491V107(1)010A(2)           | 10.0                                | 8.0                            | 0.7                             | 423                              | 381                   | 169                    | 125                    | 1                       |
| 10            | 150       | X/7343-43               | T491X157(1)010A(2)           | 15.0                                | 8.0                            | 0.7                             | 486                              | 437                   | 194                    | 125                    | 1                       |
| 10            | 150       | D/7343-31               | T491D157(1)010A(2)           | 15.0                                | 8.0                            | 0.7                             | 463                              | 417                   | 185                    | 125                    | 1                       |
| 10            | 150       | C/6032-28               | T491C157(1)010A(2)           | 15.0                                | 10.0                           | 0.9                             | 350                              | 315                   | 140                    | 125                    | 1                       |
| VDC @ 85°C    | μF        | KEMET/EIA               | (See below for part options) | μA @ +20°C<br>Maximum/<br>5 Minutes | % @ +20°C<br>120 Hz<br>Maximum | Ω @ +20°C<br>100 kHz<br>Maximum | mA @ +25°C<br>100 kHz            | mA @ +85°C<br>100 kHz | mA @ +125°C<br>100 kHz | °C                     | Reflow Temp<br>≤ 260 °C |
| Rated Voltage | Rated Cap | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage                          | DF                             | ESR                             | Maximum Allowable Ripple Current |                       |                        | Maximum Operating Temp | MSL                     |

(1) To complete KEMET part number, insert M for ±20% or K for ±10%. Designates capacitance tolerance.

(2) To complete KEMET part number, insert T = 100% Matte Tin (Sn) Plated, G = Gold Plated, H = Standard Solder coated (SnPb 5% Pb minimum), N = Non-Magnetic 100% Tin (Sn), M = Non-Magnetic (SnPb). Designates Termination Finish.

Refer to Ordering Information for additional detail.

Higher voltage ratings and tighter tolerance product including ESR may be substituted within the same size at KEMET's option. Voltage substitution will be marked with the higher voltage rating. Substitutions can include better than series.

Table 1 – Ratings &amp; Part Number Reference cont'd

| Rated Voltage | Rated Cap | Case Code/ Case Size | KEMET Part Number            | DC Leakage                    | DF                       | ESR                       | Maximum Allowable Ripple Current |                    |                     | Maximum Operating Temp | MSL                  |
|---------------|-----------|----------------------|------------------------------|-------------------------------|--------------------------|---------------------------|----------------------------------|--------------------|---------------------|------------------------|----------------------|
| VDC @ 85°C    | μF        | KEMET/EIA            | (See below for part options) | μA @ +20°C Maximum/ 5 Minutes | % @ +20°C 120 Hz Maximum | Ω @ +20°C 100 kHz Maximum | mA @ +25°C 100 kHz               | mA @ +85°C 100 kHz | mA @ +125°C 100 kHz | °C                     | Reflow Temp ≤ 260 °C |
| 10            | 150       | V/7343-20            | T491V157(1)010A(2)           | 15.0                          | 8.0                      | 0.7                       | 423                              | 381                | 169                 | 125                    | 1                    |
| 10            | 220       | C/6032-28            | T491C227(1)010A(2)           | 22.0                          | 10.0                     | 0.9                       | 350                              | 315                | 140                 | 125                    | 1                    |
| 10            | 220       | X/7343-43            | T491X227(1)010A(2)           | 22.0                          | 8.0                      | 0.5                       | 574                              | 517                | 230                 | 125                    | 1                    |
| 10            | 220       | D/7343-31            | T491D227(1)010A(2)           | 22.0                          | 8.0                      | 0.5                       | 548                              | 493                | 219                 | 125                    | 1                    |
| 10            | 220       | V/7343-20            | T491V227(1)010A(2)           | 22.0                          | 8.0                      | 0.7                       | 423                              | 381                | 169                 | 125                    | 1                    |
| 10            | 330       | D/7343-31            | T491D337(1)010A(2)           | 33.0                          | 10.0                     | 0.5                       | 548                              | 493                | 219                 | 125                    | 1                    |
| 10            | 330       | V/7343-20            | T491V337(1)010A(2)           | 33.0                          | 12.0                     | 0.7                       | 423                              | 381                | 169                 | 125                    | 1                    |
| 10            | 330       | X/7343-43            | T491X337(1)010A(2)           | 33.0                          | 10.0                     | 0.5                       | 574                              | 517                | 230                 | 125                    | 1                    |
| 10            | 330       | E/7360-38            | T491E337(1)010A(2)           | 33.0                          | 10.0                     | 0.5                       | 632                              | 569                | 253                 | 125                    | 1                    |
| 10            | 470       | X/7343-43            | T491X477(1)010A(2)           | 47                            | 10                       | 0.2                       | 908                              | 817.2              | 363.2               | 125                    | 1                    |
| 10            | 470       | E/7360-38            | T491E477(M)010A(2)           | 47.0                          | 12.0                     | 0.5                       | 632                              | 569                | 253                 | 125                    | 1                    |
| 16            | 1         | A/3216-18            | T491A105(1)016A(2)           | 0.5                           | 4.0                      | 10.0                      | 87                               | 78                 | 35                  | 125                    | 1                    |
| 16            | 1.5       | A/3216-18            | T491A155(1)016A(2)           | 0.5                           | 6.0                      | 8.0                       | 97                               | 87                 | 39                  | 125                    | 1                    |
| 16            | 2.2       | A/3216-18            | T491A225(1)016A(2)           | 0.5                           | 6.0                      | 6.0                       | 112                              | 101                | 45                  | 125                    | 1                    |
| 16            | 2.2       | S/3216-12            | T491S225(1)016A(2)           | 0.5                           | 6.0                      | 15.0                      | 63                               | 57                 | 25                  | 125                    | 1                    |
| 16            | 3.3       | B/3528-21            | T491B335(1)016A(2)           | 0.5                           | 6.0                      | 3.5                       | 156                              | 140                | 62                  | 125                    | 1                    |
| 16            | 3.3       | A/3216-18            | T491A335(1)016A(2)           | 0.5                           | 6.0                      | 5.0                       | 122                              | 110                | 49                  | 125                    | 1                    |
| 16            | 4.7       | C/6032-28            | T491C475(1)016A(2)           | 0.8                           | 6.0                      | 2.4                       | 214                              | 193                | 86                  | 125                    | 1                    |
| 16            | 4.7       | B/3528-21            | T491B475(1)016A(2)           | 0.8                           | 6.0                      | 3.5                       | 156                              | 140                | 62                  | 125                    | 1                    |
| 16            | 4.7       | A/3216-18            | T491A475(1)016A(2)           | 0.8                           | 6.0                      | 4.0                       | 137                              | 123                | 55                  | 125                    | 1                    |
| 16            | 4.7       | T/3528-12            | T491T475(1)016A(2)           | 0.8                           | 6.0                      | 5.0                       | 118                              | 106                | 47                  | 125                    | 1                    |
| 16            | 6.8       | C/6032-28            | T491C685(1)016A(2)           | 1.1                           | 6.0                      | 1.9                       | 241                              | 217                | 96                  | 125                    | 1                    |
| 16            | 6.8       | B/3528-21            | T491B685(1)016A(2)           | 1.1                           | 6.0                      | 2.5                       | 184                              | 166                | 74                  | 125                    | 1                    |
| 16            | 6.8       | A/3216-18            | T491A685(1)016A(2)           | 1.1                           | 6.0                      | 3.5                       | 146                              | 131                | 58                  | 125                    | 1                    |
| 16            | 10        | C/6032-28            | T491C106(1)016A(2)           | 1.6                           | 6.0                      | 1.8                       | 247                              | 222                | 99                  | 125                    | 1                    |
| 16            | 10        | U/6032-15            | T491U106(1)016A(2)           | 1.6                           | 6.0                      | 1.8                       | 224                              | 202                | 90                  | 125                    | 1                    |
| 16            | 10        | B/3528-21            | T491B106(1)016A(2)           | 1.6                           | 6.0                      | 2.0                       | 206                              | 185                | 82                  | 125                    | 1                    |
| 16            | 10        | A/3216-18            | T491A106(1)016A(2)           | 1.6                           | 6.0                      | 3.0                       | 158                              | 142                | 63                  | 125                    | 1                    |
| 16            | 10        | T/3528-12            | T491T106(1)016A(2)           | 1.6                           | 8.0                      | 8.0                       | 94                               | 85                 | 38                  | 125                    | 1                    |
| 16            | 15        | C/6032-28            | T491C156(1)016A(2)           | 2.4                           | 6.0                      | 1.6                       | 247                              | 222                | 99                  | 125                    | 1                    |
| 16            | 15        | U/6032-15            | T491U156(1)016A(2)           | 2.4                           | 6.0                      | 1.8                       | 224                              | 202                | 90                  | 125                    | 1                    |
| 16            | 15        | B/3528-21            | T491B156(1)016A(2)           | 2.4                           | 6.0                      | 2.0                       | 192                              | 173                | 77                  | 125                    | 1                    |
| 16            | 15        | A/3216-18            | T491A156(1)016A(2)           | 2.4                           | 8.0                      | 3.5                       | 146                              | 131                | 58                  | 125                    | 1                    |
| 16            | 22        | D/7343-31            | T491D226(1)016A(2)           | 3.5                           | 6.0                      | 0.8                       | 433                              | 390                | 173                 | 125                    | 1                    |
| 16            | 22        | C/6032-28            | T491C226(1)016A(2)           | 3.5                           | 6.0                      | 1.5                       | 262                              | 236                | 105                 | 125                    | 1                    |
| 16            | 22        | U/6032-15            | T491U226(1)016A(2)           | 3.5                           | 10.0                     | 3.0                       | 173                              | 156                | 69                  | 125                    | 1                    |
| 16            | 22        | B/3528-21            | T491B226(1)016A(2)           | 3.5                           | 6.0                      | 2.2                       | 197                              | 177                | 79                  | 125                    | 1                    |
| 16            | 33        | D/7343-31            | T491D336(1)016A(2)           | 5.3                           | 6.0                      | 0.8                       | 433                              | 390                | 173                 | 125                    | 1                    |
| 16            | 33        | C/6032-28            | T491C336(1)016A(2)           | 5.3                           | 6.0                      | 1.2                       | 303                              | 273                | 121                 | 125                    | 1                    |
| 16            | 33        | U/6032-15            | T491U336(1)016A(2)           | 5.3                           | 6.0                      | 1.0                       | 300                              | 270                | 120                 | 125                    | 1                    |
| 16            | 33        | B/3528-21            | T491B336(1)016A(2)           | 5.3                           | 8.0                      | 2.0                       | 206                              | 185                | 82                  | 125                    | 1                    |
| 16            | 47        | D/7343-31            | T491D476(1)016A(2)           | 7.5                           | 6.0                      | 0.8                       | 433                              | 390                | 173                 | 125                    | 1                    |
| 16            | 47        | V/7343-20            | T491V476(1)016A(2)           | 7.5                           | 6.0                      | 0.7                       | 423                              | 381                | 169                 | 125                    | 1                    |
| 16            | 47        | C/6032-28            | T491C476(1)016A(2)           | 7.5                           | 6.0                      | 1.0                       | 332                              | 299                | 133                 | 125                    | 1                    |
| 16            | 68        | V/7343-20            | T491V686(1)016A(2)           | 10.9                          | 6.0                      | 0.7                       | 423                              | 381                | 169                 | 125                    | 1                    |
| 16            | 68        | C/6032-28            | T491C686(1)016AT             | 10.9                          | 6.0                      | 1.0                       | 303                              | 273                | 121                 | 125                    | 1                    |
| VDC @ 85°C    | μF        | KEMET/EIA            | (See below for part options) | μA @ +20°C Maximum/ 5 Minutes | % @ +20°C 120 Hz Maximum | Ω @ +20°C 100 kHz Maximum | mA @ +25°C 100 kHz               | mA @ +85°C 100 kHz | mA @ +125°C 100 kHz | °C                     | Reflow Temp ≤ 260 °C |
| Rated Voltage | Rated Cap | Case Code/ Case Size | KEMET Part Number            | DC Leakage                    | DF                       | ESR                       | Maximum Allowable Ripple Current |                    |                     | Maximum Operating Temp | MSL                  |

(1) To complete KEMET part number, insert M for ±20% or K for ±10%. Designates capacitance tolerance.

(2) To complete KEMET part number, insert T = 100% Matte Tin (Sn) Plated, G = Gold Plated, H = Standard Solder coated (SnPb 5% Pb minimum), N = Non-Magnetic 100% Tin (Sn), M = Non-Magnetic (SnPb). Designates Termination Finish.

Refer to Ordering Information for additional detail.

Higher voltage ratings and tighter tolerance product including ESR may be substituted within the same size at KEMET's option. Voltage substitution will be marked with the higher voltage rating. Substitutions can include better than series.

Table 1 – Ratings &amp; Part Number Reference cont'd

| Rated Voltage | Rated Cap | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage                          | DF                             | ESR                             | Maximum Allowable Ripple Current |                       |                        | Maximum Operating Temp | MSL                     |
|---------------|-----------|-------------------------|------------------------------|-------------------------------------|--------------------------------|---------------------------------|----------------------------------|-----------------------|------------------------|------------------------|-------------------------|
| VDC @ 85°C    | μF        | KEMET/EIA               | (See below for part options) | μA @ +20°C<br>Maximum/<br>5 Minutes | % @ +20°C<br>120 Hz<br>Maximum | Ω @ +20°C<br>100 kHz<br>Maximum | mA @ +25°C<br>100 kHz            | mA @ +85°C<br>100 kHz | mA @ +125°C<br>100 kHz | °C                     | Reflow Temp<br>≤ 260 °C |
| 16            | 68        | W/7343-15               | T491W686(1)016AT             | 10.9                                | 6.0                            | 0.8                             | 474                              | 427                   | 190                    | 125                    | 1                       |
| 16            | 68        | D/7343-31               | T491D686(1)016A(2)           | 10.9                                | 6.0                            | 0.7                             | 463                              | 417                   | 185                    | 125                    | 1                       |
| 16            | 68        | C/6032-28               | T491C686(1)016A(2)           | 10.9                                | 12.0                           | 1.2                             | 303                              | 273                   | 121                    | 125                    | 1                       |
| 16            | 100       | X/7343-43               | T491X107(1)016A(2)           | 16.0                                | 8.0                            | 0.7                             | 486                              | 437                   | 194                    | 125                    | 1                       |
| 16            | 100       | C/6032-28               | T491C107(1)016AT             | 16.0                                | 10.0                           | 1.0                             | 332                              | 299                   | 133                    | 125                    | 1                       |
| 16            | 100       | V/7343-20               | T491V107(1)016A(2)           | 16.0                                | 8.0                            | 0.7                             | 423                              | 381                   | 169                    | 125                    | 1                       |
| 16            | 100       | D/7343-31               | T491D107(1)016A(2)           | 16.0                                | 8.0                            | 0.7                             | 463                              | 417                   | 185                    | 125                    | 1                       |
| 16            | 150       | X/7343-43               | T491X157(1)016A(2)           | 24.0                                | 8.0                            | 0.5                             | 574                              | 517                   | 230                    | 125                    | 1                       |
| 16            | 150       | D/7343-31               | T491D157(1)016A(2)           | 24.0                                | 10.0                           | 0.7                             | 463                              | 417                   | 185                    | 125                    | 1                       |
| 16            | 220       | D/7343-31               | T491D227(1)016A(2)           | 35.2                                | 15.0                           | 0.9                             | 408                              | 367                   | 163                    | 125                    | 1                       |
| 16            | 220       | X/7343-43               | T491X227(1)016A(2)           | 35.2                                | 10.0                           | 0.5                             | 574                              | 517                   | 230                    | 125                    | 1                       |
| 16            | 220       | E/7360-38               | T491E227(1)016A(2)           | 35.2                                | 7.2                            | 0.9                             | 471                              | 424                   | 188                    | 125                    | 1                       |
| 20            | 0.68      | A/3216-18               | T491A684(1)020A(2)           | 0.5                                 | 4.0                            | 12.0                            | 79                               | 71                    | 32                     | 125                    | 1                       |
| 20            | 1         | A/3216-18               | T491A105(1)020A(2)           | 0.5                                 | 4.0                            | 9.0                             | 91                               | 82                    | 36                     | 125                    | 1                       |
| 20            | 1         | S/3216-12               | T491S105(1)020A(2)           | 0.5                                 | 6.0                            | 18.0                            | 58                               | 52                    | 23                     | 125                    | 1                       |
| 20            | 1.5       | A/3216-18               | T491A155(1)020A(2)           | 0.5                                 | 6.0                            | 6.5                             | 107                              | 96                    | 43                     | 125                    | 1                       |
| 20            | 1.5       | S/3216-12               | T491S155(1)020A(2)           | 0.5                                 | 6.0                            | 15.0                            | 63                               | 57                    | 25                     | 125                    | 1                       |
| 20            | 2.2       | B/3528-21               | T491B225(1)020A(2)           | 0.5                                 | 6.0                            | 3.5                             | 156                              | 140                   | 62                     | 125                    | 1                       |
| 20            | 2.2       | A/3216-18               | T491A225(1)020A(2)           | 0.5                                 | 6.0                            | 6.0                             | 104                              | 94                    | 42                     | 125                    | 1                       |
| 20            | 3.3       | B/3528-21               | T491B335(1)020A(2)           | 0.7                                 | 6.0                            | 3.0                             | 168                              | 151                   | 67                     | 125                    | 1                       |
| 20            | 3.3       | A/3216-18               | T491A335(1)020A(2)           | 0.7                                 | 6.0                            | 4.0                             | 129                              | 116                   | 52                     | 125                    | 1                       |
| 20            | 3.3       | T/3528-12               | T491T335(1)020A(2)           | 0.7                                 | 6.0                            | 5.0                             | 118                              | 106                   | 47                     | 125                    | 1                       |
| 20            | 4.7       | C/6032-28               | T491C475(1)020A(2)           | 0.9                                 | 6.0                            | 2.4                             | 214                              | 193                   | 86                     | 125                    | 1                       |
| 20            | 4.7       | B/3528-21               | T491B475(1)020A(2)           | 0.9                                 | 6.0                            | 3.0                             | 168                              | 151                   | 67                     | 125                    | 1                       |
| 20            | 4.7       | A/3216-18               | T491A475(1)020A(2)           | 0.9                                 | 6.0                            | 4.0                             | 137                              | 123                   | 55                     | 125                    | 1                       |
| 20            | 6.8       | C/6032-28               | T491C685(1)020A(2)           | 1.4                                 | 6.0                            | 1.9                             | 241                              | 217                   | 96                     | 125                    | 1                       |
| 20            | 6.8       | U/6032-15               | T491U685(1)020A(2)           | 1.4                                 | 6.0                            | 1.9                             | 218                              | 196                   | 87                     | 125                    | 1                       |
| 20            | 6.8       | B/3528-21               | T491B685(1)020A(2)           | 1.4                                 | 6.0                            | 2.0                             | 206                              | 185                   | 82                     | 125                    | 1                       |
| 20            | 6.8       | A/3216-18               | T491A685(1)020A(2)           | 1.4                                 | 8.0                            | 6.0                             | 112                              | 101                   | 45                     | 125                    | 1                       |
| 20            | 10        | C/6032-28               | T491C106(1)020A(2)           | 2.0                                 | 6.0                            | 1.6                             | 247                              | 222                   | 99                     | 125                    | 1                       |
| 20            | 10        | U/6032-15               | T491U106(1)020A(2)           | 2.0                                 | 6.0                            | 1.8                             | 224                              | 202                   | 90                     | 125                    | 1                       |
| 20            | 10        | B/3528-21               | T491B106(1)020A(2)           | 2.0                                 | 6.0                            | 2.0                             | 201                              | 181                   | 80                     | 125                    | 1                       |
| 20            | 10        | A/3216-18               | T491A106(M)020A(2)           | 2.0                                 | 10.0                           | 5.0                             | 122                              | 110                   | 49                     | 125                    | 1                       |
| 20            | 15        | D/7343-31               | T491D156(1)020A(2)           | 3.0                                 | 6.0                            | 1.0                             | 387                              | 348                   | 155                    | 125                    | 1                       |
| 20            | 15        | B/3528-21               | T491B156(1)020AT             | 3.0                                 | 6.0                            | 2.0                             | 206                              | 185                   | 82                     | 125                    | 1                       |
| 20            | 15        | C/6032-28               | T491C156(1)020A(2)           | 3.0                                 | 6.0                            | 1.7                             | 254                              | 229                   | 102                    | 125                    | 1                       |
| 20            | 22        | D/7343-31               | T491D226(1)020A(2)           | 4.4                                 | 6.0                            | 0.8                             | 433                              | 390                   | 173                    | 125                    | 1                       |
| 20            | 22        | V/7343-20               | T491V226(1)020A(2)           | 4.4                                 | 6.0                            | 0.7                             | 423                              | 381                   | 169                    | 125                    | 1                       |
| 20            | 22        | C/6032-28               | T491C226(1)020A(2)           | 4.4                                 | 6.0                            | 1.2                             | 303                              | 273                   | 121                    | 125                    | 1                       |
| 20            | 22        | B/3528-21               | T491B226(1)020A(2)           | 4.4                                 | 8.0                            | 4.0                             | 146                              | 131                   | 58                     | 125                    | 1                       |
| 20            | 33        | D/7343-31               | T491D336(1)020A(2)           | 6.6                                 | 6.0                            | 0.8                             | 433                              | 390                   | 173                    | 125                    | 1                       |
| 20            | 33        | C/6032-28               | T491C336(M)020A(2)           | 6.6                                 | 6.0                            | 1.2                             | 303                              | 273                   | 121                    | 125                    | 1                       |
| 20            | 33        | V/7343-20               | T491V336(1)020A(2)           | 6.6                                 | 8.0                            | 0.7                             | 423                              | 381                   | 169                    | 125                    | 1                       |
| 20            | 33        | B/3528-21               | T491B336(M)020A(2)           | 6.6                                 | 10.0                           | 4.0                             | 146                              | 131                   | 58                     | 125                    | 1                       |
| 20            | 47        | C/6032-28               | T491C476(1)020A(2)           | 9.4                                 | 6.0                            | 0.9                             | 350                              | 315                   | 140                    | 125                    | 1                       |
| 20            | 47        | X/7343-43               | T491X476(1)020AT             | 9.4                                 | 6.0                            | 0.8                             | 454                              | 409                   | 182                    | 125                    | 1                       |
| VDC @ 85°C    | μF        | KEMET/EIA               | (See below for part options) | μA @ +20°C<br>Maximum/<br>5 Minutes | % @ +20°C<br>120 Hz<br>Maximum | Ω @ +20°C<br>100 kHz<br>Maximum | mA @ +25°C<br>100 kHz            | mA @ +85°C<br>100 kHz | mA @ +125°C<br>100 kHz | °C                     | Reflow Temp<br>≤ 260 °C |
| Rated Voltage | Rated Cap | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage                          | DF                             | ESR                             | Maximum Allowable Ripple Current |                       |                        | Maximum Operating Temp | MSL                     |

(1) To complete KEMET part number, insert M for ±20% or K for ±10%. Designates capacitance tolerance.

(2) To complete KEMET part number, insert T = 100% Matte Tin (Sn) Plated, G = Gold Plated, H = Standard Solder coated (SnPb 5% Pb minimum), N = Non-Magnetic 100% Tin (Sn), M = Non-Magnetic (SnPb). Designates Termination Finish.

Refer to Ordering Information for additional detail.

Higher voltage ratings and tighter tolerance product including ESR may be substituted within the same size at KEMET's option. Voltage substitution will be marked with the higher voltage rating. Substitutions can include better than series.



Table 1 – Ratings &amp; Part Number Reference cont'd

| Rated Voltage | Rated Cap | Case Code/ Case Size | KEMET Part Number            | DC Leakage                    | DF                       | ESR                       | Maximum Allowable Ripple Current |                    |                     | Maximum Operating Temp | MSL                  |
|---------------|-----------|----------------------|------------------------------|-------------------------------|--------------------------|---------------------------|----------------------------------|--------------------|---------------------|------------------------|----------------------|
| VDC @ 85°C    | μF        | KEMET/EIA            | (See below for part options) | μA @ +20°C Maximum/ 5 Minutes | % @ +20°C 120 Hz Maximum | Ω @ +20°C 100 kHz Maximum | mA @ +25°C 100 kHz               | mA @ +85°C 100 kHz | mA @ +125°C 100 kHz | °C                     | Reflow Temp ≤ 260 °C |
| 20            | 47        | D/7343-31            | T491D476(1)020A(2)           | 9.4                           | 6.0                      | 0.7                       | 463                              | 417                | 185                 | 125                    | 1                    |
| 20            | 68        | X/7343-43            | T491X686(1)020A(2)           | 13.6                          | 6.0                      | 0.7                       | 486                              | 437                | 194                 | 125                    | 1                    |
| 20            | 68        | D/7343-31            | T491D686(1)020A(2)           | 13.6                          | 6.0                      | 0.7                       | 463                              | 417                | 185                 | 125                    | 1                    |
| 20            | 100       | X/7343-43            | T491X107(1)020A(2)           | 20.0                          | 8.0                      | 0.5                       | 574                              | 517                | 230                 | 125                    | 1                    |
| 20            | 100       | D/7343-31            | T491D107(1)020AT             | 20.0                          | 8.0                      | 0.9                       | 408                              | 367                | 163                 | 125                    | 1                    |
| 20            | 100       | E/7360-38            | T491E107(1)020A(2)           | 20.0                          | 8.0                      | 0.5                       | 632                              | 569                | 253                 | 125                    | 1                    |
| 20            | 150       | X/7343-43            | T491X157(1)020A(2)           | 30.0                          | 10.0                     | 0.4                       | 642                              | 578                | 257                 | 125                    | 1                    |
| 25            | 0.33      | A/3216-18            | T491A334(1)025A(2)           | 0.5                           | 4.0                      | 15.0                      | 71                               | 64                 | 28                  | 125                    | 1                    |
| 25            | 0.47      | A/3216-18            | T491A474(1)025A(2)           | 0.5                           | 4.0                      | 13.0                      | 76                               | 68                 | 30                  | 125                    | 1                    |
| 25            | 0.68      | A/3216-18            | T491A684(1)025A(2)           | 0.5                           | 4.0                      | 10.0                      | 87                               | 78                 | 35                  | 125                    | 1                    |
| 25            | 1         | B/3528-21            | T491B105(1)025A(2)           | 0.5                           | 4.0                      | 5.0                       | 130                              | 117                | 52                  | 125                    | 1                    |
| 25            | 1         | A/3216-18            | T491A105(1)025A(2)           | 0.5                           | 4.0                      | 8.0                       | 97                               | 87                 | 39                  | 125                    | 1                    |
| 25            | 1         | S/3216-12            | T491S105(1)025A(2)           | 0.5                           | 6.0                      | 18.0                      | 58                               | 52                 | 23                  | 125                    | 1                    |
| 25            | 1.5       | B/3528-21            | T491B155(1)025A(2)           | 0.5                           | 6.0                      | 5.0                       | 130                              | 117                | 52                  | 125                    | 1                    |
| 25            | 1.5       | A/3216-18            | T491A155(1)025A(2)           | 0.5                           | 6.0                      | 7.0                       | 104                              | 94                 | 42                  | 125                    | 1                    |
| 25            | 2.2       | C/6032-28            | T491C225(1)025A(2)           | 0.6                           | 6.0                      | 3.5                       | 177                              | 159                | 71                  | 125                    | 1                    |
| 25            | 2.2       | A/3216-18            | T491A225(1)025A(2)           | 0.6                           | 6.0                      | 7.0                       | 104                              | 94                 | 42                  | 125                    | 1                    |
| 25            | 2.2       | B/3528-21            | T491B225(1)025A(2)           | 0.6                           | 6.0                      | 4.5                       | 137                              | 123                | 55                  | 125                    | 1                    |
| 25            | 3.3       | C/6032-28            | T491C335(1)025A(2)           | 0.8                           | 6.0                      | 2.5                       | 210                              | 189                | 84                  | 125                    | 1                    |
| 25            | 3.3       | A/3216-18            | T491A335(1)025A(2)           | 0.8                           | 6.0                      | 7.0                       | 104                              | 94                 | 42                  | 125                    | 1                    |
| 25            | 3.3       | B/3528-21            | T491B335(1)025A(2)           | 0.8                           | 6.0                      | 3.5                       | 156                              | 140                | 62                  | 125                    | 1                    |
| 25            | 4.7       | C/6032-28            | T491C475(1)025A(2)           | 1.2                           | 6.0                      | 2.3                       | 214                              | 193                | 86                  | 125                    | 1                    |
| 25            | 4.7       | B/3528-21            | T491B475(1)025A(2)           | 1.2                           | 6.0                      | 1.5                       | 238                              | 214                | 95                  | 125                    | 1                    |
| 25            | 4.7       | A/3216-18            | T491A475(M)025A(2)           | 1.2                           | 8.0                      | 6.0                       | 112                              | 101                | 45                  | 125                    | 1                    |
| 25            | 6.8       | D/7343-31            | T491D685(1)025A(2)           | 1.7                           | 6.0                      | 1.8                       | 289                              | 260                | 116                 | 125                    | 1                    |
| 25            | 6.8       | C/6032-28            | T491C685(1)025A(2)           | 1.7                           | 6.0                      | 1.9                       | 241                              | 217                | 96                  | 125                    | 1                    |
| 25            | 6.8       | B/3528-21            | T491B685(1)025A(2)           | 1.7                           | 6.0                      | 2.8                       | 174                              | 157                | 70                  | 125                    | 1                    |
| 25            | 10        | D/7343-31            | T491D106(1)025A(2)           | 2.5                           | 6.0                      | 1.0                       | 387                              | 348                | 155                 | 125                    | 1                    |
| 25            | 10        | C/6032-28            | T491C106(1)025A(2)           | 2.5                           | 6.0                      | 1.5                       | 271                              | 244                | 108                 | 125                    | 1                    |
| 25            | 10        | B/3528-21            | T491B106(1)025A(2)           | 2.5                           | 6.0                      | 2.0                       | 168                              | 151                | 67                  | 125                    | 1                    |
| 25            | 15        | D/7343-31            | T491D156(1)025A(2)           | 3.8                           | 6.0                      | 1.0                       | 387                              | 348                | 155                 | 125                    | 1                    |
| 25            | 15        | V/7343-20            | T491V156(1)025AT             | 3.8                           | 6.0                      | 1.0                       | 354                              | 319                | 142                 | 125                    | 1                    |
| 25            | 15        | C/6032-28            | T491C156(1)025A(2)           | 3.8                           | 6.0                      | 1.5                       | 271                              | 244                | 108                 | 125                    | 1                    |
| 25            | 15        | B/3528-21            | T491B156(1)025A(2)           | 3.8                           | 8.0                      | 4.0                       | 146                              | 131                | 58                  | 125                    | 1                    |
| 25            | 22        | D/7343-31            | T491D226(1)025A(2)           | 5.5                           | 6.0                      | 0.8                       | 433                              | 390                | 173                 | 125                    | 1                    |
| 25            | 22        | C/6032-28            | T491C226(1)025A(2)           | 5.5                           | 6.0                      | 1.0                       | 280                              | 252                | 112                 | 125                    | 1                    |
| 25            | 22        | V/7343-20            | T491V226(1)025A(2)           | 5.5                           | 6.0                      | 0.7                       | 423                              | 381                | 169                 | 125                    | 1                    |
| 25            | 33        | X/7343-43            | T491X336(1)025A(2)           | 8.3                           | 6.0                      | 0.7                       | 486                              | 437                | 194                 | 125                    | 1                    |
| 25            | 33        | D/7343-31            | T491D336(1)025A(2)           | 8.3                           | 6.0                      | 0.7                       | 463                              | 417                | 185                 | 125                    | 1                    |
| 25            | 33        | C/6032-28            | T491C336(1)025A(2)           | 8.3                           | 6.0                      | 0.9                       | 350                              | 315                | 140                 | 125                    | 1                    |
| 25            | 47        | X/7343-43            | T491X476(1)025A(2)           | 11.8                          | 6.0                      | 0.7                       | 486                              | 437                | 194                 | 125                    | 1                    |
| 25            | 47        | D/7343-31            | T491D476(1)025A(2)           | 11.8                          | 6.0                      | 0.7                       | 463                              | 417                | 185                 | 125                    | 1                    |
| 25            | 68        | X/7343-43            | T491X686(1)025A(2)           | 17.0                          | 6.0                      | 0.7                       | 486                              | 437                | 194                 | 125                    | 1                    |
| 25            | 68        | D/7343-31            | T491D686(M)025A(2)           | 17.0                          | 10.0                     | 0.7                       | 463                              | 417                | 185                 | 125                    | 1                    |
| 25            | 100       | X/7343-43            | T491X107(1)025A(2)           | 25.0                          | 8.0                      | 0.3                       | 742                              | 668                | 297                 | 125                    | 1                    |
| 35            | 0.1       | A/3216-18            | T491A104(1)035A(2)           | 0.5                           | 4.0                      | 20.0                      | 61                               | 55                 | 24                  | 125                    | 1                    |
| VDC @ 85°C    | μF        | KEMET/EIA            | (See below for part options) | μA @ +20°C Maximum/ 5 Minutes | % @ +20°C 120 Hz Maximum | Ω @ +20°C 100 kHz Maximum | mA @ +25°C 100 kHz               | mA @ +85°C 100 kHz | mA @ +125°C 100 kHz | °C                     | Reflow Temp ≤ 260 °C |
| Rated Voltage | Rated Cap | Case Code/ Case Size | KEMET Part Number            | DC Leakage                    | DF                       | ESR                       | Maximum Allowable Ripple Current |                    |                     | Maximum Operating Temp | MSL                  |

(1) To complete KEMET part number, insert M for ±20% or K for ±10%. Designates capacitance tolerance.

(2) To complete KEMET part number, insert T = 100% Matte Tin (Sn) Plated, G = Gold Plated, H = Standard Solder coated (SnPb 5% Pb minimum), N = Non-Magnetic 100% Tin (Sn), M = Non-Magnetic (SnPb). Designates Termination Finish.

Refer to Ordering Information for additional detail.

Higher voltage ratings and tighter tolerance product including ESR may be substituted within the same size at KEMET's option. Voltage substitution will be marked with the higher voltage rating. Substitutions can include better than series.

Table 1 – Ratings &amp; Part Number Reference cont'd

| Rated Voltage | Rated Cap | Case Code/ Case Size | KEMET Part Number            | DC Leakage                    | DF                       | ESR                       | Maximum Allowable Ripple Current |                    |                     | Maximum Operating Temp | MSL                  |
|---------------|-----------|----------------------|------------------------------|-------------------------------|--------------------------|---------------------------|----------------------------------|--------------------|---------------------|------------------------|----------------------|
| VDC @ 85°C    | μF        | KEMET/EIA            | (See below for part options) | μA @ +20°C Maximum/ 5 Minutes | % @ +20°C 120 Hz Maximum | Ω @ +20°C 100 kHz Maximum | mA @ +25°C 100 kHz               | mA @ +85°C 100 kHz | mA @ +125°C 100 kHz | °C                     | Reflow Temp ≤ 260 °C |
| 35            | 0.15      | A/3216-18            | T491A154(1)035A(2)           | 0.5                           | 4.0                      | 19.0                      | 63                               | 57                 | 25                  | 125                    | 1                    |
| 35            | 0.22      | A/3216-18            | T491A224(1)035A(2)           | 0.5                           | 4.0                      | 18.0                      | 65                               | 59                 | 26                  | 125                    | 1                    |
| 35            | 0.33      | A/3216-18            | T491A334(1)035A(2)           | 0.5                           | 4.0                      | 15.0                      | 71                               | 64                 | 28                  | 125                    | 1                    |
| 35            | 0.47      | B/3528-21            | T491B474(1)035A(2)           | 0.5                           | 4.0                      | 8.0                       | 103                              | 93                 | 41                  | 125                    | 1                    |
| 35            | 0.47      | A/3216-18            | T491A474(1)035A(2)           | 0.5                           | 4.0                      | 11.0                      | 79                               | 71                 | 32                  | 125                    | 1                    |
| 35            | 0.68      | B/3528-21            | T491B684(1)035A(2)           | 0.5                           | 4.0                      | 6.5                       | 114                              | 103                | 46                  | 125                    | 1                    |
| 35            | 0.68      | A/3216-18            | T491A684(1)035A(2)           | 0.5                           | 4.0                      | 8.0                       | 97                               | 87                 | 39                  | 125                    | 1                    |
| 35            | 1         | B/3528-21            | T491B105(1)035A(2)           | 0.5                           | 4.0                      | 5.0                       | 130                              | 117                | 52                  | 125                    | 1                    |
| 35            | 1         | A/3216-18            | T491A105(1)035A(2)           | 0.5                           | 4.0                      | 7.0                       | 100                              | 90                 | 40                  | 125                    | 1                    |
| 35            | 1.5       | A/3216-18            | T491A155(1)035A(2)           | 0.5                           | 6.0                      | 7.0                       | 104                              | 94                 | 42                  | 125                    | 1                    |
| 35            | 1.5       | C/6032-28            | T491C155(1)035A(2)           | 0.5                           | 6.0                      | 4.5                       | 156                              | 140                | 62                  | 125                    | 1                    |
| 35            | 1.5       | B/3528-21            | T491B155(1)035A(2)           | 0.5                           | 6.0                      | 5.0                       | 130                              | 117                | 52                  | 125                    | 1                    |
| 35            | 2.2       | C/6032-28            | T491C225(1)035A(2)           | 0.8                           | 6.0                      | 3.2                       | 185                              | 167                | 74                  | 125                    | 1                    |
| 35            | 2.2       | A/3216-18            | T491A225(1)035AT             | 0.8                           | 6.0                      | 4.0                       | 129                              | 116                | 52                  | 125                    | 1                    |
| 35            | 2.2       | B/3528-21            | T491B225(1)035A(2)           | 0.8                           | 6.0                      | 4.0                       | 146                              | 131                | 58                  | 125                    | 1                    |
| 35            | 3.3       | C/6032-28            | T491C335(1)035A(2)           | 1.2                           | 6.0                      | 2.0                       | 235                              | 212                | 94                  | 125                    | 1                    |
| 35            | 3.3       | B/3528-21            | T491B335(1)035A(2)           | 1.2                           | 6.0                      | 3.5                       | 156                              | 140                | 62                  | 125                    | 1                    |
| 35            | 4.7       | D/7343-31            | T491D475(1)035A(2)           | 1.6                           | 6.0                      | 1.5                       | 316                              | 284                | 126                 | 125                    | 1                    |
| 35            | 4.7       | B/3528-21            | T491B475(1)035AT             | 1.6                           | 6.0                      | 3.0                       | 166                              | 149                | 66                  | 125                    | 1                    |
| 35            | 4.7       | C/6032-28            | T491C475(1)035A(2)           | 1.6                           | 6.0                      | 2.0                       | 224                              | 202                | 90                  | 125                    | 1                    |
| 35            | 6.8       | D/7343-31            | T491D685(1)035A(2)           | 2.4                           | 6.0                      | 1.2                       | 340                              | 306                | 136                 | 125                    | 1                    |
| 35            | 6.8       | V/7343-20            | T491V685(1)035AT             | 2.4                           | 6.0                      | 1.2                       | 323                              | 291                | 129                 | 125                    | 1                    |
| 35            | 6.8       | C/6032-28            | T491C685(1)035A(2)           | 2.4                           | 6.0                      | 1.8                       | 247                              | 222                | 99                  | 125                    | 1                    |
| 35            | 10        | D/7343-31            | T491D106(1)035A(2)           | 3.5                           | 6.0                      | 1.0                       | 387                              | 348                | 155                 | 125                    | 1                    |
| 35            | 10        | C/6032-28            | T491C106(1)035A(2)           | 3.5                           | 6.0                      | 1.6                       | 262                              | 236                | 105                 | 125                    | 1                    |
| 35            | 10        | V/7343-20            | T491V106(1)035A(2)           | 3.5                           | 6.0                      | 1.0                       | 250                              | 225                | 100                 | 125                    | 1                    |
| 35            | 15        | C/6032-28            | T491C156(1)035A(2)           | 5.3                           | 6.0                      | 1.0                       | 332                              | 299                | 133                 | 125                    | 1                    |
| 35            | 15        | X/7343-43            | T491X156(1)035A(2)           | 5.3                           | 6.0                      | 0.9                       | 428                              | 385                | 171                 | 125                    | 1                    |
| 35            | 15        | D/7343-31            | T491D156(1)035A(2)           | 5.3                           | 6.0                      | 0.8                       | 433                              | 390                | 173                 | 125                    | 1                    |
| 35            | 22        | X/7343-43            | T491X226(1)035A(2)           | 7.7                           | 6.0                      | 0.7                       | 486                              | 437                | 194                 | 125                    | 1                    |
| 35            | 22        | D/7343-31            | T491D226(1)035A(2)           | 7.7                           | 6.0                      | 0.7                       | 463                              | 417                | 185                 | 125                    | 1                    |
| 35            | 33        | X/7343-43            | T491X336(1)035A(2)           | 11.6                          | 6.0                      | 0.6                       | 524                              | 472                | 210                 | 125                    | 1                    |
| 35            | 33        | D/7343-31            | T491D336(1)035A(2)           | 11.6                          | 6.0                      | 0.6                       | 500                              | 450                | 200                 | 125                    | 1                    |
| 35            | 47        | X/7343-43            | T491X476(1)035A(2)           | 16.5                          | 6.0                      | 0.6                       | 524                              | 472                | 210                 | 125                    | 1                    |
| 35            | 47        | E/7360-38            | T491E476(1)035A(2)           | 16.5                          | 10.0                     | 0.5                       | 632                              | 569                | 253                 | 125                    | 1                    |
| 50            | 0.1       | A/3216-18            | T491A104(1)050A(2)           | 0.5                           | 4.0                      | 20.0                      | 61                               | 55                 | 24                  | 125                    | 1                    |
| 50            | 0.15      | B/3528-21            | T491B154(1)050A(2)           | 0.5                           | 4.0                      | 16.0                      | 73                               | 66                 | 29                  | 125                    | 1                    |
| 50            | 0.15      | A/3216-18            | T491A154(1)050A(2)           | 0.5                           | 4.0                      | 15.0                      | 71                               | 64                 | 28                  | 125                    | 1                    |
| 50            | 0.22      | B/3528-21            | T491B224(1)050A(2)           | 0.5                           | 4.0                      | 14.0                      | 78                               | 70                 | 31                  | 125                    | 1                    |
| 50            | 0.22      | A/3216-18            | T491A224(1)050AT             | 0.5                           | 4.0                      | 18.0                      | 65                               | 59                 | 26                  | 125                    | 1                    |
| 50            | 0.33      | A/3216-18            | T491A334(1)050A(2)           | 0.5                           | 4.0                      | 14.0                      | 73                               | 66                 | 29                  | 125                    | 1                    |
| 50            | 0.33      | B/3528-21            | T491B334(1)050A(2)           | 0.5                           | 4.0                      | 10.0                      | 92                               | 83                 | 37                  | 125                    | 1                    |
| 50            | 0.47      | A/3216-18            | T491A474(1)050A(2)           | 0.5                           | 4.0                      | 9.5                       | 280                              | 253                | 112                 | 125                    | 1                    |
| 50            | 0.47      | C/6032-28            | T491C474(1)050A(2)           | 0.5                           | 4.0                      | 7.2                       | 117                              | 105                | 47                  | 125                    | 1                    |
| 50            | 0.47      | B/3528-21            | T491B474(1)050A(2)           | 0.5                           | 4.0                      | 9.0                       | 97                               | 87                 | 39                  | 125                    | 1                    |
| 50            | 0.68      | A/3216-18            | T491A684(1)050A(2)           | 0.5                           | 4.0                      | 8.0                       | 97                               | 87                 | 39                  | 125                    | 1                    |
| VDC @ 85°C    | μF        | KEMET/EIA            | (See below for part options) | μA @ +20°C Maximum/ 5 Minutes | % @ +20°C 120 Hz Maximum | Ω @ +20°C 100 kHz Maximum | mA @ +25°C 100 kHz               | mA @ +85°C 100 kHz | mA @ +125°C 100 kHz | °C                     | Reflow Temp ≤ 260 °C |
| Rated Voltage | Rated Cap | Case Code/ Case Size | KEMET Part Number            | DC Leakage                    | DF                       | ESR                       | Maximum Allowable Ripple Current |                    |                     | Maximum Operating Temp | MSL                  |

(1) To complete KEMET part number, insert M for ±20% or K for ±10%. Designates capacitance tolerance.

(2) To complete KEMET part number, insert T = 100% Matte Tin (Sn) Plated, G = Gold Plated, H = Standard Solder coated (SnPb 5% Pb minimum), N = Non-Magnetic 100% Tin (Sn), M = Non-Magnetic (SnPb). Designates Termination Finish.

Refer to Ordering Information for additional detail.

Higher voltage ratings and tighter tolerance product including ESR may be substituted within the same size at KEMET's option. Voltage substitution will be marked with the higher voltage rating. Substitutions can include better than series.



**Table 1 – Ratings & Part Number Reference cont'd**

| Rated Voltage | Rated Cap | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage                       | DF                       | ESR                       | Maximum Allowable Ripple Current |                    |                     | Maximum Operating Temp | MSL                  |
|---------------|-----------|-------------------------|------------------------------|----------------------------------|--------------------------|---------------------------|----------------------------------|--------------------|---------------------|------------------------|----------------------|
| VDC @ 85°C    | μF        | KEMET/EIA               | (See below for part options) | μA @ +20°C Maximum/<br>5 Minutes | % @ +20°C 120 Hz Maximum | Ω @ +20°C 100 kHz Maximum | mA @ +25°C 100 kHz               | mA @ +85°C 100 kHz | mA @ +125°C 100 kHz | °C                     | Reflow Temp ≤ 260 °C |
| 50            | 0.68      | C/6032-28               | T491C684(1)050A(2)           | 0.5                              | 4.0                      | 6.4                       | 125                              | 113                | 50                  | 125                    | 1                    |
| 50            | 0.68      | B/3528-21               | T491B684(1)050A(2)           | 0.5                              | 4.0                      | 8.0                       | 103                              | 93                 | 41                  | 125                    | 1                    |
| 50            | 1         | A/3216-18               | T491A105(1)050A(2)           | 0.5                              | 4.0                      | 7.0                       | 104                              | 94                 | 42                  | 125                    | 1                    |
| 50            | 1         | C/6032-28               | T491C105(1)050A(2)           | 0.5                              | 4.0                      | 4.8                       | 148                              | 133                | 59                  | 125                    | 1                    |
| 50            | 1         | B/3528-21               | T491B105(1)050A(2)           | 0.5                              | 6.0                      | 6.0                       | 119                              | 107                | 48                  | 125                    | 1                    |
| 50            | 1         | V/7343-20               | T491V105(1)050A(2)           | 0.5                              | 4.0                      | 6.0                       | 144                              | 130                | 58                  | 125                    | 1                    |
| 50            | 1.5       | D/7343-31               | T491D155(1)050A(2)           | 0.8                              | 6.0                      | 3.5                       | 207                              | 186                | 83                  | 125                    | 1                    |
| 50            | 1.5       | C/6032-28               | T491C155(1)050A(2)           | 0.8                              | 6.0                      | 4.0                       | 166                              | 149                | 66                  | 125                    | 1                    |
| 50            | 2.2       | D/7343-31               | T491D225(1)050A(2)           | 1.1                              | 6.0                      | 2.5                       | 245                              | 221                | 98                  | 125                    | 1                    |
| 50            | 2.2       | C/6032-28               | T491C225(1)050A(2)           | 1.1                              | 6.0                      | 3.0                       | 191                              | 172                | 76                  | 125                    | 1                    |
| 50            | 3.3       | C/6032-28               | T491C335(1)050AT             | 1.7                              | 6.0                      | 2.0                       | 235                              | 212                | 94                  | 125                    | 1                    |
| 50            | 3.3       | D/7343-31               | T491D335(1)050A(2)           | 1.7                              | 6.0                      | 1.6                       | 274                              | 247                | 110                 | 125                    | 1                    |
| 50            | 4.7       | D/7343-31               | T491D475(1)050A(2)           | 2.4                              | 6.0                      | 1.2                       | 354                              | 319                | 142                 | 125                    | 1                    |
| 50            | 6.8       | X/7343-43               | T491X685(1)050A(2)           | 3.4                              | 6.0                      | 0.8                       | 406                              | 365                | 162                 | 125                    | 1                    |
| 50            | 6.8       | D/7343-31               | T491D685(1)050A(2)           | 3.4                              | 6.0                      | 0.8                       | 387                              | 348                | 155                 | 125                    | 1                    |
| 50            | 10        | X/7343-43               | T491X106(1)050A(2)           | 5.0                              | 6.0                      | 0.7                       | 486                              | 437                | 194                 | 125                    | 1                    |
| 50            | 10        | D/7343-31               | T491D106(1)050A(2)           | 5.0                              | 6.0                      | 0.8                       | 433                              | 390                | 173                 | 125                    | 1                    |
| 50            | 15        | X/7343-43               | T491X156(1)050A(2)           | 7.5                              | 8.0                      | 0.7                       | 486                              | 437                | 194                 | 125                    | 1                    |
| 50            | 22        | X/7343-43               | T491X226(1)050A(2)           | 11.0                             | 10.0                     | 0.6                       | 524                              | 472                | 210                 | 125                    | 1                    |
| VDC @ 85°C    | μF        | KEMET/EIA               | (See below for part options) | μA @ +20°C Maximum/<br>5 Minutes | % @ +20°C 120 Hz Maximum | Ω @ +20°C 100 kHz Maximum | mA @ +25°C 100 kHz               | mA @ +85°C 100 kHz | mA @ +125°C 100 kHz | °C                     | Reflow Temp ≤ 260 °C |
| Rated Voltage | Rated Cap | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage                       | DF                       | ESR                       | Maximum Allowable Ripple Current |                    |                     | Maximum Operating Temp | MSL                  |

(1) To complete KEMET part number, insert M for ±20% or K for ±10%. Designates capacitance tolerance.


(2) To complete KEMET part number, insert T = 100% Matte Tin (Sn) Plated, G = Gold Plated, H = Standard Solder coated (SnPb 5% Pb minimum), N = Non-Magnetic 100% Tin (Sn), M = Non-Magnetic (SnPb). Designates Termination Finish.

Refer to Ordering Information for additional detail.

Higher voltage ratings and tighter tolerance product including ESR may be substituted within the same size at KEMET's option. Voltage substitution will be marked with the higher voltage rating. Substitutions can include better than series.

## Recommended Voltage Derating Guidelines

|                                                 | -55°C to 85°C         | 85°C to 125°C         |
|-------------------------------------------------|-----------------------|-----------------------|
| % Change in Working DC Voltage with Temperature | V <sub>R</sub>        | 67% of V <sub>R</sub> |
| Recommended Maximum Application Voltage         | 50% of V <sub>R</sub> | 33% of V <sub>R</sub> |

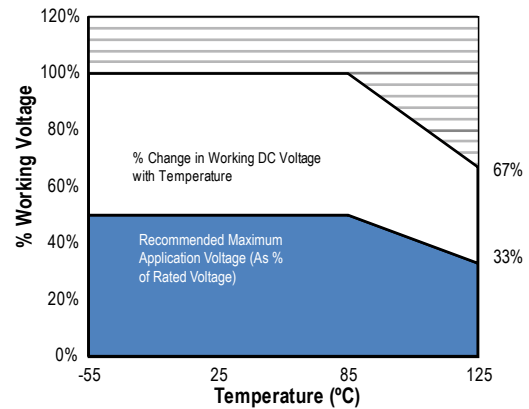

## Ripple Current/Ripple Voltage

Permissible AC ripple voltage and current are related to equivalent series resistance (ESR) and the power dissipation capabilities of the device. Permissible AC ripple voltage which may be applied is limited by two criteria:

1. The positive peak AC voltage plus the DC bias voltage, if any, must not exceed the DC voltage rating of the capacitor.
2. The negative peak AC voltage in combination with bias voltage, if any, must not exceed the allowable limits specified for reverse voltage. See the Reverse Voltage section for allowable limits.

The maximum power dissipation by case size can be determined using the table at right. The maximum power dissipation rating stated in the table must be reduced with increasing environmental operating temperatures. Refer to the table below for temperature compensation requirements.

| Temperature Compensation Multipliers<br>for Maximum Ripple Current |          |           |
|--------------------------------------------------------------------|----------|-----------|
| T ≤ 25°C                                                           | T ≤ 85°C | T ≤ 125°C |
| 1.00                                                               | 0.90     | 0.40      |

T = Environmental Temperature

| KEMET<br>Case Code | EIA<br>Case Code | Maximum Power<br>Dissipation (P max)<br>mWatts @ 25°C<br>w/+20°C Rise |
|--------------------|------------------|-----------------------------------------------------------------------|
| A                  | 3216-18          | 75                                                                    |
| B                  | 3528-21          | 85                                                                    |
| C                  | 6032-28          | 110                                                                   |
| D                  | 7343-31          | 150                                                                   |
| X                  | 7343-43          | 165                                                                   |
| E                  | 7360-38          | 200                                                                   |
| S                  | 3216-12          | 60                                                                    |
| T                  | 3528-12          | 70                                                                    |
| U                  | 6032-15          | 90                                                                    |
| V                  | 7343-20          | 125                                                                   |
| W                  | 7343-15          | 180                                                                   |
| T510X              | 7343-43          | 270                                                                   |
| T510E              | 7360-38          | 285                                                                   |

The maximum power dissipation rating must be reduced with increasing environmental operating temperatures. Refer to the Temperature Compensation Multiplier table for details.

Using the P max of the device, the maximum allowable rms ripple current or voltage may be determined.

$$I(max) = \sqrt{P_{max}/R}$$

$$E(max) = Z \sqrt{P_{max}/R}$$

I = rms ripple current (amperes)

E = rms ripple voltage (volts)

P max = maximum power dissipation (watts)

R = ESR at specified frequency (ohms)

Z = Impedance at specified frequency (ohms)

## Reverse Voltage

Solid tantalum capacitors are polar devices and may be permanently damaged or destroyed if connected with the wrong polarity. The positive terminal is identified on the capacitor body by a stripe plus in some cases a beveled edge. A small degree of transient reverse voltage is permissible for short periods per the table. The capacitors should not be operated continuously in reverse mode, even within these limits.

| Temperature | Permissible Transient Reverse Voltage |
|-------------|---------------------------------------|
| 25°C        | 15% of Rated Voltage                  |
| 85°C        | 5% of Rated Voltage                   |
| 125°C       | 1% of Rated Voltage                   |

**Table 2 – Land Dimensions/Courtyard**

| KEMET          | Metric Size Code | Density Level A:<br>Maximum (Most) Land Protrusion (mm) |      |      |       |      | Density Level B:<br>Median (Nominal) Land Protrusion (mm) |      |      |      |      | Density Level C:<br>Minimum (Least) Land Protrusion (mm) |      |      |      |      |
|----------------|------------------|---------------------------------------------------------|------|------|-------|------|-----------------------------------------------------------|------|------|------|------|----------------------------------------------------------|------|------|------|------|
|                |                  | W                                                       | L    | S    | V1    | V2   | W                                                         | L    | S    | V1   | V2   | W                                                        | L    | S    | V1   | V2   |
| A              | 3216–18          | 1.35                                                    | 2.20 | 0.62 | 6.02  | 2.80 | 1.23                                                      | 1.80 | 0.82 | 4.92 | 2.30 | 1.13                                                     | 1.42 | 0.98 | 4.06 | 2.04 |
| B              | 3528–21          | 2.35                                                    | 2.21 | 0.92 | 6.32  | 4.00 | 2.23                                                      | 1.80 | 1.12 | 5.22 | 3.50 | 2.13                                                     | 1.42 | 1.28 | 4.36 | 3.24 |
| C              | 6032–25          | 2.35                                                    | 2.77 | 2.37 | 8.92  | 4.50 | 2.23                                                      | 2.37 | 2.57 | 7.82 | 4.00 | 2.13                                                     | 1.99 | 2.73 | 6.96 | 3.74 |
| D              | 7343–31          | 2.55                                                    | 2.77 | 3.67 | 10.22 | 5.60 | 2.43                                                      | 2.37 | 3.87 | 9.12 | 5.10 | 2.33                                                     | 1.99 | 4.03 | 8.26 | 4.84 |
| E <sup>1</sup> | 7360–38          | 4.25                                                    | 2.77 | 3.67 | 10.22 | 7.30 | 4.13                                                      | 2.37 | 3.87 | 9.12 | 6.80 | 4.03                                                     | 1.99 | 4.03 | 8.26 | 6.54 |
| S <sup>2</sup> | 3216–12          | 1.35                                                    | 2.20 | 0.62 | 6.02  | 2.80 | 1.23                                                      | 1.80 | 0.82 | 4.92 | 2.30 | 1.13                                                     | 1.42 | 0.98 | 4.06 | 2.04 |
| T              | 3528–12          | 2.35                                                    | 2.20 | 0.92 | 6.32  | 4.00 | 2.23                                                      | 1.80 | 1.12 | 5.22 | 3.50 | 2.13                                                     | 1.42 | 1.28 | 4.36 | 3.24 |
| U              | 6032–15          | 2.35                                                    | 2.77 | 2.37 | 8.92  | 4.50 | 2.23                                                      | 2.37 | 2.57 | 7.82 | 4.00 | 2.13                                                     | 1.99 | 2.73 | 6.96 | 3.74 |
| V              | 7343–20          | 2.55                                                    | 2.77 | 3.67 | 10.22 | 5.60 | 2.43                                                      | 2.37 | 3.87 | 9.12 | 5.10 | 2.33                                                     | 1.99 | 4.03 | 8.26 | 4.84 |
| W              | 7343–15          | 2.55                                                    | 2.77 | 3.67 | 10.22 | 5.60 | 2.43                                                      | 2.37 | 3.87 | 9.12 | 5.10 | 2.33                                                     | 1.99 | 4.03 | 8.26 | 4.84 |
| X <sup>1</sup> | 7343–43          | 2.55                                                    | 2.77 | 3.67 | 10.22 | 5.60 | 2.43                                                      | 2.37 | 3.87 | 9.12 | 5.10 | 2.33                                                     | 1.99 | 4.03 | 8.26 | 4.84 |


**Density Level A:** For low-density product applications. Recommended for wave solder applications and provides a wider process window for reflow solder processes.

**Density Level B:** For products with a moderate level of component density. Provides a robust solder attachment condition for reflow solder processes.

**Density Level C:** For high component density product applications. Before adapting the minimum land pattern variations the user should perform qualification testing based on the conditions outlined in IPC standard 7351 (IPC-7351).

<sup>1</sup> Height of these chips may create problems in wave soldering.

<sup>2</sup> Land pattern geometry is too small for silkscreen outline.

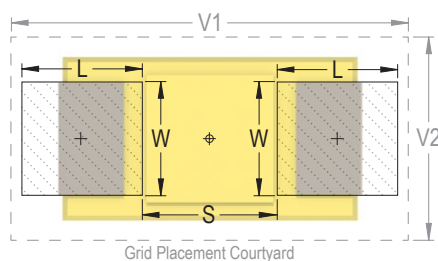

## Soldering Process

KEMET's families of surface mount capacitors are compatible with wave (single or dual), convection, IR, or vapor phase reflow techniques. Preheating of these components is recommended to avoid extreme thermal stress. KEMET's recommended profile conditions for convection and IR reflow reflect the profile conditions of the IPC/J-STD-020D standard for moisture sensitivity testing. The devices can safely withstand a maximum of three reflow passes at these conditions.

Please note that although the X/7343-43 case size can withstand wave soldering, the tall profile (4.3 mm maximum) dictates care in wave process development.

Hand soldering should be performed with care due to the difficulty in process control. If performed, care should be taken to avoid contact of the soldering iron to the molded case. The iron should be used to heat the solder pad, applying solder between the pad and the termination, until reflow occurs. Once reflow occurs, the iron should be removed immediately. "Wiping" the edges of a chip and heating the top surface is not recommended.


During typical reflow operations, a slight darkening of the gold-colored epoxy may be observed. This slight darkening is normal and not harmful to the product. Marking permanency is not affected by this change.

| Profile Feature                                          | SnPb Assembly       | Pb-Free Assembly    |
|----------------------------------------------------------|---------------------|---------------------|
| Preheat/Soak                                             |                     |                     |
| Temperature Minimum ( $T_{\text{min}}$ )                 | 100°C               | 150°C               |
| Temperature Maximum ( $T_{\text{max}}$ )                 | 150°C               | 200°C               |
| Time ( $t_s$ ) from $T_{\text{min}}$ to $T_{\text{max}}$ | 60 – 120 seconds    | 60 – 120 seconds    |
| Ramp-up Rate ( $T_L$ to $T_P$ )                          | 3°C/seconds maximum | 3°C/seconds maximum |
| Liquidous Temperature ( $T_L$ )                          | 183°C               | 217°C               |
| Time Above Liquidous ( $t_L$ )                           | 60 – 150 seconds    | 60 – 150 seconds    |
| Peak Temperature ( $T_P$ )                               | 220°C*<br>235°C**   | 250°C*<br>260°C**   |
| Time within 5°C of Maximum Peak Temperature ( $t_p$ )    | 20 seconds maximum  | 30 seconds maximum  |
| Ramp-down Rate ( $T_P$ to $T_L$ )                        | 6°C/seconds maximum | 6°C/seconds maximum |
| Time 25°C to Peak Temperature                            | 6 minutes maximum   | 8 minutes maximum   |

*Note: All temperatures refer to the center of the package, measured on the package body surface that is facing up during assembly reflow.*

\*Case Size D, E, P, Y, and X


\*\*Case Size A, B, C, H, I, K, M, R, S, T, U, V, W, and Z

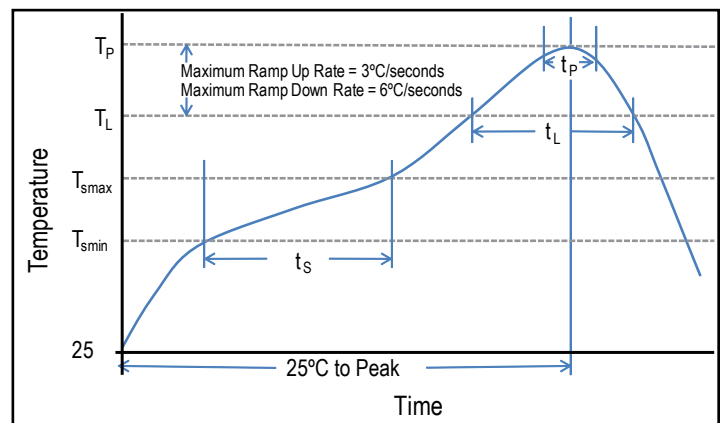


## Storage

Tantalum chip capacitors should be stored in normal working environments. While the chips themselves are quite robust in other environments, solderability will be degraded by exposure to high temperatures, high humidity, corrosive atmospheres, and long term storage. In addition, packaging materials will be degraded by high temperature—reels may soften or warp and tape peel force may increase. KEMET recommends that maximum storage temperature not exceed 40°C and maximum storage humidity not exceed 60% relative humidity. Temperature fluctuations should be minimized to avoid condensation on the parts and atmospheres should be free of chlorine and sulphur bearing compounds. For optimized solderability chip stock should be used promptly, preferably within three years of receipt.

## Construction

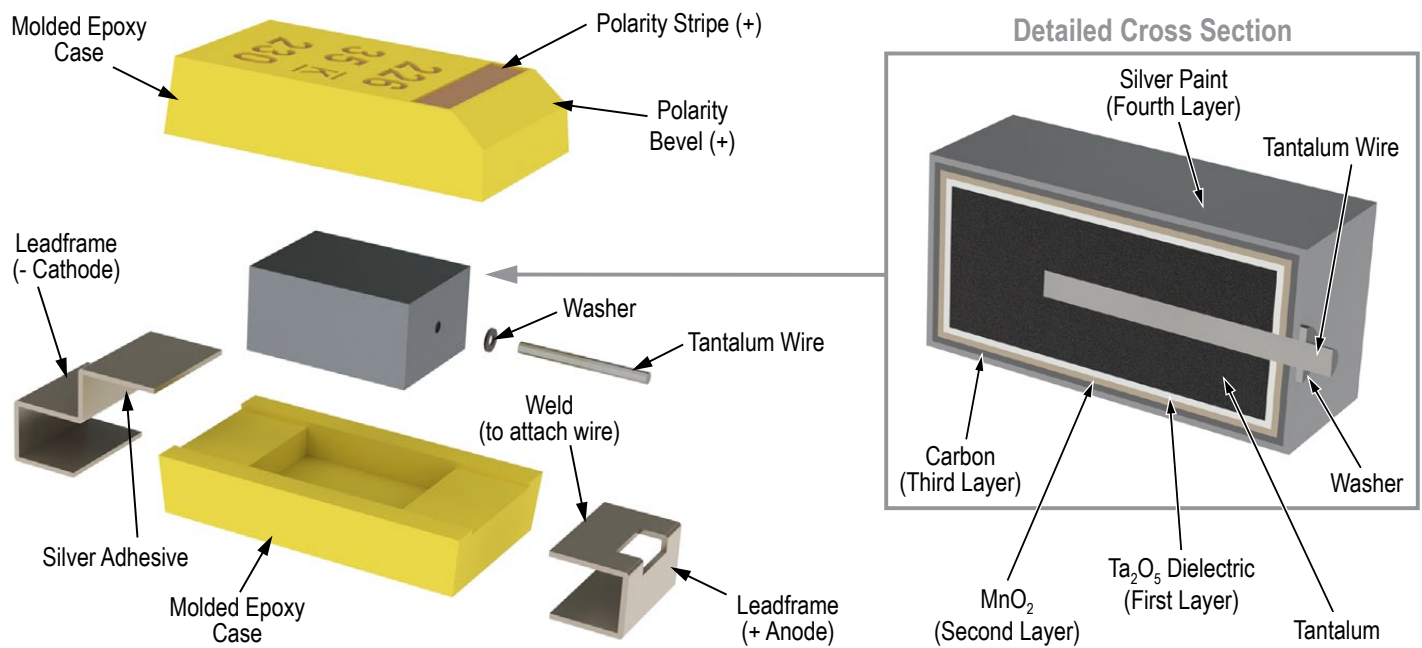


## Capacitor Marking

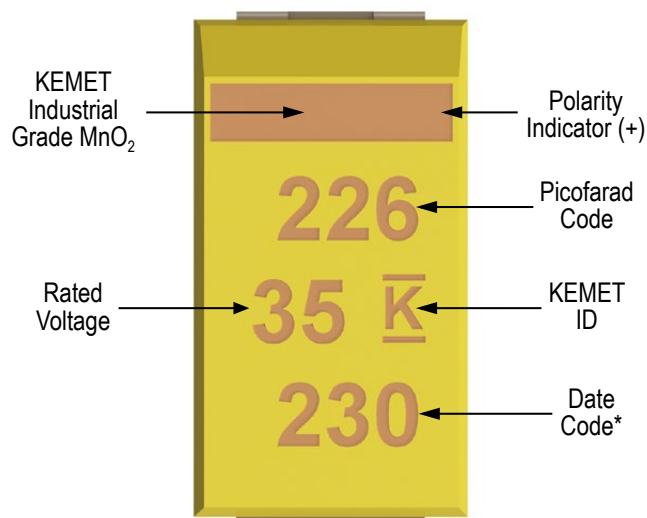

\* 230 = 30<sup>th</sup> week of 2012

| Date Code *                                                  |                                                                                    |
|--------------------------------------------------------------|------------------------------------------------------------------------------------|
| 1 <sup>st</sup> digit = Last number of Year                  | 9 = 2009<br>0 = 2010<br>1 = 2011<br>2 = 2012<br>3 = 2013<br>4 = 2014               |
| 2 <sup>nd</sup> and 3 <sup>rd</sup> digit = Week of the Year | 01 = 1 <sup>st</sup> week of the Year to<br>52 = 52 <sup>nd</sup> week of the Year |

## C, D, X Case Sizes

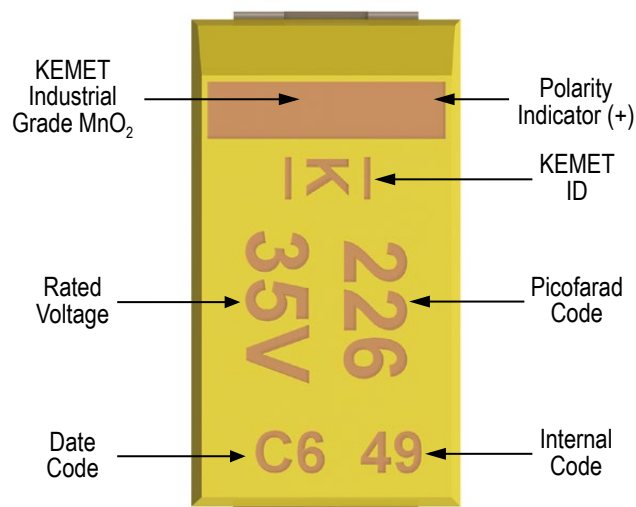

| Date Code* |         |          |
|------------|---------|----------|
| Year       | Month   |          |
| X = 2009   | 1 = Jan | 7 = Jul  |
| A = 2010   | 2 = Feb | 8 = Aug  |
| B = 2011   | 3 = Mar | 9 = Sept |
| C = 2012   | 4 = Apr | O = Oct  |
| D = 2013   | 5 = May | N = Nov  |
| E = 2014   | 6 = Jun | D = Dec  |




## Overview

The KEMET T489 Series provides DC leakage current that is 25% lower than the commercial T491 Series. The T489 Series also offers improved reliability, low ESR options and meets or exceeds the requirements of EIA standard 535BAAC. This series is classified as MSL (Moisture Sensitivity Level) 1 under J STD 020: unlimited floor life time at ≤30°C/85% RH. The T489 standard terminations are available in 100% matte tin

and provide excellent wetting characteristics and compatibility with today's surface mount solder systems. Tin/lead (Sn/Pb) terminations are available upon request for any part number. Gold-plated terminations are also available for use with conductive epoxy attachment processes. Standard packaging of these devices is tape and reel in accordance with EIA 481. This system provides perfect compatibility with all tape-fed placement units.

## Benefits

- DC Leakage at 0.0075 CV
- Improved reliability: 0.50%/1,000 hours, 85°C, rated voltage
- Low ESR options available
- Meets or exceeds EIA standard 535BAAC
- Taped and reeled per EIA 481
- Symmetrical, compliant terminations
- Laser-marked case
- Halogen-free epoxy
- Capacitance values of 0.1 µF to 470 µF
- Tolerances of ±10% and ±20%
- Voltage rating of 6.3 – 50 VDC
- RoHS Compliant and lead-free terminations
- Operating temperature range of -55°C to +125°C

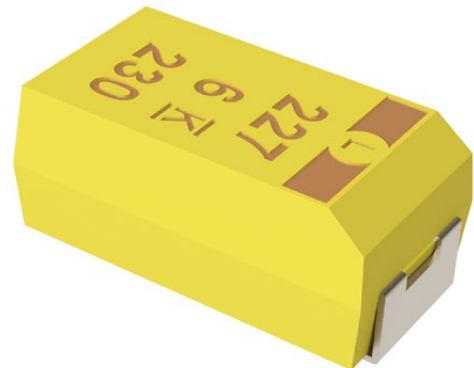

## Applications

Typical applications include decoupling and filtering in industrial and automotive high end applications.

## Environmental Compliance

RoHS Compliant (6/6) according to Directive 2002/95/EC when ordered with 100% Sn solder.



RoHS Compliant

## SPICE

For a detailed analysis of specific part numbers, please visit [www.kemet.com](http://www.kemet.com) for a free download of KEMET's SPICE software. The KEMET SPICE program is freeware intended to aid design engineers in analyzing the performance of these capacitors over frequency, temperature, ripple, and DC bias conditions.

## Ordering Information

| T               | 489                   | B             | 156                                                                                    | M                                | 16                                                                                              | A                   | T                                                                                                    | E800                                                                  |
|-----------------|-----------------------|---------------|----------------------------------------------------------------------------------------|----------------------------------|-------------------------------------------------------------------------------------------------|---------------------|------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| Capacitor Class | Series                | Case Size     | Capacitance Code (pF)                                                                  | Capacitance Tolerance            | Voltage                                                                                         | Failure Rate/Design | Lead Material                                                                                        | ESR                                                                   |
| T = Tantalum    | Low DC Leakage Series | A, B, C, D, X | First two digits represent significant figures. Third digit specifies number of zeros. | K = $\pm 10\%$<br>M = $\pm 20\%$ | 006 = 6.3 V<br>010 = 10 V<br>016 = 16 V<br>020 = 20 V<br>025 = 25 V<br>035 = 35 V<br>050 = 50 V | A = N/A             | T = 100% Matte Tin (Sn) Plated<br>H = Standard Solder Coated (SnPb 5% Pb minimum)<br>G = Gold Plated | Last three digits specify ESR in m $\Omega$ . (800 = 800 m $\Omega$ ) |

## Performance Characteristics

| Item                    | Performance Characteristics                                                   |
|-------------------------|-------------------------------------------------------------------------------|
| Operating Temperature   | -55°C to 125°C                                                                |
| Rated Capacitance Range | 0.10 $\mu$ F to 470 $\mu$ F @ 120 Hz/25°C                                     |
| Capacitance Tolerance   | K Tolerance ( $\pm 10\%$ ), M Tolerance ( $\pm 20\%$ )                        |
| Rated Voltage Range     | 6.3 – 50 V                                                                    |
| DF(120 Hz)              | Refer to Part Number Electrical Specification                                 |
| ESR (100 kHz)           | Refer to Part Number Electrical Specification                                 |
| Leakage Current         | $\leq 0.0075$ CV ( $\mu$ A) at rated voltage after 5 minutes                  |
| Reliability             | 0.50%/1,000 hours at 85°C, V <sub>R</sub> with 0.1 $\Omega$ series resistance |

## Qualification


| Test                       | Condition                                                                                                               |       | Characteristics |                              |          |          |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------|-------|-----------------|------------------------------|----------|----------|
| Endurance                  | 85°C @ rated voltage, 2,000 hours<br>125°C @ 2/3 rated voltage, 2,000 hours                                             |       | Δ C/C           | Within ±10% of initial value |          |          |
|                            |                                                                                                                         |       | DF              | Within initial limits        |          |          |
|                            |                                                                                                                         |       | DCL             | Within 1.25 x initial limit  |          |          |
|                            |                                                                                                                         |       | ESR             | Within initial limits        |          |          |
| Storage Life               | 125°C @ 0 volts, 2,000 hours                                                                                            |       | Δ C/C           | Within ±10% of initial value |          |          |
|                            |                                                                                                                         |       | DF              | Within initial limits        |          |          |
|                            |                                                                                                                         |       | DCL             | Within 1.25 x initial limit  |          |          |
|                            |                                                                                                                         |       | ESR             | Within initial limits        |          |          |
| Thermal Shock              | MIL–STD–202, Method 107, Condition B, mounted, -55°C to 125° C, 1,000 cycles                                            |       | Δ C/C           | Within ±5% of initial value  |          |          |
|                            |                                                                                                                         |       | DF              | Within initial limits        |          |          |
|                            |                                                                                                                         |       | DCL             | Within 1.25 x initial limit  |          |          |
|                            |                                                                                                                         |       | ESR             | Within initial limits        |          |          |
| Temperature Stability      | Extreme temperature exposure at a succession of continuous steps at +25°C, -55°C, +25°C, +85°C, +125°C, +25°C           |       | +25°C           | -55°C                        | +85°C    | +125°C   |
|                            |                                                                                                                         | Δ C/C | IL*             | ±10%                         | ±10%     | ±20%     |
|                            |                                                                                                                         | DF    | IL              | IL                           | 1.5 x IL | 1.5 x IL |
|                            |                                                                                                                         | DCL   | IL              | n/a                          | 10 x IL  | 12 x IL  |
| Surge Voltage              | 85°C, 1.32 x rated voltage 1,000 cycles (125°C, 1.2 x rated voltage)                                                    |       | Δ C/C           | Within ±5% of initial value  |          |          |
|                            |                                                                                                                         |       | DF              | Within initial limits        |          |          |
|                            |                                                                                                                         |       | DCL             | Within initial limits        |          |          |
|                            |                                                                                                                         |       | ESR             | Within initial limits        |          |          |
| Mechanical Shock/Vibration | MIL–STD–202, Method 213, Condition I, 100 G peak.<br>MIL–STD–202, Method 204, Condition D, 10 Hz to 2,000 Hz, 20 G peak |       | Δ C/C           | Within ±10% of initial value |          |          |
|                            |                                                                                                                         |       | DF              | Within initial limits        |          |          |
|                            |                                                                                                                         |       | DCL             | Within initial limits        |          |          |

\*IL = Initial limit


## Dimensions – Millimeters (Inches)

Metric will govern


CATHODE (-) END VIEW




SIDE VIEW

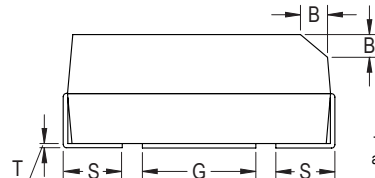

ANODE (+) END VIEW



BOTTOM VIEW

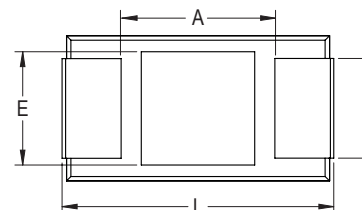

| Case Size |         | Component                  |                           |                          |                    |                    |                         |                              |            |            |             |             |            |            |
|-----------|---------|----------------------------|---------------------------|--------------------------|--------------------|--------------------|-------------------------|------------------------------|------------|------------|-------------|-------------|------------|------------|
| KEMET     | EIA     | L*                         | W*                        | H*                       | F* ±0.1<br>±(.004) | S* ±0.3<br>±(.012) | B* ±0.15<br>(Ref) ±.006 | X (Ref)                      | P (Ref)    | R (Ref)    | T (Ref)     | A (Min)     | G (Ref)    | E (Ref)    |
| A         | 3216-18 | 3.2 ±0.2<br>(0.126 ±0.008) | 1.6 ±0.2<br>(.063 ±0.008) | 1.6 ±0.2<br>(.063 ±.008) | 1.2 (.047)         | 0.8 (.031)         | 0.4 (.016)              | 0.10 ± 0.10<br>(.004 ± .004) | 0.4 (.016) | 0.4 (.016) | 0.13 (.005) | 0.8 (.31)   | 1.1 (.043) | 1.3 (.051) |
| B         | 3528-21 | 3.5 ±0.2<br>(0.138 ±0.008) | 2.8 ±0.2<br>(.110 ±0.008) | 1.9 ±0.2<br>(.075 ±.008) | 2.2 (.087)         | 0.8 (.031)         | 0.4 (.016)              | 0.10 ± 0.10<br>(.004 ± .004) | 0.5 (.020) | 1.0 (.039) | 0.13 (.005) | 1.1 (0.043) | 1.8 (.071) | 2.2 (.087) |
| C         | 6032-28 | 6.0 ±0.3<br>(0.236 ±0.03)  | 3.2 ±0.3<br>(.126 ±0.012) | 2.5 ±0.3<br>(.098 ±.012) | 2.2 (.087)         | 1.3 (.051)         | 0.5 (.020)              | 0.10 ± 0.10<br>(.004 ± .004) | 0.9 (.035) | 1.0 (.039) | 0.13 (.005) | 2.5(.098)   | 2.8 (.110) | 2.4 (.094) |
| D         | 7343-31 | 7.3 ±0.3<br>(0.287 ±0.012) | 4.3 ±0.3<br>(.169 ±0.012) | 2.8 ±0.3<br>(.110 ±.012) | 2.4 (.094)         | 1.3 (.051)         | 0.5 (.020)              | 0.10 ± 0.10<br>(.004 ± .004) | 0.9 (.035) | 1.0 (.039) | 0.13 (.005) | 3.8 (.150)  | 3.5 (.138) | 3.5 (.138) |
| X         | 7343-43 | 7.3 ±0.3<br>(0.287 ±0.012) | 4.3 ±0.3<br>(.169 ±0.012) | 4.0 ±0.3<br>(.157 ±.012) | 2.4 (.094)         | 1.3 (.051)         | 0.5 (.020)              | 0.10 ± 0.10<br>(.004 ± .004) | 1.7 (.067) | 1.0 (.039) | 0.13 (.005) | 3.8 (.150)  | 3.5 (.138) | 3.5 (.138) |

\* MIL-PRF-55365/8 specified dimensions

Table 1 – Ratings &amp; Part Number Reference

| Rated Voltage | Rated Capacitance | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage                          | DF                             | Standard ESR                     |             | Low ESR                          |                        | Maximum Operating Temp |
|---------------|-------------------|-------------------------|------------------------------|-------------------------------------|--------------------------------|----------------------------------|-------------|----------------------------------|------------------------|------------------------|
| VDC @ 85°C    | μF                | KEMET/EIA               | (See below for part options) | μA @ +25°C<br>Maximum/<br>5 Minutes | % @ +25°C<br>120 Hz<br>Maximum | mΩ @ +25°C<br>100 kHz<br>Maximum | E-Spec Code | mΩ @ +25°C<br>100 kHz<br>Maximum | E-Spec Code            | °C                     |
| 6.3           | 10                | B/3528-21               | T489B106(1)006A(2)           | 0.5                                 | 6.0                            | 3000                             | E3K0        |                                  |                        | 125                    |
| 6.3           | 15                | A/3216-18               | T489A156(1)006A(2)           | 0.7                                 | 6.0                            | 2030                             | E2K0        | 1500                             | E1K5                   | 125                    |
| 6.3           | 22                | C/6032-28               | T489C226(1)006A(2)           | 1.0                                 | 6.0                            | 2000                             | E2K0        |                                  |                        | 125                    |
| 6.3           | 47                | B/3528-21               | T489B476(1)006A(2)           | 2.1                                 | 6.0                            | 1620                             | E1K6        | 500                              | E500                   | 125                    |
| 6.3           | 150               | B/3528-21               | T489B157(1)006A(2)           | 7.1                                 | 15.0                           | 3000                             | E3K0        |                                  |                        | 125                    |
| 6.3           | 100               | C/6032-28               | T489C107(1)006A(2)           | 4.5                                 | 6.0                            | 440                              | E440        |                                  |                        | 125                    |
| 6.3           | 150               | C/6032-28               | T489C157(1)006A(2)           | 6.8                                 | 8.0                            | 500                              | E500        | 300                              | E300                   | 125                    |
| 6.3           | 100               | D/7343-31               | T489D107(1)006A(2)           | 4.7                                 | 8.0                            | 800                              | E800        |                                  |                        | 125                    |
| 6.3           | 150               | D/7343-31               | T489D157(1)006A(2)           | 6.8                                 | 6.0                            | 400                              | E400        | 150                              | E150                   | 125                    |
| 6.3           | 220               | D/7343-31               | T489D227(1)006A(2)           | 9.9                                 | 8.0                            | 360                              | E360        | 150                              | E150                   | 125                    |
| 6.3           | 470               | X/7343-43               | T489X477(1)006A(2)           | 21.0                                | 8.0                            | 250                              | E250        | 200                              | E200                   | 125                    |
| 10            | 2.2               | A/3216-18               | T489A225(1)010A(2)           | 0.3                                 | 6.0                            | 7000                             | E7K0        |                                  |                        | 125                    |
| 10            | 4.7               | A/3216-18               | T489A475(1)010A(2)           | 0.4                                 | 6.0                            | 2900                             | E2K9        |                                  |                        | 125                    |
| 10            | 6.8               | A/3216-18               | T489A685(1)010A(2)           | 0.5                                 | 6.0                            | 2650                             | E2K6        |                                  |                        | 125                    |
| 10            | 6.8               | B/3528-21               | T489B685(1)010A(2)           | 0.5                                 | 6.0                            | 3000                             | E3K0        |                                  |                        | 125                    |
| 10            | 10                | A/3216-18               | T489A106(1)010A(2)           | 0.8                                 | 6.0                            | 2200                             | E2K2        | 1800                             | E1K8                   | 125                    |
| 10            | 15                | B/3528-21               | T489B156(1)010A(2)           | 1.1                                 | 6.0                            | 2030                             | E2K0        |                                  |                        | 125                    |
| 10            | 15                | C/6032-28               | T489C156(1)010A(2)           | 1.1                                 | 6.0                            | 2000                             | E2K0        |                                  |                        | 125                    |
| 10            | 22                | B/3528-21               | T489B226(1)010A(2)           | 1.7                                 | 6.0                            | 1880                             | E1K8        | 700                              | E700                   | 125                    |
| 10            | 33                | B/3528-21               | T489B336(1)010A(2)           | 2.5                                 | 6.0                            | 1000                             | E1K0        | 650                              | E650                   | 125                    |
| 10            | 33                | C/6032-28               | T489C336(1)010A(2)           | 2.5                                 | 6.0                            | 590                              | E590        |                                  |                        | 125                    |
| 10            | 33                | D/7343-31               | T489D336(1)010A(2)           | 2.5                                 | 6.0                            | 1100                             | E1K1        |                                  |                        | 125                    |
| 10            | 47                | C/6032-28               | T489C476(1)010A(2)           | 3.5                                 | 6.0                            | 540                              | E540        |                                  |                        | 125                    |
| 10            | 47                | D/7343-31               | T489D476(1)010A(2)           | 3.5                                 | 6.0                            | 400                              | E400        |                                  |                        | 125                    |
| 10            | 68                | C/6032-28               | T489C686(1)010A(2)           | 5.1                                 | 6.0                            | 490                              | E490        |                                  |                        | 125                    |
| 10            | 100               | C/6032-28               | T489C107(1)010A(2)           | 7.5                                 | 8.0                            | 500                              | E500        |                                  |                        | 125                    |
| 10            | 100               | D/7343-31               | T489D107(1)010A(2)           | 7.5                                 | 6.0                            | 440                              | E440        | 150                              | E150                   | 125                    |
| 10            | 150               | D/7343-31               | T489D157(1)010A(2)           | 11.0                                | 8.0                            | 400                              | E400        | 150                              | E150                   | 125                    |
| 10            | 220               | D/7343-31               | T489D227(1)010A(2)           | 16.5                                | 8.0                            | 500                              | E500        |                                  |                        | 125                    |
| 10            | 330               | X/7343-43               | T489X337(1)010A(2)           | 25.0                                | 8.0                            | 300                              | E300        | 100                              | E100                   | 125                    |
| 16            | 1                 | A/3216-18               | T489A105(1)016A(2)           | 0.3                                 | 6.0                            | 10000                            | E10K        |                                  |                        | 125                    |
| 16            | 2.2               | A/3216-18               | T489A225(1)016A(2)           | 0.3                                 | 6.0                            | 4550                             | E4K5        | 3500                             | E3K5                   | 125                    |
| 16            | 3.3               | B/3528-21               | T489B335(1)016A(2)           | 0.4                                 | 6.0                            | 4500                             | E4K5        |                                  |                        | 125                    |
| 16            | 4.7               | B/3528-21               | T489B475(1)016A(2)           | 0.6                                 | 6.0                            | 3160                             | E3K1        |                                  |                        | 125                    |
| 16            | 6.8               | B/3528-21               | T489B685(1)016A(2)           | 0.8                                 | 6.0                            | 2650                             | E2K6        |                                  |                        | 125                    |
| 16            | 6.8               | C/6032-28               | T489C685(1)016A(2)           | 0.8                                 | 6.0                            | 2500                             | E2K5        |                                  |                        | 125                    |
| 16            | 10                | B/3528-21               | T489B106(1)016A(2)           | 1.2                                 | 6.0                            | 2200                             | E2K2        |                                  |                        | 125                    |
| 16            | 10                | C/6032-28               | T489C106(1)016A(2)           | 1.2                                 | 6.0                            | 2000                             | E2K0        |                                  |                        | 125                    |
| 16            | 15                | B/3528-21               | T489B156(1)016A(2)           | 1.8                                 | 6.0                            | 2030                             | E2K0        | 800                              | E800                   | 125                    |
| 16            | 22                | B/3528-21               | T489B226(1)016A(2)           | 2.6                                 | 6.0                            | 1100                             | E1K1        | 600                              | E600                   | 125                    |
| 16            | 22                | C/6032-28               | T489C226(1)016A(2)           | 2.6                                 | 6.0                            | 700                              | E700        | 350                              | E350                   | 125                    |
| 16            | 22                | D/7343-31               | T489D226(1)016A(2)           | 2.6                                 | 6.0                            | 1100                             | E1K1        |                                  |                        | 125                    |
| 16            | 33                | C/6032-28               | T489C336(1)016A(2)           | 4.0                                 | 6.0                            | 590                              | E590        |                                  |                        | 125                    |
| 16            | 47                | C/6032-28               | T489C476(1)016A(2)           | 5.6                                 | 6.0                            | 540                              | E540        | 350                              | E350                   | 125                    |
| 16            | 47                | D/7343-31               | T489D476(1)016A(2)           | 5.6                                 | 6.0                            | 540                              | E540        | 200                              | E200                   | 125                    |
| 16            | 68                | D/7343-31               | T489D686(1)016A(2)           | 8.2                                 | 6.0                            | 490                              | E490        | 150                              | E150                   | 125                    |
| 16            | 100               | D/7343-31               | T489D107(1)016A(2)           | 12.0                                | 6.0                            | 440                              | E440        | 150                              | E150                   | 125                    |
| 16            | 150               | D/7343-31               | T489D157(1)016A(2)           | 18.0                                | 12.0                           | 700                              | E700        |                                  |                        | 125                    |
| VDC @ 85°C    | μF                | KEMET/EIA               | (See below for part options) | μA @ +25°C<br>Maximum/<br>5 Minutes | % @ +25°C<br>120 Hz<br>Maximum | mΩ @ +25°C<br>100 kHz<br>Maximum | E-Spec Code | mΩ @ +25°C<br>100 kHz<br>Maximum | E-Spec Code            | °C                     |
| Rated Voltage | Rated Capacitance | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage                          | DF                             | Standard ESR                     | Low ESR     |                                  | Maximum Operating Temp |                        |

(1) To complete KEMET part number, insert M for ±20% or K for ±10%. Designates Capacitance tolerance.

(2) To complete KEMET part number, insert T = 100% Matte Tin (Sn) Plated, G = Gold Plated, H = Standard Solder coated (SnPb 5% Pb minimum). Designates Termination Finish.

Refer to Ordering Information for additional detail.

Higher voltage ratings and tighter tolerance product including ESR may be substituted within the same size at KEMET's option. Voltage substitution will be marked with the higher voltage rating. Substitutions can include better than series.

Table 1 – Ratings &amp; Part Number Reference cont'd

| Rated Voltage | Rated Capacitance | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage                          | DF                             | Standard ESR                     |             | Low ESR                          |                        | Maximum Operating Temp |
|---------------|-------------------|-------------------------|------------------------------|-------------------------------------|--------------------------------|----------------------------------|-------------|----------------------------------|------------------------|------------------------|
| VDC @ 85°C    | μF                | KEMET/EIA               | (See below for part options) | μA @ +25°C<br>Maximum/<br>5 Minutes | % @ +25°C<br>120 Hz<br>Maximum | mΩ @ +25°C<br>100 kHz<br>Maximum | E-Spec Code | mΩ @ +25°C<br>100 kHz<br>Maximum | E-Spec Code            | °C                     |
| 20            | 1                 | A/3216-18               | T489A105(1)020A(2)           | 0.3                                 | 4.0                            | 6630                             | E6K6        |                                  |                        | 125                    |
| 20            | 1.5               | A/3216-18               | T489A155(1)020A(2)           | 0.3                                 | 6.0                            | 5460                             | E5K4        |                                  |                        | 125                    |
| 20            | 2.2               | A/3216-18               | T489A225(1)020A(2)           | 0.3                                 | 6.0                            | 4550                             | E4K5        |                                  |                        | 125                    |
| 20            | 3.3               | A/3216-18               | T489A335(1)020A(2)           | 0.5                                 | 6.0                            | 3740                             | E3K7        | 3500                             | E3K5                   | 125                    |
| 20            | 3.3               | B/3528-21               | T489B335(1)020A(2)           | 0.5                                 | 6.0                            | 3740                             | E3K7        |                                  |                        | 125                    |
| 20            | 4.7               | B/3528-21               | T489B475(1)020A(2)           | 0.7                                 | 6.0                            | 3160                             | E3K1        |                                  |                        | 125                    |
| 20            | 6.8               | B/3528-21               | T489B685(1)020A(2)           | 1.0                                 | 6.0                            | 2650                             | E2K6        |                                  |                        | 125                    |
| 20            | 6.8               | C/6032-28               | T489C685(1)020A(2)           | 1.0                                 | 6.0                            | 2000                             | E2K0        |                                  |                        | 125                    |
| 20            | 10                | B/3528-21               | T489B106(1)020A(2)           | 1.5                                 | 6.0                            | 2200                             | E2K2        | 1000                             | E1K0                   | 125                    |
| 20            | 10                | C/6032-28               | T489C106(1)020A(2)           | 1.5                                 | 6.0                            | 800                              | E800        | 500                              | E500                   | 125                    |
| 20            | 15                | C/6032-28               | T489C156(1)020A(2)           | 2.3                                 | 6.0                            | 720                              | E720        | 400                              | E400                   | 125                    |
| 20            | 15                | D/7343-31               | T489D156(1)020A(2)           | 2.3                                 | 6.0                            | 1100                             | E1K1        |                                  |                        | 125                    |
| 20            | 22                | D/7343-31               | T489D226(1)020A(2)           | 3.3                                 | 6.0                            | 650                              | E650        | 300                              | E300                   | 125                    |
| 20            | 33                | C/6032-28               | T489C336(1)020A(2)           | 5.0                                 | 6.0                            | 590                              | E590        | 300                              | E300                   | 125                    |
| 20            | 33                | D/7343-31               | T489D336(1)020A(2)           | 5.0                                 | 6.0                            | 590                              | E590        | 250                              | E250                   | 125                    |
| 20            | 47                | D/7343-31               | T489D476(1)020A(2)           | 7.1                                 | 6.0                            | 540                              | E540        | 200                              | E200                   | 125                    |
| 20            | 68                | D/7343-31               | T489D686(1)020A(2)           | 10.0                                | 6.0                            | 490                              | E490        | 200                              | E200                   | 125                    |
| 20            | 100               | X/7343-43               | T489X107(1)020A(2)           | 15.0                                | 6.0                            | 300                              | E300        | 150                              | E150                   | 125                    |
| 25            | 0.47              | A/3216-18               | T489A474(1)025A(2)           | 0.3                                 | 4.0                            | 9530                             | E9K5        | 7000                             | E7K0                   | 125                    |
| 25            | 0.68              | A/3216-18               | T489A684(1)025A(2)           | 0.3                                 | 4.0                            | 7980                             | E7K9        |                                  |                        | 125                    |
| 25            | 1                 | A/3216-18               | T489A105(1)025A(2)           | 0.3                                 | 4.0                            | 6630                             | E6K6        |                                  |                        | 125                    |
| 25            | 2.2               | B/3528-21               | T489B225(1)025A(2)           | 0.4                                 | 6.0                            | 4550                             | E4K5        |                                  |                        | 125                    |
| 25            | 3.3               | B/3528-21               | T489B335(1)025A(2)           | 0.6                                 | 6.0                            | 3740                             | E3K7        | 2000                             | E2K0                   | 125                    |
| 25            | 4.7               | B/3528-21               | T489B475(1)025A(2)           | 0.9                                 | 6.0                            | 3160                             | E3K1        | 1000                             | E1K0                   | 125                    |
| 25            | 6.8               | B/3528-21               | T489B685(1)025A(2)           | 1.3                                 | 6.0                            | 1500                             | E1K5        | 1000                             | E1K0                   | 125                    |
| 25            | 6.8               | C/6032-28               | T489C685(1)025A(2)           | 1.3                                 | 6.0                            | 1070                             | E1K0        | 600                              | E600                   | 125                    |
| 25            | 10                | C/6032-28               | T489C106(1)025A(2)           | 1.9                                 | 6.0                            | 800                              | E800        | 600                              | E600                   | 125                    |
| 25            | 10                | D/7343-31               | T489D106(1)025A(2)           | 1.9                                 | 6.0                            | 1200                             | E1K2        |                                  |                        | 125                    |
| 25            | 15                | C/6032-28               | T489C156(1)025A(2)           | 2.8                                 | 6.0                            | 720                              | E720        |                                  |                        | 125                    |
| 25            | 15                | D/7343-31               | T489D156(1)025A(2)           | 2.8                                 | 6.0                            | 720                              | E720        | 300                              | E300                   | 125                    |
| 25            | 22                | D/7343-31               | T489D226(1)025A(2)           | 4.1                                 | 6.0                            | 650                              | E650        | 300                              | E300                   | 125                    |
| 25            | 33                | D/7343-31               | T489D336(1)025A(2)           | 6.2                                 | 6.0                            | 590                              | E590        | 400                              | E400                   | 125                    |
| 25            | 47                | D/7343-31               | T489D476(1)025A(2)           | 8.8                                 | 6.0                            | 540                              | E540        | 250                              | E250                   | 125                    |
| 35            | 0.1               | A/3216-18               | T489A104(1)035A(2)           | 0.3                                 | 4.0                            | 20000                            | E20K        |                                  |                        | 125                    |
| 35            | 0.22              | A/3216-18               | T489A224(1)035A(2)           | 0.3                                 | 4.0                            | 13710                            | E13K        |                                  |                        | 125                    |
| 35            | 0.33              | A/3216-18               | T489A334(1)035A(2)           | 0.3                                 | 4.0                            | 11280                            | E11K        |                                  |                        | 125                    |
| 35            | 1                 | A/3216-18               | T489A105(1)035A(2)           | 0.3                                 | 4.0                            | 6630                             | E6K6        | 3000                             | E3K0                   | 125                    |
| 35            | 1                 | B/3528-21               | T489B105(1)035A(2)           | 0.3                                 | 4.0                            | 3400                             | E3K4        | 2000                             | E2K0                   | 125                    |
| 35            | 1.5               | B/3528-21               | T489B155(1)035A(2)           | 0.4                                 | 6.0                            | 5460                             | E5K4        | 2500                             | E2K5                   | 125                    |
| 35            | 2.2               | B/3528-21               | T489B225(1)035A(2)           | 0.6                                 | 6.0                            | 4550                             | E4K5        | 2000                             | E2K0                   | 125                    |
| 35            | 3.3               | B/3528-21               | T489B335(1)035A(2)           | 0.9                                 | 6.0                            | 3740                             | E3K7        |                                  |                        | 125                    |
| 35            | 3.3               | C/6032-28               | T489C335(1)035A(2)           | 0.9                                 | 6.0                            | 1840                             | E1K8        | 800                              | E800                   | 125                    |
| 35            | 4.7               | C/6032-28               | T489C475(1)035A(2)           | 1.2                                 | 6.0                            | 1410                             | E1K4        | 600                              | E600                   | 125                    |
| 35            | 4.7               | D/7343-31               | T489D475(1)035A(2)           | 1.2                                 | 6.0                            | 1500                             | E1K5        |                                  |                        | 125                    |
| 35            | 6.8               | C/6032-28               | T489C685(1)035A(2)           | 1.8                                 | 6.0                            | 1070                             | E1K0        | 600                              | E600                   | 125                    |
| 35            | 6.8               | D/7343-31               | T489D685(1)035A(2)           | 1.8                                 | 6.0                            | 1300                             | E1K3        |                                  |                        | 125                    |
| 35            | 10                | C/6032-28               | T489C106(1)035A(2)           | 2.6                                 | 6.0                            | 800                              | E800        | 600                              | E600                   | 125                    |
| 35            | 10                | D/7343-31               | T489D106(1)035A(2)           | 2.6                                 | 6.0                            | 800                              | E800        | 400                              | E400                   | 125                    |
| VDC @ 85°C    | μF                | KEMET/EIA               | (See below for part options) | μA @ +25°C<br>Maximum/<br>5 Minutes | % @ +25°C<br>120 Hz<br>Maximum | mΩ @ +25°C<br>100 kHz<br>Maximum | E-Spec Code | mΩ @ +25°C<br>100 kHz<br>Maximum | E-Spec Code            | °C                     |
| Rated Voltage | Rated Capacitance | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage                          | DF                             | Standard ESR                     | Low ESR     |                                  | Maximum Operating Temp |                        |

(1) To complete KEMET part number, insert M for ±20% or K for ±10%. Designates Capacitance tolerance.

(2) To complete KEMET part number, insert T = 100% Matte Tin (Sn) Plated, G = Gold Plated, H = Standard Solder coated (SnPb 5% Pb minimum). Designates Termination Finish.

Refer to Ordering Information for additional detail.

Higher voltage ratings and tighter tolerance product including ESR may be substituted within the same size at KEMET's option. Voltage substitution will be marked with the higher voltage rating. Substitutions can include better than series.



**Table 1 – Ratings & Part Number Reference cont'd**

| Rated Voltage | Rated Capacitance | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage                          | DF                             | Standard ESR                     |             | Low ESR                          |             | Maximum Operating Temp |
|---------------|-------------------|-------------------------|------------------------------|-------------------------------------|--------------------------------|----------------------------------|-------------|----------------------------------|-------------|------------------------|
| VDC @ 85°C    | μF                | KEMET/EIA               | (See below for part options) | μA @ +25°C<br>Maximum/<br>5 Minutes | % @ +25°C<br>120 Hz<br>Maximum | mΩ @ +25°C<br>100 kHz<br>Maximum | E-Spec Code | mΩ @ +25°C<br>100 kHz<br>Maximum | E-Spec Code | °C                     |
| 35            | 15                | D/7343-31               | T489D156(1)035A(2)           | 3.9                                 | 6.0                            | 720                              | E720        | 350                              | E350        | 125                    |
| 35            | 22                | D/7343-31               | T489D226(1)035A(2)           | 5.8                                 | 6.0                            | 650                              | E650        | 300                              | E300        | 125                    |
| 50            | 0.22              | A/3216-18               | T489A224(1)050A(2)           | 0.3                                 | 4.0                            | 7500                             | E7K5        | 7000                             | E7K0        | 125                    |
| 50            | 0.33              | A/3216-18               | T489A334(1)050A(2)           | 0.3                                 | 4.0                            | 7000                             | E7K0        |                                  |             | 125                    |
| 50            | 0.68              | B/3528-21               | T489B684(1)050A(2)           | 0.3                                 | 4.0                            | 4000                             | E4K0        | 2000                             | E2K0        | 125                    |
| 50            | 1                 | C/6032-28               | T489C105(1)050A(2)           | 0.4                                 | 4.0                            | 3000                             | E3K0        |                                  |             | 125                    |
| 50            | 1.5               | C/6032-28               | T489C155(1)050A(2)           | 0.6                                 | 6.0                            | 2500                             | E2K5        | 1500                             | E1K5        | 125                    |
| 50            | 2.2               | C/6032-28               | T489C225(1)050A(2)           | 0.8                                 | 6.0                            | 1700                             | E1K7        | 1000                             | E1K0        | 125                    |
| 50            | 2.2               | D/7343-31               | T489D225(1)050A(2)           | 0.8                                 | 4.5                            | 2000                             | E2K0        | 1200                             | E1K2        | 125                    |
| 50            | 3.3               | D/7343-31               | T489D335(1)050A(2)           | 1.2                                 | 4.5                            | 1100                             | E1K1        | 800                              | E800        | 125                    |
| 50            | 4.7               | D/7343-31               | T489D475(1)050A(2)           | 1.8                                 | 4.5                            | 900                              | E900        | 600                              | E600        | 125                    |
| 50            | 6.8               | D/7343-31               | T489D685(1)050A(2)           | 2.6                                 | 4.5                            | 700                              | E700        |                                  |             | 125                    |
| VDC @ 85°C    | μF                | KEMET/EIA               | (See below for part options) | μA @ +25°C<br>Maximum/<br>5 Minutes | % @ +25°C<br>120 Hz<br>Maximum | mΩ @ +25°C<br>100 kHz<br>Maximum | E-Spec Code | mΩ @ +25°C<br>100 kHz<br>Maximum | E-Spec Code | °C                     |
| Rated Voltage | Rated Capacitance | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage                          | DF                             | Standard ESR                     |             | Low ESR                          |             | Maximum Operating Temp |

(1) To complete KEMET part number, insert M for ±20% or K for ±10%. Designates Capacitance tolerance.


(2) To complete KEMET part number, insert T = 100% Matte Tin (Sn) Plated, G = Gold Plated, H = Standard Solder coated (SnPb 5% Pb minimum). Designates Termination Finish.

Refer to Ordering Information for additional detail.

Higher voltage ratings and tighter tolerance product including ESR may be substituted within the same size at KEMET's option. Voltage substitution will be marked with the higher voltage rating. Substitutions can include better than series.

## Recommended Voltage Derating Guidelines

|                                                 | -55°C to 85°C         | 85°C to 125°C         |
|-------------------------------------------------|-----------------------|-----------------------|
| % Change in Working DC Voltage with Temperature | V <sub>R</sub>        | 67% of V <sub>R</sub> |
| Recommended Maximum Application Voltage         | 50% of V <sub>R</sub> | 33% of V <sub>R</sub> |

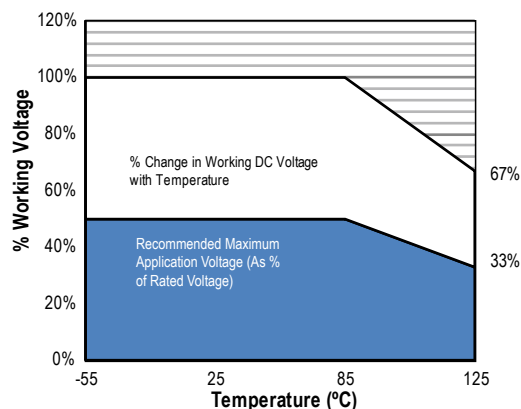

## Ripple Current/Ripple Voltage

| KEMET Series and Case Code | EIA Case Code | Maximum Power Dissipation (P max) mWatts @ 25°C w/+20°C Rise |
|----------------------------|---------------|--------------------------------------------------------------|
| A                          | 3216-18       | 75                                                           |
| B                          | 3528-21       | 85                                                           |
| C                          | 6032-28       | 110                                                          |
| D                          | 7343-31       | 150                                                          |
| X                          | 7343-43       | 165                                                          |
| E                          | 7360-38       | 200                                                          |
| S                          | 3216-12       | 60                                                           |
| T                          | 3528-12       | 70                                                           |
| U                          | 6032-15       | 90                                                           |
| V                          | 7343-20       | 125                                                          |
| T510X                      | 7343-43       | 270                                                          |
| T510E                      | 7360-38       | 285                                                          |

| Temperature Compensation Multipliers for Maximum Ripple Current |          |           |
|-----------------------------------------------------------------|----------|-----------|
| T ≤ 25°C                                                        | T ≤ 85°C | T ≤ 125°C |
| 1.00                                                            | 0.90     | 0.40      |

T = Environmental Temperature

Using the P max of the device, the maximum allowable rms ripple current or voltage may be determined.

$$I(max) = \sqrt{P_{max}/R}$$

$$E(max) = Z \sqrt{P_{max}/R}$$

I = rms ripple current (amperes)

E = rms ripple voltage (volts)

Pmax = maximum power dissipation (watts)

R = ESR at specified frequency (ohms)

Z = Impedance at specified frequency (ohms)

## Reverse Voltage

Solid tantalum capacitors are polar devices and may be permanently damaged or destroyed if connected with the wrong polarity. The positive terminal is identified on the capacitor body by a stripe plus in some cases a beveled edge. A small degree of transient reverse voltage is permissible for short periods per the table. The capacitors should not be operated continuously in reverse mode, even within these limits.

| Temperature | Permissible Transient Reverse Voltage |
|-------------|---------------------------------------|
| 25°C        | 15% of Rated Voltage                  |
| 85°C        | 5% of Rated Voltage                   |
| 125°C       | 1% of Rated Voltage                   |

**Table 2 – Land Dimensions/Courtyard**

| KEMET          | Metric Size Code | Density Level A:<br>Maximum (Most) Land Protrusion (mm) |      |      |       |      | Density Level B:<br>Median (Nominal) Land Protrusion (mm) |      |      |      |      | Density Level C:<br>Minimum (Least) Land Protrusion (mm) |      |      |      |      |
|----------------|------------------|---------------------------------------------------------|------|------|-------|------|-----------------------------------------------------------|------|------|------|------|----------------------------------------------------------|------|------|------|------|
|                |                  | W                                                       | L    | S    | V1    | V2   | W                                                         | L    | S    | V1   | V2   | W                                                        | L    | S    | V1   | V2   |
| A              | 3216–18          | 1.35                                                    | 2.20 | 0.62 | 6.02  | 2.80 | 1.23                                                      | 1.80 | 0.82 | 4.92 | 2.30 | 1.13                                                     | 1.42 | 0.98 | 4.06 | 2.04 |
| B              | 3528–21          | 2.35                                                    | 2.21 | 0.92 | 6.32  | 4.00 | 2.23                                                      | 1.80 | 1.12 | 5.22 | 3.50 | 2.13                                                     | 1.42 | 1.28 | 4.36 | 3.24 |
| C              | 6032–25          | 2.35                                                    | 2.77 | 2.37 | 8.92  | 4.50 | 2.23                                                      | 2.37 | 2.57 | 7.82 | 4.00 | 2.13                                                     | 1.99 | 2.73 | 6.96 | 3.74 |
| D              | 7343–31          | 2.55                                                    | 2.77 | 3.67 | 10.22 | 5.60 | 2.43                                                      | 2.37 | 3.87 | 9.12 | 5.10 | 2.33                                                     | 1.99 | 4.03 | 8.26 | 4.84 |
| X <sup>1</sup> | 7343–43          | 2.55                                                    | 2.77 | 3.67 | 10.22 | 5.60 | 2.43                                                      | 2.37 | 3.87 | 9.12 | 5.10 | 2.33                                                     | 1.99 | 4.03 | 8.26 | 4.84 |


**Density Level A:** For low-density product applications. Recommended for wave solder applications and provides a wider process window for reflow solder processes.

**Density Level B:** For products with a moderate level of component density. Provides a robust solder attachment condition for reflow solder processes.

**Density Level C:** For high component density product applications. Before adapting the minimum land pattern variations the user should perform qualification testing based on the conditions outlined in IPC standard 7351 (IPC–7351).

<sup>1</sup> Height of these chips may create problems in wave soldering.

<sup>2</sup> Land pattern geometry is too small for silkscreen outline.

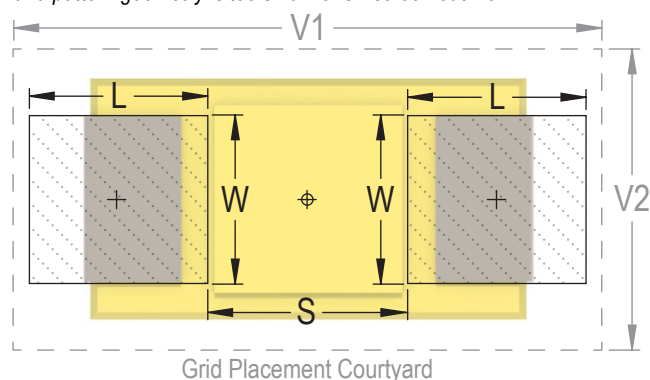

## Soldering Process

KEMET's families of surface mount capacitors are compatible with wave (single or dual), convection, IR, or vapor phase reflow techniques. Preheating of these components is recommended to avoid extreme thermal stress. KEMET's recommended profile conditions for convection and IR reflow reflect the profile conditions of the IPC/J-STD-020D standard for moisture sensitivity testing. The devices can safely withstand a maximum of three reflow passes at these conditions.

Please note that although the X/7343-43 case size can withstand wave soldering, the tall profile (4.3 mm maximum) dictates care in wave process development.

Hand soldering should be performed with care due to the difficulty in process control. If performed, care should be taken to avoid contact of the soldering iron to the molded case. The iron should be used to heat the solder pad, applying solder between the pad and the termination, until reflow occurs. Once reflow occurs, the iron should be removed immediately. "Wiping" the edges of a chip and heating the top surface is not recommended.


During typical reflow operations, a slight darkening of the gold-colored epoxy may be observed. This slight darkening is normal and not harmful to the product. Marking permanency is not affected by this change.

| Profile Feature                                            | SnPb Assembly       | Pb-Free Assembly    |
|------------------------------------------------------------|---------------------|---------------------|
| <b>Preheat/Soak</b>                                        |                     |                     |
| Temperature Minimum ( $T_{\text{Smin}}$ )                  | 100°C               | 150°C               |
| Temperature Maximum ( $T_{\text{Smax}}$ )                  | 150°C               | 200°C               |
| Time ( $t_s$ ) from $T_{\text{Smin}}$ to $T_{\text{Smax}}$ | 60 – 120 seconds    | 60 – 120 seconds    |
| Ramp-up Rate ( $T_L$ to $T_P$ )                            | 3°C/seconds maximum | 3°C/seconds maximum |
| Liquidous Temperature ( $T_L$ )                            | 183°C               | 217°C               |
| Time Above Liquidous ( $t_L$ )                             | 60 – 150 seconds    | 60 – 150 seconds    |
| Peak Temperature ( $T_P$ )                                 | 220°C*<br>235°C**   | 250°C*<br>260°C**   |
| Time within 5°C of Maximum Peak Temperature ( $t_p$ )      | 20 seconds maximum  | 30 seconds maximum  |
| Ramp-down Rate ( $T_P$ to $T_L$ )                          | 6°C/seconds maximum | 6°C/seconds maximum |
| Time 25°C to Peak Temperature                              | 6 minutes maximum   | 8 minutes maximum   |

*Note: All temperatures refer to the center of the package, measured on the package body surface that is facing up during assembly reflow.*

\*Case Size D, E, P, Y, and X


\*\*Case Size A, B, C, H, I, K, M, R, S, T, U, V, W, and Z

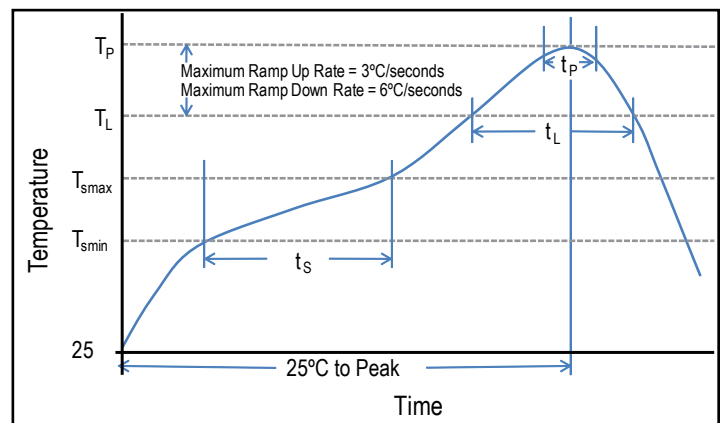


## Storage

Tantalum chip capacitors should be stored in normal working environments. While the chips themselves are quite robust in other environments, solderability will be degraded by exposure to high temperatures, high humidity, corrosive atmospheres, and long term storage. In addition, packaging materials will be degraded by high temperature—reels may soften or warp and tape peel force may increase. KEMET recommends that maximum storage temperature not exceed 40°C and maximum storage humidity not exceed 60% relative humidity. Temperature fluctuations should be minimized to avoid condensation on the parts and atmospheres should be free of chlorine and sulphur bearing compounds. For optimized solderability chip stock should be used promptly, preferably within three years of receipt.

Construction

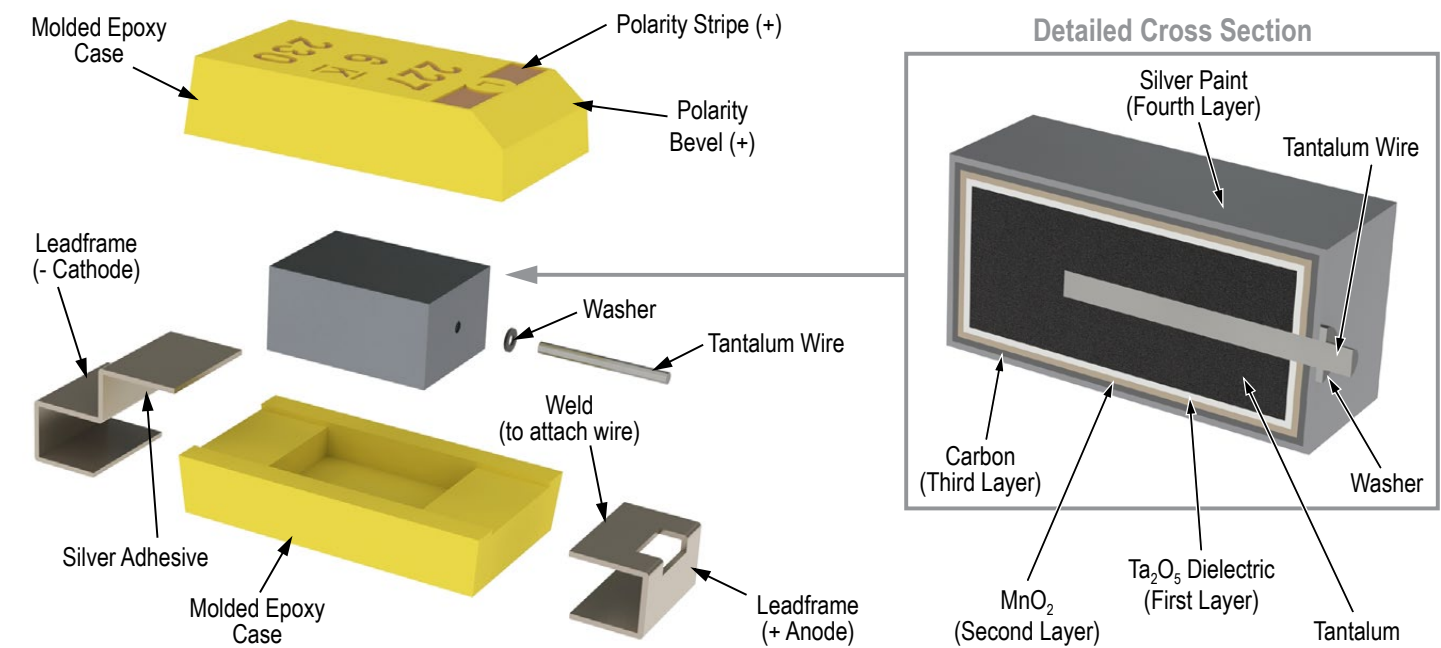

Capacitor Marking

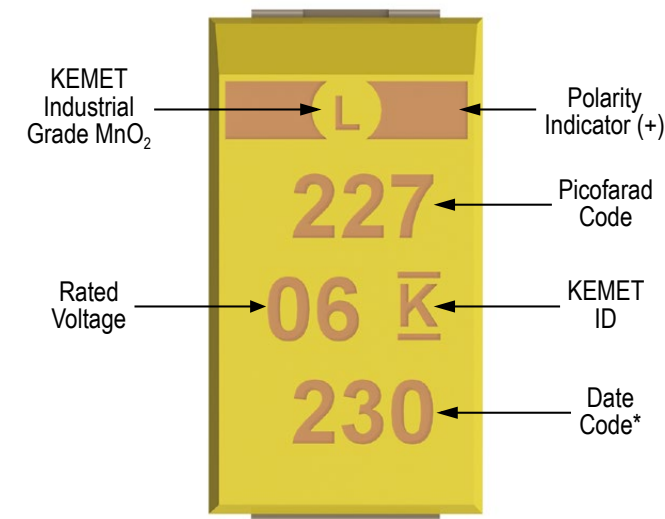

\* 230 = 30<sup>th</sup> week of 2012

| Date Code *                                                  |                                                                                    |
|--------------------------------------------------------------|------------------------------------------------------------------------------------|
| 1 <sup>st</sup> digit = Last number of Year                  | 9 = 2009<br>0 = 2010<br>1 = 2011<br>2 = 2012<br>3 = 2013<br>4 = 2014               |
| 2 <sup>nd</sup> and 3 <sup>rd</sup> digit = Week of the Year | 01 = 1 <sup>st</sup> week of the Year to<br>52 = 52 <sup>nd</sup> week of the Year |


## Overview

The KEMET T490 Series, designed for customer product applications (low temperature demanding applications), meets RoHS compliance with leads constructed of 100% matte tin and green molding compound. This series is classified as MSL (Moisture Sensitivity Level) 1 under J STD 020: unlimited floor life time at ≤30°C / 85% RH. Tin/lead (Sn/Pb) terminations

are available upon request for any part number. Gold-plated terminations are also available for use with conductive epoxy attachment processes. Standard packaging of these devices is tape and reel in accordance with EIA 481. This system provides perfect compatibility with all tape-fed placement units.

## Benefits

- Taped and reeled per EIA 481
- Symmetrical compliant terminations
- Optional gold-plated terminations
- Laser-marked case
- Suitable for 3 x 260°C reflow passes
- Halogen-free epoxy
- Capacitance values of 47 µF to 470 µF
- Tolerance of ±20%
- Voltage rating of 4 – 10 VDC
- 0.2% per 1,000 hours at 85°C 0.5 V<sub>R</sub> Reliability
- Small and low profile case sizes
- RoHS Compliant and lead-free terminations
- MSL Reflow Temp ≤ 260°C = 1
- Operating temperature range of -55°C to +40°C

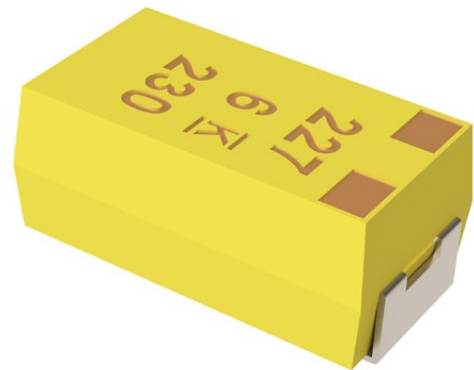

## Applications

Typical applications include decoupling and filtering in communications end applications such as cellphones and consumer mobile.

## Environmental Compliance

RoHS Compliant (6/6) according to Directive 2002/95/EC when ordered with 100% Sn solder.



RoHS Compliant

## SPICE

For a detailed analysis of specific part numbers, please visit [www.kemet.com](http://www.kemet.com) for a free download of KEMET's SPICE software. The KEMET SPICE program is freeware intended to aid design engineers in analyzing the performance of these capacitors over frequency, temperature, ripple, and DC bias conditions.

## Ordering Information

| T               | 490        | B         | 227                                                                                    | M                     | 006                                    | A                   | T                                                                                                                |                                    |
|-----------------|------------|-----------|----------------------------------------------------------------------------------------|-----------------------|----------------------------------------|---------------------|------------------------------------------------------------------------------------------------------------------|------------------------------------|
| Capacitor Class | Series     | Case Size | Capacitance Code (pF)                                                                  | Capacitance Tolerance | Voltage                                | Failure Rate/Design | Lead Material                                                                                                    | Packaging (C-Spec)                 |
| T = Tantalum    | Industrial | A, B, T   | First two digits represent significant figures. Third digit specifies number of zeros. | M = $\pm 20\%$        | 004 = 4 V<br>006 = 6.3 V<br>010 = 10 V | A = N/A             | T = 100% Matte Tin (Sn) Plated<br>H = Standard Solder Coated (SnPb 5% Pb minimum)<br>G = Gold Plated (A, B only) | Blank = 7" Reel<br>7280 = 13" Reel |

## Performance Characteristics

| Item                    | Performance Characteristics                                |
|-------------------------|------------------------------------------------------------|
| Operating Temperature   | -55°C to 40°C                                              |
| Rated Capacitance Range | 47 – 470 $\mu$ F @ 120 Hz/25°C                             |
| Capacitance Tolerance   | M Tolerance (20%)                                          |
| Rated Voltage Range     | 4 – 10 V                                                   |
| ESR (100 kHz)           | Refer to Part Number Electrical Specification Table        |
| Leakage Current         | $\leq 0.01$ CV ( $\mu$ A) at rated voltage after 5 minutes |




## Qualification

| Test                  | Condition                                                                                                     |       | Characteristics |                                    |         |         |
|-----------------------|---------------------------------------------------------------------------------------------------------------|-------|-----------------|------------------------------------|---------|---------|
| Endurance             | 40°C @ 1.0 V <sub>R</sub> 85°C @ 1/2 V <sub>R</sub> and 125°C @ 1/5 rated voltage, 1,000 hours                |       | Δ C/C           | Within +10%/- 20% of initial value |         |         |
|                       |                                                                                                               |       | DCL             | Within 2 x initial limit           |         |         |
|                       |                                                                                                               |       | ESR             | Within 2.5 x initial limits        |         |         |
| Storage Life          | 85°C @ 0 volts, 1,000 hours                                                                                   |       | Δ C/C           | Within +10%/- 20% of initial value |         |         |
|                       |                                                                                                               |       | DCL             | Within 1.25 x initial limit        |         |         |
|                       |                                                                                                               |       | ESR             | Within initial limits              |         |         |
| Humidity              | 40°C, 93% RH, 1,000 hours, no load                                                                            |       | Δ C/C           | Within -5%/+35% of initial value   |         |         |
|                       |                                                                                                               |       | DCL             | Within 2.0 x initial limit         |         |         |
| Temperature Stability | Extreme temperature exposure at a succession of continuous steps at +25°C, -55°C, +25°C, +85°C, +125°C, +25°C |       | +25°C           | -55°C                              | +85°C   | +125°C  |
|                       |                                                                                                               | Δ C/C | IL*             | ±10%                               | ±20%    | ±30%    |
|                       |                                                                                                               | DCL   | IL              | n/a                                | 10 x IL | 15 x IL |
| Surge Voltage         | 40°C, 1.32 x rated voltage 1,000 cycles                                                                       |       | Δ C/C           | Within +10%/- 20% of initial value |         |         |
|                       |                                                                                                               |       | DCL             | Within 2.0 x initial limits        |         |         |
|                       |                                                                                                               |       | ESR             | Within 1.25 x initial limits       |         |         |


\*IL = Initial limit

## Electrical Characteristics

ESR vs. Frequency

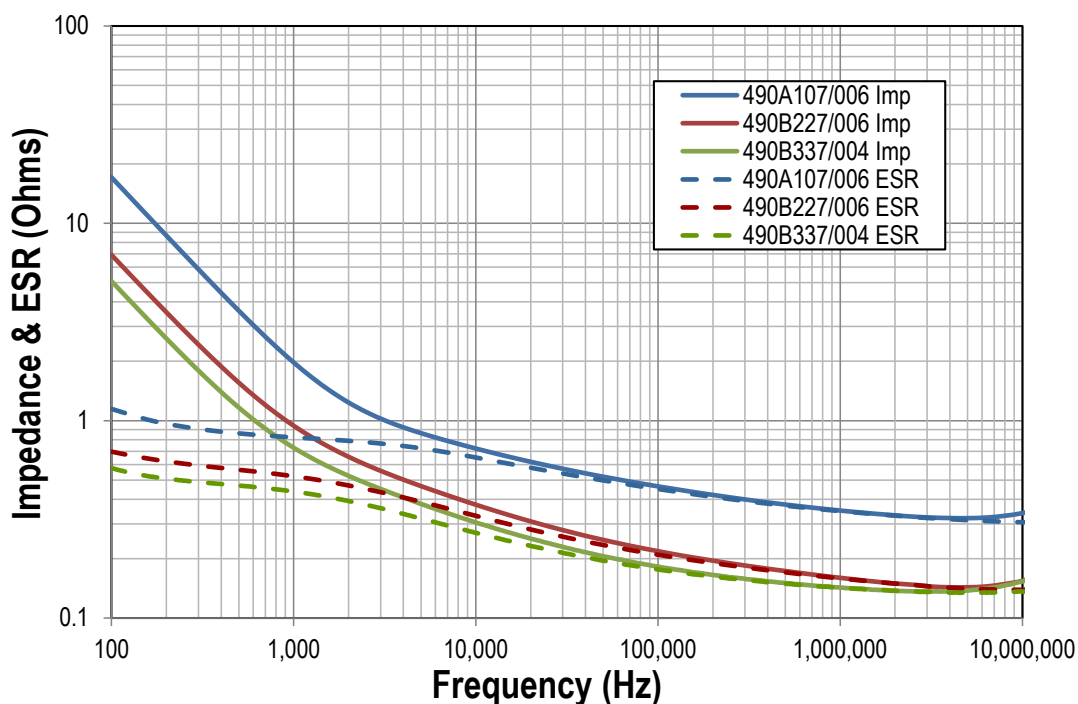


Capacitance vs. Frequency

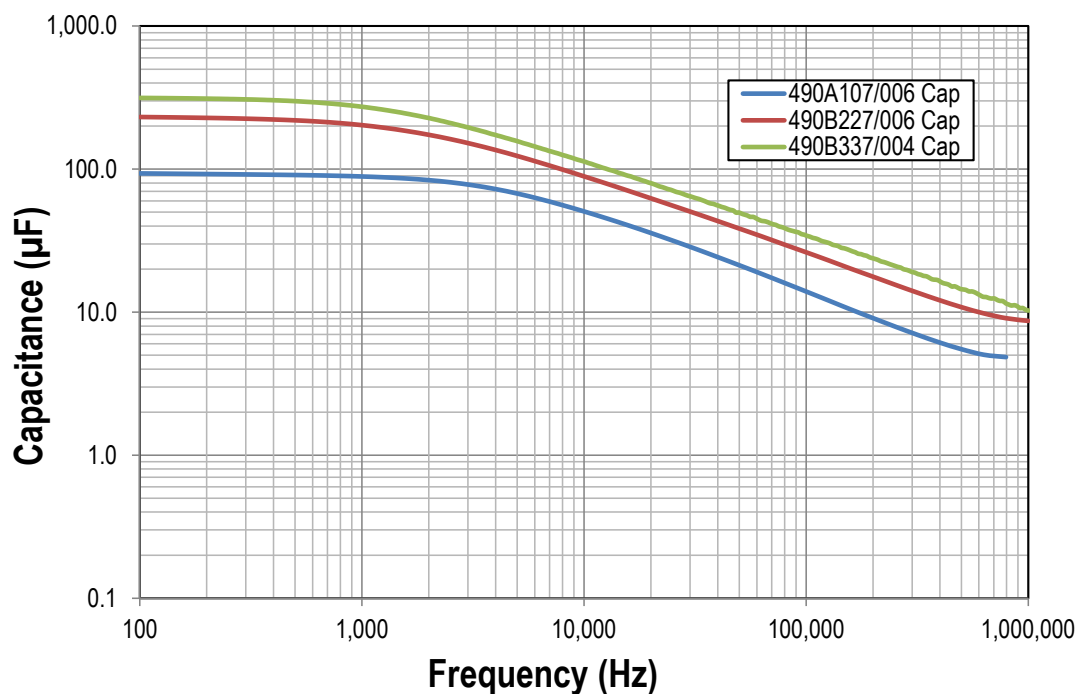

## Dimensions – Millimeters (Inches)

Metric will govern


CATHODE (-) END VIEW




SIDE VIEW



ANODE (+) END VIEW



BOTTOM VIEW

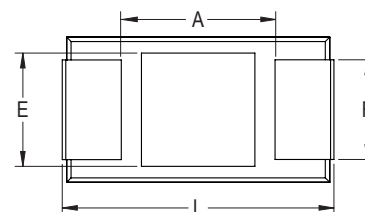

| Case Size |         | Component                  |                            |                            |                    |                    |                         |                              |             |             |             |             |             |             |
|-----------|---------|----------------------------|----------------------------|----------------------------|--------------------|--------------------|-------------------------|------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| KEMET     | EIA     | L*                         | W*                         | H*                         | F* ±0.1<br>±(.004) | S* ±0.3<br>±(.012) | B* ±0.15<br>(Ref) ±.006 | X (Ref)                      | P (Ref)     | R (Ref)     | T (Ref)     | A (Min)     | G (Ref)     | E (Ref)     |
| A         | 3216-18 | 3.2 ±0.2<br>(0.126 ±0.008) | 1.6 ±0.2<br>(0.063 ±0.008) | 1.6 ±0.2<br>(0.063 ±0.008) | 1.2 (0.047)        | 0.8 (0.031)        | 0.4 (.016)              | 0.10 ±0.10<br>(0.004 ±0.004) | 0.4 (0.016) | 0.4 (0.016) | 0.13 (.005) | 0.8 (0.31)  | 1.1 (0.043) | 1.3 (0.051) |
| B         | 3528-21 | 3.5 ±0.2<br>(0.138 ±0.008) | 2.8 ±0.2<br>(0.110 ±0.008) | 1.9 ±0.2<br>(0.075 ±0.008) | 2.2 (0.087)        | 0.8 (0.031)        | 0.4 (.016)              | 0.10 ±0.10<br>(0.004 ±0.004) | 0.5 (0.020) | 1.0 (0.039) | 0.13 (.005) | 1.1 (0.043) | 1.8 (0.071) | 2.2 (0.087) |
| T         | 3528-12 | 3.5 ±0.2<br>(0.138 ±0.008) | 2.8 ±0.2<br>(0.110 ±0.008) | 1.2 (0.047)                | 2.2 (0.087)        | 0.8 (0.031)        | n/a                     | 0.05 (0.002)                 | n/a         | n/a         | 0.13 (.005) | 1.1 (0.043) | 1.8 (0.071) | 2.2 (0.087) |

Notes: (Ref) – Dimensions provided for reference only. No dimensions are provided for B, P or R because low profile cases do not have a bevel or a notch.

\* MIL-PRF-55365/8 specified dimensions

**Table 1 – Ratings & Part Number Reference**

| Rated Voltage | Rated Capacitance | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage                          | ESR                             | Maximum Allowable Ripple Current | Maximum Operating Temp | MSL                     |
|---------------|-------------------|-------------------------|------------------------------|-------------------------------------|---------------------------------|----------------------------------|------------------------|-------------------------|
| VDC @ 40°C    | µF                | KEMET/EIA               | (See below for part options) | µA @ +20°C<br>Maximum/<br>5 Minutes | Ω @ +20°C<br>100 kHz<br>Maximum | mA @ +25°C<br>100 kHz            | °C                     | Reflow Temp<br>≤ 260 °C |
| 4             | 100               | A/3216-18               | T490A107M004A(1)E500         | 4.0                                 | 0.5                             | 387                              | 40                     | 1                       |
| 4             | 150               | A/3216-18               | T490A157M004A(1)E800         | 6.0                                 | 0.8                             | 306                              | 40                     | 1                       |
| 4             | 150               | T/3528-12               | T490T157M004A(1)E1K1         | 6.0                                 | 1.1                             | 252                              | 40                     | 1                       |
| 4             | 220               | B/3528-21               | T490B227M004A(1)E500         | 8.8                                 | 0.5                             | 412                              | 40                     | 1                       |
| 4             | 330               | B/3528-21               | T490B337M004A(1)E800         | 13.2                                | 0.8                             | 326                              | 40                     | 1                       |
| 4             | 470               | B/3528-21               | T490B477M004A(1)E1K0         | 18.8                                | 1.0                             | 291                              | 40                     | 1                       |
| 6             | 47                | T/3528-12               | T490T476M006A(1)E800         | 2.8                                 | 0.8                             | 295                              | 40                     | 1                       |
| 6             | 68                | A/3216-18               | T490A686M006A(1)E1K0         | 4.1                                 | 1.0                             | 274                              | 40                     | 1                       |
| 6             | 68                | T/3528-12               | T490T686M006A(1)E600         | 4.1                                 | 0.6                             | 342                              | 40                     | 1                       |
| 6             | 100               | A/3216-18               | T490A107M006A(1)E500         | 6.0                                 | 0.5                             | 387                              | 40                     | 1                       |
| 6             | 100               | A/3216-18               | T490A107M006A(1)E800         | 6.0                                 | 0.8                             | 306                              | 40                     | 1                       |
| 6             | 100               | T/3528-12               | T490T107M006A(1)E1K0         | 6.0                                 | 1.0                             | 265                              | 40                     | 1                       |
| 6             | 150               | B/3528-21               | T490B157M006A(1)E500         | 9.0                                 | 0.5                             | 412                              | 40                     | 1                       |
| 6             | 150               | B/3528-21               | T490B157M006A(1)E800         | 9.0                                 | 0.8                             | 326                              | 40                     | 1                       |
| 6             | 220               | B/3528-21               | T490B227M006A(1)E300         | 13.2                                | 0.3                             | 532                              | 40                     | 1                       |
| 6             | 220               | B/3528-21               | T490B227M006A(1)E500         | 13.2                                | 0.5                             | 412                              | 40                     | 1                       |
| 6             | 330               | B/3528-21               | T490B337M006A(1)E800         | 19.8                                | 0.8                             | 326                              | 40                     | 1                       |
| 10            | 47                | T/3528-12               | T490T476M010A(1)E1K0         | 4.7                                 | 1.0                             | 265                              | 40                     | 1                       |
| 10            | 47                | A/3216-18               | T490A476M010A(1)E1K0         | 4.7                                 | 1.0                             | 274                              | 40                     | 1                       |
| 10            | 150               | B/3528-21               | T490B157M010A(1)E500         | 15.0                                | 0.5                             | 412                              | 40                     | 1                       |
| 10            | 150               | B/3528-21               | T490B157M010A(1)E800         | 15.0                                | 0.8                             | 326                              | 40                     | 1                       |
| 10            | 220               | B/3528-21               | T490B227M010A(1)E800         | 22.0                                | 0.8                             | 326                              | 40                     | 1                       |
| VDC @ 40°C    | µF                | KEMET/EIA               | (See below for part options) | µA @ +20°C<br>Maximum/<br>5 Minutes | Ω @ +20°C<br>100 kHz<br>Maximum | mA @ +25°C<br>100 kHz            | °C                     | Reflow Temp<br>≤ 260 °C |
| Rated Voltage | Rated Capacitance | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage                          | ESR                             | Maximum Allowable Ripple Current | Maximum Operating Temp | MSL                     |

(1) To complete KEMET part number, insert T = 100% Matte Tin (Sn) Plated, G = Gold Plated, H = Standard Solder coated (SnPb 5% Pb minimum). Designates termination finish.

**Blue color text denotes "Under Development"**

Refer to Ordering Information for additional detail.


The ESR value may increase up to 1.5 x Initial Limit post mounting

The DCL value may increase up to 2.0 x Initial Limit post mounting

Higher voltage ratings and tighter tolerance product including ESR may be substituted within the same size at KEMET's option. Voltage substitution will be marked with the higher voltage rating. Substitutions can include better than series.

## Recommended Voltage Derating Guidelines

| -55°C to 40°C                                   |                        |                |
|-------------------------------------------------|------------------------|----------------|
| % Change in Working DC Voltage with Temperature | 100% of V <sub>R</sub> | V <sub>R</sub> |
| Recommended Maximum Application Voltage         | 50% of V <sub>R</sub>  | V <sub>R</sub> |
| 40°C to 85°C                                    |                        |                |
| % Change in Working DC Voltage with Temperature | 50% of V <sub>R</sub>  | V <sub>R</sub> |
| Recommended Maximum Application Voltage         | 50% of V <sub>R</sub>  | V <sub>R</sub> |
| 85°C to 125°C                                   |                        |                |
| % Change in Working DC Voltage with Temperature | 20% of V <sub>R</sub>  | V <sub>R</sub> |
| Recommended Maximum Application Voltage         | 20% of V <sub>R</sub>  | V <sub>R</sub> |

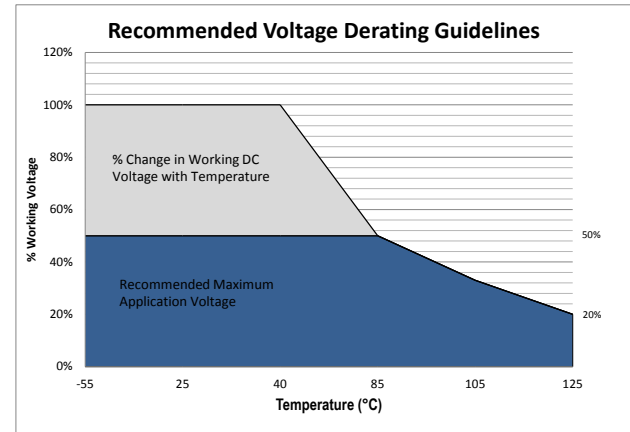

## Ripple Current/Ripple Voltage

Permissible AC ripple voltage and current are related to equivalent series resistance (ESR) and the power dissipation capabilities of the device. Permissible AC ripple voltage which may be applied is limited by two criteria:

1. The positive peak AC voltage plus the DC bias voltage, if any, must not exceed the DC voltage rating of the capacitor.
2. The negative peak AC voltage in combination with bias voltage, if any, must not exceed the allowable limits specified for reverse voltage. See the Reverse Voltage section for allowable limits.

The maximum power dissipation by case size can be determined using the table at right. The maximum power dissipation rating stated in the table must be reduced with increasing environmental operating temperatures. Refer to the table below for temperature compensation requirements.

| Temperature Compensation Multipliers<br>for Maximum Ripple Current |          |          |
|--------------------------------------------------------------------|----------|----------|
| T ≤ 25°C                                                           | T ≤ 40°C | T ≤ 85°C |
| 1.00                                                               | 0.90     | 0.40     |

T = Environmental Temperature

| KEMET<br>Case Code | EIA<br>Case Code | Maximum Power<br>Dissipation (P max)<br>mWatts @ 25°C<br>w/+20°C Rise |
|--------------------|------------------|-----------------------------------------------------------------------|
| A                  | 3216-18          | 75                                                                    |
| B                  | 3528-21          | 85                                                                    |
| T                  | 3528-12          | 70                                                                    |

The maximum power dissipation rating must be reduced with increasing environmental operating temperatures. Refer to the Temperature Compensation Multiplier table for details.

Using the P max of the device, the maximum allowable rms ripple current or voltage may be determined.

$$I(\text{max}) = \sqrt{P \text{ max} / R}$$

$$E(\text{max}) = Z \sqrt{P \text{ max} / R}$$

I = rms ripple current (amperes)

E = rms ripple voltage (volts)

P max = maximum power dissipation (watts)

R = ESR at specified frequency (ohms)

Z = Impedance at specified frequency (ohms)

## Reverse Voltage

Solid tantalum capacitors are polar devices and may be permanently damaged or destroyed if connected with the wrong polarity. The positive terminal is identified on the capacitor body by a stripe plus in some cases a beveled edge. A small degree of transient reverse voltage is permissible for short periods per the table. The capacitors should not be operated continuously in reverse mode, even within these limits.

| Temperature | Permissible Transient Reverse Voltage |
|-------------|---------------------------------------|
| 25°C        | 15% of Rated Voltage                  |
| 40°C        | 5% of Rated Voltage                   |
| 85°C        | 1% of Rated Voltage                   |

**Table 2 – Land Dimensions/Courtyard**

| KEMET | Metric Size Code | Density Level A:<br>Maximum (Most) Land Protrusion (mm) |      |      |      |      | Density Level B:<br>Median (Nominal) Land Protrusion (mm) |      |      |      |      | Density Level C:<br>Minimum (Least) Land Protrusion (mm) |      |      |      |      |
|-------|------------------|---------------------------------------------------------|------|------|------|------|-----------------------------------------------------------|------|------|------|------|----------------------------------------------------------|------|------|------|------|
|       |                  | W                                                       | L    | S    | V1   | V2   | W                                                         | L    | S    | V1   | V2   | W                                                        | L    | S    | V1   | V2   |
| A     | 3216-18          | 1.35                                                    | 2.20 | 0.62 | 6.02 | 2.80 | 1.23                                                      | 1.80 | 0.82 | 4.92 | 2.30 | 1.13                                                     | 1.42 | 0.98 | 4.06 | 2.04 |
| B     | 3528-21          | 2.35                                                    | 2.21 | 0.92 | 6.32 | 4.00 | 2.23                                                      | 1.80 | 1.12 | 5.22 | 3.50 | 2.13                                                     | 1.42 | 1.28 | 4.36 | 3.24 |
| T     | 3528-12          | 2.35                                                    | 2.20 | 0.92 | 6.32 | 4.00 | 2.23                                                      | 1.80 | 1.12 | 5.22 | 3.50 | 2.13                                                     | 1.42 | 1.28 | 4.36 | 3.24 |


**Density Level A:** For low-density product applications. Recommended for wave solder applications and provides a wider process window for reflow solder processes.

**Density Level B:** For products with a moderate level of component density. Provides a robust solder attachment condition for reflow solder processes.

**Density Level C:** For high component density product applications. Before adapting the minimum land pattern variations the user should perform qualification testing based on the conditions outlined in IPC standard 7351 (IPC-7351).

<sup>1</sup> Height of these chips may create problems in wave soldering.

<sup>2</sup> Land pattern geometry is too small for silkscreen outline.

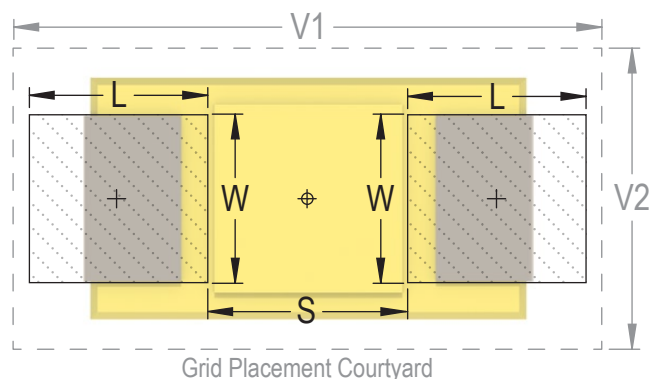

## Soldering Process

KEMET's families of surface mount capacitors are compatible with wave (single or dual), convection, IR, or vapor phase reflow techniques. Preheating of these components is recommended to avoid extreme thermal stress. KEMET's recommended profile conditions for convection and IR reflow reflect the profile conditions of the IPC/J-STD-020D standard for moisture sensitivity testing. The devices can safely withstand a maximum of three reflow passes at these conditions.

Please note that although the X/7343-43 case size can withstand wave soldering, the tall profile (4.3 mm maximum) dictates care in wave process development.

Hand soldering should be performed with care due to the difficulty in process control. If performed, care should be taken to avoid contact of the soldering iron to the molded case. The iron should be used to heat the solder pad, applying solder between the pad and the termination, until reflow occurs. Once reflow occurs, the iron should be removed immediately. "Wiping" the edges of a chip and heating the top surface is not recommended.


During typical reflow operations, a slight darkening of the gold-colored epoxy may be observed. This slight darkening is normal and not harmful to the product. Marking permanency is not affected by this change.

| Profile Feature                                       | SnPb Assembly       | Pb-Free Assembly    |
|-------------------------------------------------------|---------------------|---------------------|
| <b>Preheat/Soak</b>                                   |                     |                     |
| Temperature Minimum ( $T_{Smin}$ )                    | 100°C               | 150°C               |
| Temperature Maximum ( $T_{Smax}$ )                    | 150°C               | 200°C               |
| Time ( $t_s$ ) from $T_{Smin}$ to $T_{Smax}$          | 60 – 120 seconds    | 60 – 120 seconds    |
| Ramp-up Rate ( $T_L$ to $T_P$ )                       | 3°C/seconds maximum | 3°C/seconds maximum |
| Liquidous Temperature ( $T_L$ )                       | 183°C               | 217°C               |
| Time Above Liquidous ( $t_L$ )                        | 60 – 150 seconds    | 60 – 150 seconds    |
| Peak Temperature ( $T_P$ )                            | 220°C*<br>235°C**   | 250°C*<br>260°C**   |
| Time within 5°C of Maximum Peak Temperature ( $t_p$ ) | 20 seconds maximum  | 30 seconds maximum  |
| Ramp-down Rate ( $T_P$ to $T_L$ )                     | 6°C/seconds maximum | 6°C/seconds maximum |
| Time 25°C to Peak Temperature                         | 6 minutes maximum   | 8 minutes maximum   |

*Note: All temperatures refer to the center of the package, measured on the package body surface that is facing up during assembly reflow.*

\*Case Size D, E, P, Y, and X

\*\*Case Size A, B, C, H, I, K, M, R, S, T, U, V, W, and Z

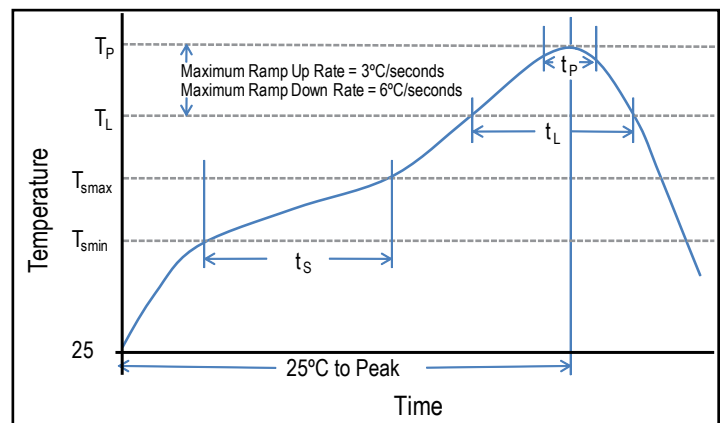


## Storage


Tantalum chip capacitors should be stored in normal working environments. While the chips themselves are quite robust in other environments, solderability will be degraded by exposure to high temperatures, high humidity, corrosive atmospheres, and long term storage. In addition, packaging materials will be degraded by high temperature—reels may soften or warp and tape peel force may increase. KEMET recommends that maximum storage temperature not exceed 40°C and maximum storage humidity not exceed 60% relative humidity. Temperature fluctuations should be minimized to avoid condensation on the parts and atmospheres should be free of chlorine and sulphur bearing compounds. For optimized solderability chip stock should be used promptly, preferably within three years of receipt.



## Construction

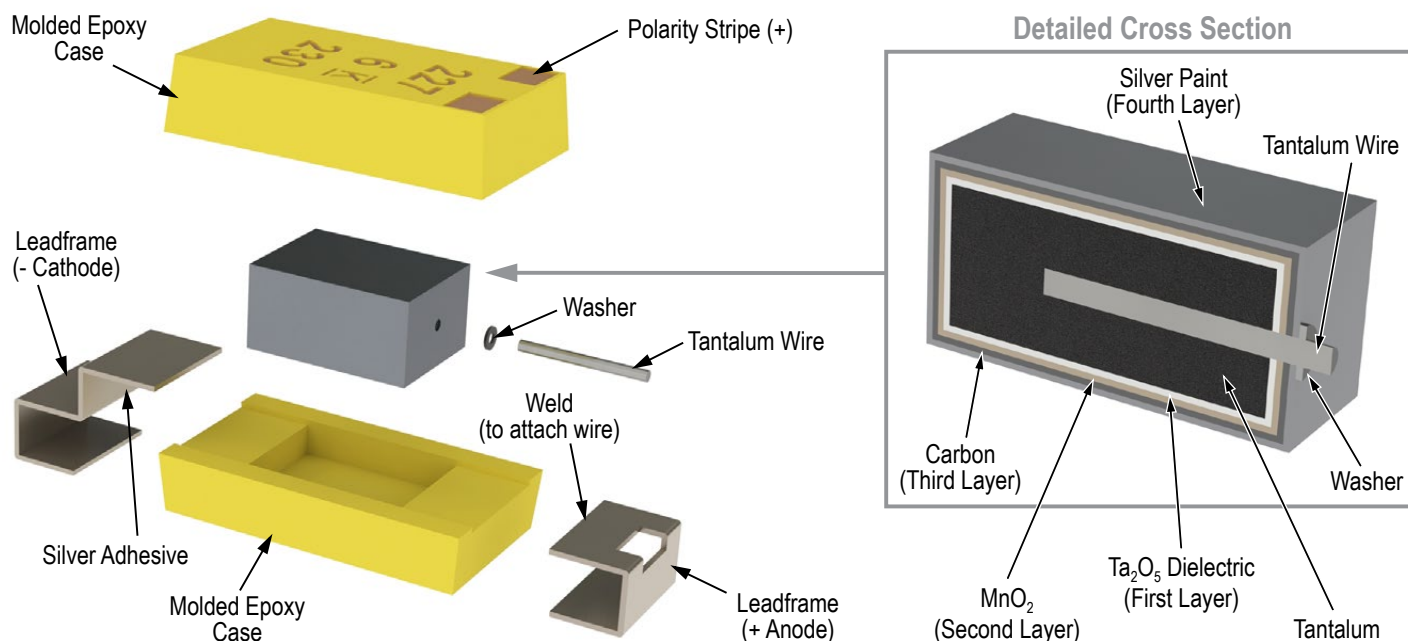

## Capacitor Marking

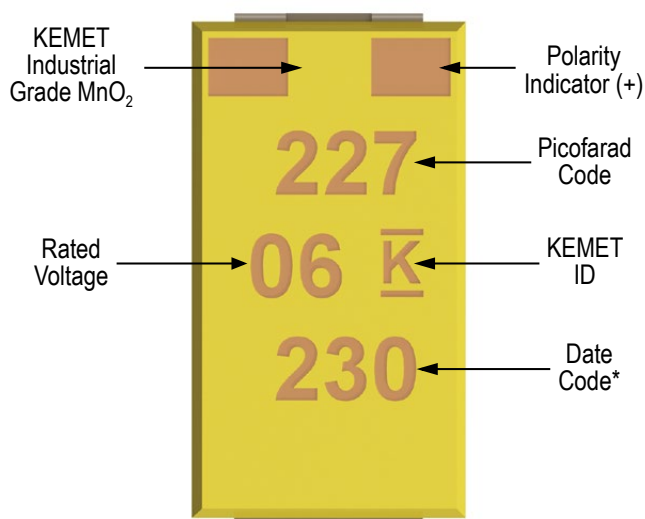


\* 230 = 30<sup>th</sup> week of 2012

| Date Code *                                                  |                                                                                    |
|--------------------------------------------------------------|------------------------------------------------------------------------------------|
| 1 <sup>st</sup> digit = Last number of Year                  | 9 = 2009<br>0 = 2010<br>1 = 2011<br>2 = 2012<br>3 = 2013<br>4 = 2014               |
| 2 <sup>nd</sup> and 3 <sup>rd</sup> digit = Week of the Year | 01 = 1 <sup>st</sup> week of the Year to<br>52 = 52 <sup>nd</sup> week of the Year |

## Tape & Reel Packaging Information


KEMET's molded tantalum and aluminum chip capacitor families are packaged in 8 and 12 mm plastic tape on 7" and 13" reels in accordance with *EIA Standard 481: Embossed Carrier Taping of Surface Mount Components for Automatic Handling*. This packaging system is compatible with all tape-fed automatic pick-and-place systems.

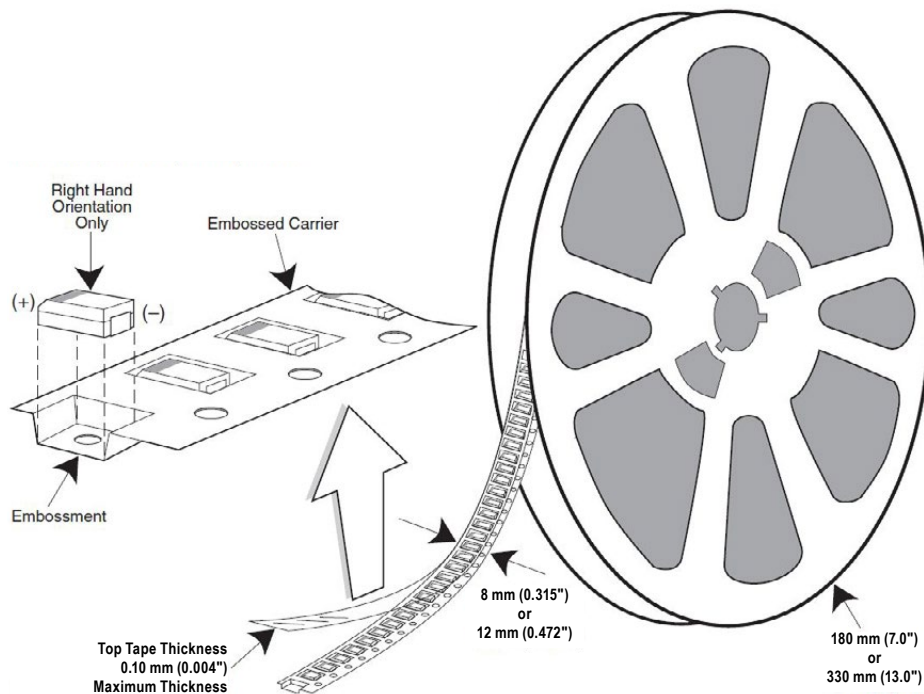

**Table 3 – Packaging Quantity**

| Case Code |         | Tape Width (mm) | 7" Reel* | 13" Reel* |
|-----------|---------|-----------------|----------|-----------|
| KEMET     | EIA     |                 |          |           |
| S         | 3216-12 | 8               | 2,500    | 10,000    |
| T         | 3528-12 | 8               | 2,500    | 10,000    |
| M         | 3528-15 | 8               | 2,000    | 8,000     |
| U         | 6032-15 | 12              | 1,000    | 5,000     |
| L         | 6032-19 | 12              | 1,000    | 5,000     |
| W         | 7343-15 | 12              | 1,000    | 3,000     |
| Z         | 7343-17 | 12              | 1,000    | 3,000     |
| V         | 7343-20 | 12              | 1,000    | 3,000     |
| A         | 3216-18 | 8               | 2,000    | 9,000     |
| B         | 3528-21 | 8               | 2,000    | 8,000     |
| C         | 6032-28 | 12              | 500      | 3,000     |
| D         | 7343-31 | 12              | 500      | 2,500     |
| Q         | 7343-12 | 12              | 1,000    | 3,000     |
| Y         | 7343-40 | 12              | 500      | 2,000     |
| X         | 7343-43 | 12              | 500      | 2,000     |
| E/T428P   | 7360-38 | 12              | 500      | 2,000     |
| H         | 7360-20 | 12              | 1,000    | 2,500     |

\* No C-Spec required for 7" reel packaging. C-7280 required for 13" reel packaging.

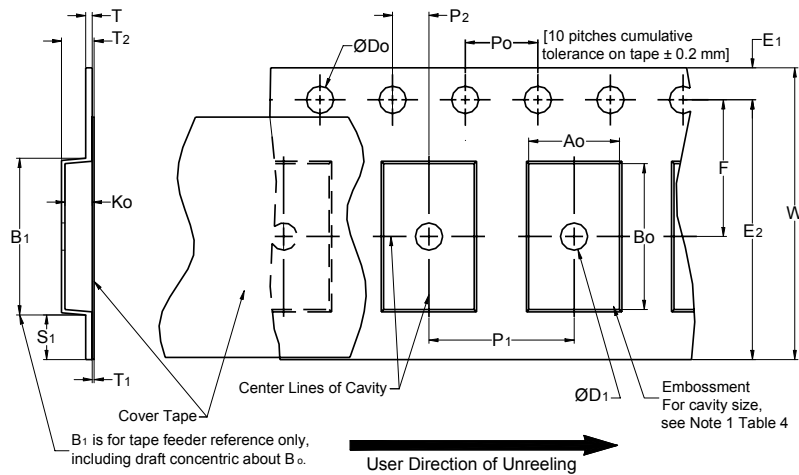**Figure 1 – Embossed (Plastic) Carrier Tape Dimensions****Table 4 – Embossed (Plastic) Carrier Tape Dimensions**

Metric will govern

| Constant Dimensions — Millimeters (Inches) |                                       |                                  |                              |                             |                                                                                        |                        |                                  |                                                  |                        |
|--------------------------------------------|---------------------------------------|----------------------------------|------------------------------|-----------------------------|----------------------------------------------------------------------------------------|------------------------|----------------------------------|--------------------------------------------------|------------------------|
| Tape Size                                  | D <sub>0</sub>                        | D <sub>1</sub> Minimum<br>Note 1 | E <sub>1</sub>               | P <sub>0</sub>              | P <sub>2</sub>                                                                         | R Reference<br>Note 2  | S <sub>1</sub> Minimum<br>Note 3 | T Maximum                                        | T <sub>1</sub> Maximum |
| 8 mm                                       | 1.5 +0.10/-0.0<br>(0.059 +0.004/-0.0) | 1.0<br>(0.039)                   | 1.75 ±0.10<br>(0.069 ±0.004) | 4.0 ±0.10<br>(0.157 ±0.004) | 2.0 ±0.05<br>(0.079 ±0.002)                                                            | 25.0<br>(0.984)        | 0.600<br>(0.024)                 | 0.600<br>(0.024)                                 | 0.100<br>(0.004)       |
| 12 mm                                      |                                       | 1.5<br>(0.059)                   |                              |                             | 2.0 ±0.1<br>(0.079 ±0.059)                                                             | 30<br>(1.181)          |                                  |                                                  |                        |
| 16 mm                                      |                                       |                                  |                              |                             |                                                                                        |                        |                                  |                                                  |                        |
| Variable Dimensions — Millimeters (Inches) |                                       |                                  |                              |                             |                                                                                        |                        |                                  |                                                  |                        |
| Tape Size                                  | Pitch                                 | B <sub>1</sub> Maximum<br>Note 4 | E <sub>2</sub> Minimum       | F                           | P <sub>1</sub>                                                                         | T <sub>2</sub> Maximum | W Maximum                        | A <sub>0</sub> , B <sub>0</sub> & K <sub>0</sub> |                        |
| 8 mm                                       | Single (4 mm)                         | 4.35<br>(0.171)                  | 6.25<br>(0.246)              | 3.5 ±0.05<br>(0.138 ±0.002) | 2.0 ±0.05 or 4.0 ±0.10<br>(0.079 ±0.002 or 0.157 ±0.004)                               | 2.5<br>(0.098)         | 8.3<br>(0.327)                   | Note 5                                           |                        |
| 12 mm                                      | Single (4 mm) &<br>Double (8 mm)      | 8.2<br>(0.323)                   | 10.25<br>(0.404)             | 5.5 ±0.05<br>(0.217 ±0.002) | 2.0 ±0.05 (0.079 ±0.002) or 4.0<br>±0.10 (0.157 ±0.004) or 8.0 ±0.10<br>(0.315 ±0.004) | 4.6<br>(0.181)         | 12.3<br>(0.484)                  |                                                  |                        |
| 16 mm                                      | Triple (12 mm)                        | 12.1<br>(0.476)                  | 14.25<br>(0.561)             | 7.5±0.10<br>(0.295 ±0.004)  | 4.0 ±0.10 (0.157 ±0.004) to 12.0<br>±0.10 (0.472 ±0.004)                               | 8.0 (0.315)            | 16.3<br>(0.642)                  |                                                  |                        |

1. The embossment hole location shall be measured from the sprocket hole controlling the location of the embossment. Dimensions of embossment location and hole location shall be applied independent of each other.
2. The tape, with or without components, shall pass around R without damage (see Figure 4).
3. If S<sub>1</sub> < 1.0 mm, there may not be enough area for cover tape to be properly applied (see EIA Standard 481–D, paragraph 4.3, section b).
4. B<sub>1</sub> dimension is a reference dimension for tape feeder clearance only.
5. The cavity defined by A<sub>0</sub>, B<sub>0</sub> and K<sub>0</sub> shall surround the component with sufficient clearance that:
  - (a) the component does not protrude above the top surface of the carrier tape.
  - (b) the component can be removed from the cavity in a vertical direction without mechanical restriction, after the top cover tape has been removed.
  - (c) rotation of the component is limited to 20° maximum for 8 and 12 mm tapes and 10° maximum for 16 mm tapes (see Figure 2).
  - (d) lateral movement of the component is restricted to 0.5 mm maximum for 8 mm and 12 mm wide tape and to 1.0 mm maximum for 16 mm tape (see Figure 3).
  - (e) see Addendum in EIA Standard 481–D for standards relating to more precise taping requirements.

## Packaging Information Performance Notes



- 1. Cover Tape Break Force:** 1.0 Kg minimum.
- 2. Cover Tape Peel Strength:** The total peel strength of the cover tape from the carrier tape shall be:

| Tape Width   | Peel Strength                    |
|--------------|----------------------------------|
| 8 mm         | 0.1 to 1.0 Newton (10 to 100 gf) |
| 12 and 16 mm | 0.1 to 1.3 Newton (10 to 130 gf) |


The direction of the pull shall be opposite the direction of the carrier tape travel. The pull angle of the carrier tape shall be 165° to 180° from the plane of the carrier tape. During peeling, the carrier and/or cover tape shall be pulled at a velocity of 300 ±10 mm/minute.

- 3. Labeling:** Bar code labeling (standard or custom) shall be on the side of the reel opposite the sprocket holes. Refer to EIA Standards 556 and 624.


## Figure 2 – Maximum Component Rotation

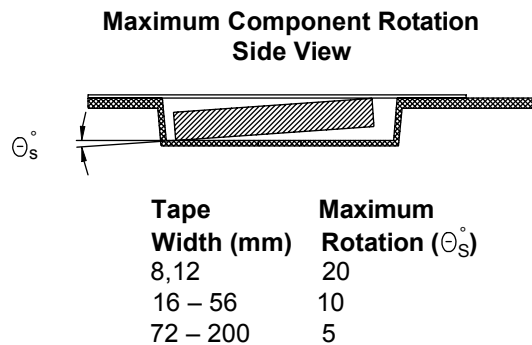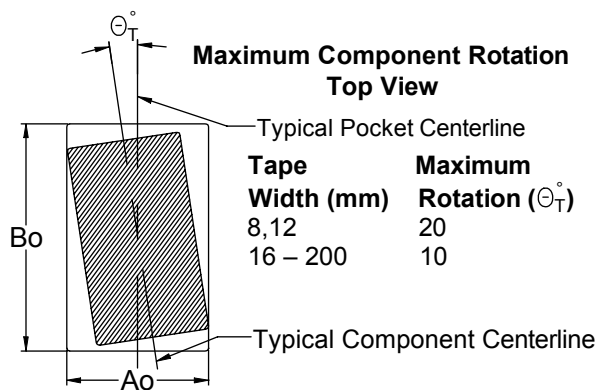


## Figure 3 – Maximum Lateral Movement

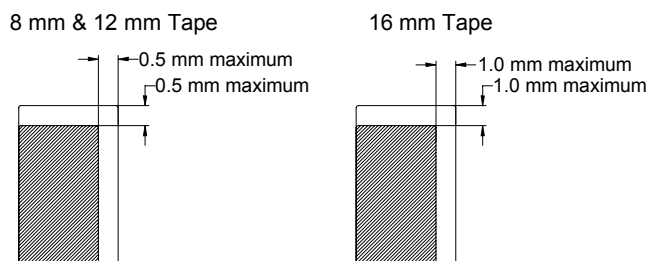

## Figure 4 – Bending Radius

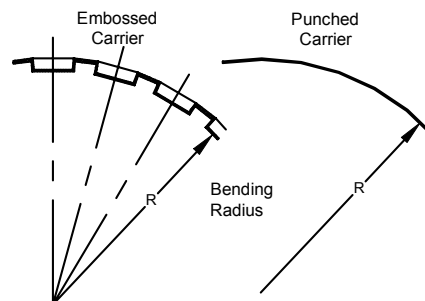


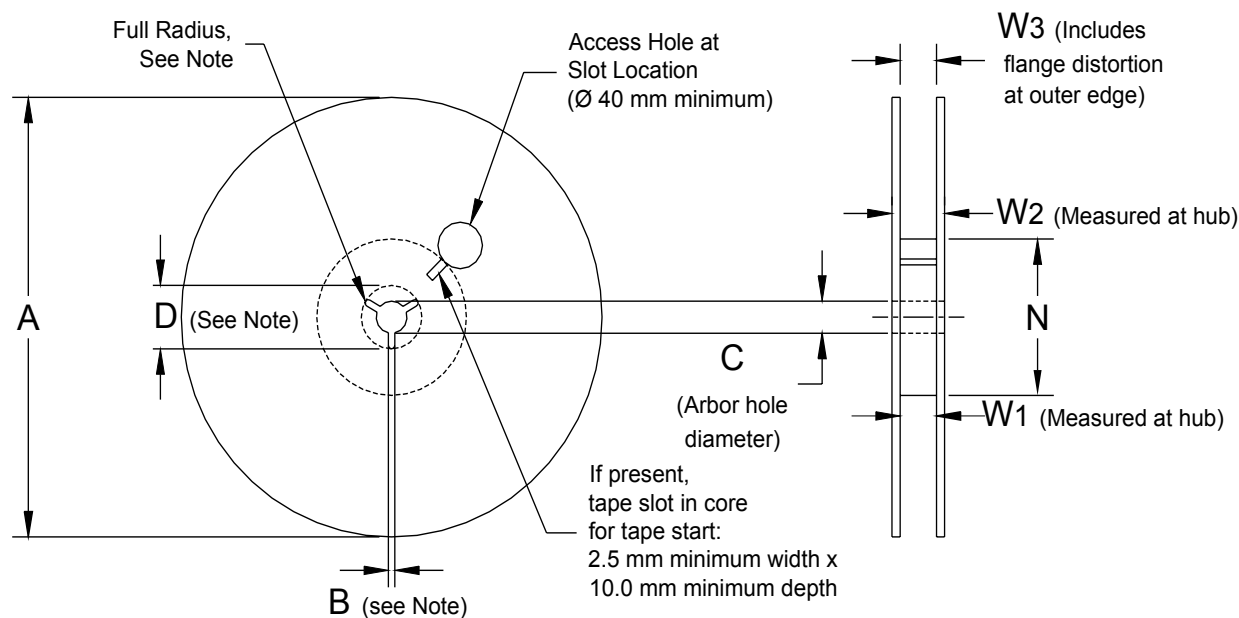
**Figure 5 – Reel Dimensions**

Note: Drive spokes optional; if used, dimensions B and D shall apply.

**Table 5 – Reel Dimensions**

Metric will govern

| Constant Dimensions — Millimeters (Inches) |                                                                   |                                       |                                        |                                                      |
|--------------------------------------------|-------------------------------------------------------------------|---------------------------------------|----------------------------------------|------------------------------------------------------|
| Tape Size                                  | A                                                                 | B Minimum                             | C                                      | D Minimum                                            |
| 8 mm                                       | 178 ±0.20<br>(7.008 ±0.008)<br>or<br>330 ±0.20<br>(13.000 ±0.008) | 1.5<br>(0.059)                        | 13.0 +0.5/-0.2<br>(0.521 +0.02/-0.008) | 20.2<br>(0.795)                                      |
| 12 mm                                      |                                                                   |                                       |                                        |                                                      |
| 16 mm                                      |                                                                   |                                       |                                        |                                                      |
| Variable Dimensions — Millimeters (Inches) |                                                                   |                                       |                                        |                                                      |
| Tape Size                                  | N Minimum                                                         | W <sub>1</sub>                        | W <sub>2</sub> Maximum                 | W <sub>3</sub>                                       |
| 8 mm                                       | 50<br>(1.969)                                                     | 8.4 +1.5/-0.0<br>(0.331 +0.059/-0.0)  | 14.4<br>(0.567)                        | Shall accommodate tape width<br>without interference |
| 12 mm                                      |                                                                   | 12.4 +2.0/-0.0<br>(0.488 +0.078/-0.0) | 18.4<br>(0.724)                        |                                                      |
| 16 mm                                      |                                                                   | 16.4 +2.0/-0.0<br>(0.646 +0.078/-0.0) | 22.4<br>(0.882)                        |                                                      |

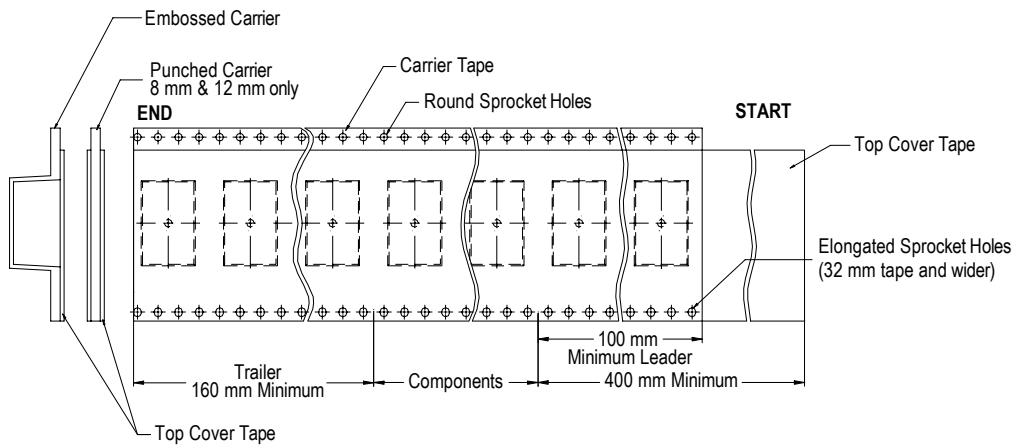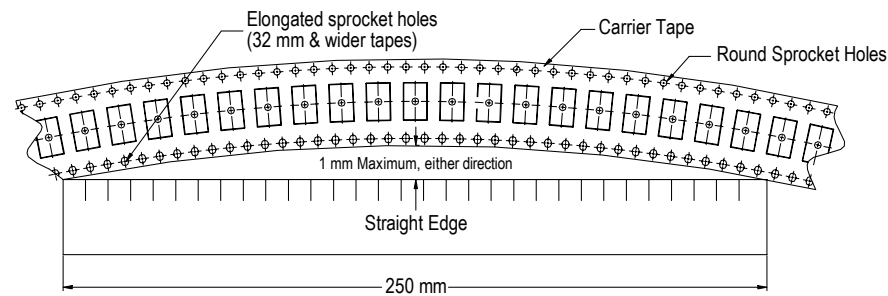**Figure 6 – Tape Leader & Trailer Dimensions****Figure 7 – Maximum Camber**

## KEMET Corporation World Headquarters

2835 KEMET Way  
Simpsonville, SC 29681

Mailing Address:  
P.O. Box 5928  
Greenville, SC 29606

www.kemet.com  
Tel: 864-963-6300  
Fax: 864-963-6521

**Corporate Offices**  
Fort Lauderdale, FL  
Tel: 954-766-2800

## North America

### Southeast

Lake Mary, FL  
Tel: 407-855-8886

### Northeast

Wilmington, MA  
Tel: 978-658-1663

### Central

Novi, MI  
Tel: 248-306-9353

### West

Milpitas, CA  
Tel: 408-433-9950

### Mexico

Guadalajara, Jalisco  
Tel: 52-33-3123-2141

## Europe

### Southern Europe

Paris, France  
Tel: 33-1-4646-1006

Sasso Marconi, Italy  
Tel: 39-051-939111

### Central Europe

Landsberg, Germany  
Tel: 49-8191-3350800

Kamen, Germany  
Tel: 49-2307-438110

### Northern Europe

Bishop's Stortford, United Kingdom  
Tel: 44-1279-460122

Espoo, Finland  
Tel: 358-9-5406-5000

## Asia

### Northeast Asia

Hong Kong  
Tel: 852-2305-1168

Shenzhen, China  
Tel: 86-755-2518-1306

Beijing, China  
Tel: 86-10-5829-1711

Shanghai, China  
Tel: 86-21-6447-0707

Taipei, Taiwan  
Tel: 886-2-27528585

### Southeast Asia

Singapore  
Tel: 65-6586-1900

Penang, Malaysia  
Tel: 60-4-6430200

Bangalore, India  
Tel: 91-806-53-76817

*Note: KEMET reserves the right to modify minor details of internal and external construction at any time in the interest of product improvement. KEMET does not assume any responsibility for infringement that might result from the use of KEMET Capacitors in potential circuit designs. KEMET is a registered trademark of KEMET Electronics Corporation.*



## Disclaimer

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed.

All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.

Product & Process Design

Sales & Marketing

Supplier

Material Management

Quality

Manufacturing

Logistics & Distribution

People: Leadership  
& Development

# KEMET Production System

One world. One KEMET

Electronic Components  
**KEMET**  
CHARGED.™

**Corporate Office**

KEMET Corporation  
2835 KEMET Way  
Simpsonville, SC 29681  
USA

Tel: 864.963.6300

Fax: 864.963.6521

[www.kemet.com](http://www.kemet.com)

One world. One KEMET.

Electronic Components  
**KEMET**  
CHARGED®