


Fast Diode				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
V_{RSM}	max. non-repetitive reverse blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				300	V
V_{RRM}	max. repetitive reverse blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				300	V
I_R	reverse current, drain current	$V_R = 300\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			650	μA
		$V_R = 300\text{ V}$	$T_{VJ} = 150^{\circ}\text{C}$			2.5	mA
V_F	forward voltage drop	$I_F = 60\text{ A}$	$T_{VJ} = 25^{\circ}\text{C}$			1.51	V
		$I_F = 120\text{ A}$				1.82	V
		$I_F = 60\text{ A}$	$T_{VJ} = 150^{\circ}\text{C}$			1.11	V
		$I_F = 120\text{ A}$				1.45	V
I_{FAV}	average forward current	$T_C = 80^{\circ}\text{C}$ rectangular	$T_{VJ} = 150^{\circ}\text{C}$ $d = 0.5$			60	A
V_{F0}	threshold voltage	} for power loss calculation only		$T_{VJ} = 150^{\circ}\text{C}$		0.79	V
r_F	slope resistance					5.3	m Ω
R_{thJC}	thermal resistance junction to case					0.85	K/W
R_{thCH}	thermal resistance case to heatsink				0.10		K/W
P_{tot}	total power dissipation	$T_C = 25^{\circ}\text{C}$				140	W
I_{FSM}	max. forward surge current	$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}; V_R = 0\text{ V}$	$T_{VJ} = 45^{\circ}\text{C}$			600	A
C_J	junction capacitance	$V_R = 150\text{ V}$ $f = 1\text{ MHz}$	$T_{VJ} = 25^{\circ}\text{C}$		170		pF
I_{RM}	max. reverse recovery current	$I_F = 60\text{ A}; V_R = 190\text{ V}$ $-di_F/dt = 600\text{ A}/\mu\text{s}$		$T_{VJ} = 25^{\circ}\text{C}$		12	A
				$T_{VJ} = 100^{\circ}\text{C}$		15	A
t_{rr}	reverse recovery time			$T_{VJ} = 25^{\circ}\text{C}$		40	ns
				$T_{VJ} = 100^{\circ}\text{C}$		60	ns

Package SOT-227B (minibloc)				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
I _{RMS}	RMS current	per terminal				100	A
T _{VJ}	virtual junction temperature			-40		150	°C
T _{op}	operation temperature			-40		125	°C
T _{stg}	storage temperature			-40		150	°C
Weight					30		g
M _D	mounting torque			1.1		1.5	Nm
M _T	terminal torque			1.1		1.5	Nm
d _{Spp/App}	creepage distance on surface striking distance through air	terminal to terminal	10.5	3.2			mm
d _{Spb/Apb}		terminal to backside	8.6	6.8			mm
V _{ISOL}	isolation voltage	t = 1 second	50/60 Hz, RMS; I _{ISOL} ≤ 1 mA	3000			V
		t = 1 minute		2500			V

Product Marking

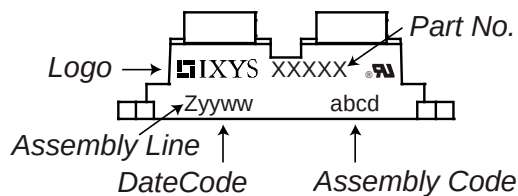


Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DSEP2x61-03A	DSEP2x61-03A	Tube	10	476250

Equivalent Circuits for Simulation

* on die level

$T_{VJ} = 150^\circ\text{C}$



Fast Diode

$V_{0\max}$ threshold voltage

0.79


V

$R_{0\max}$ slope resistance *


3.4

mΩ

Outlines SOT-227B (minibloc)

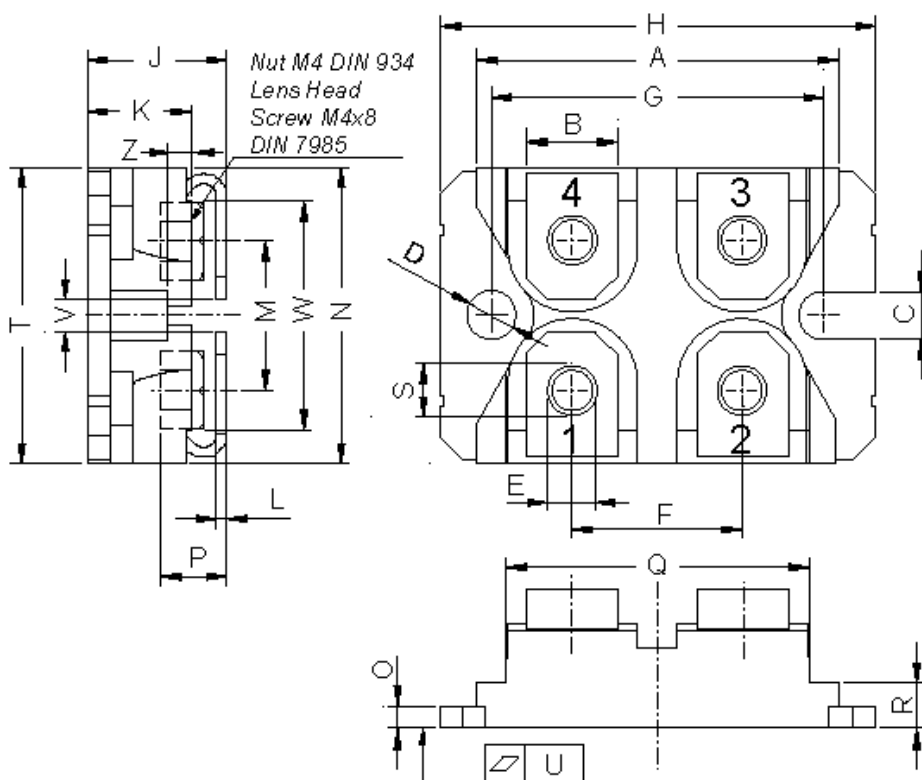

Dim.	Millimeter		Inches	
	min	max	min	max
A	31.50	31.88	1.240	1.255
B	7.80	8.20	0.307	0.323
C	4.09	4.29	0.161	0.169
D	4.09	4.29	0.161	0.169
E	4.09	4.29	0.161	0.169
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	37.80	38.23	1.488	1.505
J	11.68	12.22	0.460	0.481
K	8.92	9.60	0.351	0.378
L	0.74	0.84	0.029	0.033
M	12.50	13.10	0.492	0.516
N	25.15	25.42	0.990	1.001
O	1.95	2.13	0.077	0.084
P	4.95	6.20	0.195	0.244
Q	26.54	26.90	1.045	1.059
R	3.94	4.42	0.155	0.167
S	4.55	4.85	0.179	0.191
T	24.59	25.25	0.968	0.994
U	-0.05	0.10	-0.002	0.004
V	3.20	5.50	0.126	0.217
W	19.81	21.08	0.780	0.830
Z	2.50	2.70	0.098	0.106

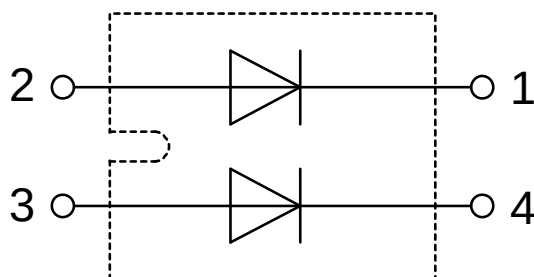

Fast Diode

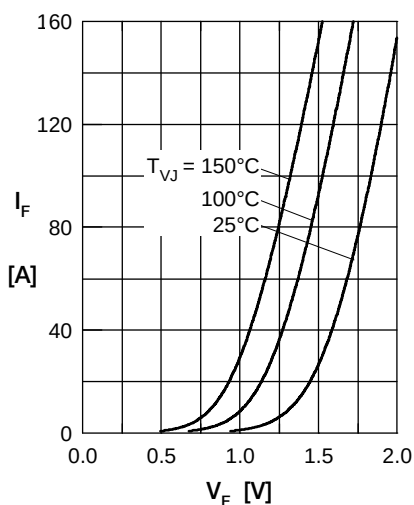


Fig. 1 Forward current I_F versus V_F

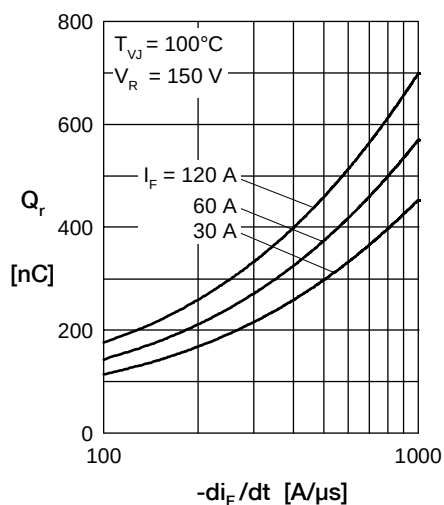


Fig. 2 Typ. reverse recov. charge Q_r versus $-di_F/dt$

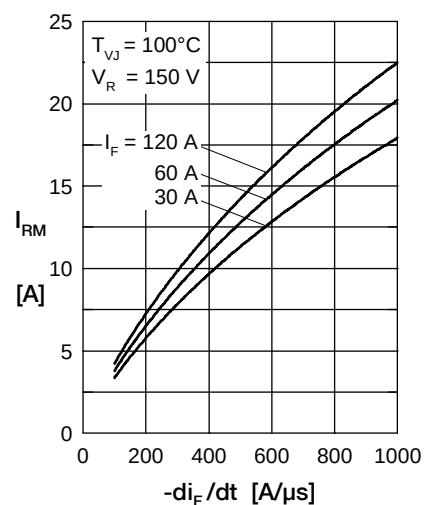


Fig. 3 Typ. peak reverse current I_{RM} versus $-di_F/dt$

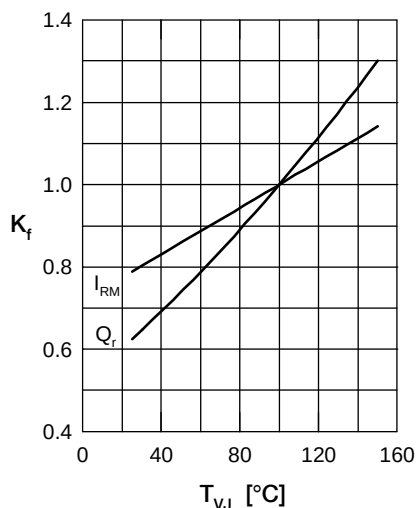


Fig. 4 Typ. dynamic parameters Q_r , I_{RM} versus T_{VJ}

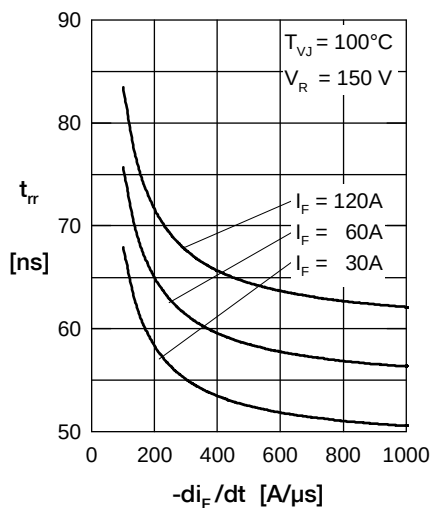


Fig. 5 Typ. recovery time t_{rr} versus $-di_F/dt$

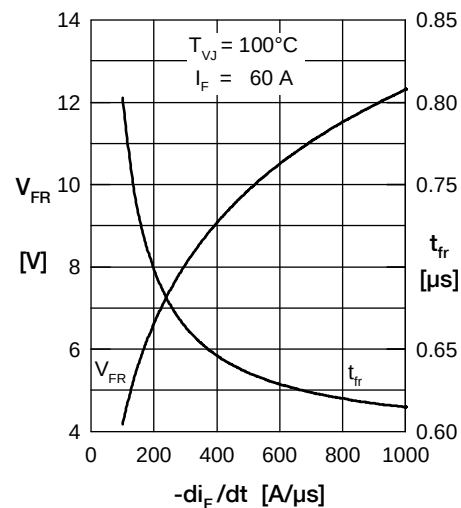


Fig. 6 Typ. peak forward voltage V_{FR} and t_{fr} versus di_F/dt

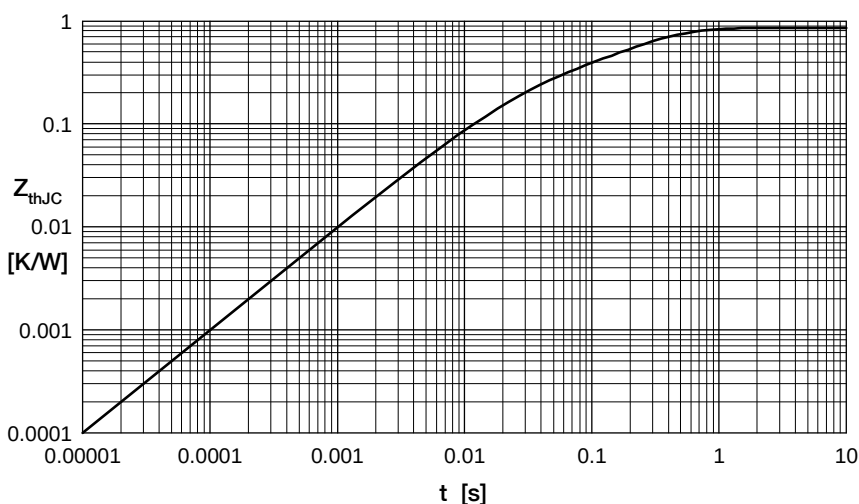


Fig. 7 Transient thermal resistance junction to case

Constants for Z_{thJC} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.307	0.0055
2	0.353	0.009
3	0.089	0.0007
4	0.101	0.04