


Fast Diode				Ratings				
Symbol	Definition	Conditions		min.	typ.	max.	Unit	
V _{RSM}	max. non-repetitive reverse blocking voltage	T _{VJ} = 25°C				400	V	
V _{RRM}	max. repetitive reverse blocking voltage	T _{VJ} = 25°C				400	V	
I _R	reverse current, drain current	V _R = 400 V	T _{VJ} = 25°C			1	μA	
		V _R = 400 V	T _{VJ} = 150°C			0.15	mA	
V _F	forward voltage drop	I _F = 10 A	T _{VJ} = 25°C			1.32	V	
		I _F = 20 A				1.51	V	
		I _F = 10 A	T _{VJ} = 150°C			1.03	V	
		I _F = 20 A				1.24	V	
I _{FAV}	average forward current	T _C = 150°C rectangular d = 0.5	T _{VJ} = 175°C			10	A	
V _{F0}	threshold voltage	} for power loss calculation only		T _{VJ} = 175°C		0.77	V	
r _F	slope resistance					19.8	mΩ	
R _{thJC}	thermal resistance junction to case					2.3	K/W	
R _{thCH}	thermal resistance case to heatsink				0.25		K/W	
P _{tot}	total power dissipation	T _C = 25°C				65	W	
I _{FSM}	max. forward surge current	t = 10 ms; (50 Hz), sine; V _R = 0 V		T _{VJ} = 45°C		150	A	
C _J	junction capacitance	V _R = 200 V f = 1 MHz		T _{VJ} = 25°C	12		pF	
I _{RM}	max. reverse recovery current	I _F = 10 A; V _R = 270 V -di _F /dt = 200 A/μs		T _{VJ} = 25°C	4		A	
				T _{VJ} = 125°C	6		A	
t _{rr}	reverse recovery time			T _{VJ} = 25°C	45		ns	
				T _{VJ} = 125°C	65		ns	

Package TO-263 (D2Pak)			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal			35	A
T_{VJ}	virtual junction temperature		-55		175	°C
T_{op}	operation temperature		-55		150	°C
T_{stg}	storage temperature		-55		150	°C
Weight				2		g
F_c	mounting force with clip		20		60	N

Product Marking

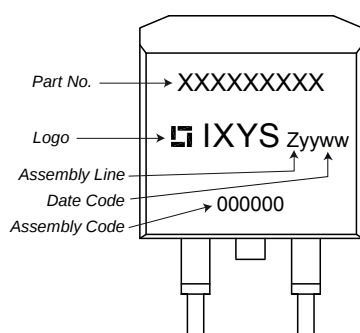

Part number

D = Diode
 P = HiPerFRED
 G = extreme fast
 20 = Current Rating [A]
 C = Common Cathode
 400 = Reverse Voltage [V]
 PC = TO-263AB (D2Pak) (2)

Ordering	Part Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DPG20C400PC	DPG20C400PC	Tape & Reel	800	507327

Similar Part	Package	Voltage class
DPG20C400PB	TO-220AB (3)	400
DPG20C400PN	TO-220ABFP (3)	400


Equivalent Circuits for Simulation

* on die level

 $T_{VJ} = 175^{\circ}\text{C}$


$I \rightarrow$	V_0	R_0	Fast Diode	
$V_{0\max}$	threshold voltage	0.77		V
$R_{0\max}$	slope resistance *	16.6		mΩ

Outlines TO-263 (D2Pak)

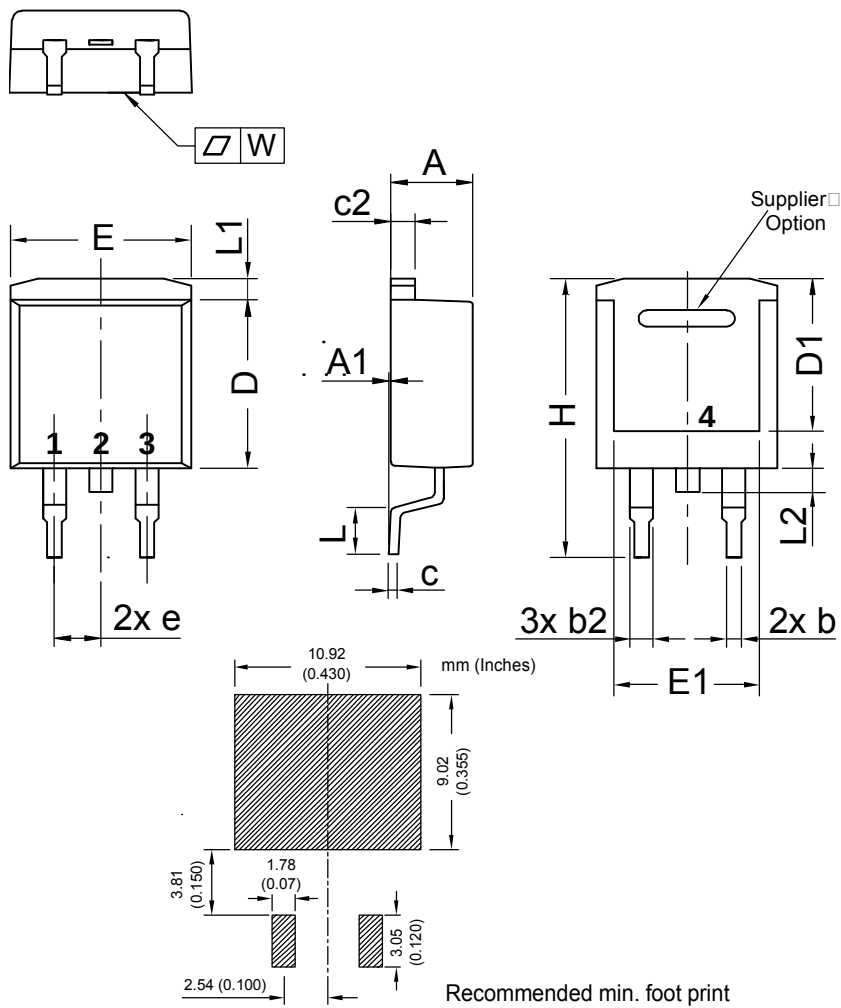

Dim.	Millimeter		Inches	
	min	max	min	max
A	4.06	4.83	0.160	0.190
A1	typ. 0.10		typ. 0.004	
A2	2.41		0.095	
b	0.51	0.99	0.020	0.039
b2	1.14	1.40	0.045	0.055
c	0.40	0.74	0.016	0.029
c2	1.14	1.40	0.045	0.055
D	8.38	9.40	0.330	0.370
D1	8.00	8.89	0.315	0.350
D2	2.5		0.098	
E	9.65	10.41	0.380	0.410
E1	6.22	8.50	0.245	0.335
e	2.54 BSC		0.100 BSC	
e1	4.28		0.169	
H	14.61	15.88	0.575	0.625
L	1.78	2.79	0.070	0.110
L1	1.02	1.68	0.040	0.066
W	typ. 0.02	0.040	typ. 0.0008	0.002

All dimensions conform with and/or within JEDEC standard.



Fast Diode

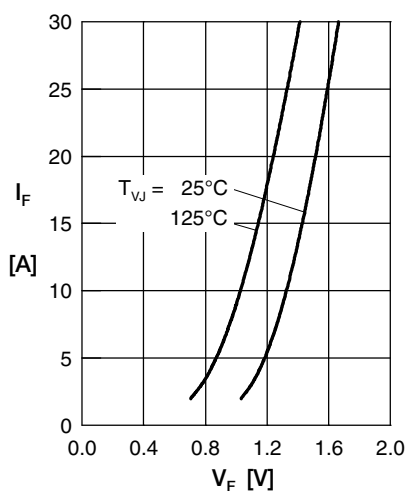


Fig. 1 Forward current I_F versus V_F

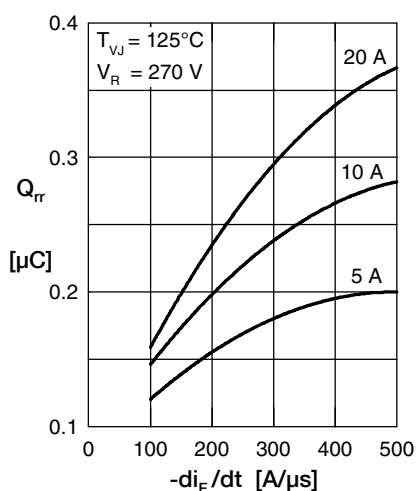


Fig. 2 Typ. reverse recov. charge Q_{rr} versus $-di_F/dt$

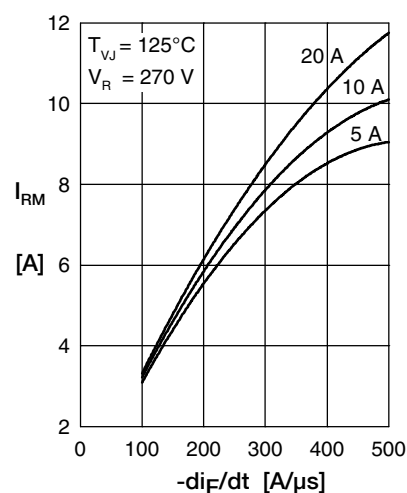


Fig. 3 Typ. reverse recov. current I_{RM} versus $-di_F/dt$

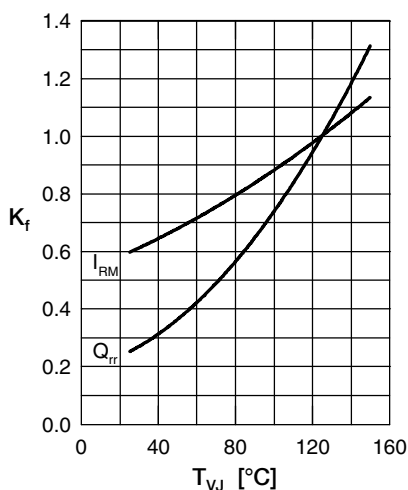


Fig. 4 Typ. dynamic parameters Q_{rr} , I_{RM} versus T_{VJ}

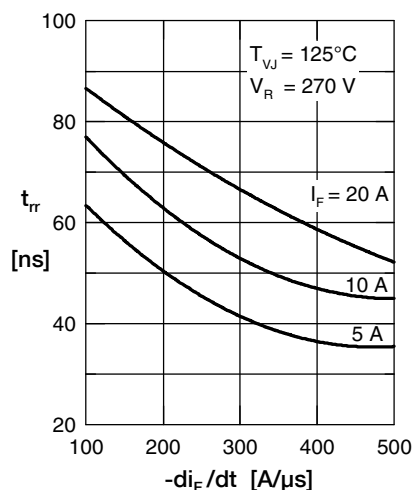


Fig. 5 Typ. reverse recov. time t_{rr} versus $-di_F/dt$

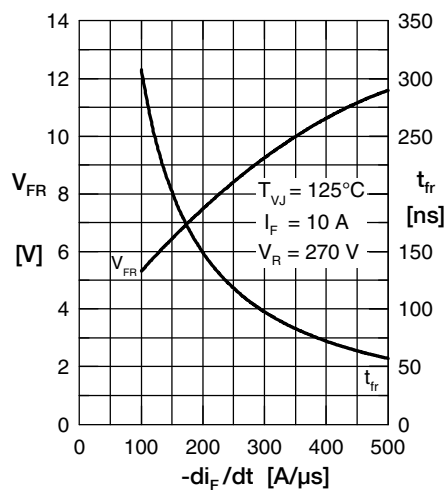


Fig. 6 Typ. forward recov. voltage V_{FR} and t_{fr} versus di_F/dt

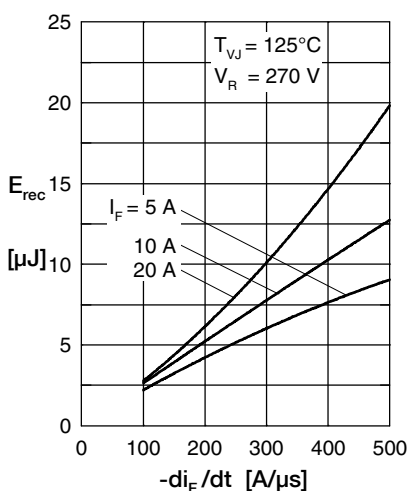


Fig. 7 Typ. recovery energy E_{rec} versus $-di_F/dt$

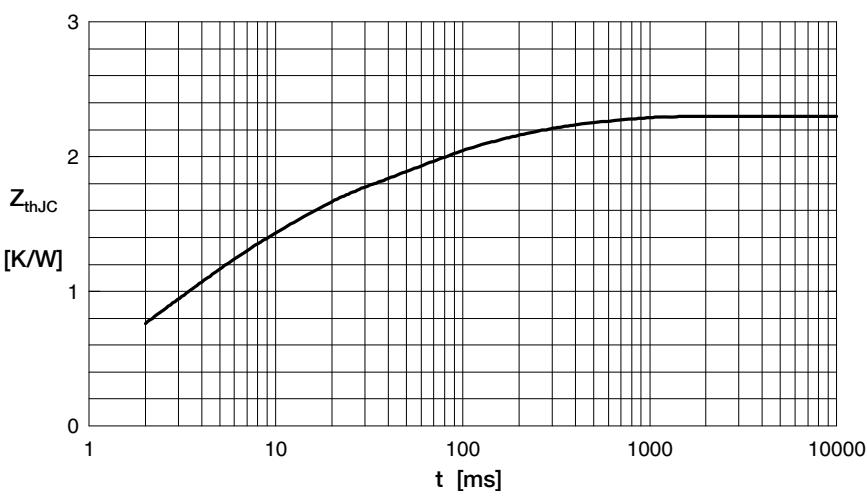


Fig. 8 Transient thermal resistance junction to case