


## Introduction to High Current Card Edge Connectors (Continued)


### CROWN EDGE Connectors

Page 139




### .100 [2.54] Centerline Solder Posts without Mounting Ears

Page 147





### .100 [2.54] Centerline Straddle Mount Sec-II Power Products

Page 148

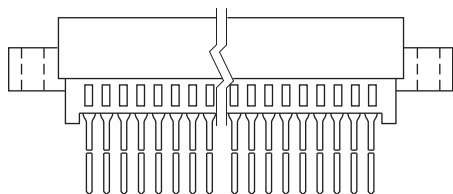

### .100 [2.54] Centerline Right Angle Posts with Low and No Mounting Ears

Page 149

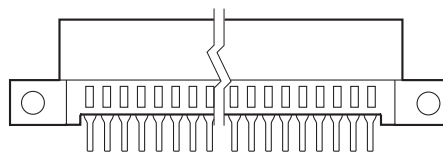

### .100 [2.54] Centerline Wire-to-Board for "Thin Power Supplies" per SSI Standard

Page 153




## CROWN EDGE Card Edge-style High Current Connectors

### Product Facts

- Low cost power solution
- Power, signal and mixed modules
- 35A per power contact
- Mates with .062 (1.6 mm) with thick card edge or bus bar tab
- Press-fit or solder tail terminations
- True hot-plug power modules
- Meets regulatory safety requirements
- All CROWN EDGE Products in this section are RoHS compliant.

### Typical Applications

- Board-to-board power connections
- DC-DC converters
- Uninterruptible Power Supply (UPS)
- Power supplies

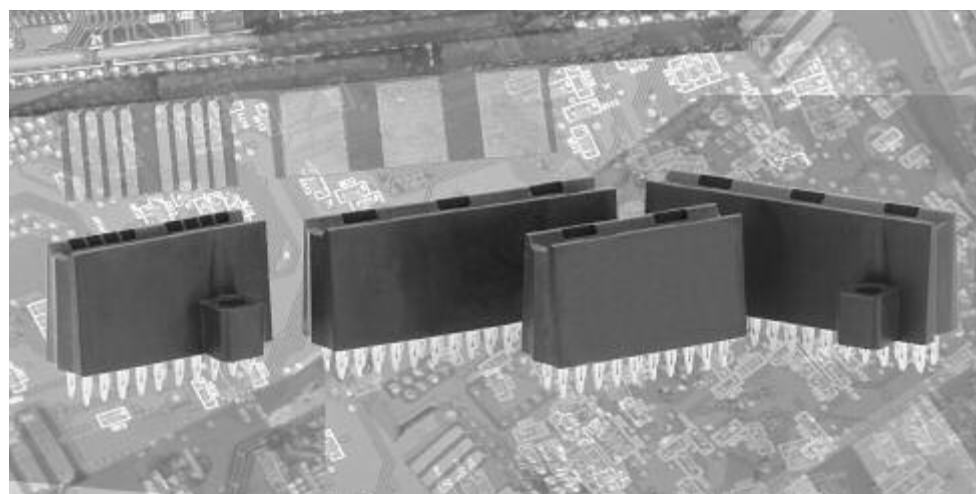

CROWN EDGE Connectors are a board-to-board power interconnect solution that uses ELCON high performance CROWN BAND contact technology configured to mate directly with a printed circuit board edge or — for higher currents — with a solid bus bar. Power and signal can be combined and mounted end-to-end to meet the requirements of the applications.

### Product Highlights

#### High-current Card Edge Interface

CROWN EDGE Connectors uses Tyco Electronics proven ELCON CROWN BAND contacts that provide multiple points of contact for high current, and low voltage drop and minimal heat generation. The desired current rating for most applications can be achieved by bussing multiple contacts or even modules. For even higher currents, CROWN EDGE Connectors can be mounted onto a bus bar, and mate directly with a bus bar tab. Optimum interface to the mounting PC board is achieved through five termination tails.

#### Flexible Modular Design

To make easy work of power distribution design, CROWN EDGE Connectors are available in modules of 2 and 3 contact segments with power or signal contacts or a combination of both in a single module. Modules can be placed end-to-end for assemblies up to 8" (203.20 mm) long. Custom molded configurations are possible on high-volume projects. Consult Tyco Electronics or your local Tyco Electronics sales representative for details.

#### Versatile Power Arrangements

Opposing contacts are isolated, so power connections at different voltage levels can be on one side of the board, with ground or power return on the other side.

#### True Hot-Plug Support

CROWN EDGE power modules that support current interruption under load as defined by safety regulatory agencies are also available for mating to a metal blade or bus bar tab. These true hot-plug modules allow current interruption under load by incorporating a contact design that restricts the effects of arcing to areas that do not compromise the integrity of the connection.

## CROWN EDGE Card Edge-style High Current Connectors (Continued)


### Product Specifications

Materials & Finishes			
Insulators		PPA, UL 94-V-0 flammability rated, color black	
Contacts	Non-hot-plug power contact		Copper alloy, selectively plated with gold (30 micro inches minimum) and tin on terminations, all over nickel
	Hot-plug power contact	Contact holder	Phosphor bronze alloy, selectively plated with tin on terminations, over nickel
		CROWN BAND element	Beryllium copper alloy, selectively plated with gold (30 micro inches minimum), over nickel
	Signal contacts		Phosphor bronze alloy, selectively plated with gold (30 micro inches minimum) and tin on terminations, all over nickel
Electrical			
Current ratings	Power contact		35A (see graph below)
	Signal contact		3A max.
Insulation resistance			5,000MΩ minimum at 500 VDC for 2 minutes, power MIL-STD 1344, Method 3003
Dielectric strength			1,500VDC for 1 minute, per MIL-STD 1344, Method 3001
Mechanical			
Mating PCB thickness			.062" 91.6mm±.006" (0.15mm)
Insertion Forces	2 segment power module		5.0 lbf typical using .062" (1.6mm) thick mating board with 5 oz. of copper
	3 segment power module		6.0 lbf typical using .062" (1.6mm) thick mating board with 5 oz. of copper
Extraction Forces	2 segment power module		3.0 lbf typical using .062" (1.6mm) thick mating board with 5 oz. of copper
	3 segment power module		5.0 lbf typical using .062" (1.6mm) thick mating board with 5 oz. of copper
Tooling			Press fixture is recommended for compliant press-fit assemblies Consult Tyco Electronics customer service for details

### Current Ratings

The chart below demonstrates the performance of the CROWN EDGE power contact by showing the temperature rise at different current levels applied to two power contacts connected in series.

Current rating for any given application will depend, among other things, on the module combination, PCB copper trace volume, and internal equipment temperature/air flow. Mounting and mating to a bus bar will increase current ratings.

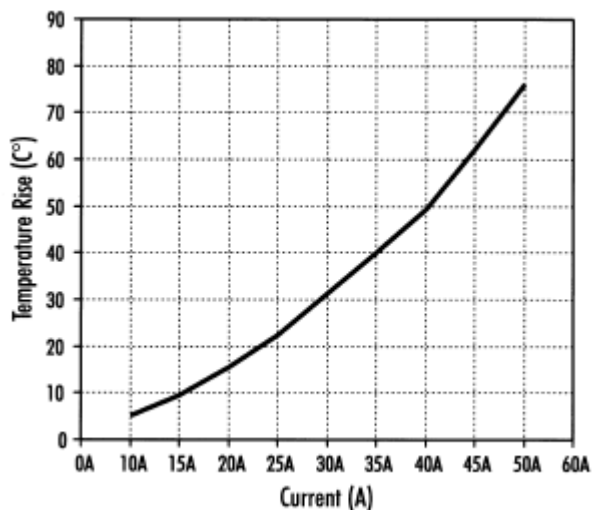

### Safety Regulatory Compliance

CROWN EDGE Connectors have been evaluated by Underwriters Laboratories and has been found to comply with the requirements of U.S. standard UL1997 and Canadian standard C22.2 No. 182.3-M1987.



### Compliance with Current Interruption Requirements



Hot-Plug CROWN EDGE modules are available for applications that require current interruption as defined by safety regulatory agencies. These power-only modules have been evaluated and recognized by Underwriters Laboratories for current interruption up to 50 cycles as per the UL1977 standard. See Hot-Plug requirements on page 144.

## CROWN EDGE Card Edge-style High Current Connectors (Continued)

### 4-Position Power Module

#### Part Numbers



- |           |                                  |                                                                                                                   |
|-----------|----------------------------------|-------------------------------------------------------------------------------------------------------------------|
| 6651170-1 | Long solder tail, non-hot-plug*  | * Also available for .093" (2.4 mm) thick mating board.<br>Contact Tyco Electronics Customer Service for details. |
| 6651170-2 | Press-fit tail, non-hot-plug*    |                                                                                                                   |
| 6651170-3 | Short solder tail, non-hot-plug* |                                                                                                                   |
| 6651331-1 | Press-fit tail, hot-plug         |                                                                                                                   |
| 6650380-1 | Short solder tail, hot-plug      |                                                                                                                   |
| 6650380-2 | Long solder tail, hot-plug       |                                                                                                                   |

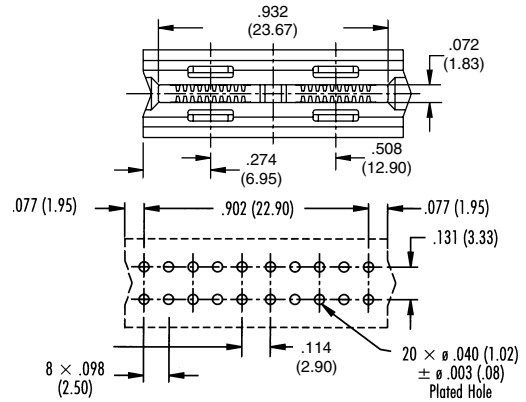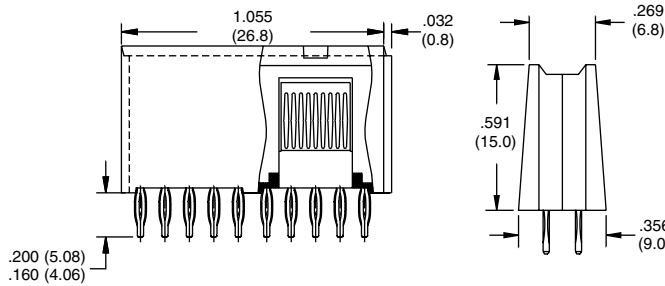

### 6-Position Power Module

#### Part Numbers



- |           |                                 |
|-----------|---------------------------------|
| 6650383-1 | Press-fit tail, non-hot-plug    |
| 6650383-2 | Long solder tail, non-hot-plug  |
| 6650383-3 | Short solder tail, non-hot-plug |
| 6650384-1 | Short solder tail, hot-plug     |
| 6650384-2 | Press-fit tail, hot-plug        |
| 6650384-3 | Long solder tail, hot-plug      |

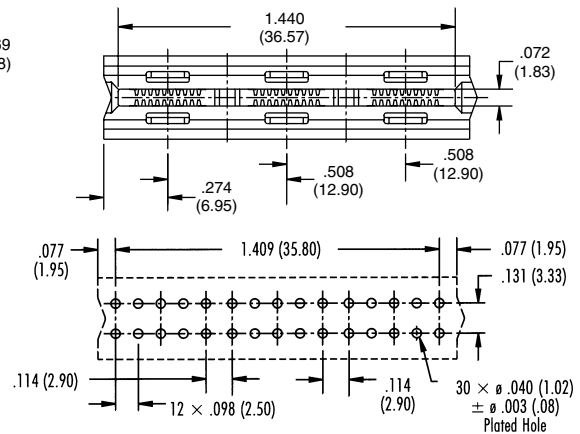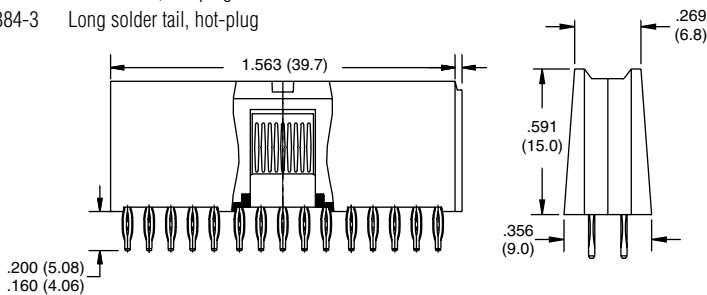

### 30-Position Signal Module

#### Part Number

- |           |                              |
|-----------|------------------------------|
| 1926088-1 | Press-fit tail, non-hot-plug |
|-----------|------------------------------|

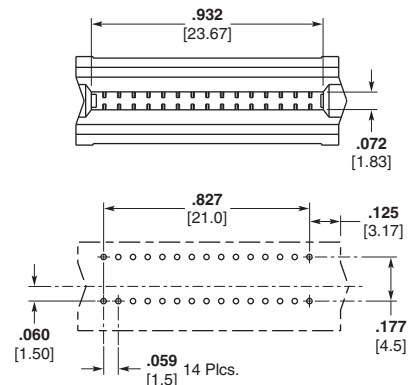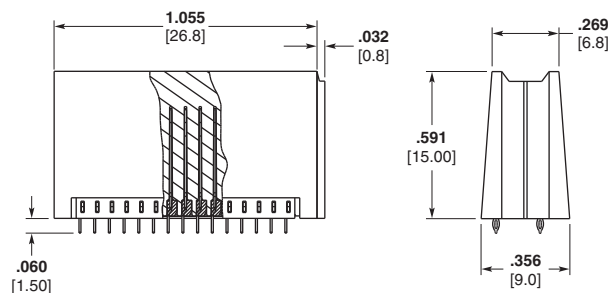


**Note:** All part numbers are RoHS compliant.

## CROWN EDGE Card Edge-style High Current Connectors (Continued)

### 16-Position Signal Module

#### Part Numbers


- 6650534-1 Press-fit tail  
6650534-2 Short solder tail  
6650534-3 Long solder tail

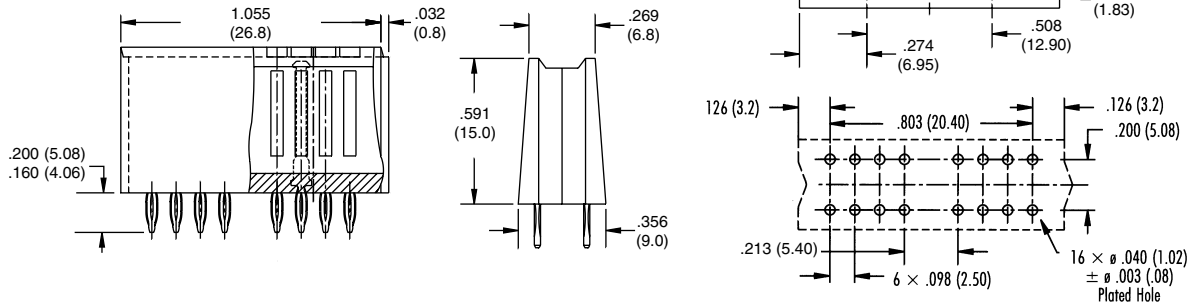

### 24-Position Signal Module

#### Part Numbers

- 6650494-1 Press-fit tail  
6651193-1 Long solder tail  
6651214-1 Short solder tail

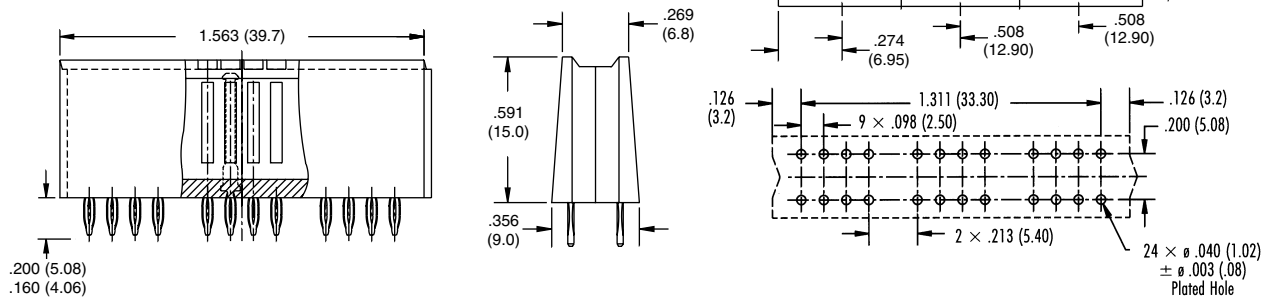


**Note:** All part numbers are RoHS compliant.

## CROWN EDGE Card Edge-style High Current Connectors (Continued)

### 2 Power + 8 Signal Modules

#### Part Numbers


- 6643460-1 Short solder tail  
6643460-2 Long solder tail  
6643460-3 Press-fit tail

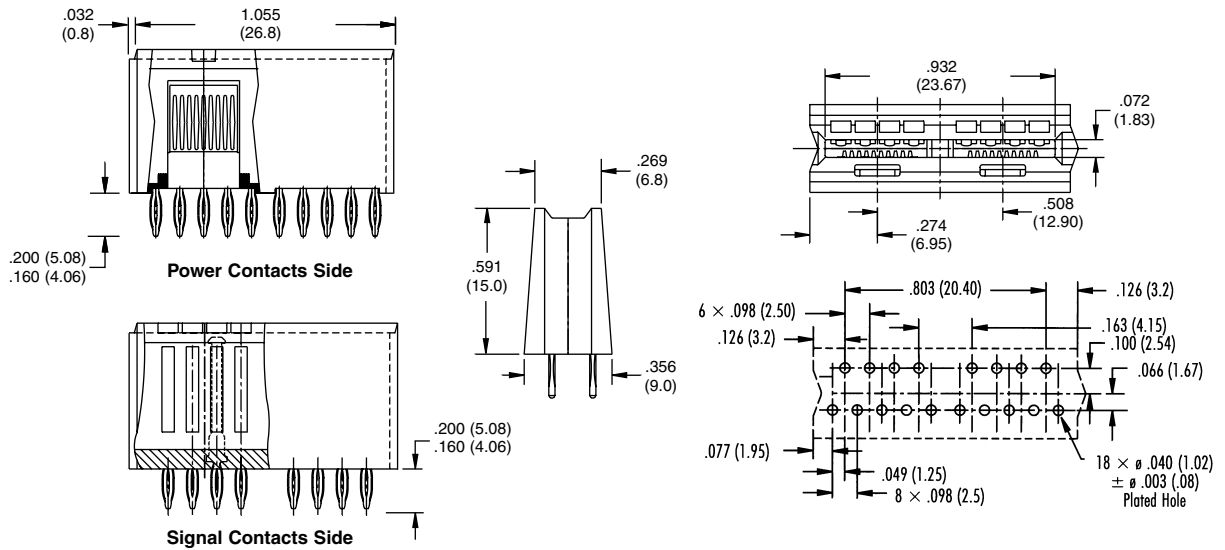

### 4 Power + 8 Signal Modules

#### Part Numbers

- 6651290-1 Press-fit tail  
6651290-2 Long solder tail  
6651290-3 Short solder tail

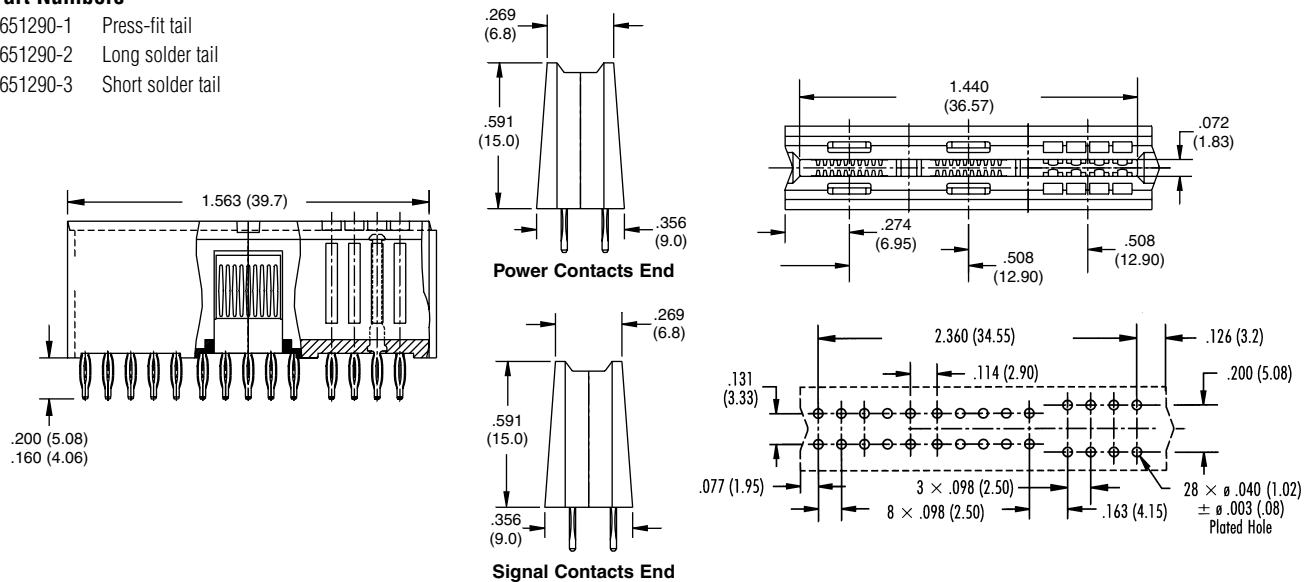

**Note:** All part numbers are RoHS compliant.

## CROWN EDGE Card Edge-style High Current Connectors (Continued)

### Design Notes

#### Mating PCB Requirements


Mating PCB edge fingers should be gold plated, have .050" (1.3 mm) side margins, and be of suitable copper weight for power applications. Mating board thickness is .062 [1.60].

#### Sequenced Mating

Sequenced mating can be achieved by designing one or more setback traces on the mating card edge, or by notching the edge of the card.


#### End-to-end Mounting

CROWN EDGE modules can be placed end-to-end for connector assemblies up to 8" (203.20 mm) long.

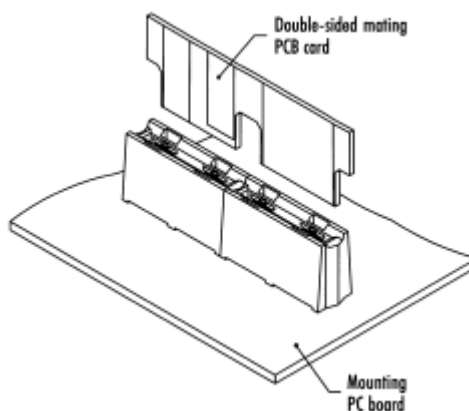


### Mating PC Card Edge Samples

The drawings below show two PC card edge samples with signal and power lines designed to mate with 2 and 3-segment CROWN EDGE modules.

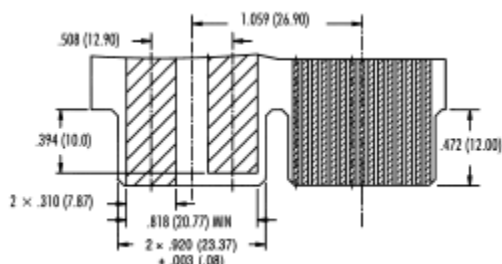



**2 x 2 Segment Modules Provide Two Sequenced Power Traces and 30 Signal Traces**

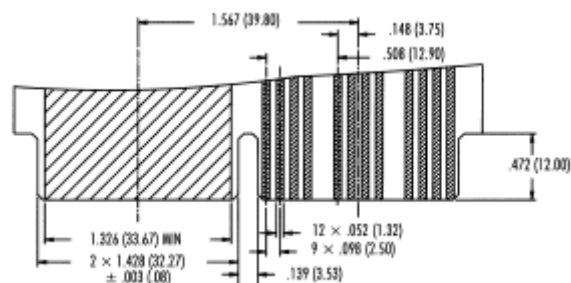

**2 x 3 Segment Modules Provide Ground Plane and 12 Signal Lines**

### Hot-Plug Requirements

Hot-plug application of this product requires the use of the CROWN EDGE true hot-plug modules (see part numbers on pages 141-143) mated with a customer-supplied metal blade or bus bar. Dimensions of a sample mating blade for use with CROWN EDGE hot-plug modules is shown below.

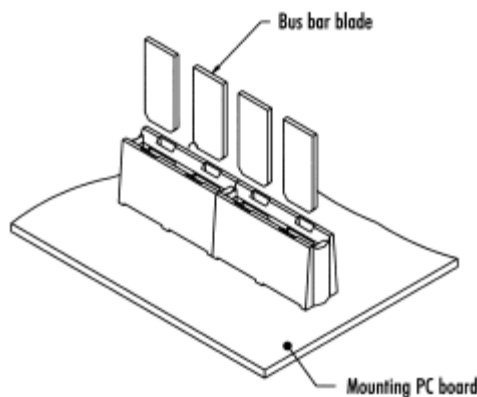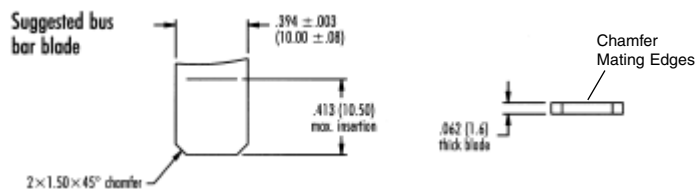




## CROWN EDGE Card Edge-style High Current Connectors (Continued)

### Connector Mounting

#### Solder Tails

Solder termination is available in two lengths. See table below for board thicknesses and recommended tail lengths.




Solder Tail Detail

#### Tail Length vs. Board Thickness

Board Thickness	Dimension "A"
.062" (1.6mm)	.100" - .140" (2.55 - 3.57mm) [.115" (2.92mm) nominal]
.092"/.125" (2.3/3.0mm)	.160" - .200" (4.06 - 5.08mm) [1.77" (4.5mm) nominal]

#### Press-fit Tails

CROWN EDGE Connectors use truly compliant eye of the needle press-fit tails designed for boards 0.093" thick and above.



Press-fit Tail Detail

#### Tooling for Compliant Press-fit Assemblies

Pressing fixtures are recommended for compliant press-fit assemblies. Contact Tyco Electronics for a detailed tool drawing.

#### Suggested Printed Circuit Hole for Power and 2.5mm Signal




Finished Hole:  $\varnothing .040 \pm .003$  [ $\varnothing 1.02 \pm .08$ ]  
 Drilled Hole:  $\varnothing .0453 \pm .005$  [ $\varnothing 1.151 \pm .013$ ]  
 Copper Plate: .0010 [.025] min. (per surface)  
 Tin Plate: .0003 [.008] min. (per surface)

#### Suggested Printed Circuit Hole for 1.5mm Signal

Finished Hole:  $\varnothing .022 \pm .002$  [ $\varnothing 0.56 \pm 0.05$ ]  
 Drilled Hole:  $\varnothing .026 \pm .002$  [ $\varnothing 0.65 \pm 0.02$ ]  
 Copper Plate: .0010 [.025] min. (per surface)  
 Tin Plate: .0003 [.008] min. (per surface)

### Spacing Between Modules in End-to-end Mounting

This spacing between plated thru-holes for end-to-end mounting varies depending on the chosen module combination. Spacing for the three possible combinations is shown below.



### Custom Solutions

#### Non-standard Modules

In case the standard CROWN EDGE modules do not meet your design requirements, Tyco Electronics has the capability to mold any combination of power and signal contact layouts in 2 and 3 segment modules.



#### Application-specific Custom Designs



Tyco Electronics has a long history of designing and building application specific custom connectors, and CROWN EDGE Connectors are no exception. A one-piece CROWN EDGE insulator, instead of a combination of several modules, provides a more robust interconnection design, as well as cost savings in high volume projects. Consult Tyco Electronics Customer Service for details.





## Standard Edge II Card Edge Connectors

### Product Facts

- Maximum number of dual positions  
.100 [2.54] Centerlines-70,  
.125 [3.18] Centerlines-50,  
.150 [3.81] Centerlines-31
- Selective gold plating of contacts for high performance at low cost
- .025 [0.64] square solid posts meet standard wrap-type specifications
- For flow solder applications
- Glass-filled polyester housing is 94V-0 rated
- Accepts double sided PC boards, .054-.070 [1.27-1.78] thick
- Recognized under the Component Program of Underwriters Laboratories Inc., File No. E28476 
- Certified by Canadian Standards Association, File No. LR 7189 

### Performance Specifications

**Contact Rating\*** — 3 amperes continuous (UL and CSA)

**Contact Resistance** — 10 milliohms max.

**Operating Temperature** — -55°C to +85°C

**Voltage Rating (Sea Level)** —  
.100 [2.54] centerline — 1000 VAC (test)  
.125 [3.18] centerline — 1500 VAC (test)  
.150 [3.81] centerline — 1500 VAC (test)

**Insulation Resistance** —  
5000 megohms min., after exposure to humidity

**Vibration Tolerance** — 10 to 500 Hz

**Contact Engagement Force** —  
12 oz [3.3 N] average per pair with .062 [1.57] PC board

**Contact Separation Force** —  
2 oz [0.6 N] average per pair with .062 [1.57] PC board

**Humidity Tolerance** — 90%-95% for 96 hours

\*Consult Tyco Electronics engineering when paralleling contacts for power applications.



Tyco Electronics Standard Edge II Connectors provide high reliability and economy in packages compatible with industry standards for double sided printed circuit boards.

Tyco Electronics offers Standard Edge II Connectors with or without mounting ears, for rack mounting and soldering. Contacts are arranged on .100 [2.54] centers, .125 [3.18] centers, .150 [3.81] centers, .200 [5.08] row-to-row; and .250 [6.35] row-to-row.

Right angle connectors are also available with contacts arranged on .100 [2.54] centers, .150 [3.81] row-to-row or .200 [5.08] row-to-row.

Card extenders with contacts on .100 [2.54] and .125 [3.18] centers also are available.

Precision formed phosphor bronze contacts are selectively gold plated. Phosphor bronze has excellent strength characteristics which help the connector absorb load deflection movement of a PC board while maintaining sufficient contact force for good electrical connection. Bifurcated cantilever beam contacts provide redundant contact.

## Standard Edge II Card Edge Connectors (Continued)

### .100 [2.54] Centerline, Vertical Solder Posts, Without Mounting Ears

#### Material and Finish

**Housing** — Black glass-filled polyester, 94V-0 rated

**Contacts** — Phosphor bronze, duplex plated as follows:

**Plating** — .000030 [0.00076] gold in contact area, tin on posts, with entire contact nickel underplated


#### Technical Documents

##### Product Specification

108-9039

##### Qualification Test Report


501-227

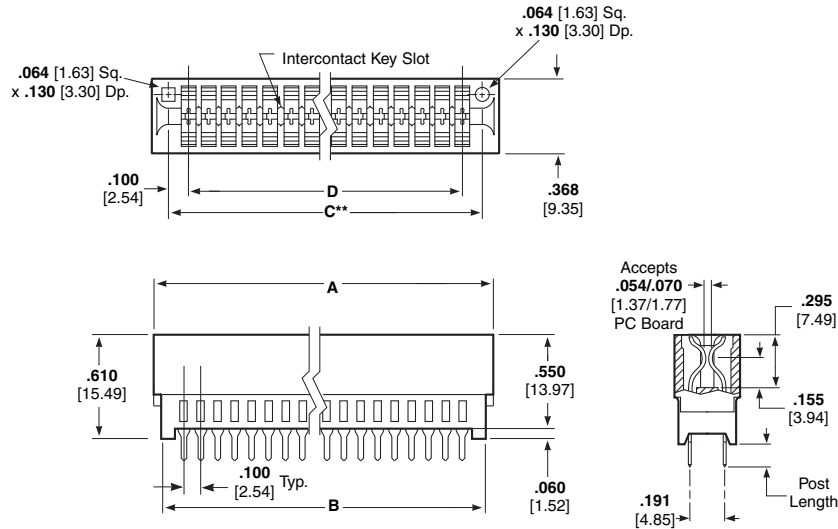

### Intercontact Keying Plug

#### Material

Natural color polyester



**Part Number 650025-2**  
(.100 [2.54] Centerline)

No. of Dual Positions	Dimensions				Post Length*	Part Numbers	
	A	B	C**	D		Solder Tail	Press-Fit
6	.860 21.84	.750 19.05	.700 17.78	.500 12.70	.125 3.18	7-5530843-5	—
10	1.260 32.00	1.150 29.21	1.100 27.94	.900 22.86	.125 3.18	5-5530843-0	5145269-5
12	1.460 37.08	1.350 34.29	1.300 33.02	1.100 27.94	.125 3.18	8-5530843-3	—
15	1.760 44.70	1.650 41.91	1.600 40.64	1.400 35.56	.125 3.18	5530843-2	—
17	1.960 49.78	1.850 46.99	1.800 45.72	1.600 40.64	.125 3.18	5-5530843-3	—
18	2.060 52.32	1.950 49.53	1.900 48.26	1.700 43.18	.125 3.18	5530843-3	—
20	2.260 57.40	2.150 54.61	2.100 53.34	1.900 48.26	.125 3.18	5-5530843-4	—
22	2.640 62.48	2.350 59.69	2.300 58.42	2.100 53.34	.125 3.18	5530843-4	—
25	2.760 70.10	2.650 67.31	2.600 66.04	2.400 60.96	.125 3.18	5530843-5	5145269-3
28	3.060 77.72	2.950 74.93	2.900 73.66	2.700 68.58	.125 3.18	5530843-6	—
30	3.260 82.80	3.150 80.01	3.100 78.74	2.900 73.66	.125 and .187 3.18 and 1.75	5530843-7	5145269-6
31	3.360 85.34	3.250 82.55	3.200 81.28	3.000 76.20	.125 3.18	6-5530843-5	—
35	3.760 95.50	3.650 92.71	3.600 91.44	3.400 86.36	.125 3.18	2-5530843-4	61489782-13
36	3.860 98.04	3.750 95.25	3.700 93.98	3.500 88.90	.125 3.18	5530843-8	—
40	4.260 108.20	4.150 105.41	4.100 104.14	3.900 99.06	.187 3.18	2-5530843-0	—
50	5.260 133.60	5.150 130.81	5.100 129.54	4.900 124.46	.187 3.18	2-5530843-2	—

\*Contact Tyco Electronics for alternate post length.

\*\*C dimension is card slot length.

**Notes:** 1. Other connector sizes can be made available, consult Tyco Electronics.

2. High temperature IR reflow compatible connectors can be made available, consult Tyco Electronics.

3. Contains high conductivity contacts.

**Note:** All part numbers are RoHS compliant.

## Standard Edge II Card Edge Connectors (Continued)

### .100 [2.54] Centerline, Special 18/31 Dual Combination Connector, Vertical Solder Posts, Without Mounting Ears

#### Material and Finish

**Housing** — Black glass-filled polyester, 94V-0 rated, except where noted

**Contacts** — Phosphor bronze, plated with .000030 [0.00076] gold in contact area (except where noted), tin on posts, with entire contact nickel underplated


#### Technical Documents

**Product Specification**  
108-9039




#### Intercontact Keying Plug

##### Material


Natural color polyester



**Part Number 650025-2**  
(.100 [2.54] Centerline)

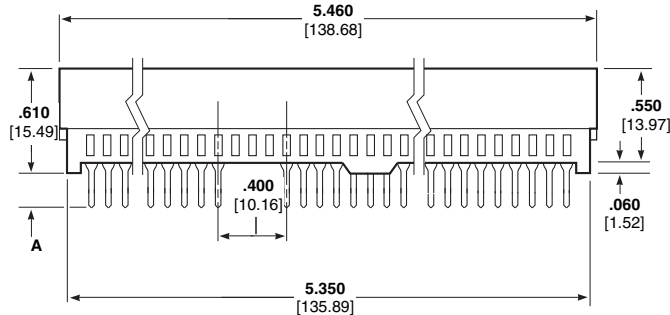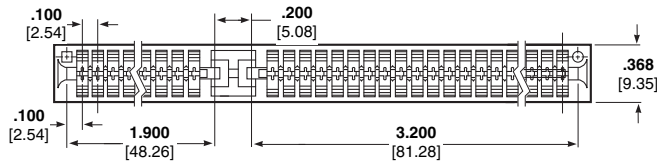

**Retention Feature**



**Solder Posts**

No. of Dual Positions	Post Type	Dimension A	Retention Feature	Part Numbers
52	Solder Posts	.125 3.18	3-6, 41, 42, 51, 52, 93-96	5645169-2 5536128-1 <sup>1</sup>
52	Solder Posts	.125 3.18	None	5645169-3
52	Solder Posts	.187 4.75	None	5650616-1

<sup>1</sup> Housing material is high temperature glass-filled polyester, gray.

**Notes:** 1. Card slot length is 5.300 [134.62].

2. Other connector sizes can be made available, consult Tyco Electronics.

3. High temperature IR reflow compatible connectors can be made available, consult Tyco Electronics.

**Note:** All part numbers are RoHS compliant.

## Standard Edge II Card Edge Connectors (Continued)

### .100 [2.54] Right Angle Solder Posts, with Low and No Mounting Ears

#### Material and Finish

**Housing** — Black glass-filled polyester, 94V-0 rated

**Contacts** — Phosphor bronze, duplex plated as follows:

**Plating A** — .000030 [0.00076] gold in contact area, tin on posts, with entire contact nickel underplated

**Plating B** — .000015 [0.00038] gold in contact area, tin on posts, with entire contact nickel underplated

#### Related Product Data

**Performance Specifications** — page 146


#### Technical Documents

**Product Specification**  
108-9039


### Intercontact Keying Plug

#### Material

Natural color polyester



**Part Number 650025-2**  
(.100 [2.54] Centerline)

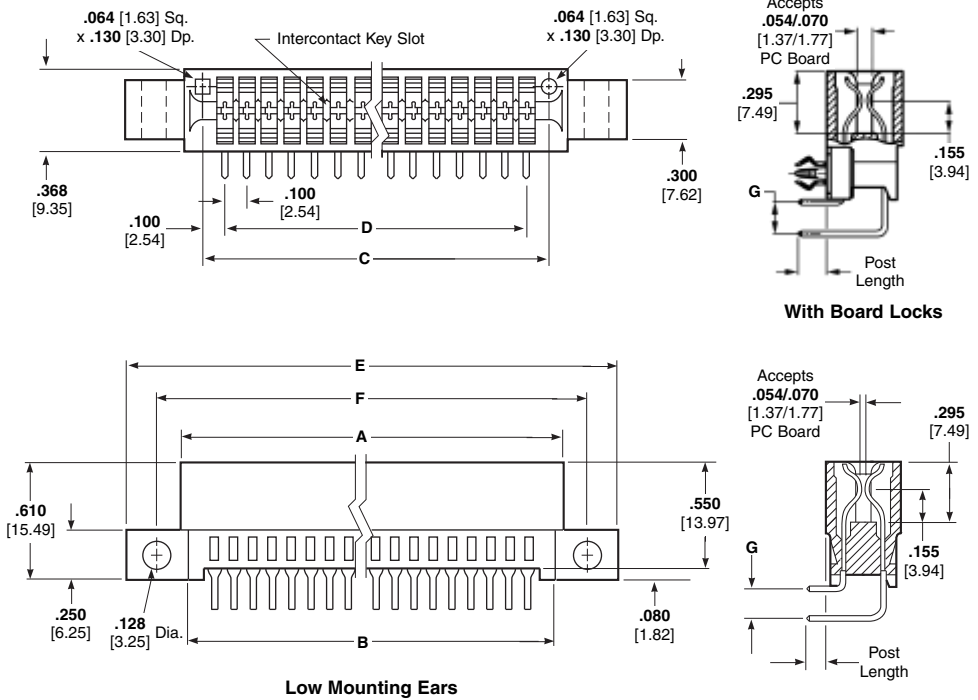

### Low Mounting Ears

No. of Dual Positions	Dimensions							Post Length <sup>2</sup>	Part Numbers (Plating A)
	A	B	C*	D	E	F	G <sup>1</sup>		
12	1.460 37.08	1.350 34.29	1.300 33.02	1.100 27.94	2.045 51.94	1.775 45.08	.100x .150	.090	5145089-1 <sup>3</sup>
18	2.060 52.32	1.950 49.53	1.900 48.26	1.700 43.18	2.645 67.18	2.375 60.32	.100x .150	.090	5645384-1
20	2.260 57.40	2.150 54.61	2.100 53.34	1.900 48.26	2.845 72.30	2.575 65.40	.100x .150	.090	5645384-3

\*C dimension is card slot length.

<sup>1</sup> Metric equivalent for .100 x .150 and .100 x .200 are [2.54 x 3.81] and [2.54 x 5.08].

<sup>2</sup> Metric equivalent for post length is .090 = [2.27].

<sup>3</sup> Connector with Board Locks.

**Note:** Other connector sizes can be made available, consult Tyco Electronics.

### No Mounting Ears

No. of Dual Positions	Dimensions					Post Length <sup>2</sup>	Part Numbers	
	A	B	C*	D	G <sup>1</sup>		Plating A	Plating B
10	1.260 32.00	1.150 29.21	1.100 27.94	0.900 22.96	.100x .150	.090	5650118-2	—
15	1.760 44.70	1.650 41.91	1.600 40.64	1.400 35.56	.100x .150	.090	5650118-1	—
25	2.760 70.10	2.350 67.61	2.600 66.04	2.400 60.96	.100x .150	.090	—	5532600-2
31	3.360 85.34	3.250 82.55	3.200 81.28	3.000 76.20	.100x .150	.090	—	5532600-4
32	3.460 87.88	3.350 85.09	3.300 83.82	3.100 78.74	.100x .150	.090	—	5532600-5
19	2.160 54.86	2.750 69.85	2.700 68.58	1.800 45.72	.100x .150	.090	—	5532600-6

\*C dimension is card slot length.

<sup>1</sup> Metric equivalent for .100 x .150 and .100 x .200 are [2.54 x 3.81] and [2.54 x 5.08].

<sup>2</sup> Metric equivalent for post length is .090 = [2.27].

**Notes:** 1. Other connector sizes can be made available, consult Tyco Electronics.

2. High temperature IR reflow compatible connectors can be made available, consult Tyco Electronics.

**Note:** All part numbers are RoHS compliant.

## SEC-II Power Products

### Product Facts

- Combines industry standard 0.100" pitch card edge format in a high power density design
- Industry-proven multi-beam power contact design
- High conductivity contact materials
- High temperature housing materials
- UL 94V-0
- Selective gold plating for high performance with low cost
- .000030 [0.00076] gold in contact area. Tin/lead on posts with entire contact nickel underplated
- Power Contact Current Ratings:
  - 36 amps — Single Contact
  - 22 amps — on each of 4 adjacent pairs (8 power contacts)



The trends in electronic power supplies require high current density and lower cost. In addition, smaller sized connectors are needed to provide less airflow restriction for cooling the power supplies. The SEC-II Power connectors offer an ideal combination of low-current and high-current connections in a single, durable design.

SEC-II Power connectors are built on an expandable tooling platform which allows for a variety of combinations of power and signal contacts, all

combined in a single molded housing. The vertical press-fit versions are ideal for high density stacking of cards into a backplane or for low air restriction of blade-style power supply designs. The straddle mount style offers a true co-planar interconnection with a total height of less than 4mm from the top surface of the pcb.

SEC-II Power Connectors are currently in use in high-end computer and data storage equipment. Extensive testing in exposure to high vibration and

shock has proven these connectors equally suited for industrial applications as well, where low contact resistance and high current density is required.


### Product Specification 108-2202




Vertical



Co-Planar




3P




4P

Power Only



3P

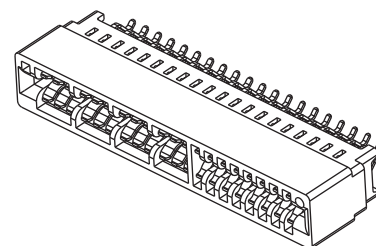

4P


Power and Signal

**Note:** See page 151 for part numbers and details.

## SEC-II Power Products (Continued)

### Co-Planar Application

Straddle Mount to 0.062 [1.6]  
PCB

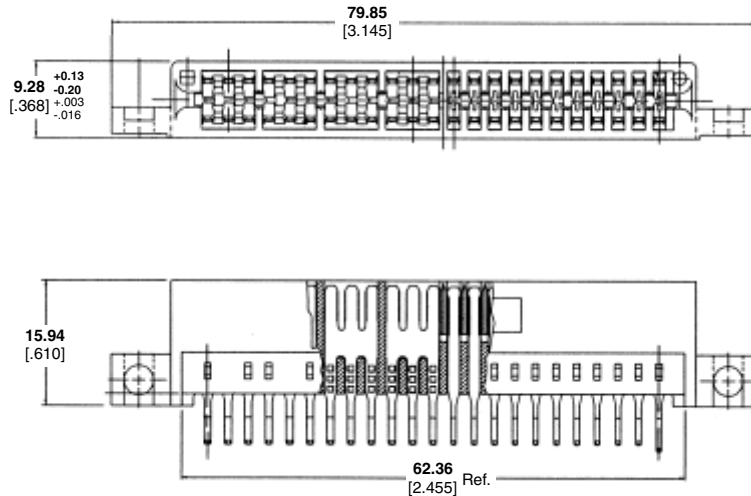

Card Edge Products

No. of Power Contacts	No. of Signal Contacts	Dimensions		With or Without Mounting Ears	Part Number
		Overall Length	"B" Card Slot		
4	16	42.16 [1.66]	38.10 [1.500]	Without	2007008-2
6	16	49.78 [1.960]	45.72 [1.800]	Without	2007008-1
6	20	69.72 [2.745]	50.80 [2.000]	With	1761500-1
8	16	57.40 [2.260]	53.40 [2.100]	Without	2007008-3
8	22	79.88 [3.145]	60.96 [2.400]	With	1761879-1

**Note:** All part numbers are RoHS compliant.






## SEC-II Power Products (Continued)

### Vertical PCB Mount

#### Seating tool required

\*See customer drawing for details

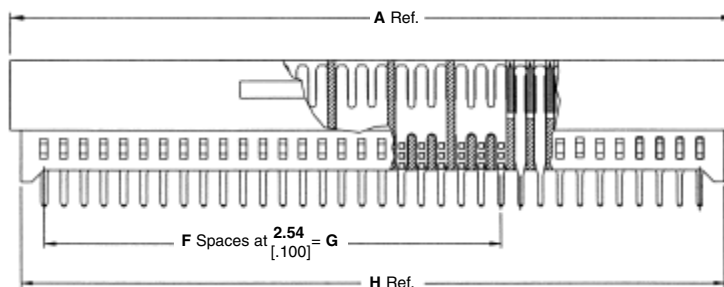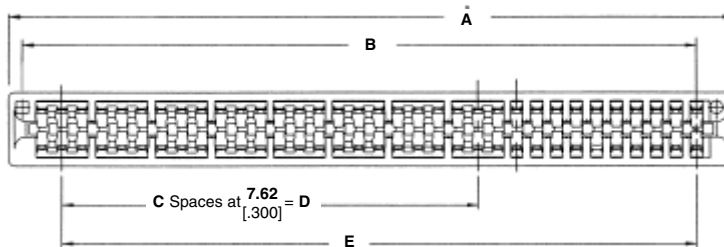

Dimensions								No. of Power Contacts	No. of Signal Contacts	Omitted PIN	Molded Key Location	Part Number
A	B	C	D	E	F	G	H					
Power and Signal, Solder Tail												
92.93 [3.660]	88.90 [3.500]	7	53.34 [2.100]	81.28 [3.200]	23	58.42 [2.300]	90.18 [3.550]	16	20	None	None	1761426-1
70.1 [2.760]	66.07 [2.600]	4	30.48 [1.200]	58.42 [2.300]	14	35.56 [1.400]	67.31 [2.650]	10	20	None	None	1761426-2
54.86 [2.160]	50.80 [2.000]	2	15.24 [0.600]	43.18 [1.700]	8	20.32 [0.800]	52.07 [2.050]	6	20	None	None	1761426-3
Power and Signal, Press-Fit												
54.61 [2.150]	50.80 [2.000]	3	22.86 [0.900]	40.64 [1.600]	17	43.16 [1.700]	49.53 [1.950]	8	12	None	None	1761786-1
Power only, Press-Fit												
24.13 [0.950]	20.32 [0.800]	1	3.81 [0.150]	12.70 [0.500]	5	N/A	18.79 [0.740]	4	0	None	None	1888946-1
31.75 [1.250]	27.94 [1.100]	2	7.62 [0.300]	20.32 [0.800]	8	N/A	26.42 [1.040]	6	0	None	None	1888946-2
39.37 [1.550]	35.56 [1.400]	3	11.43 [0.450]	27.94 [1.100]	11	N/A	34.03 [1.340]	8	0	None	None	1888946-3

**Note:** All part numbers are RoHS compliant.



## Hybrid Power Twin Leaf Connectors

### Product Facts

- Specified for use in Thin Power Supplies (TPS) per the Server Systems Infrastructure (SSI) standard
- High conductivity contacts — deliver 33% more current than traditional card edge connectors
- Max. Operating temperature 105°C
- 29 Dual Positions
- Housing Accepts
  - 4 – 18-20 AWG contacts — input power
  - 24 – 20 AWG Contacts — output power
  - 24 – 24-28 AWG contacts — signals

### Input Power Contacts

**Part Number 147431-2**  
18-20 AWG

### Output Power Contacts

**Part Number 147439-2**  
20 AWG

### Signal Contacts

**Part Number 583616-2**  
24-28 AWG

### Product Specification


108-2081

UL File NO. E28476

CSA File No. LR7189



\*Consult Tyco Electronics engineering when paralleling contacts for power applications.

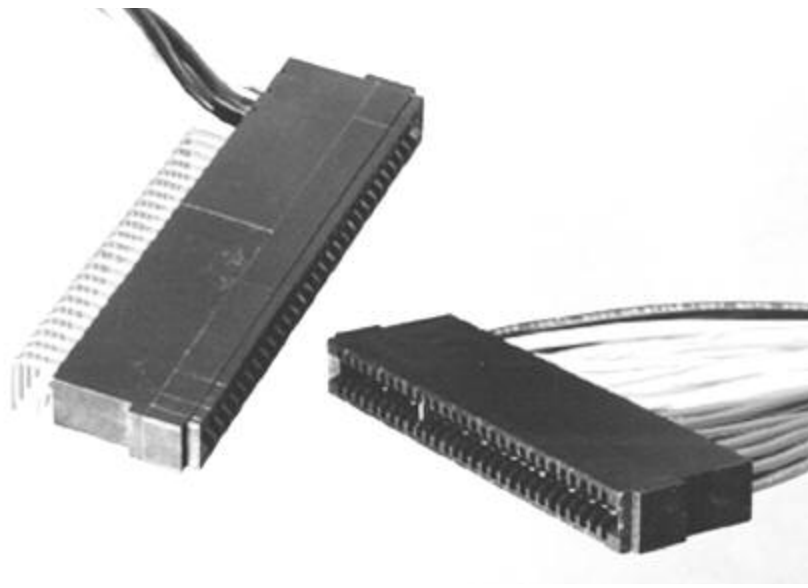

The Hybrid Power Twin Leaf product combines the industry proven AMP Twin Leaf Card-Edge connector with high temperature plastics, high conductivity metals and a housing designed for both pcb or wire connection.

Due to its thin overall profile and high current density performance, the Hybrid Power Twin Leaf connector was selected for the I/O connector of the "Thin Power Supply" section of the Server Systems Infrastructure (SSI) standard. This standard has been adopted throughout the high-end computer industry to allow interoperability of subsystems in a computer server.

The Wire-to-Board version has been designed to accommodate up to 300V AC Input on 18 AWG wire and offers 24 DC Output wires (each on 20 AWG)

and 24 Signal wires (each on 24-28 AWG). The cable-to-board solution allows flexibility in routing inputs and outputs directly to input filtering devices and to the point of load for the outputs.

The Hybrid version combines the wire inputs with traditional printed circuit board (pcb) solder tail outputs all in one connector. This can be appealing in some applications where the input power may not be suitably located near, or desired to be integrated with the output power. The hybrid version combines a right angle pcb mount section for the DC Signals and Output Power, along with a traditional crimp-snap contact for the Input Power.

A key concern with any power connector is the temperature rise when the connector is under load.

These connectors have been qualified to meet UL and CSA requirements and are rated at the industry standard 30°C T-Rise criteria. In addition, the connectors pass the finger probe test so the connectors can be energized while unmated. This is a requirement in N + 1 redundant power supply applications where power supplies may be removed, while the system is still powered.

## Hybrid Power Twin Leaf Connectors (Continued)


### Contacts

#### Materials and Finish

**Power** — High Conductivity Copper Alloy

**Signal** — Phosphor Bronze

**Plating** — .000030 [0.00076] gold over nickel in contact area, tin plated in crimp area.

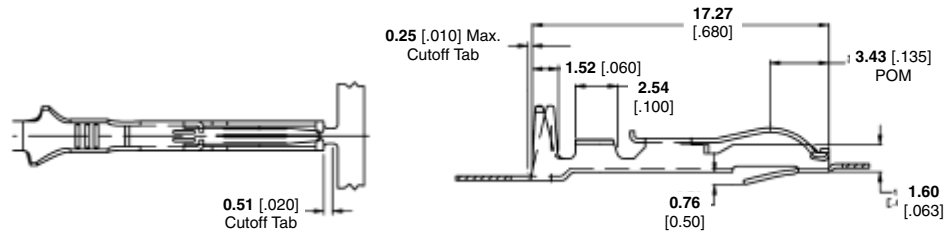


Contact Type	Wire Range AWG/mm <sup>2</sup>	Contact Part Numbers	Applicator
P	16-20	5147431-2	1385306-3
	0.6-1.4	5147439-2	—
S	24-28 0.08-0.2	5-583616-2	466577-4

### Wire-to-Board

#### Materials and Finish

**Housing** — High temperature glass filled polyester  
Max. Operating temperature 105°C

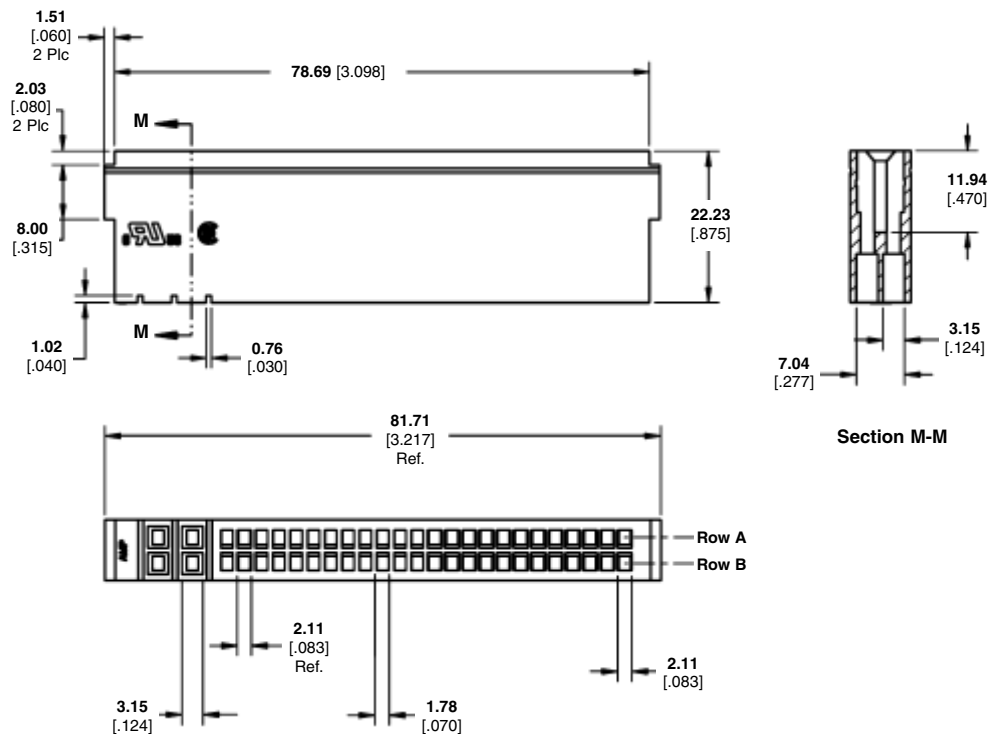

Number of Positions	Key Location	Part Number
4-Input Power	14,15	147354-8
24-Signal		
24-Output Power		

**Note:** All part numbers are RoHS compliant.

## Hybrid Power Twin Leaf Connectors (Continued)


### Hybrids Wire/PCB-to-Board

#### Materials and Finish

**Housing** — High temperature glass filled polyester

**Max. Operating temperature** — 105°C

High Conductivity copper alloy PCB contacts

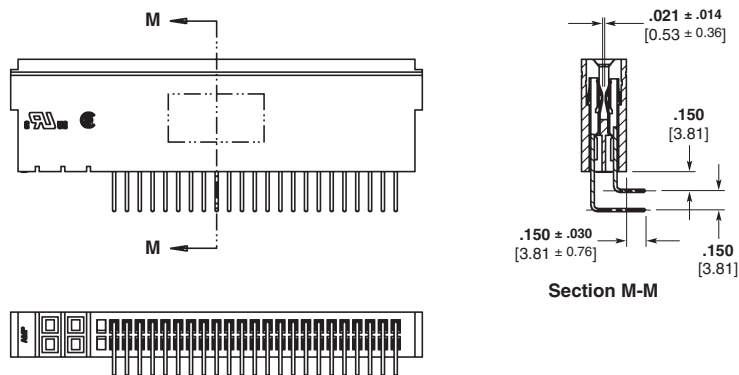

Number of Positions	Key Location	Part Number
4-Input Power		
24-Signal	9,10	147351-1
24-Output Power		

**Note:** All part numbers are RoHS compliant.