

---

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

---

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

#### **Trademarks**

The Microchip name and logo, the Microchip logo, Accuron, dsPIC, KEELOQ, KEELOQ logo, MPLAB, PIC, PICmicro, PICSTART, rfPIC, SmartShunt and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

FilterLab, Linear Active Thermistor, MXDEV, MXLAB, SEEVAL, SmartSensor and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, Application Maestro, CodeGuard, dsPICDEM, dsPICDEM.net, dsPICworks, dsSPEAK, ECAN, ECONOMONITOR, FanSense, In-Circuit Serial Programming, ICSP, ICEPIC, Mindi, MiWi, MPASM, MPLAB Certified logo, MPLIB, MPLINK, mTouch, nanoWatt XLP, PICKit, PICDEM, PICDEM.net, PICTail, PIC<sup>32</sup> logo, PowerCal, PowerInfo, PowerMate, PowerTool, REAL ICE, rfLAB, Select Mode, Total Endurance, TSHARC, WiperLock and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

All other trademarks mentioned herein are property of their respective companies.

© 2009, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

 Printed on recycled paper.

**QUALITY MANAGEMENT SYSTEM**  
**CERTIFIED BY DNV**  
**== ISO/TS 16949:2002 ==**

*Microchip received ISO/TS-16949:2002 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.*

**MICROCHIP****PIC24HJXXXGPX06/X08/X10**

---

## High-Performance, 16-Bit Microcontrollers

---

**Operating Range:**

- Up to 40 MIPS operation (at 3.0-3.6V):
  - Industrial temperature range (-40°C to +85°C)

**High-Performance CPU:**

- Modified Harvard architecture
- C compiler optimized instruction set
- 16-bit wide data path
- 24-bit wide instructions
- Linear program memory addressing up to 4M instruction words
- Linear data memory addressing up to 64 Kbytes
- 71 base instructions: mostly 1 word/1 cycle
- Sixteen 16-bit General Purpose Registers
- Flexible and powerful Indirect Addressing modes
- Software stack
- 16 x 16 multiply operations
- 32/16 and 16/16 divide operations
- Up to  $\pm 16$ -bit data shifts

**Direct Memory Access (DMA):**

- 8-channel hardware DMA
- 2 Kbytes dual ported DMA buffer area (DMA RAM) to store data transferred via DMA:
  - Allows data transfer between RAM and a peripheral while CPU is executing code (no cycle stealing)
- Most peripherals support DMA

**Interrupt Controller:**

- 5-cycle latency
- Up to 61 available interrupt sources
- Up to five external interrupts
- Seven programmable priority levels
- Five processor exceptions

**Digital I/O:**

- Up to 85 programmable digital I/O pins
- Wake-up/Interrupt-on-Change on up to 24 pins
- Output pins can drive from 3.0V to 3.6V
- All digital input pins are 5V tolerant
- 4 mA sink on all I/O pins

**On-Chip Flash and SRAM:**

- Flash program memory, up to 256 Kbytes
- Data SRAM, up to 16 Kbytes (includes 2 Kbytes of DMA RAM)

**System Management:**

- Flexible clock options:
  - External, crystal, resonator, internal RC
  - Fully integrated PLL
  - Extremely low jitter PLL
- Power-up Timer
- Oscillator Start-up Timer/Stabilizer
- Watchdog Timer with its own RC oscillator
- Fail-Safe Clock Monitor
- Reset by multiple sources

**Power Management:**

- On-chip 2.5V voltage regulator
- Switch between clock sources in real time
- Idle, Sleep and Doze modes with fast wake-up

**Timers/Capture/Compare/PWM:**

- Timer/Counters, up to nine 16-bit timers:
  - Can pair up to make four 32-bit timers
  - One timer runs as Real-Time Clock with external 32.768 kHz oscillator
  - Programmable prescaler
- Input Capture (up to eight channels):
  - Capture on up, down or both edges
  - 16-bit capture input functions
  - 4-deep FIFO on each capture
- Output Compare (up to eight channels):
  - Single or Dual 16-Bit Compare mode
  - 16-bit Glitchless PWM mode

# PIC24HJXXXGPX06/X08/X10

---

## Communication Modules:

- 3-wire SPI (up to two modules):
  - Framing supports I/O interface to simple codecs
  - Supports 8-bit and 16-bit data
  - Supports all serial clock formats and sampling modes
- I<sup>2</sup>C™ (up to two modules):
  - Full Multi-Master Slave mode support
  - 7-bit and 10-bit addressing
  - Bus collision detection and arbitration
  - Integrated signal conditioning
  - Slave address masking
- UART (up to two modules):
  - Interrupt on address bit detect
  - Interrupt on UART error
  - Wake-up on Start bit from Sleep mode
  - 4-character TX and RX FIFO buffers
  - LIN bus support
  - IrDA® encoding and decoding in hardware
  - High-Speed Baud mode
  - Hardware Flow Control with CTS and RTS
- Enhanced CAN (ECAN™ module) 2.0B active (up to two modules):
  - Up to eight transmit and up to 32 receive buffers
  - 16 receive filters and 3 masks
  - Loopback, Listen Only and Listen All Messages modes for diagnostics and bus monitoring
  - Wake-up on CAN message
  - Automatic processing of Remote Transmission Requests
  - FIFO mode using DMA
  - DeviceNet™ addressing support

## Analog-to-Digital Converters:

- Up to two Analog-to-Digital Converter (ADC) modules in a device
- 10-bit, 1.1 Msps or 12-bit, 500 ksps conversion:
  - Two, four, or eight simultaneous samples
  - Up to 32 input channels with auto-scanning
  - Conversion start can be manual or synchronized with one of four trigger sources
  - Conversion possible in Sleep mode
  - ±1 LSB max integral nonlinearity
  - ±1 LSB max differential nonlinearity

## CMOS Flash Technology:

- Low-power, high-speed Flash technology
- Fully static design
- 3.3V (±10%) operating voltage
- Industrial temperature
- Low-power consumption

## Packaging:

- 100-pin TQFP (14x14x1 mm and 12x12x1 mm)
- 64-pin TQFP (10x10x1 mm)

|                                                                                      |
|--------------------------------------------------------------------------------------|
| <b>Note:</b> See the device variant tables for exact peripheral features per device. |
|--------------------------------------------------------------------------------------|

# PIC24HJXXXGPX06/X08/X10

## PIC24H PRODUCT FAMILIES

The PIC24H Family of devices is ideal for a wide variety of 16-bit MCU embedded applications. The device names, pin counts, memory sizes and peripheral availability of each device are listed below, followed by their pinout diagrams.

### PIC24H Family Controllers

| Device          | Pins | Program Flash Memory (KB) | RAM <sup>(1)</sup> (KB) | DMA Channels | Timer 16-bit | Input Capture | Output Compare Std. PWM | Codec Interface | ADC          | UART | SPI | I <sup>2</sup> C™ | CAN | I/O Pins (Max) <sup>(2)</sup> | Packages |
|-----------------|------|---------------------------|-------------------------|--------------|--------------|---------------|-------------------------|-----------------|--------------|------|-----|-------------------|-----|-------------------------------|----------|
| PIC24HJ64GP206  | 64   | 64                        | 8                       | 8            | 9            | 8             | 8                       | 0               | 1 ADC, 18 ch | 2    | 2   | 1                 | 0   | 53                            | PT       |
| PIC24HJ64GP210  | 100  | 64                        | 8                       | 8            | 9            | 8             | 8                       | 0               | 1 ADC, 32 ch | 2    | 2   | 2                 | 0   | 85                            | PF, PT   |
| PIC24HJ64GP506  | 64   | 64                        | 8                       | 8            | 9            | 8             | 8                       | 0               | 1 ADC, 18 ch | 2    | 2   | 2                 | 1   | 53                            | PT       |
| PIC24HJ64GP510  | 100  | 64                        | 8                       | 8            | 9            | 8             | 8                       | 0               | 1 ADC, 32 ch | 2    | 2   | 2                 | 1   | 85                            | PF, PT   |
| PIC24HJ128GP206 | 64   | 128                       | 8                       | 8            | 9            | 8             | 8                       | 0               | 1 ADC, 18 ch | 2    | 2   | 2                 | 0   | 53                            | PT       |
| PIC24HJ128GP210 | 100  | 128                       | 8                       | 8            | 9            | 8             | 8                       | 0               | 1 ADC, 32 ch | 2    | 2   | 2                 | 0   | 85                            | PF, PT   |
| PIC24HJ128GP506 | 64   | 128                       | 8                       | 8            | 9            | 8             | 8                       | 0               | 1 ADC, 18 ch | 2    | 2   | 2                 | 1   | 53                            | PT       |
| PIC24HJ128GP510 | 100  | 128                       | 8                       | 8            | 9            | 8             | 8                       | 0               | 1 ADC, 32 ch | 2    | 2   | 2                 | 1   | 85                            | PF, PT   |
| PIC24HJ128GP306 | 64   | 128                       | 16                      | 8            | 9            | 8             | 8                       | 0               | 1 ADC, 18 ch | 2    | 2   | 2                 | 0   | 53                            | PT       |
| PIC24HJ128GP310 | 100  | 128                       | 16                      | 8            | 9            | 8             | 8                       | 0               | 1 ADC, 32 ch | 2    | 2   | 2                 | 0   | 85                            | PF, PT   |
| PIC24HJ256GP206 | 64   | 256                       | 16                      | 8            | 9            | 8             | 8                       | 0               | 1 ADC, 18 ch | 2    | 2   | 2                 | 0   | 53                            | PT       |
| PIC24HJ256GP210 | 100  | 256                       | 16                      | 8            | 9            | 8             | 8                       | 0               | 1 ADC, 32 ch | 2    | 2   | 2                 | 0   | 85                            | PF, PT   |
| PIC24HJ256GP610 | 100  | 256                       | 16                      | 8            | 9            | 8             | 8                       | 0               | 2 ADC, 32 ch | 2    | 2   | 2                 | 2   | 85                            | PF, PT   |

**Note 1:** RAM size is inclusive of 2 Kbytes DMA RAM.


**Note 2:** Maximum I/O pin count includes pins shared by the peripheral functions.

# PIC24HJXXXGPX06/X08/X10

## Pin Diagrams

### 64-Pin TQFP

■ = Pins are up to 5V tolerant

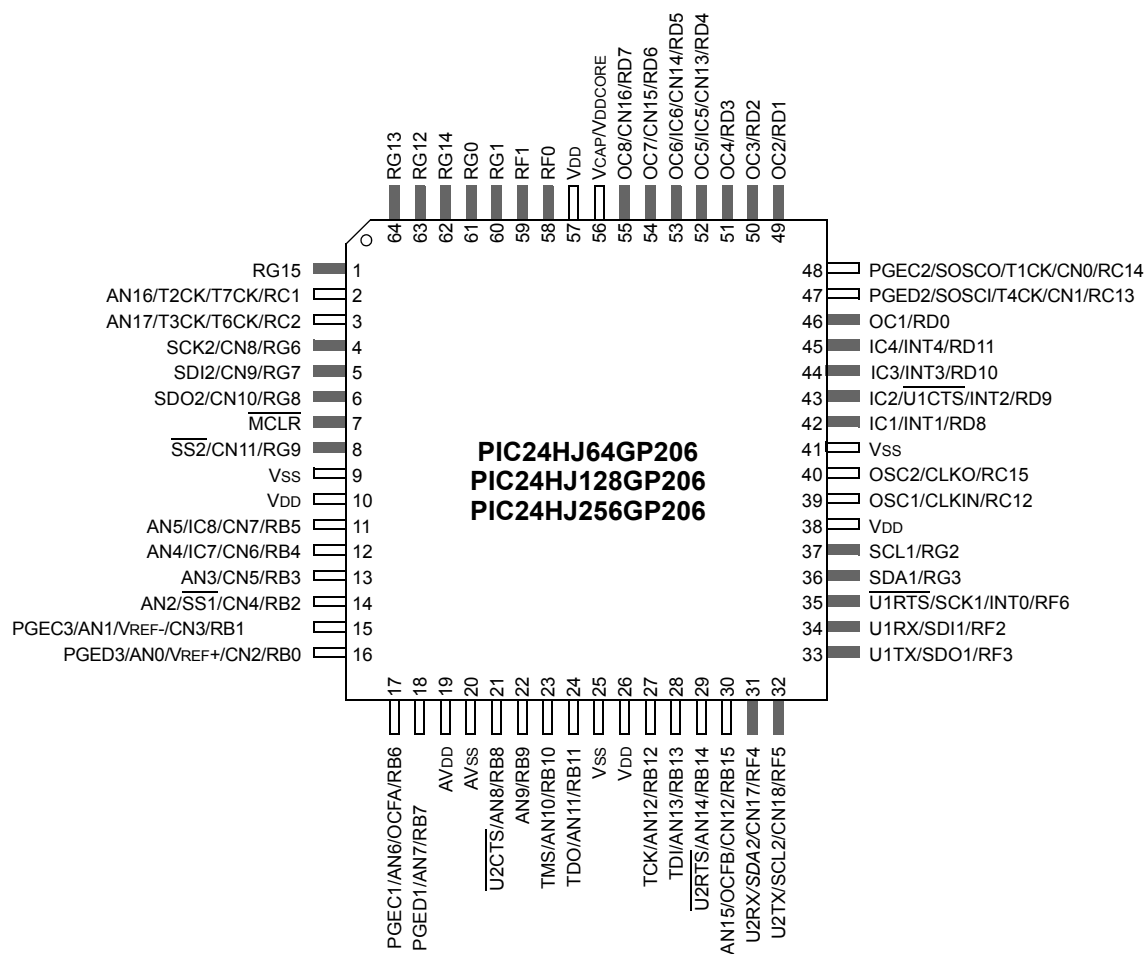


**Note:** The PIC24HJ64GP206 device does not have the SCL2 and SDA2 pins.

# PIC24HJXXXGPX06/X08/X10

## Pin Diagrams (Continued)


### 64-Pin TQFP

■ = Pins are up to 5V tolerant

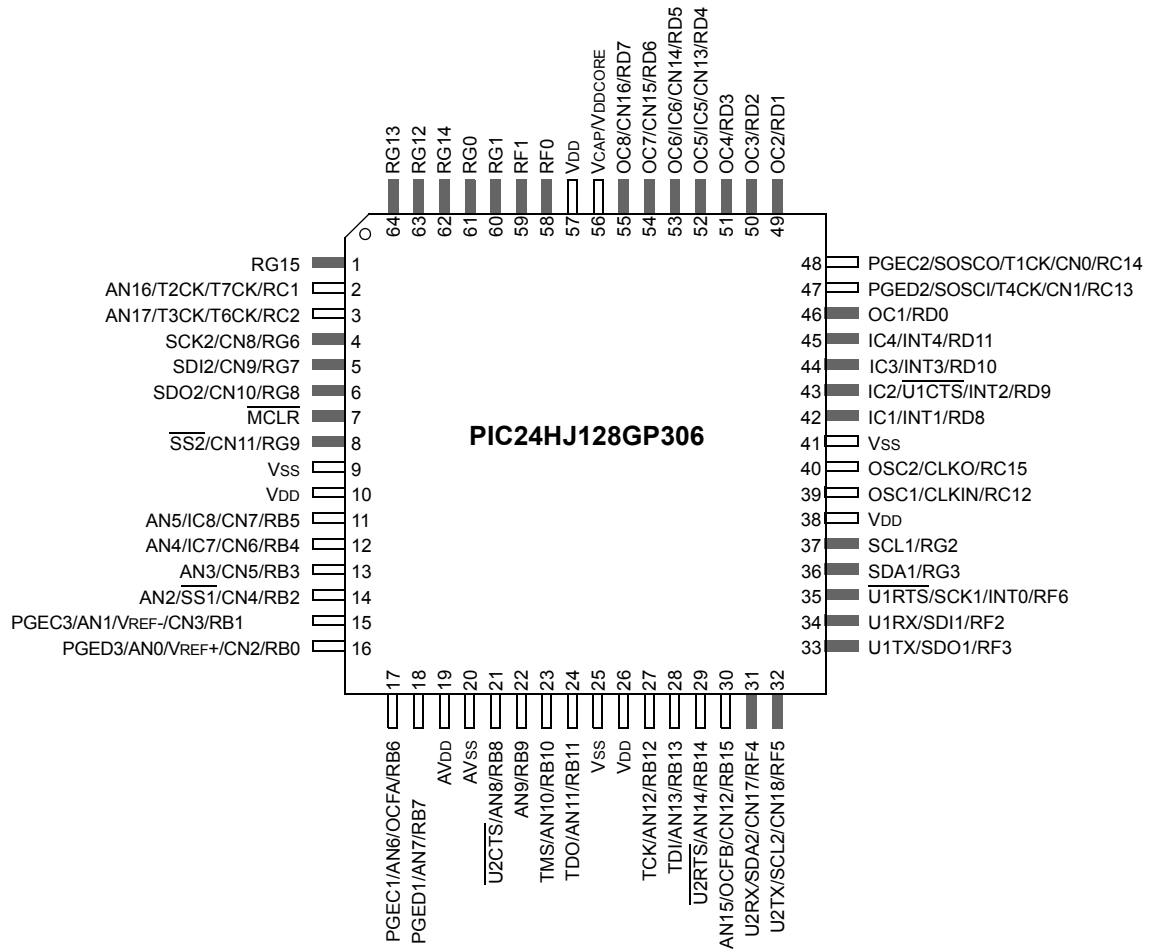


# PIC24HJXXXGPX06/X08/X10

## Pin Diagrams (Continued)

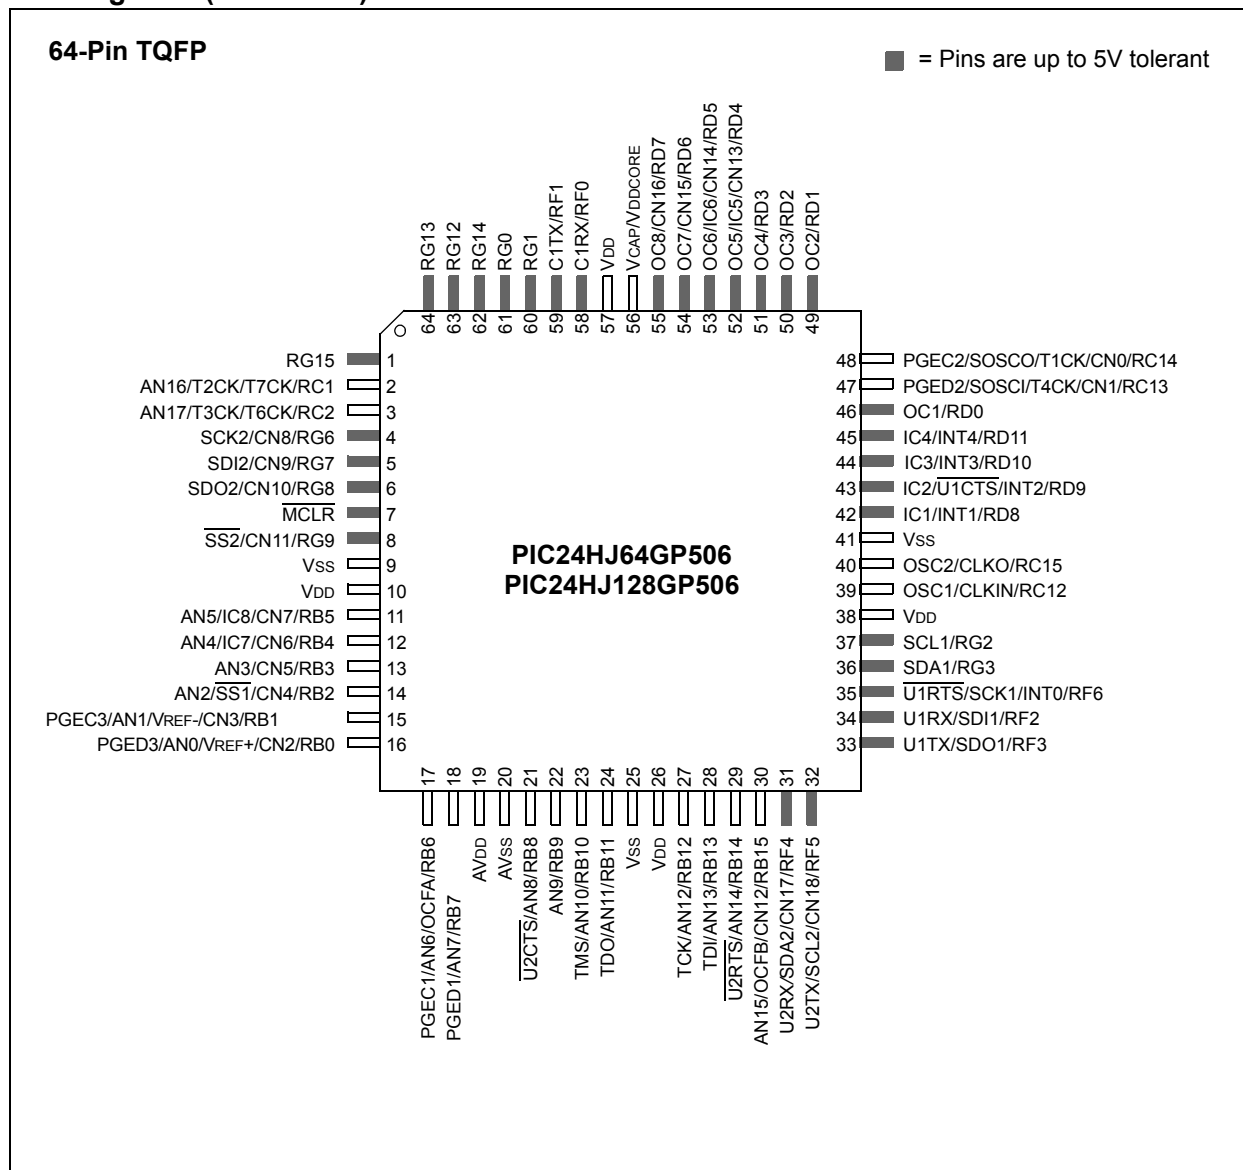

# PIC24HJXXXGPX06/X08/X10

## Pin Diagrams (Continued)

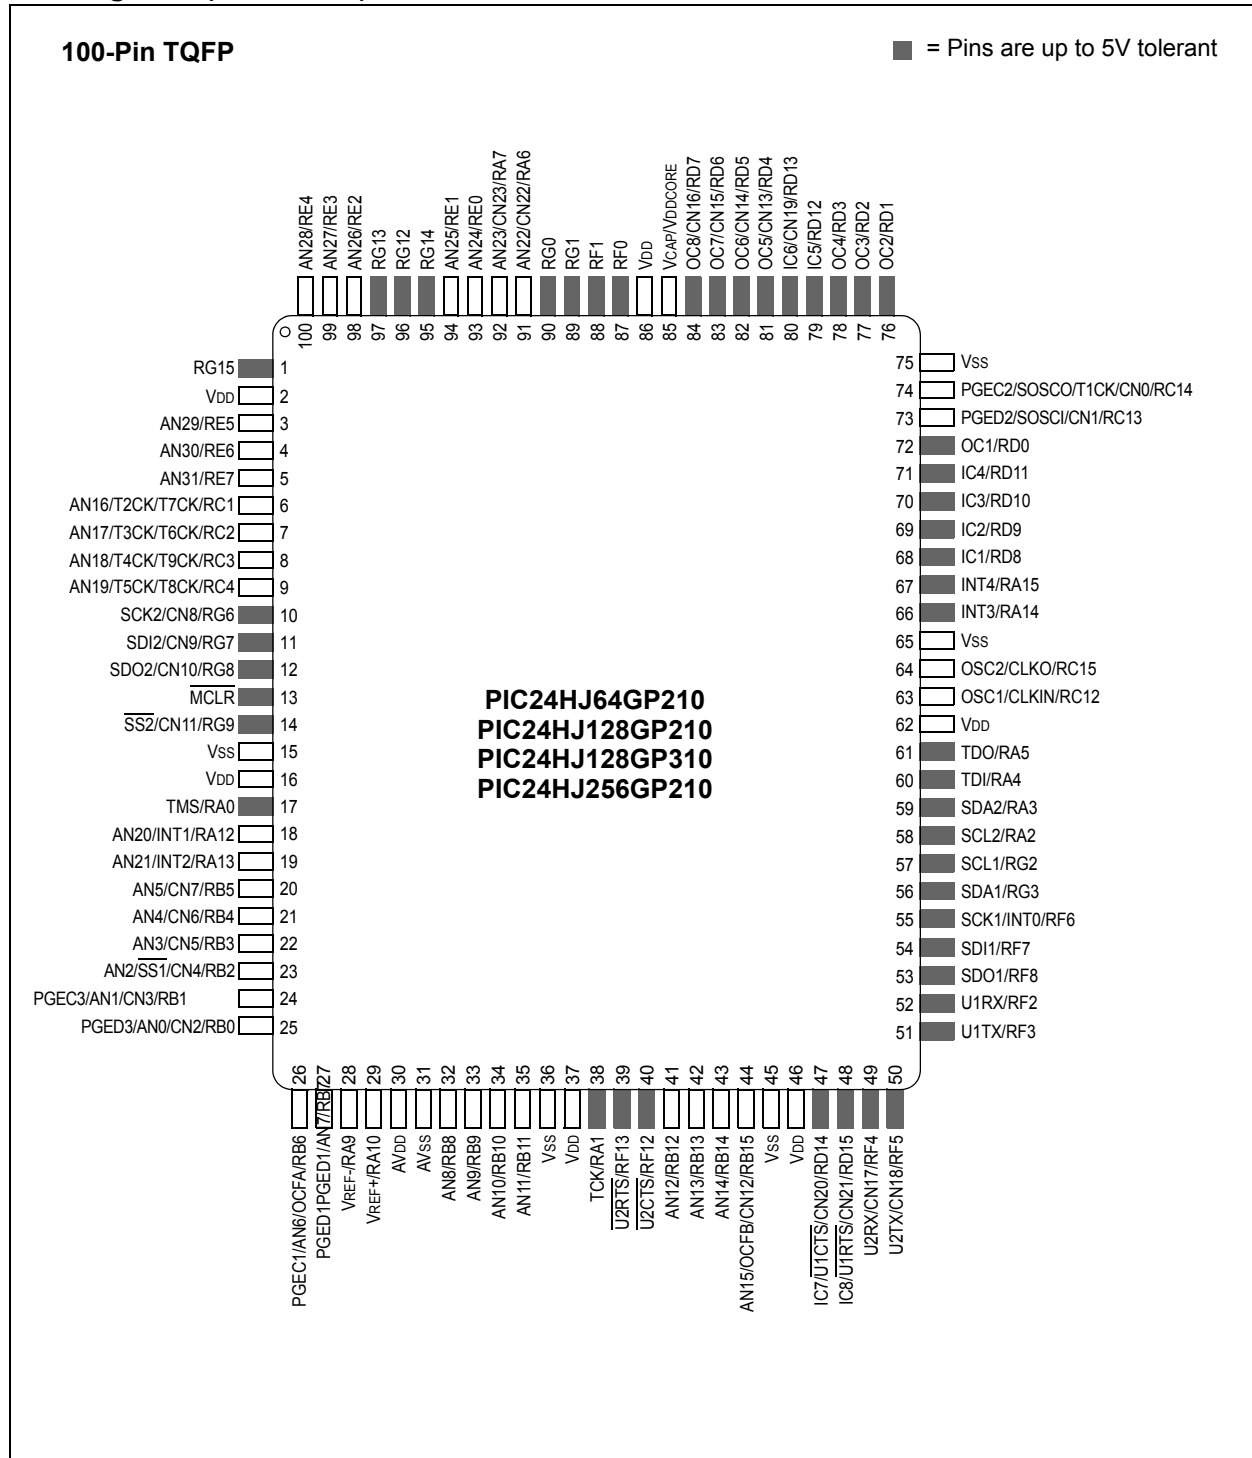


# PIC24HJXXXGPX06/X08/X10

## Pin Diagrams (Continued)


### 100-Pin TQFP

■ = Pins are up to 5V tolerant

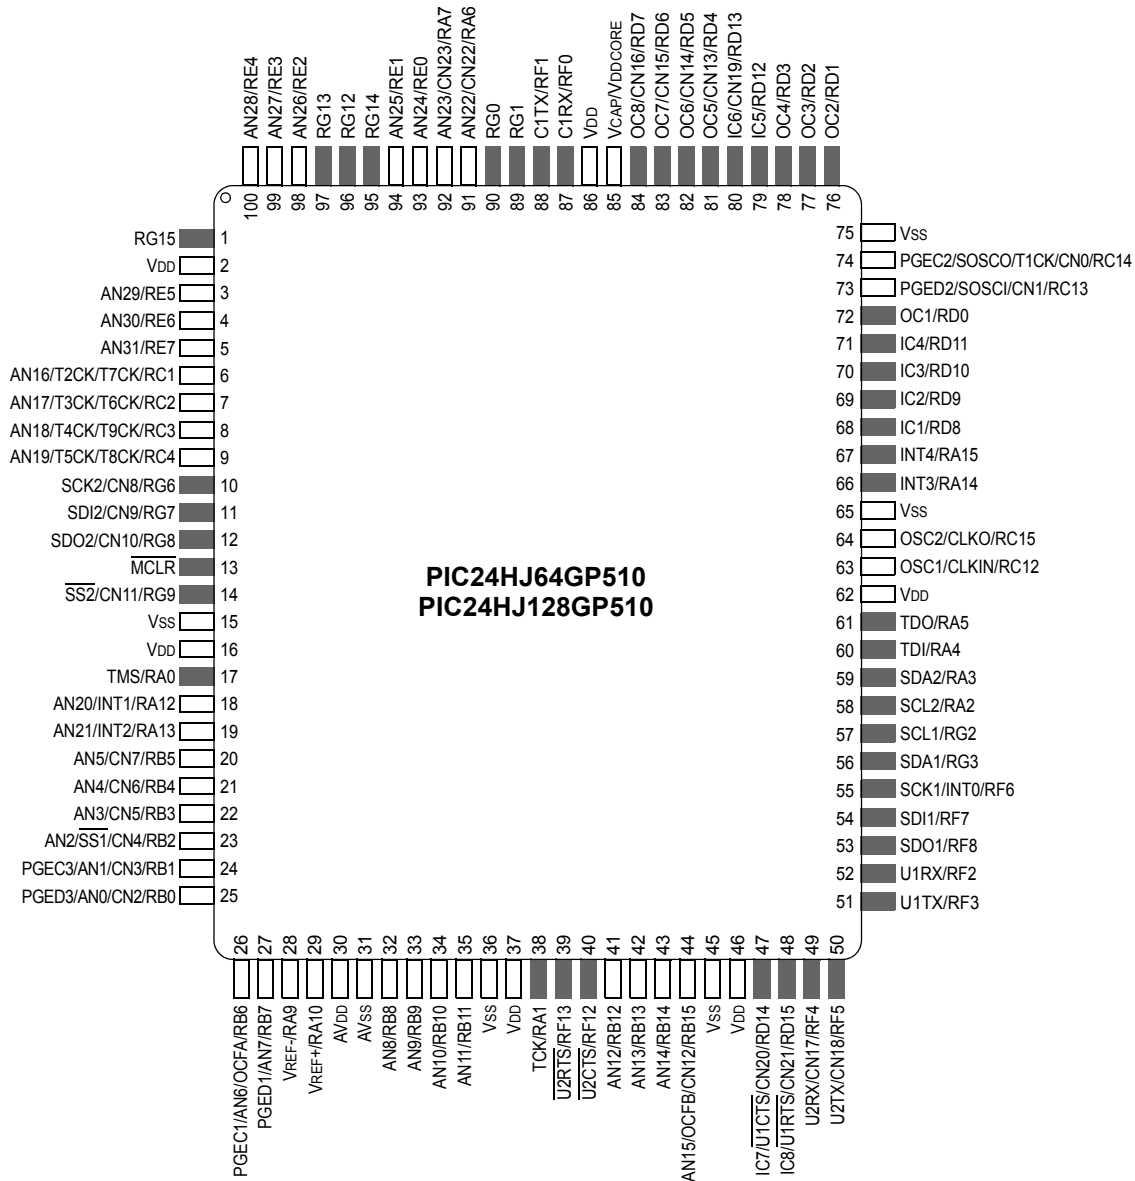

# PIC24HJXXXGPX06/X08/X10

## Pin Diagrams (Continued)

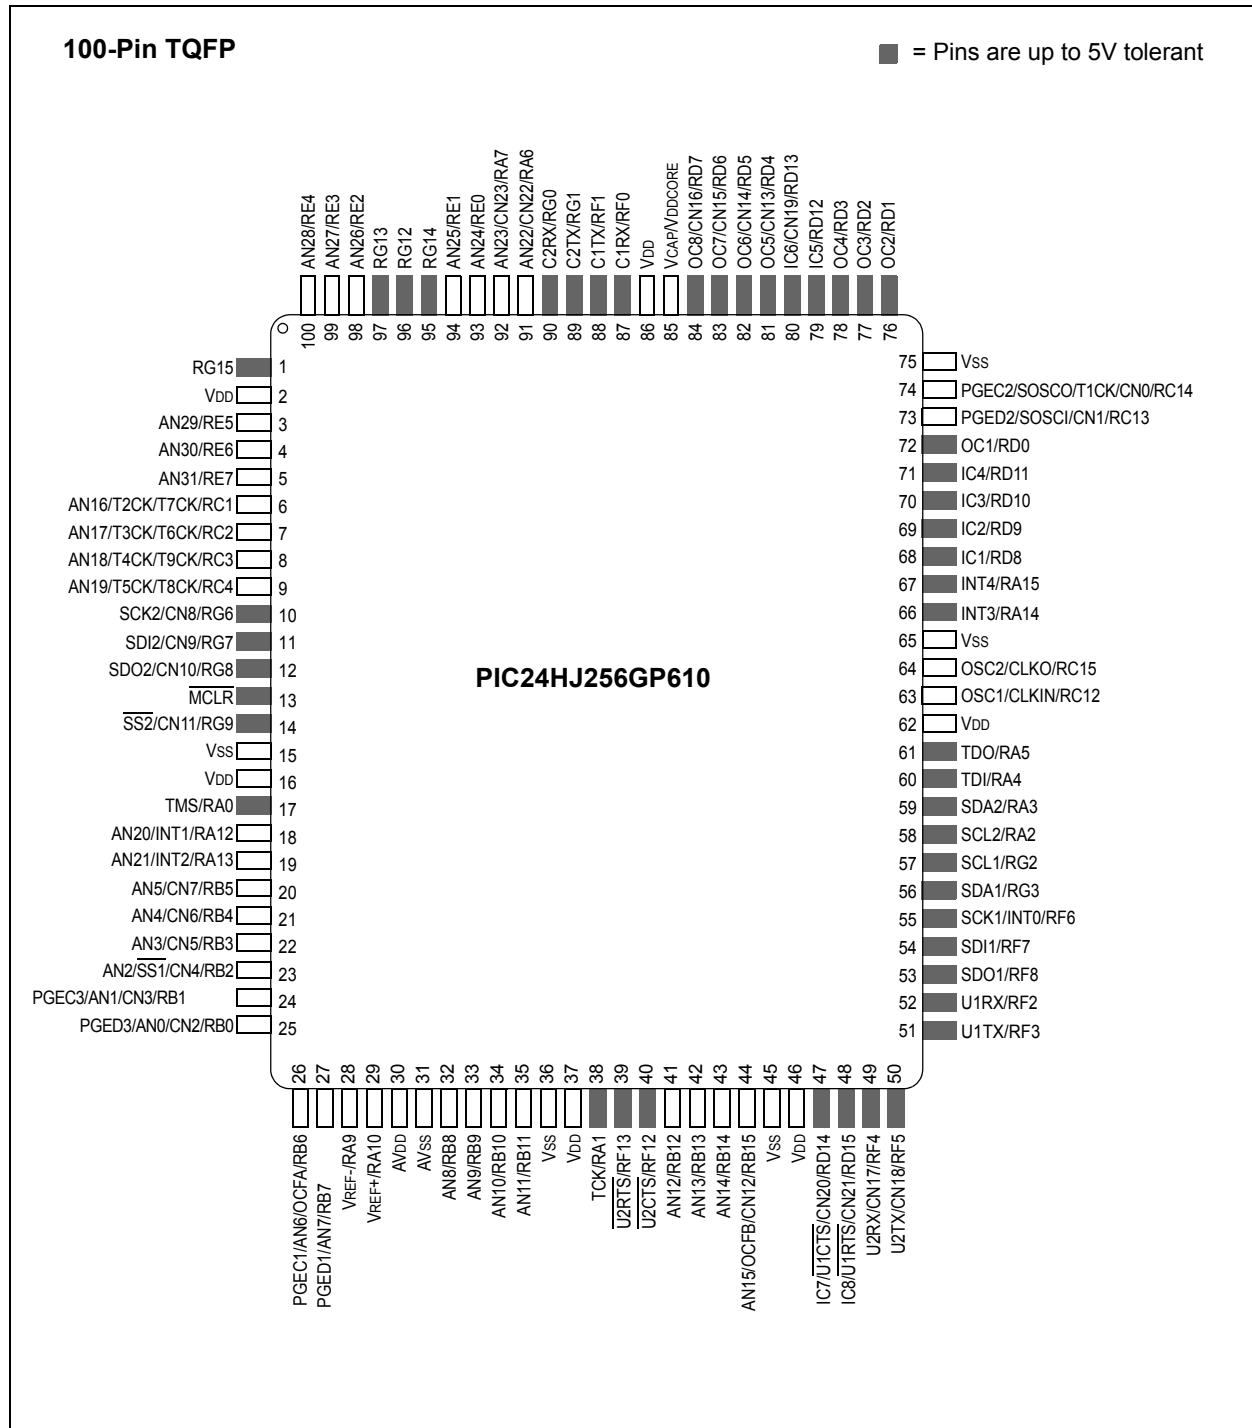

# PIC24HJXXXGPX06/X08/X10

## Table of Contents

|                                                                       |     |
|-----------------------------------------------------------------------|-----|
| PIC24H Product Families .....                                         | 3   |
| 1.0 Device Overview .....                                             | 11  |
| 2.0 Guidelines for Getting Started with 16-Bit Microcontrollers ..... | 15  |
| 3.0 CPU .....                                                         | 19  |
| 4.0 Memory Organization .....                                         | 25  |
| 5.0 Flash Program Memory .....                                        | 55  |
| 6.0 Reset .....                                                       | 61  |
| 7.0 Interrupt Controller .....                                        | 65  |
| 8.0 Direct Memory Access (DMA) .....                                  | 109 |
| 9.0 Oscillator Configuration .....                                    | 119 |
| 10.0 Power-Saving Features .....                                      | 129 |
| 11.0 I/O Ports .....                                                  | 137 |
| 12.0 Timer1 .....                                                     | 139 |
| 13.0 Timer2/3, Timer4/5, Timer6/7 and Timer8/9 .....                  | 141 |
| 14.0 Input Capture .....                                              | 147 |
| 15.0 Output Compare .....                                             | 149 |
| 16.0 Serial Peripheral Interface (SPI) .....                          | 153 |
| 17.0 Inter-Integrated Circuit™ (I <sup>2</sup> C™) .....              | 159 |
| 18.0 Universal Asynchronous Receiver Transmitter (UART) .....         | 167 |
| 19.0 Enhanced CAN (ECAN™) Module .....                                | 173 |
| 20.0 10-Bit/12-Bit Analog-to-Digital Converter (ADC) .....            | 199 |
| 21.0 Special Features .....                                           | 211 |
| 22.0 Instruction Set Summary .....                                    | 219 |
| 23.0 Development Support .....                                        | 227 |
| 24.0 Electrical Characteristics .....                                 | 231 |
| 25.0 Packaging Information .....                                      | 267 |
| Appendix A: Revision History .....                                    | 275 |
| Index .....                                                           | 281 |
| The Microchip Web Site .....                                          | 285 |
| Customer Change Notification Service .....                            | 285 |
| Customer Support .....                                                | 285 |
| Reader Response .....                                                 | 286 |
| Product Identification System .....                                   | 287 |

## TO OUR VALUED CUSTOMERS

It is our intention to provide our valued customers with the best documentation possible to ensure successful use of your Microchip products. To this end, we will continue to improve our publications to better suit your needs. Our publications will be refined and enhanced as new volumes and updates are introduced.

If you have any questions or comments regarding this publication, please contact the Marketing Communications Department via E-mail at [docerrors@microchip.com](mailto:docerrors@microchip.com) or fax the **Reader Response Form** in the back of this data sheet to (480) 792-4150. We welcome your feedback.

### Most Current Data Sheet

To obtain the most up-to-date version of this data sheet, please register at our Worldwide Web site at:

<http://www.microchip.com>

You can determine the version of a data sheet by examining its literature number found on the bottom outside corner of any page. The last character of the literature number is the version number, (e.g., DS30000A is version A of document DS30000).

### Errata

An errata sheet, describing minor operational differences from the data sheet and recommended workarounds, may exist for current devices. As device/documentation issues become known to us, we will publish an errata sheet. The errata will specify the revision of silicon and revision of document to which it applies.

To determine if an errata sheet exists for a particular device, please check with one of the following:

- Microchip's Worldwide Web site; <http://www.microchip.com>
- Your local Microchip sales office (see last page)

When contacting a sales office, please specify which device, revision of silicon and data sheet (include literature number) you are using.

### Customer Notification System

Register on our web site at [www.microchip.com](http://www.microchip.com) to receive the most current information on all of our products.

# PIC24HJXXXGPX06/X08/X10

## 1.0 DEVICE OVERVIEW

**Note:** This data sheet summarizes the features of the PIC24HJXXXGPX06/X08/X10 family of devices. However, it is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the latest family reference sections of the “PIC24H Family Reference Manual”, which is available from the Microchip web site ([www.microchip.com](http://www.microchip.com)).

This document contains device specific information for the following devices:

- PIC24HJ64GP206
- PIC24HJ64GP210
- PIC24HJ64GP506
- PIC24HJ64GP510
- PIC24HJ128GP206
- PIC24HJ128GP210
- PIC24HJ128GP506
- PIC24HJ128GP510
- PIC24HJ128GP306
- PIC24HJ128GP310
- PIC24HJ256GP206
- PIC24HJ256GP210
- PIC24HJ256GP610

The PIC24HJXXXGPX06/X08/X10 device family includes devices with different pin counts (64 and 100 pins), different program memory sizes (64 Kbytes, 128 Kbytes and 256 Kbytes) and different RAM sizes (8 Kbytes and 16 Kbytes).

This makes these families suitable for a wide variety of high-performance digital signal control applications. The devices are pin compatible with the dsPIC33F family of devices, and also share a very high degree of compatibility with the dsPIC30F family devices. This allows easy migration between device families as may be necessitated by the specific functionality, computational resource and system cost requirements of the application.


The PIC24HJXXXGPX06/X08/X10 device family employs a powerful 16-bit architecture, ideal for applications that rely on high-speed, repetitive computations, as well as control.

The 17 x 17 multiplier, hardware support for division operations, multi-bit data shifter, a large array of 16-bit working registers and a wide variety of data addressing modes, together provide the PIC24HJXXXGPX06/X08/X10 Central Processing Unit (CPU) with extensive mathematical processing capability. Flexible and deterministic interrupt handling, coupled with a powerful array of peripherals, renders the PIC24HJXXXGPX06/X08/X10 devices suitable for control applications. Further, Direct Memory Access (DMA) enables overhead-free transfer of data between several peripherals and a dedicated DMA RAM. Reliable, field programmable Flash program memory ensures scalability of applications that use PIC24HJXXXGPX06/X08/X10 devices.

Figure 1-1 shows a general block diagram of the various core and peripheral modules in the PIC24HJXXXGPX06/X08/X10 family of devices, while Table 1-1 lists the functions of the various pins shown in the pinout diagrams.

# PIC24HJXXXGPX06/X08/X10

**FIGURE 1-1: PIC24HJXXXGPX06/X08/X10 GENERAL BLOCK DIAGRAM**

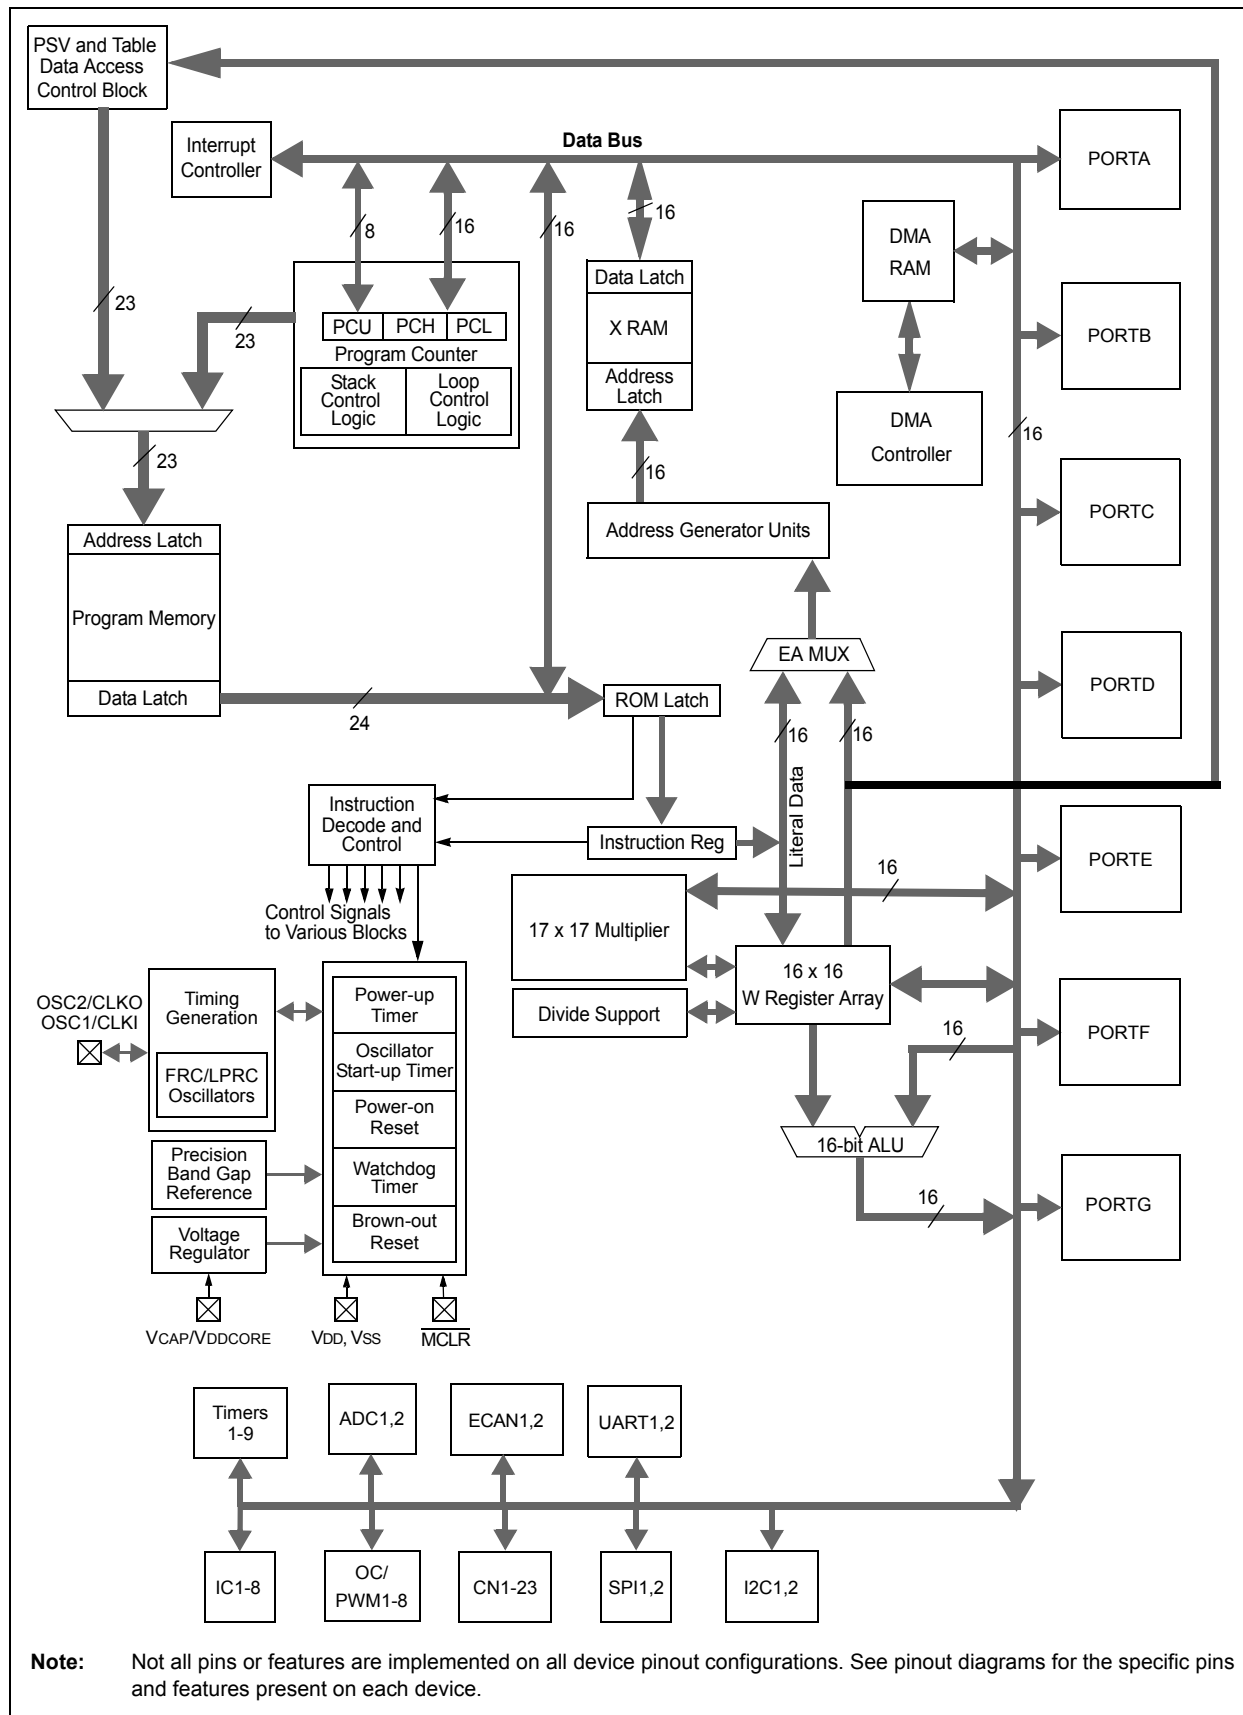

# PIC24HJXXXGPX06/X08/X10

**TABLE 1-1: PINOUT I/O DESCRIPTIONS**

| Pin Name  | Pin Type | Buffer Type | Description                                                                                                                                                                        |
|-----------|----------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AN0-AN31  | I        | Analog      | Analog input channels.                                                                                                                                                             |
| AVDD      | P        | P           | Positive supply for analog modules. This pin must be connected at all times.                                                                                                       |
| AVSS      | P        | P           | Ground reference for analog modules.                                                                                                                                               |
| CLKI      | I        | ST/CMOS     | External clock source input. Always associated with OSC1 pin function.                                                                                                             |
| CLKO      | O        | —           | Oscillator crystal output. Connects to crystal or resonator in Crystal Oscillator mode. Optionally functions as CLKO in RC and EC modes. Always associated with OSC2 pin function. |
| CN0-CN23  | I        | ST          | Input change notification inputs.<br>Can be software programmed for internal weak pull-ups on all inputs.                                                                          |
| C1RX      | I        | ST          | ECAN1 bus receive pin.                                                                                                                                                             |
| C1TX      | O        | —           | ECAN1 bus transmit pin.                                                                                                                                                            |
| C2RX      | I        | ST          | ECAN2 bus receive pin.                                                                                                                                                             |
| C2TX      | O        | —           | ECAN2 bus transmit pin.                                                                                                                                                            |
| PGED1     | I/O      | ST          | Data I/O pin for programming/debugging communication channel 1.                                                                                                                    |
| PGEC1     | I        | ST          | Clock input pin for programming/debugging communication channel 1.                                                                                                                 |
| PGED2     | I/O      | ST          | Data I/O pin for programming/debugging communication channel 2.                                                                                                                    |
| PGEC2     | I        | ST          | Clock input pin for programming/debugging communication channel 2.                                                                                                                 |
| PGED3     | I/O      | ST          | Data I/O pin for programming/debugging communication channel 3.                                                                                                                    |
| PGEC3     | I        | ST          | Clock input pin for programming/debugging communication channel 3.                                                                                                                 |
| IC1-IC8   | I        | ST          | Capture inputs 1 through 8.                                                                                                                                                        |
| INT0      | I        | ST          | External interrupt 0.                                                                                                                                                              |
| INT1      | I        | ST          | External interrupt 1.                                                                                                                                                              |
| INT2      | I        | ST          | External interrupt 2.                                                                                                                                                              |
| INT3      | I        | ST          | External interrupt 3.                                                                                                                                                              |
| INT4      | I        | ST          | External interrupt 4.                                                                                                                                                              |
| MCLR      | I/P      | ST          | Master Clear (Reset) input. This pin is an active-low Reset to the device.                                                                                                         |
| OCFA      | I        | ST          | Compare Fault A input (for Compare Channels 1, 2, 3 and 4).                                                                                                                        |
| OCFB      | I        | ST          | Compare Fault B input (for Compare Channels 5, 6, 7 and 8).                                                                                                                        |
| OC1-OC8   | O        | —           | Compare outputs 1 through 8.                                                                                                                                                       |
| OSC1      | I        | ST/CMOS     | Oscillator crystal input. ST buffer when configured in RC mode; CMOS otherwise.                                                                                                    |
| OSC2      | I/O      | —           | Oscillator crystal output. Connects to crystal or resonator in Crystal Oscillator mode. Optionally functions as CLKO in RC and EC modes.                                           |
| RA0-RA7   | I/O      | ST          | PORTA is a bidirectional I/O port.                                                                                                                                                 |
| RA9-RA10  | I/O      | ST          |                                                                                                                                                                                    |
| RA12-RA15 | I/O      | ST          |                                                                                                                                                                                    |
| RB0-RB15  | I/O      | ST          | PORTB is a bidirectional I/O port.                                                                                                                                                 |
| RC1-RC4   | I/O      | ST          | PORTC is a bidirectional I/O port.                                                                                                                                                 |
| RC12-RC15 | I/O      | ST          |                                                                                                                                                                                    |
| RD0-RD15  | I/O      | ST          | PORTD is a bidirectional I/O port.                                                                                                                                                 |
| RE0-RE7   | I/O      | ST          | PORTE is a bidirectional I/O port.                                                                                                                                                 |
| RF0-RF8   | I/O      | ST          | PORTF is a bidirectional I/O port.                                                                                                                                                 |
| RF12-RF13 | I/O      | ST          |                                                                                                                                                                                    |
| RG0-RG3   | I/O      | ST          | PORTG is a bidirectional I/O port.                                                                                                                                                 |
| RG6-RG9   | I/O      | ST          |                                                                                                                                                                                    |
| RG12-RG15 | I/O      | ST          |                                                                                                                                                                                    |

**Legend:** CMOS = CMOS compatible input or output  
ST = Schmitt Trigger input with CMOS levels

Analog = Analog input  
O = Output

P = Power  
I = Input

# PIC24HJXXXGPX06/X08/X10

**TABLE 1-1: PINOUT I/O DESCRIPTIONS (CONTINUED)**

| Pin Name     | Pin Type | Buffer Type | Description                                                    |
|--------------|----------|-------------|----------------------------------------------------------------|
| SCK1         | I/O      | ST          | Synchronous serial clock input/output for SPI1.                |
| SDI1         | I        | ST          | SPI1 data in.                                                  |
| SDO1         | O        | —           | SPI1 data out.                                                 |
| SS1          | I/O      | ST          | SPI1 slave synchronization or frame pulse I/O.                 |
| SCK2         | I/O      | ST          | Synchronous serial clock input/output for SPI2.                |
| SDI2         | I        | ST          | SPI2 data in.                                                  |
| SDO2         | O        | —           | SPI2 data out.                                                 |
| SS2          | I/O      | ST          | SPI2 slave synchronization or frame pulse I/O.                 |
| SCL1         | I/O      | ST          | Synchronous serial clock input/output for I2C1.                |
| SDA1         | I/O      | ST          | Synchronous serial data input/output for I2C1.                 |
| SCL2         | I/O      | ST          | Synchronous serial clock input/output for I2C2.                |
| SDA2         | I/O      | ST          | Synchronous serial data input/output for I2C2.                 |
| SOSCI        | I        | ST/CMOS     | 32.768 kHz low-power oscillator crystal input; CMOS otherwise. |
| SOSCO        | O        | —           | 32.768 kHz low-power oscillator crystal output.                |
| TMS          | I        | ST          | JTAG Test mode select pin.                                     |
| TCK          | I        | ST          | JTAG test clock input pin.                                     |
| TDI          | I        | ST          | JTAG test data input pin.                                      |
| TDO          | O        | —           | JTAG test data output pin.                                     |
| T1CK         | I        | ST          | Timer1 external clock input.                                   |
| T2CK         | I        | ST          | Timer2 external clock input.                                   |
| T3CK         | I        | ST          | Timer3 external clock input.                                   |
| T4CK         | I        | ST          | Timer4 external clock input.                                   |
| T5CK         | I        | ST          | Timer5 external clock input.                                   |
| T6CK         | I        | ST          | Timer6 external clock input.                                   |
| T7CK         | I        | ST          | Timer7 external clock input.                                   |
| T8CK         | I        | ST          | Timer8 external clock input.                                   |
| T9CK         | I        | ST          | Timer9 external clock input.                                   |
| U1CTS        | I        | ST          | UART1 clear to send.                                           |
| U1RTS        | O        | —           | UART1 ready to send.                                           |
| U1RX         | I        | ST          | UART1 receive.                                                 |
| U1TX         | O        | —           | UART1 transmit.                                                |
| U2CTS        | I        | ST          | UART2 clear to send.                                           |
| U2RTS        | O        | —           | UART2 ready to send.                                           |
| U2RX         | I        | ST          | UART2 receive.                                                 |
| U2TX         | O        | —           | UART2 transmit.                                                |
| VDD          | P        | —           | Positive supply for peripheral logic and I/O pins.             |
| VCAP/VDDCORE | P        | —           | CPU logic filter capacitor connection.                         |
| VSS          | P        | —           | Ground reference for logic and I/O pins.                       |
| VREF+        | I        | Analog      | Analog voltage reference (high) input.                         |
| VREF-        | I        | Analog      | Analog voltage reference (low) input.                          |

**Legend:** CMOS = CMOS compatible input or output      Analog = Analog input      P = Power  
ST = Schmitt Trigger input with CMOS levels      O = Output      I = Input

## 2.0 GUIDELINES FOR GETTING STARTED WITH 16-BIT MICROCONTROLLERS

**Note:** This data sheet summarizes the features of the PIC24HJXXXGPX06/X08/X10 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the “PIC24H Family Reference Manual”, which is available from the Microchip website ([www.microchip.com](http://www.microchip.com)).

### 2.1 Basic Connection Requirements

Getting started with the PIC24HJXXXGPX06/X08/X10 family of 16-bit Microcontrollers (MCUs) requires attention to a minimal set of device pin connections before proceeding with development. The following is a list of pin names, which must always be connected:

- All VDD and VSS pins (see **Section 2.2 “Decoupling Capacitors”**)
- All AVDD and AVSS pins (regardless if ADC module is not used) (see **Section 2.2 “Decoupling Capacitors”**)
- VCAP/VDDCORE (see **Section 2.3 “Capacitor on Internal Voltage Regulator (VCAP/VDDCORE)”**)
- MCLR pin (see **Section 2.4 “Master Clear (MCLR) Pin”**)
- PGECx/PGEDx pins used for In-Circuit Serial Programming™ (ICSP™) and debugging purposes (see **Section 2.5 “ICSP Pins”**)
- OSC1 and OSC2 pins when external oscillator source is used (see **Section 2.6 “External Oscillator Pins”**)

Additionally, the following pins may be required:

- VREF+/VREF- pins used when external voltage reference for ADC module is implemented

**Note:** The AVDD and AVSS pins must be connected independent of the ADC voltage reference source.

### 2.2 Decoupling Capacitors


The use of decoupling capacitors on every pair of power supply pins, such as VDD, VSS, AVDD and AVSS is required.

Consider the following criteria when using decoupling capacitors:

- **Value and type of capacitor:** Recommendation of 0.1  $\mu\text{F}$  (100 nF), 10-20V. This capacitor should be a low-ESR and have resonance frequency in the range of 20 MHz and higher. It is recommended that ceramic capacitors be used.
- **Placement on the printed circuit board:** The decoupling capacitors should be placed as close to the pins as possible. It is recommended to place the capacitors on the same side of the board as the device. If space is constricted, the capacitor can be placed on another layer on the PCB using a via; however, ensure that the trace length from the pin to the capacitor is within one-quarter inch (6 mm) in length.
- **Handling high frequency noise:** If the board is experiencing high frequency noise, upward of tens of MHz, add a second ceramic-type capacitor in parallel to the above described decoupling capacitor. The value of the second capacitor can be in the range of 0.01  $\mu\text{F}$  to 0.001  $\mu\text{F}$ . Place this second capacitor next to the primary decoupling capacitor. In high-speed circuit designs, consider implementing a decade pair of capacitances as close to the power and ground pins as possible. For example, 0.1  $\mu\text{F}$  in parallel with 0.001  $\mu\text{F}$ .
- **Maximizing performance:** On the board layout from the power supply circuit, run the power and return traces to the decoupling capacitors first, and then to the device pins. This ensures that the decoupling capacitors are first in the power chain. Equally important is to keep the trace length between the capacitor and the power pins to a minimum thereby reducing PCB track inductance.

# PIC24HJXXXGPX06/X08/X10

**FIGURE 2-1: RECOMMENDED MINIMUM CONNECTION**

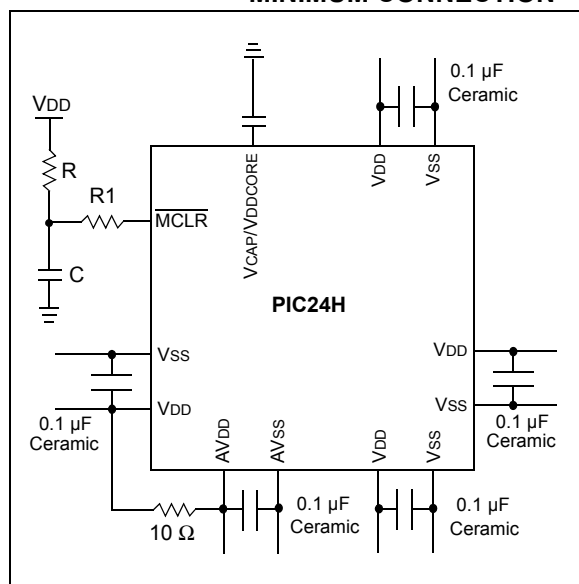

## 2.2.1 TANK CAPACITORS

On boards with power traces running longer than six inches in length, it is suggested to use a tank capacitor for integrated circuits including MCUs to supply a local power source. The value of the tank capacitor should be determined based on the trace resistance that connects the power supply source to the device, and the maximum current drawn by the device in the application. In other words, select the tank capacitor so that it meets the acceptable voltage sag at the device. Typical values range from 4.7  $\mu\text{F}$  to 47  $\mu\text{F}$ .

## 2.3 Capacitor on Internal Voltage Regulator (VCAP/VDDCORE)

A low-ESR ( $< 5 \text{ Ohms}$ ) capacitor is required on the VCAP/VDDCORE pin, which is used to stabilize the voltage regulator output voltage. The VCAP/VDDCORE pin must not be connected to VDD, and must have a capacitor between 4.7  $\mu\text{F}$  and 10  $\mu\text{F}$ , 16V connected to ground. The type can be ceramic or tantalum. Refer to **Section 24.0 “Electrical Characteristics”** for additional information.

The placement of this capacitor should be close to the VCAP/VDDCORE. It is recommended that the trace length not exceed one-quarter inch (6 mm). Refer to **Section 21.2 “On-Chip Voltage Regulator”** for details.

## 2.4 Master Clear (MCLR) Pin

The MCLR pin provides for two specific device functions:


- Device Reset
- Device programming and debugging

During device programming and debugging, the resistance and capacitance that can be added to the pin must be considered. Device programmers and debuggers drive the MCLR pin. Consequently, specific voltage levels ( $V_{IH}$  and  $V_{IL}$ ) and fast signal transitions must not be adversely affected. Therefore, specific values of R and C will need to be adjusted based on the application and PCB requirements.

For example, as shown in Figure 2-2, it is recommended that the capacitor C, be isolated from the MCLR pin during programming and debugging operations.

Place the components shown in Figure 2-2 within one-quarter inch (6 mm) from the MCLR pin.

**FIGURE 2-2: EXAMPLE OF MCLR PIN CONNECTIONS**

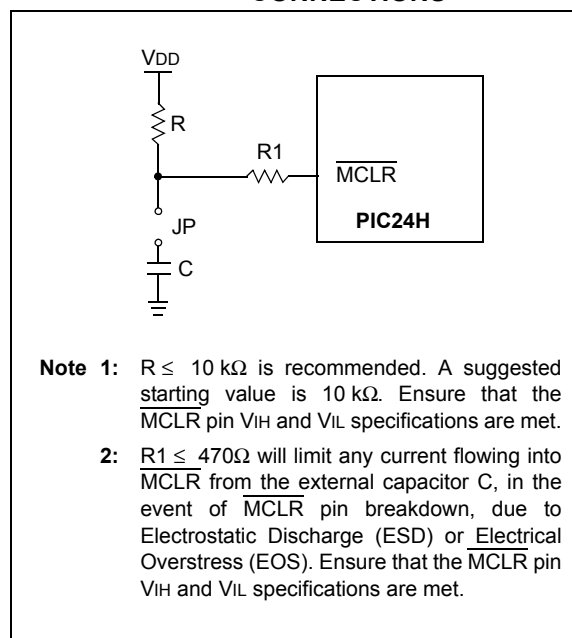

## 2.5 ICSP Pins

The PGECx and PGEDx pins are used for In-Circuit Serial Programming™ (ICSP™) and debugging purposes. It is recommended to keep the trace length between the ICSP connector and the ICSP pins on the device as short as possible. If the ICSP connector is expected to experience an ESD event, a series resistor is recommended, with the value in the range of a few tens of Ohms, not to exceed 100 Ohms.

Pull-up resistors, series diodes, and capacitors on the PGECx and PGEDx pins are not recommended as they will interfere with the programmer/debugger communications to the device. If such discrete components are an application requirement, they should be removed from the circuit during programming and debugging. Alternatively, refer to the AC/DC characteristics and timing requirements information in the respective device Flash programming specification for information on capacitive loading limits and pin input voltage high (V<sub>IH</sub>) and input low (V<sub>IL</sub>) requirements.

Ensure that the “Communication Channel Select” (i.e., PGECx/PGEDx pins) programmed into the device matches the physical connections for the ICSP to MPLAB® ICD 2, MPLAB ICD 3, or MPLAB REAL ICE™.

For more information on ICD 2, ICD 3 and REAL ICE connection requirements, refer to the following documents that are available on the Microchip website.


- “MPLAB® ICD 2 In-Circuit Debugger User’s Guide” DS51331
- “Using MPLAB® ICD 2” (poster) DS51265
- “MPLAB® ICD 2 Design Advisory” DS51566
- “Using MPLAB® ICD 3 In-Circuit Debugger” (poster) DS51765
- “MPLAB® ICD 3 Design Advisory” DS51764
- “MPLAB® REAL ICE™ In-Circuit Emulator User’s Guide” DS51616
- “Using MPLAB® REAL ICE™” (poster) DS51749

## 2.6 External Oscillator Pins

Many MCUs have options for at least two oscillators: a high-frequency primary oscillator and a low-frequency secondary oscillator (refer to **Section 9.0 “Oscillator Configuration”** for details).

The oscillator circuit should be placed on the same side of the board as the device. Also, place the oscillator circuit close to the respective oscillator pins, not exceeding one-half inch (12 mm) distance between them. The load capacitors should be placed next to the oscillator itself, on the same side of the board. Use a grounded copper pour around the oscillator circuit to isolate them from surrounding circuits. The grounded copper pour should be routed directly to the MCU ground. Do not run any signal traces or power traces inside the ground pour. Also, if using a two-sided board, avoid any traces on the other side of the board where the crystal is placed. A suggested layout is shown in Figure 2-3.

**FIGURE 2-3: SUGGESTED PLACEMENT OF THE OSCILLATOR CIRCUIT**

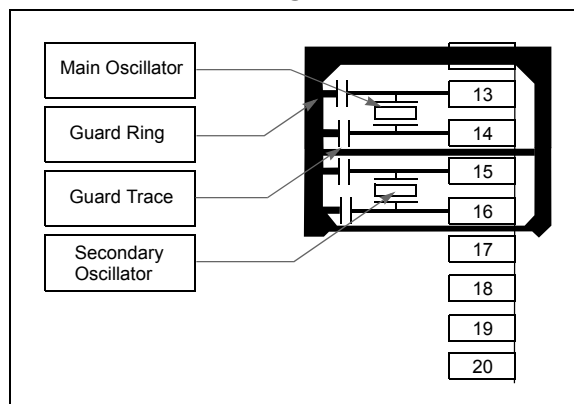

## 2.7 Oscillator Value Conditions on Device Start-up

If the PLL of the target device is enabled and configured for the device start-up oscillator, the maximum oscillator source frequency must be limited to  $4\text{ MHz} < F_{\text{IN}} < 8\text{ MHz}$  to comply with device PLL start-up conditions. This means that if the external oscillator frequency is outside this range, the application must start-up in the FRC mode first. The default PLL settings after a POR with an oscillator frequency outside this range will violate the device operating speed.

Once the device powers up, the application firmware can initialize the PLL SFRs, CLKDIV and PLLDBF to a suitable value, and then perform a clock switch to the Oscillator + PLL clock source. Note that clock switching must be enabled in the device Configuration word.

## 2.8 Configuration of Analog and Digital Pins During ICSP Operations

If MPLAB ICD 2, ICD 3 or REAL ICE is selected as a debugger, it automatically initializes all of the A/D input pins (ANx) as “digital” pins, by setting all bits in the AD1PCFGL register.

The bits in this register that correspond to the A/D pins that are initialized by MPLAB ICD 2, ICD 3, or REAL ICE, must not be cleared by the user application firmware; otherwise, communication errors will result between the debugger and the device.

If your application needs to use certain A/D pins as analog input pins during the debug session, the user application must clear the corresponding bits in the AD1PCFGL register during initialization of the ADC module.

When MPLAB ICD 2, ICD 3 or REAL ICE is used as a programmer, the user application firmware must correctly configure the AD1PCFGL register. Automatic initialization of this register is only done during debugger operation. Failure to correctly configure the register(s) will result in all A/D pins being recognized as analog input pins, resulting in the port value being read as a logic ‘0’, which may affect user application functionality.

## 2.9 Unused I/Os

Unused I/O pins should be configured as outputs and driven to a logic-low state.

Alternatively, connect a 1k to 10k resistor to Vss on unused pins and drive the output to logic low.

## 3.0 CPU

**Note:** This data sheet summarizes the features of the PIC24HJXXXGPX06/X08/X10 family of devices. However, it is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the “PIC24H Family Reference Manual”, **Section 2. “CPU”** (DS70245), which is available from the Microchip website ([www.microchip.com](http://www.microchip.com)).

The PIC24HJXXXGPX06/X08/X10 CPU module has a 16-bit (data) modified Harvard architecture with an enhanced instruction set and addressing modes. The CPU has a 24-bit instruction word with a variable length opcode field. The Program Counter (PC) is 23 bits wide and addresses up to 4M x 24 bits of user program memory space. The actual amount of program memory implemented varies by device. A single-cycle instruction prefetch mechanism is used to help maintain throughput and provides predictable execution. All instructions execute in a single cycle, with the exception of instructions that change the program flow, the double word move (MOV.D) instruction and the table instructions. Overhead-free, single-cycle program loop constructs are supported using the REPEAT instruction, which is interruptible at any point.

The PIC24HJXXXGPX06/X08/X10 devices have sixteen, 16-bit working registers in the programmer's model. Each of the working registers can serve as a data, address or address offset register. The 16th working register (W15) operates as a software Stack Pointer (SP) for interrupts and calls.

The PIC24HJXXXGPX06/X08/X10 instruction set includes many addressing modes and is designed for optimum C compiler efficiency. For most instructions, the PIC24HJXXXGPX06/X08/X10 is capable of executing a data (or program data) memory read, a working register (data) read, a data memory write and a program (instruction) memory read per instruction cycle. As a result, three parameter instructions can be supported, allowing  $A + B = C$  operations to be executed in a single cycle.

A block diagram of the CPU is shown in Figure 3-1, and the programmer's model for the PIC24HJXXXGPX06/X08/X10 is shown in Figure 3-2.

## 3.1 Data Addressing Overview

The data space can be linearly addressed as 32K words or 64 Kbytes using an Address Generation Unit (AGU). The upper 32 Kbytes of the data space memory map can optionally be mapped into program space at any 16K program word boundary defined by the 8-bit Program Space Visibility Page (PSVPAG) register. The program to data space mapping feature lets any instruction access program space as if it were data space.

The data space also includes 2 Kbytes of DMA RAM, which is primarily used for DMA data transfers, but may be used as general purpose RAM.

## 3.2 Special MCU Features


The PIC24HJXXXGPX06/X08/X10 features a 17-bit by 17-bit, single-cycle multiplier. The multiplier can perform signed, unsigned and mixed-sign multiplication. Using a 17-bit by 17-bit multiplier for 16-bit by 16-bit multiplication makes mixed-sign multiplication possible.

The PIC24HJXXXGPX06/X08/X10 supports 16/16 and 32/16 integer divide operations. All divide instructions are iterative operations. They must be executed within a REPEAT loop, resulting in a total execution time of 19 instruction cycles. The divide operation can be interrupted during any of those 19 cycles without loss of data.

A multi-bit data shifter is used to perform up to a 16-bit, left or right shift in a single cycle.


# PIC24HJXXXGPX06/X08/X10

**FIGURE 3-1: PIC24HJXXXGPX06/X08/X10 CPU CORE BLOCK DIAGRAM**

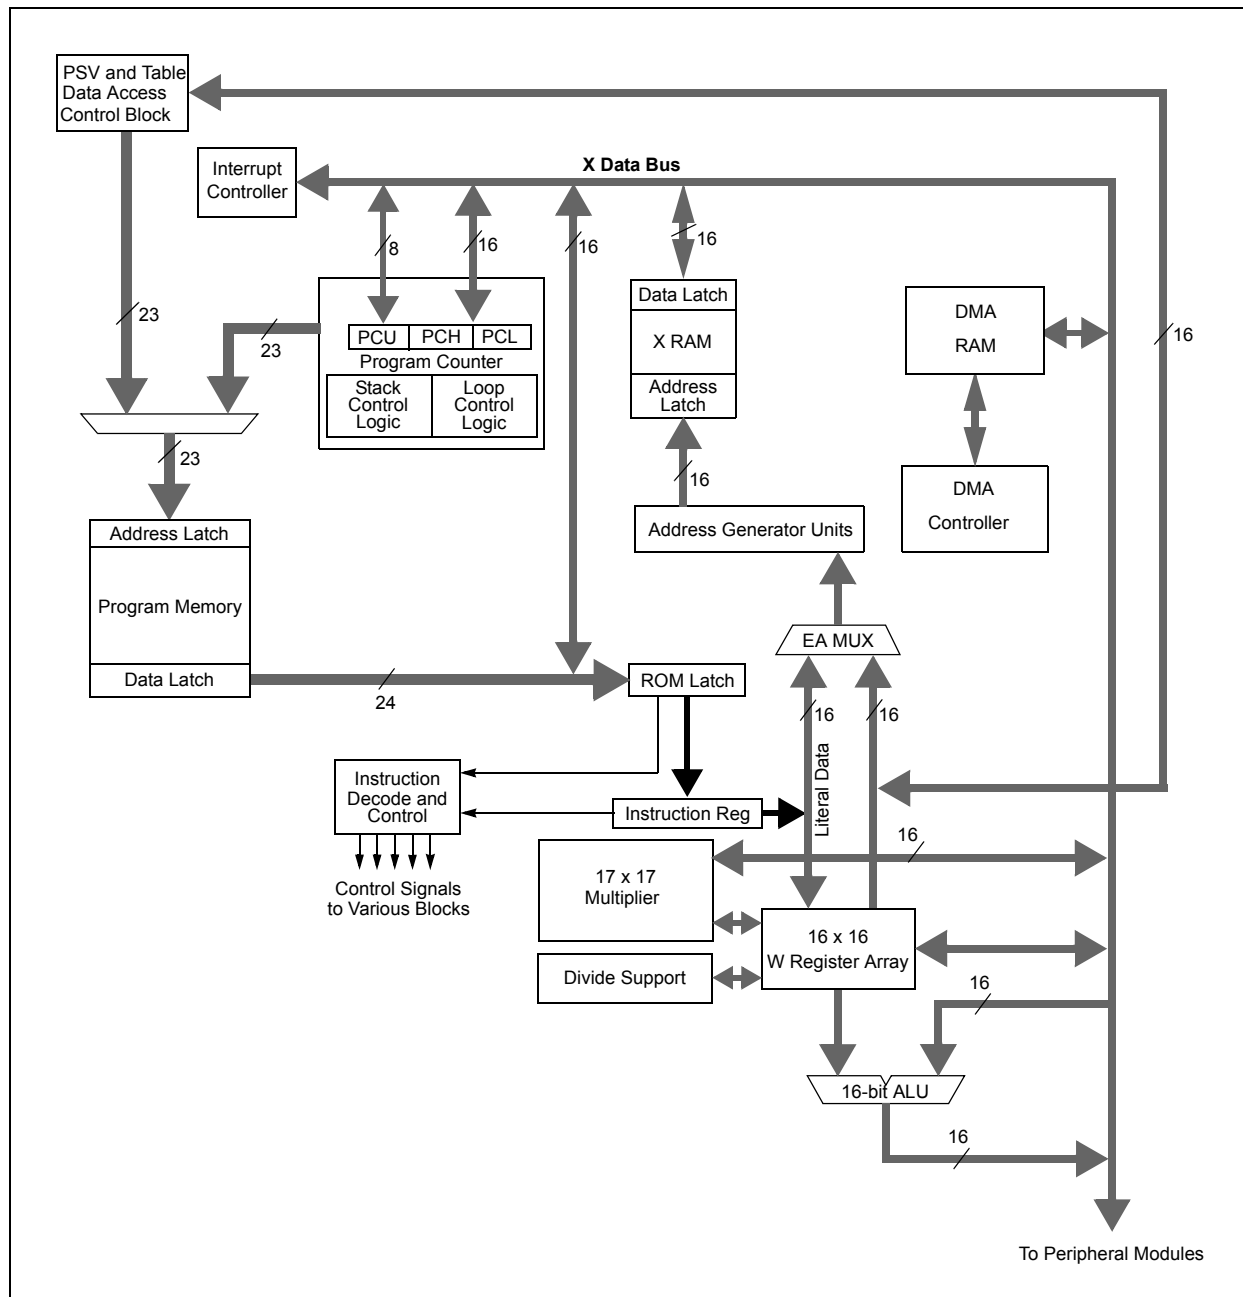

# PIC24HJXXXGPX06/X08/X10

**FIGURE 3-2: PIC24HJXXXGPX06/X08/X10 PROGRAMMER'S MODEL**

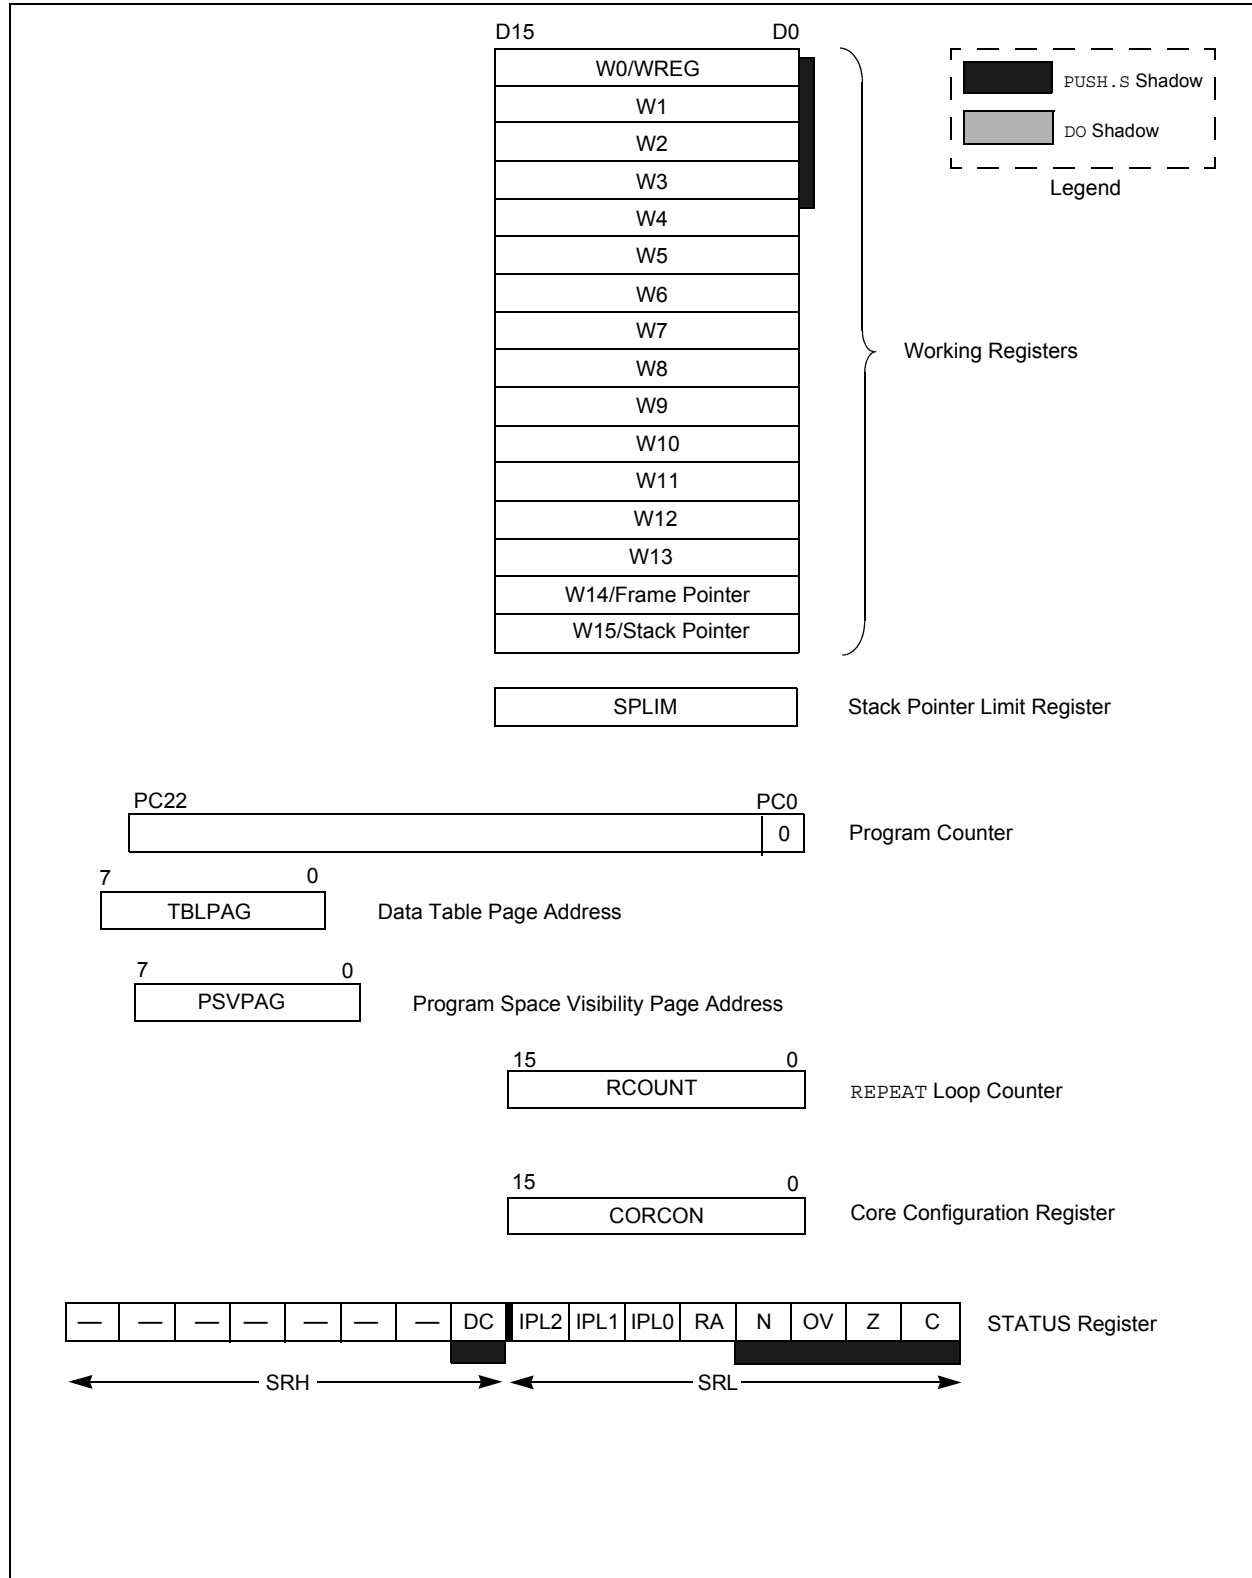

## 3.3 CPU Control Registers

# PIC24HJXXXGPX06/X08/X10

## REGISTER 3-1: SR: CPU STATUS REGISTER

|        |     |     |     |     |     |     |       |
|--------|-----|-----|-----|-----|-----|-----|-------|
| U-0    | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 |
| —      | —   | —   | —   | —   | —   | —   | DC    |
| bit 15 |     |     |     |     |     |     | bit 8 |

|                         |                      |                      |     |       |       |       |       |
|-------------------------|----------------------|----------------------|-----|-------|-------|-------|-------|
| R/W-0 <sup>(1)</sup>    | R/W-0 <sup>(2)</sup> | R/W-0 <sup>(2)</sup> | R-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| IPL<2:0> <sup>(2)</sup> |                      |                      | RA  | N     | OV    | Z     | C     |
| bit 7                   |                      |                      |     |       |       |       | bit 0 |

### Legend:

|                    |                      |                                    |
|--------------------|----------------------|------------------------------------|
| C = Clear only bit | R = Readable bit     | U = Unimplemented bit, read as '0' |
| S = Set only bit   | W = Writable bit     | -n = Value at POR                  |
| '1' = Bit is set   | '0' = Bit is cleared | x = Bit is unknown                 |

bit 15-9 **Unimplemented:** Read as '0'

bit 8 **DC:** MCU ALU Half Carry/Borrow bit

- 1 = A carry-out from the 4th low-order bit (for byte sized data) or 8th low-order bit (for word sized data) of the result occurred
- 0 = No carry-out from the 4th low-order bit (for byte sized data) or 8th low-order bit (for word sized data) of the result occurred

bit 7-5 **IPL<2:0>:** CPU Interrupt Priority Level Status bits<sup>(2)</sup>

- 111 = CPU Interrupt Priority Level is 7 (15), user interrupts disabled
- 110 = CPU Interrupt Priority Level is 6 (14)
- 101 = CPU Interrupt Priority Level is 5 (13)
- 100 = CPU Interrupt Priority Level is 4 (12)
- 011 = CPU Interrupt Priority Level is 3 (11)
- 010 = CPU Interrupt Priority Level is 2 (10)
- 001 = CPU Interrupt Priority Level is 1 (9)
- 000 = CPU Interrupt Priority Level is 0 (8)

bit 4 **RA:** REPEAT Loop Active bit

- 1 = REPEAT loop in progress
- 0 = REPEAT loop not in progress

bit 3 **N:** MCU ALU Negative bit

- 1 = Result was negative
- 0 = Result was non-negative (zero or positive)

bit 2 **OV:** MCU ALU Overflow bit

This bit is used for signed arithmetic (2's complement). It indicates an overflow of the magnitude which causes the sign bit to change state.

- 1 = Overflow occurred for signed arithmetic (in this arithmetic operation)
- 0 = No overflow occurred

bit 1 **Z:** MCU ALU Zero bit

- 1 = An operation which affects the Z bit has set it at some time in the past
- 0 = The most recent operation which affects the Z bit has cleared it (i.e., a non-zero result)

bit 0 **C:** MCU ALU Carry/Borrow bit

- 1 = A carry-out from the Most Significant bit (MSb) of the result occurred
- 0 = No carry-out from the Most Significant bit of the result occurred

**Note 1:** The IPL<2:0> bits are concatenated with the IPL<3> bit (CORCON<3>) to form the CPU Interrupt Priority Level. The value in parentheses indicates the IPL if IPL<3> = 1. User interrupts are disabled when IPL<3> = 1.

**2:** The IPL<2:0> Status bits are read only when NSTDIS = 1 (INTCON1<15>).

# PIC24HJXXXGPX06/X08/X10

## REGISTER 3-2: CORCON: CORE CONTROL REGISTER

|        |     |     |     |     |     |       |     |
|--------|-----|-----|-----|-----|-----|-------|-----|
| U-0    | U-0 | U-0 | U-0 | U-0 | U-0 | U-0   | U-0 |
| —      | —   | —   | —   | —   | —   | —     | —   |
| bit 15 |     |     |     |     |     | bit 8 |     |

|       |     |     |     |                     |       |       |     |
|-------|-----|-----|-----|---------------------|-------|-------|-----|
| U-0   | U-0 | U-0 | U-0 | R/C-0               | R/W-0 | U-0   | U-0 |
| —     | —   | —   | —   | IPL3 <sup>(1)</sup> | PSV   | —     | —   |
| bit 7 |     |     |     |                     |       | bit 0 |     |

|                     |                      |                                    |                  |
|---------------------|----------------------|------------------------------------|------------------|
| <b>Legend:</b>      | C = Clear only bit   |                                    |                  |
| R = Readable bit    | W = Writable bit     | -n = Value at POR                  | '1' = Bit is set |
| 0' = Bit is cleared | 'x' = Bit is unknown | U = Unimplemented bit, read as '0' |                  |

- bit 15-4      **Unimplemented:** Read as '0'
- bit 3      **IPL3:** CPU Interrupt Priority Level Status bit 3<sup>(1)</sup>  
1 = CPU interrupt priority level is greater than 7  
0 = CPU interrupt priority level is 7 or less
- bit 2      **PSV:** Program Space Visibility in Data Space Enable bit  
1 = Program space visible in data space  
0 = Program space not visible in data space
- bit 1-0      **Unimplemented:** Read as '0'

**Note 1:** The IPL3 bit is concatenated with the IPL<2:0> bits (SR<7:5>) to form the CPU interrupt priority level.

# PIC24HJXXXGPX06/X08/X10

---

## 3.4 Arithmetic Logic Unit (ALU)

The PIC24HJXXXGPX06/X08/X10 ALU is 16 bits wide and is capable of addition, subtraction, bit shifts and logic operations. Unless otherwise mentioned, arithmetic operations are 2's complement in nature. Depending on the operation, the ALU may affect the values of the Carry (C), Zero (Z), Negative (N), Overflow (OV) and Digit Carry (DC) Status bits in the SR register. The C and DC Status bits operate as Borrow and Digit Borrow bits, respectively, for subtraction operations.

The ALU can perform 8-bit or 16-bit operations, depending on the mode of the instruction that is used. Data for the ALU operation can come from the W register array, or data memory, depending on the addressing mode of the instruction. Likewise, output data from the ALU can be written to the W register array or a data memory location.

Refer to the “*dsPIC30F/33F Programmer's Reference Manual*” (DS70157) for information on the SR bits affected by each instruction.

The PIC24HJXXXGPX06/X08/X10 CPU incorporates hardware support for both multiplication and division. This includes a dedicated hardware multiplier and support hardware for 16-bit divisor division.

### 3.4.1 MULTIPLIER

Using the high-speed 17-bit x 17-bit multiplier, the ALU supports unsigned, signed or mixed-sign operation in several multiplication modes:

1. 16-bit x 16-bit signed
2. 16-bit x 16-bit unsigned
3. 16-bit signed x 5-bit (literal) unsigned
4. 16-bit unsigned x 16-bit unsigned
5. 16-bit unsigned x 5-bit (literal) unsigned
6. 16-bit unsigned x 16-bit signed
7. 8-bit unsigned x 8-bit unsigned

### 3.4.2 DIVIDER

The divide block supports 32-bit/16-bit and 16-bit/16-bit signed and unsigned integer divide operations with the following data sizes:

1. 32-bit signed/16-bit signed divide
2. 32-bit unsigned/16-bit unsigned divide
3. 16-bit signed/16-bit signed divide
4. 16-bit unsigned/16-bit unsigned divide

The quotient for all divide instructions ends up in W0 and the remainder in W1. Sixteen-bit signed and unsigned DIV instructions can specify any W register for both the 16-bit divisor (Wn) and any W register (aligned) pair (W(m + 1):Wm) for the 32-bit dividend. The divide algorithm takes one cycle per bit of divisor, so both 32-bit/16-bit and 16-bit/16-bit instructions take the same number of cycles to execute.

### 3.4.3 MULTI-BIT DATA SHIFTER

The multi-bit data shifter is capable of performing up to 16-bit arithmetic or logic right shifts, or up to 16-bit left shifts in a single cycle. The source can be either a working register or a memory location.

The shifter requires a signed binary value to determine both the magnitude (number of bits) and direction of the shift operation. A positive value shifts the operand right. A negative value shifts the operand left. A value of '0' does not modify the operand.

# PIC24HJXXXGPX06/X08/X10

## 4.0 MEMORY ORGANIZATION

**Note:** This data sheet summarizes the features of the PIC24HJXXXGPX06/X08/X10 family of devices. However, it is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the “PIC24H Family Reference Manual”, **Section 3. “Data Memory”** (DS70237), which is available from the Microchip website ([www.microchip.com](http://www.microchip.com)).


The PIC24HJXXXGPX06/X08/X10 architecture features separate program and data memory spaces and buses. This architecture also allows the direct access of program memory from the data space during code execution.

## 4.1 Program Address Space

The program address memory space of the PIC24HJXXXGPX06/X08/X10 devices is 4M instructions. The space is addressable by a 24-bit value derived from either the 23-bit Program Counter (PC) during program execution, or from table operation or data space remapping as described in **Section 4.4 “Interfacing Program and Data Memory Spaces”**.

User access to the program memory space is restricted to the lower half of the address range (0x000000 to 0x7FFFFFFF). The exception is the use of TBLRD/TBLWT operations, which use TBLPAG<7> to permit access to the Configuration bits and Device ID sections of the configuration memory space.

Memory maps for the PIC24HJXXXGPX06/X08/X10 family of devices are shown in Figure 4-1.

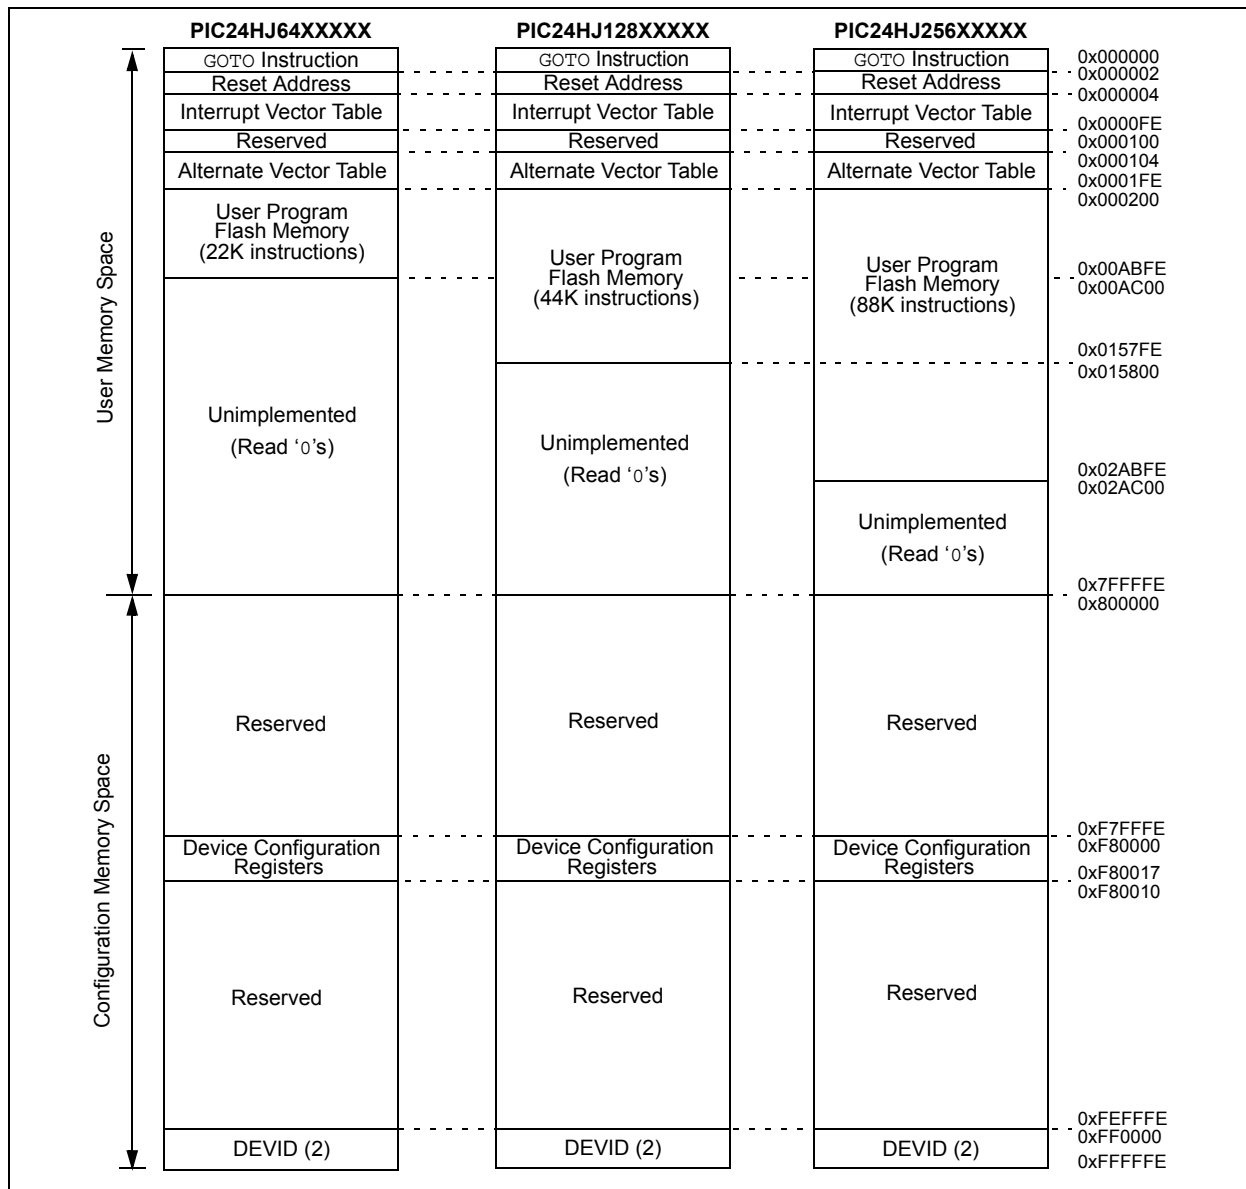**FIGURE 4-1: PROGRAM MEMORY MAP FOR PIC24HJXXXGPX06/X08/X10 FAMILY DEVICES**

# PIC24HJXXXGPX06/X08/X10

## 4.1.1 PROGRAM MEMORY ORGANIZATION

The program memory space is organized in word-addressable blocks. Although it is treated as 24 bits wide, it is more appropriate to think of each address of the program memory as a lower and upper word, with the upper byte of the upper word being unimplemented. The lower word always has an even address, while the upper word has an odd address (Figure 4-2).


Program memory addresses are always word-aligned on the lower word, and addresses are incremented or decremented by two during code execution. This arrangement also provides compatibility with data memory space addressing and makes it possible to access data in the program memory space.

## 4.1.2 INTERRUPT AND TRAP VECTORS

All PIC24HJXXXGPX06/X08/X10 devices reserve the addresses between 0x00000 and 0x000200 for hard-coded program execution vectors. A hardware Reset vector is provided to redirect code execution from the default value of the PC on device Reset to the actual start of code. A GOTO instruction is programmed by the user at 0x000000, with the actual address for the start of code at 0x000002.

PIC24HJXXXGPX06/X08/X10 devices also have two interrupt vector tables, located from 0x000004 to 0x0000FF and 0x000100 to 0x0001FF. These vector tables allow each of the many device interrupt sources to be handled by separate Interrupt Service Routines (ISRs). A more detailed discussion of the interrupt vector tables is provided in **Section 7.1 “Interrupt Vector Table”**.

FIGURE 4-2: PROGRAM MEMORY ORGANIZATION

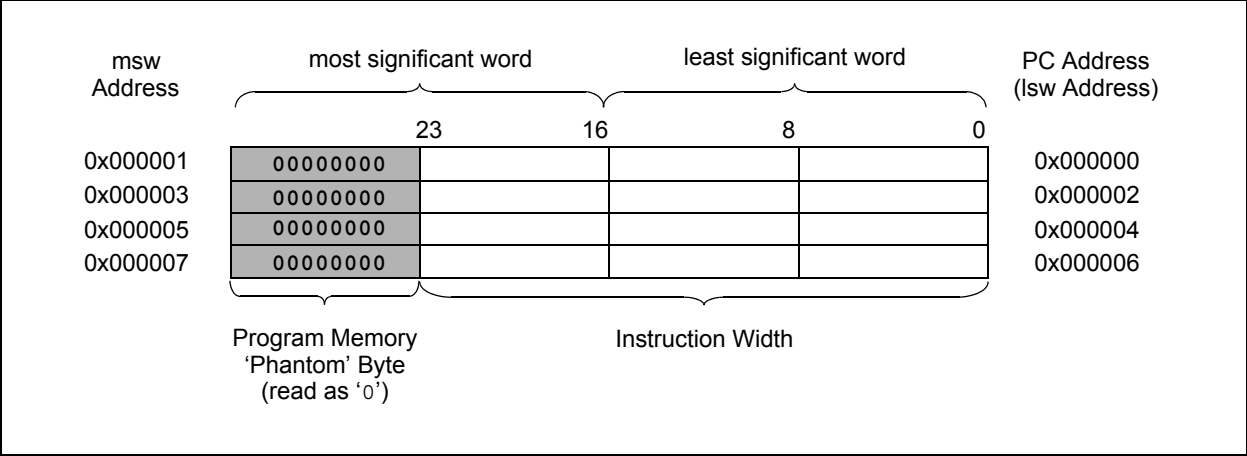

## 4.2 Data Address Space

The PIC24HJXXXGPX06/X08/X10 CPU has a separate 16-bit wide data memory space. The data space is accessed using separate Address Generation Units (AGUs) for read and write operations. Data memory maps of devices with different RAM sizes are shown in Figure 4-3 and Figure 4-4.

All Effective Addresses (EAs) in the data memory space are 16 bits wide and point to bytes within the data space. This arrangement gives a data space address range of 64 Kbytes or 32K words. The lower half of the data memory space (that is, when  $EA_{<15>} = 0$ ) is used for implemented memory addresses, while the upper half ( $EA_{<15>} = 1$ ) is reserved for the Program Space Visibility area (see **Section 4.4.3 “Reading Data from Program Memory Using Program Space Visibility”**).

PIC24HJXXXGPX06/X08/X10 devices implement up to 16 Kbytes of data memory. Should an EA point to a location outside of this area, an all-zero word or byte will be returned.

### 4.2.1 DATA SPACE WIDTH

The data memory space is organized in byte addressable, 16-bit wide blocks. Data is aligned in data memory and registers as 16-bit words, but all data space EAs resolve to bytes. The Least Significant Bytes of each word have even addresses, while the Most Significant Bytes have odd addresses.

### 4.2.2 DATA MEMORY ORGANIZATION AND ALIGNMENT

To maintain backward compatibility with PIC® MCU devices and improve data space memory usage efficiency, the PIC24HJXXXGPX06/X08/X10 instruction set supports both word and byte operations. As a consequence of byte accessibility, all effective address calculations are internally scaled to step through word-aligned memory. For example, the core recognizes that Post-Modified Register Indirect Addressing mode  $[Ws++]$  will result in a value of  $Ws + 1$  for byte operations and  $Ws + 2$  for word operations.

Data byte reads will read the complete word that contains the byte, using the Least Significant bit (LSb) of any EA to determine which byte to select. The selected byte is placed onto the Least Significant Byte (LSB) of the data path. That is, data memory and registers are organized as two parallel byte-wide entities with shared (word) address decode but separate write lines. Data byte writes only write to the corresponding side of the array or register which matches the byte address.

All word accesses must be aligned to an even address. Misaligned word data fetches are not supported, so care must be taken when mixing byte and word operations, or translating from 8-bit MCU code. If a misaligned read or write is attempted, an address error trap is generated. If the error occurred on a read, the instruction underway is completed; if it occurred on a write, the instruction will be executed but the write does not occur. In either case, a trap is then executed, allowing the system and/or user to examine the machine state prior to execution of the address Fault.

All byte loads into any W register are loaded into the Least Significant Byte. The Most Significant Byte (MSB) is not modified.

A sign-extend instruction (**SE**) is provided to allow users to translate 8-bit signed data to 16-bit signed values. Alternatively, for 16-bit unsigned data, users can clear the Most Significant Byte of any W register by executing a zero-extend (**ZE**) instruction on the appropriate address.

### 4.2.3 SFR SPACE

The first 2 Kbytes of the Near Data Space, from 0x0000 to 0x07FF, is primarily occupied by Special Function Registers (SFRs). These are used by the PIC24HJXXXGPX06/X08/X10 core and peripheral modules for controlling the operation of the device.

SFRs are distributed among the modules that they control, and are generally grouped together by module. Much of the SFR space contains unused addresses; these are read as '0'. A complete listing of implemented SFRs, including their addresses, is shown in Table 4-1 through Table 4-33.


**Note:** The actual set of peripheral features and interrupts varies by the device. Please refer to the corresponding device tables and pinout diagrams for device-specific information.

### 4.2.4 NEAR DATA SPACE

The 8-Kbyte area between 0x0000 and 0x1FFF is referred to as the Near Data Space. Locations in this space are directly addressable via a 13-bit absolute address field within all memory direct instructions. Additionally, the whole data space is addressable using **MOV** instructions, which support Memory Direct Addressing mode with a 16-bit address field, or by using Indirect Addressing mode using a working register as an Address Pointer.


# PIC24HJXXXGPX06/X08/X10

FIGURE 4-3: DATA MEMORY MAP FOR PIC24HJXXXGPX06/X08/X10 DEVICES WITH 8 KBS RAM

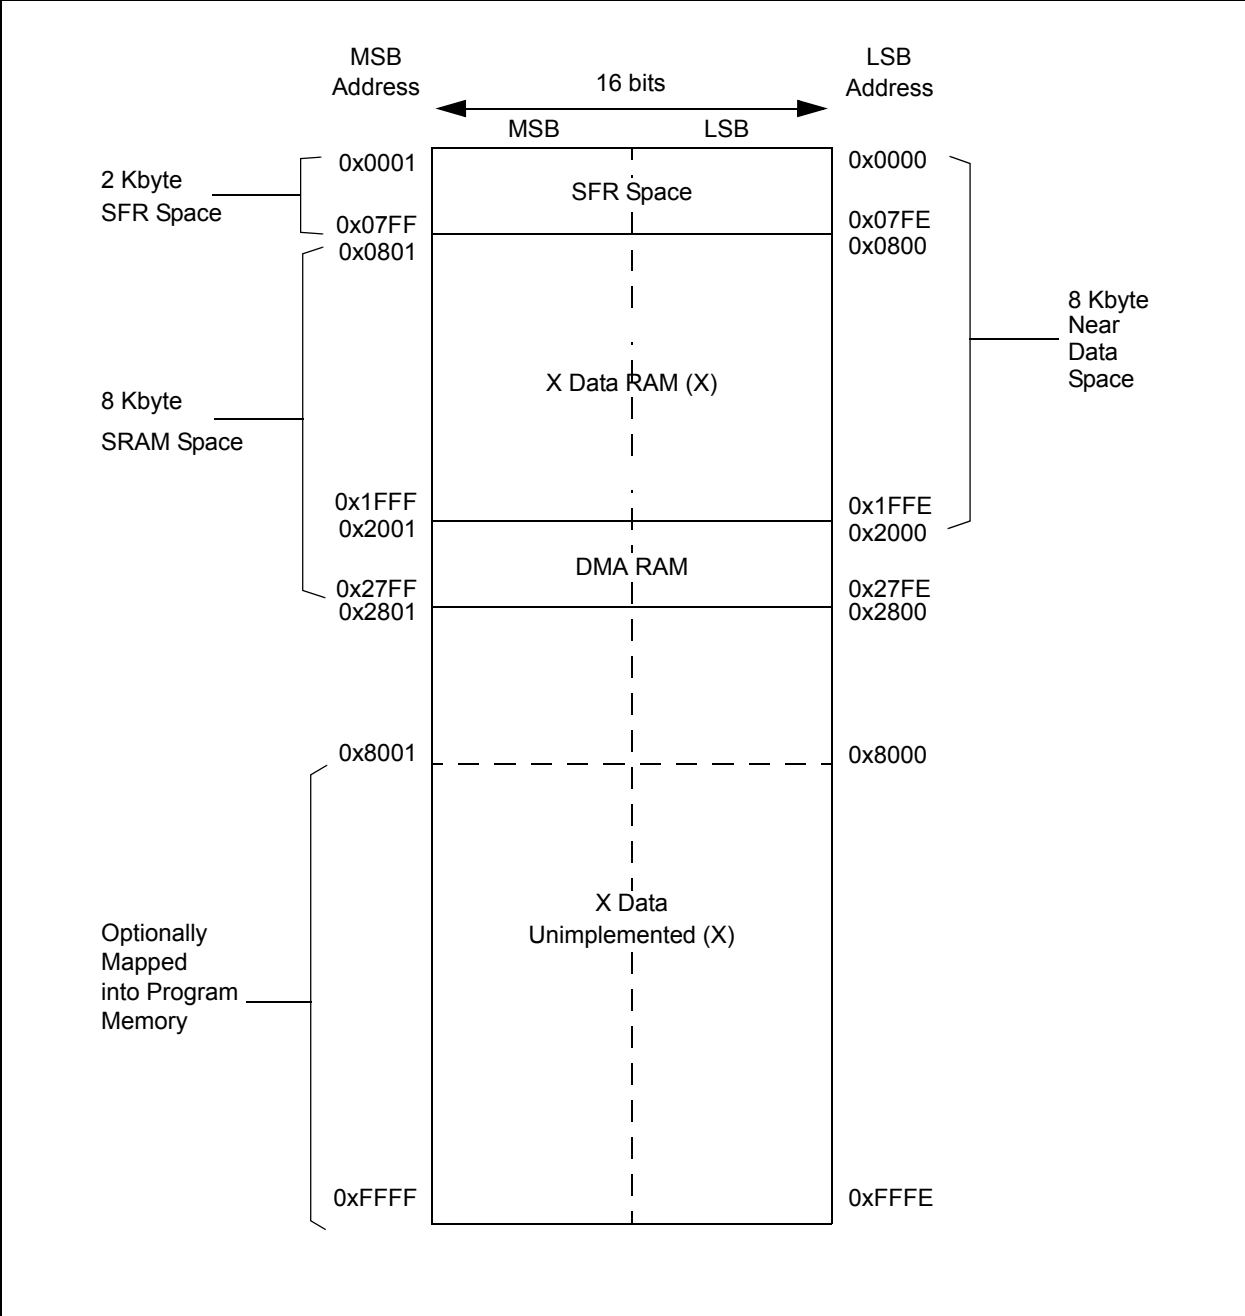

# PIC24HJXXXGPX06/X08/X10

**FIGURE 4-4: DATA MEMORY MAP FOR PIC24HJXXXGPX06/X08/X10 DEVICES WITH 16 KBS RAM**

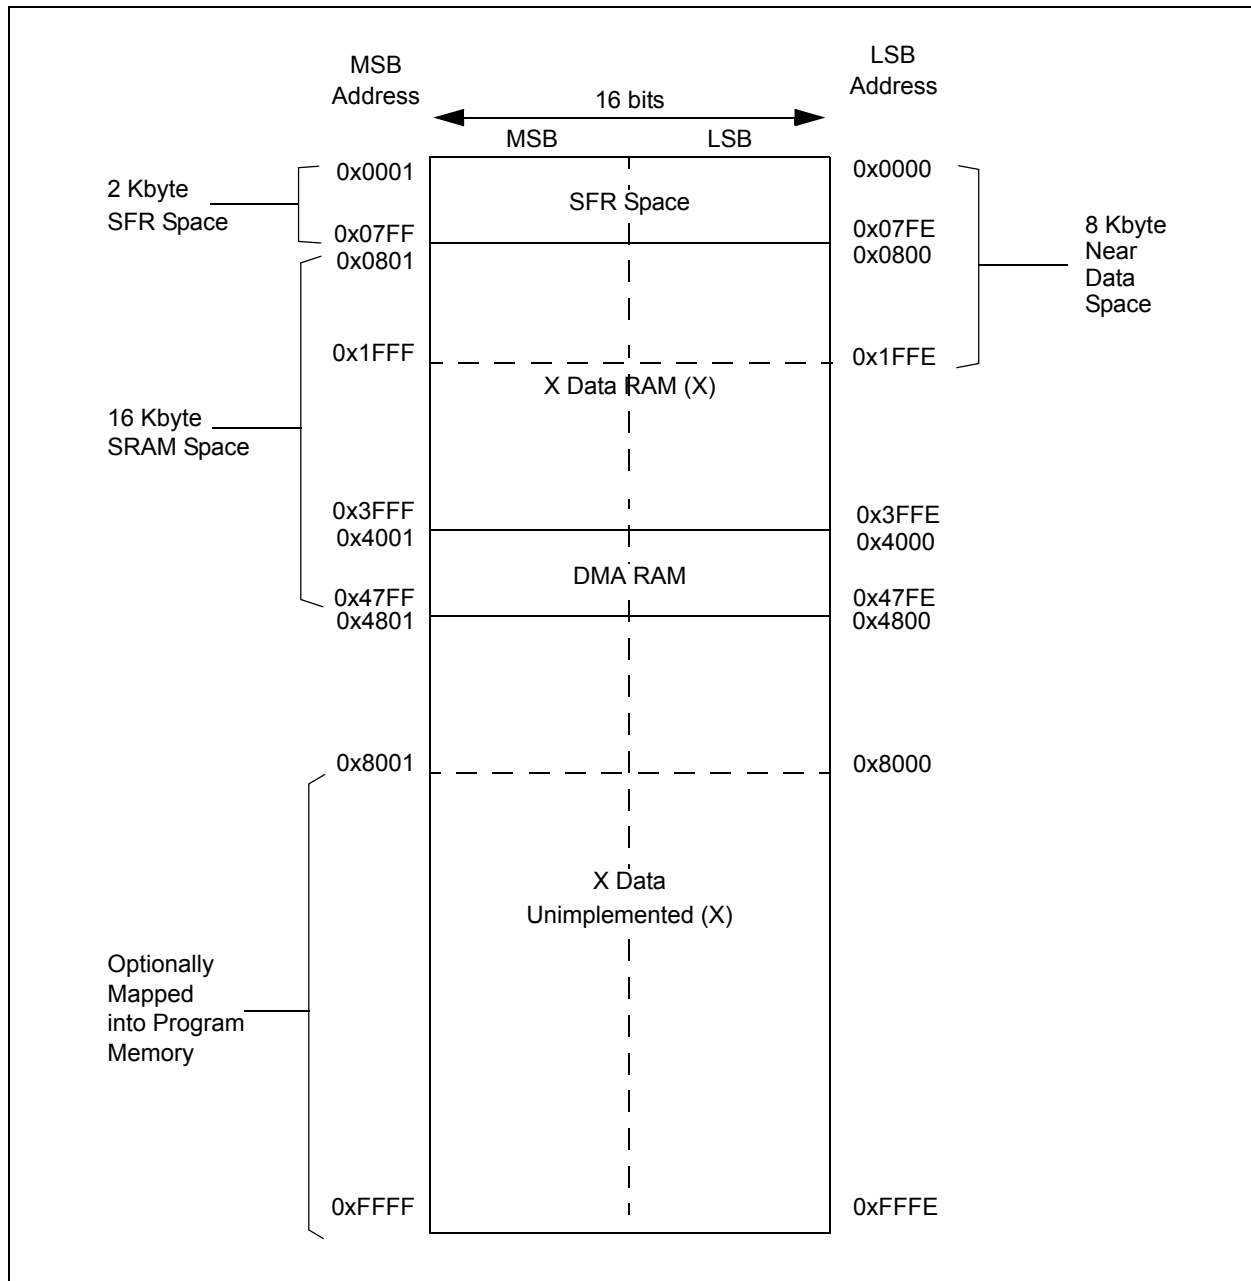

## 4.2.5 DMA RAM

Every PIC24HJXXXGPX06/X08/X10 device contains 2 Kbytes of dual ported DMA RAM located at the end of data space. Memory locations in the DMA RAM space are accessible simultaneously by the CPU and the DMA controller module. DMA RAM is utilized by the DMA controller to store data to be transferred to various peripherals using DMA, as well as data transferred from

various peripherals using DMA. The DMA RAM can be accessed by the DMA controller without having to steal cycles from the CPU.

When the CPU and the DMA controller attempt to concurrently write to the same DMA RAM location, the hardware ensures that the CPU is given precedence in accessing the DMA RAM location. Therefore, the DMA RAM provides a reliable means of transferring DMA data without ever having to stall the CPU.

**Note:** DMA RAM can be used for general purpose data storage if the DMA function is not required in an application.

# PIC24HJXXXGPX06/X08/X10

**TABLE 4-1: CPU CORE REGISTERS MAP**

| SFR Name | SFR Addr | Bit 15 | Bit 14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | All Resets |
|----------|----------|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------------|
| WREG0    | 0000     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| WREG1    | 0002     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| WREG2    | 0004     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| WREG3    | 0006     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| WREG4    | 0008     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| WREG5    | 000A     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| WREG6    | 000C     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| WREG7    | 000E     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| WREG8    | 0010     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| WREG9    | 0012     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| WREG10   | 0014     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| WREG11   | 0016     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| WREG12   | 0018     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| WREG13   | 001A     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| WREG14   | 001C     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| WREG15   | 001E     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| SPLIM    | 0020     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| PCL      | 002E     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| PCH      | 0030     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| TBLPAG   | 0032     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| PSVPAG   | 0034     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| RCOUNT   | 0036     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| SR       | 0042     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| CORCON   | 0044     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| DISICNT  | 0052     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| BSRAM    | 0750     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |
| SSRAM    | 0752     |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       | 0000       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**TABLE 4-2: CHANGE NOTIFICATION REGISTER MAP FOR PIC24HJXXXGPX10 DEVICES**

| SFR Name | SFR Addr | Bit 15  | Bit 14  | Bit 13  | Bit 12  | Bit 11  | Bit 10  | Bit 9  | Bit 8  | Bit 7   | Bit 6   | Bit 5   | Bit 4   | Bit 3   | Bit 2   | Bit 1   | Bit 0   | All Resets |
|----------|----------|---------|---------|---------|---------|---------|---------|--------|--------|---------|---------|---------|---------|---------|---------|---------|---------|------------|
| CNEN1    | 0060     | CN15IE  | CN14IE  | CN13IE  | CN12IE  | CN11IE  | CN10IE  | CN9IE  | CN8IE  | CN7IE   | CN6IE   | CN5IE   | CN4IE   | CN3IE   | CN2IE   | CN1IE   | CN0IE   | 0000       |
| CNEN2    | 0062     | —       | —       | —       | —       | —       | —       | —      | —      | CN23IE  | CN22IE  | CN21IE  | CN20IE  | CN19IE  | CN18IE  | CN17IE  | CN16IE  | 0000       |
| CNPU1    | 0068     | CN15PUE | CN14PUE | CN13PUE | CN12PUE | CN11PUE | CN10PUE | CN9PUE | CN8PUE | CN7PUE  | CN6PUE  | CN5PUE  | CN4PUE  | CN3PUE  | CN2PUE  | CN1PUE  | CN0PUE  | 0000       |
| CNPU2    | 006A     | —       | —       | —       | —       | —       | —       | —      | —      | CN23PUE | CN22PUE | CN21PUE | CN20PUE | CN19PUE | CN18PUE | CN17PUE | CN16PUE | 0000       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**TABLE 4-3: CHANGE NOTIFICATION REGISTER MAP FOR PIC24HJXXXGPX08 DEVICES**

| SFR Name | SFR Addr | Bit 15  | Bit 14  | Bit 13  | Bit 12  | Bit 11  | Bit 10  | Bit 9  | Bit 8  | Bit 7  | Bit 6  | Bit 5   | Bit 4   | Bit 3   | Bit 2   | Bit 1   | Bit 0   | All Resets |
|----------|----------|---------|---------|---------|---------|---------|---------|--------|--------|--------|--------|---------|---------|---------|---------|---------|---------|------------|
| CNEN1    | 0060     | CN15IE  | CN14IE  | CN13IE  | CN12IE  | CN11IE  | CN10IE  | CN9IE  | CN8IE  | CN7IE  | CN6IE  | CN5IE   | CN4IE   | CN3IE   | CN2IE   | CN1IE   | CN0IE   | 0000       |
| CNEN2    | 0062     | —       | —       | —       | —       | —       | —       | —      | —      | —      | —      | CN21IE  | CN20IE  | CN19IE  | CN18IE  | CN17IE  | CN16IE  | 0000       |
| CNPU1    | 0068     | CN15PUE | CN14PUE | CN13PUE | CN12PUE | CN11PUE | CN10PUE | CN9PUE | CN8PUE | CN7PUE | CN6PUE | CN5PUE  | CN4PUE  | CN3PUE  | CN2PUE  | CN1PUE  | CN0PUE  | 0000       |
| CNPU2    | 006A     | —       | —       | —       | —       | —       | —       | —      | —      | —      | —      | CN21PUE | CN20PUE | CN19PUE | CN18PUE | CN17PUE | CN16PUE | 0000       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**TABLE 4-4: CHANGE NOTIFICATION REGISTER MAP FOR PIC24HJXXXGPX06 DEVICES**

| SFR Name | SFR Addr | Bit 15  | Bit 14  | Bit 13  | Bit 12  | Bit 11  | Bit 10  | Bit 9  | Bit 8  | Bit 7  | Bit 6  | Bit 5   | Bit 4   | Bit 3  | Bit 2   | Bit 1   | Bit 0   | All Resets |
|----------|----------|---------|---------|---------|---------|---------|---------|--------|--------|--------|--------|---------|---------|--------|---------|---------|---------|------------|
| CNEN1    | 0060     | CN15IE  | CN14IE  | CN13IE  | CN12IE  | CN11IE  | CN10IE  | CN9IE  | CN8IE  | CN7IE  | CN6IE  | CN5IE   | CN4IE   | CN3IE  | CN2IE   | CN1IE   | CN0IE   | 0000       |
| CNEN2    | 0062     | —       | —       | —       | —       | —       | —       | —      | —      | —      | —      | CN21IE  | CN20IE  | —      | CN18IE  | CN17IE  | CN16IE  | 0000       |
| CNPU1    | 0068     | CN15PUE | CN14PUE | CN13PUE | CN12PUE | CN11PUE | CN10PUE | CN9PUE | CN8PUE | CN7PUE | CN6PUE | CN5PUE  | CN4PUE  | CN3PUE | CN2PUE  | CN1PUE  | CN0PUE  | 0000       |
| CNPU2    | 006A     | —       | —       | —       | —       | —       | —       | —      | —      | —      | —      | CN21PUE | CN20PUE | —      | CN18PUE | CN17PUE | CN16PUE | 0000       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

# PIC24HJXXXGPX06/X08/X10

**TABLE 4-5: INTERRUPT CONTROLLER REGISTER MAP**

| SFR Name | SFR Addr | Bit 15 | Bit 14 | Bit 13      | Bit 12 | Bit 11 | Bit 10       | Bit 9   | Bit 8  | Bit 7  | Bit 6  | Bit 5        | Bit 4   | Bit 3   | Bit 2        | Bit 1   | Bit 0   | All Resets |
|----------|----------|--------|--------|-------------|--------|--------|--------------|---------|--------|--------|--------|--------------|---------|---------|--------------|---------|---------|------------|
| INTCON1  | 0080     | NSTDIS | —      | —           | —      | —      | —            | —       | —      | —      | DIVERR | DMACERR      | MATHERR | ADDRERR | STKERR       | OSCFAIL | —       | 0000       |
| INTCON2  | 0082     | ALTVT  | DISI   | —           | —      | —      | —            | —       | —      | —      | —      | —            | INT4EP  | INT3EP  | INT2EP       | INT1EP  | INT0EP  | 0000       |
| IFS0     | 0084     | —      | DMA1IF | AD1IF       | U1TXIF | U1RXIF | SPI1IF       | SPI1EIF | T3IF   | T2IF   | OC2IF  | IC2IF        | DMA0IF  | T1IF    | OC1IF        | IC1IF   | INT0IF  | 0000       |
| IFS1     | 0086     | U2TXIF | U2RXIF | INT2IF      | T5IF   | T4IF   | OC4IF        | OC3IF   | DMA2IF | IC8IF  | IC7IF  | AD2IF        | INT1IF  | CNIF    | —            | M12C1IF | S12C1IF | 0000       |
| IFS2     | 0088     | T6IF   | DMA4IF | —           | OC8IF  | OC7IF  | OC6IF        | OC5IF   | IC6IF  | IC5IF  | IC4IF  | IC3IF        | DMA3IF  | C1IF    | C1RXIF       | SPI2IF  | SPI2EIF | 0000       |
| IFS3     | 008A     | —      | —      | DMA5IF      | —      | —      | —            | —       | C2IF   | C2RXIF | INT4IF | INT3IF       | T9IF    | T8IF    | M12C2IF      | S12C2IF | T7IF    | 0000       |
| IFS4     | 008C     | —      | —      | —           | —      | —      | —            | —       | —      | C2TXIF | C1TXIF | DMA7IF       | DMA6IF  | —       | U2EIF        | U1EIF   | —       | 0000       |
| IEC0     | 0094     | —      | DMA1IE | AD1IE       | U1TXIE | U1RXIE | SPI1IE       | SPI1EIE | T3IE   | T2IE   | OC2IE  | IC2IE        | DMA0IE  | T1IE    | OC1IE        | IC1IE   | INT0IE  | 0000       |
| IEC1     | 0096     | U2TXIE | U2RXIE | INT2IE      | T5IE   | T4IE   | OC4IE        | OC3IE   | DMA2IE | IC8IE  | IC7IE  | AD2IE        | INT1IE  | CNIE    | —            | M12C1IE | S12C1IE | 0000       |
| IEC2     | 0098     | T6IE   | DMA4IE | —           | OC8IE  | OC7IE  | OC6IE        | OC5IE   | IC6IE  | IC5IE  | IC4IE  | IC3IE        | DMA3IE  | C1IE    | C1RXIE       | SPI2IE  | SPI2EIE | 0000       |
| IEC3     | 009A     | —      | —      | DMA5IE      | —      | —      | —            | —       | C2IE   | C2RXIE | INT4IE | INT3IE       | T9IE    | T8IE    | M12C2IE      | S12C2IE | T7IE    | 0000       |
| IEC4     | 009C     | —      | —      | —           | —      | —      | —            | —       | —      | C2TXIE | C1TXIE | DMA7IE       | DMA6IE  | —       | U2EIE        | U1EIE   | —       | 0000       |
| IPC0     | 00A4     | —      | —      | T1IP<2:0>   | —      | —      | OC1IP<2:0>   | —       | —      | —      | —      | IC1IP<2:0>   | —       | —       | INT0IP<2:0>  | —       | —       | 4444       |
| IPC1     | 00A6     | —      | —      | T2IP<2:0>   | —      | —      | OC2IP<2:0>   | —       | —      | —      | —      | IC2IP<2:0>   | —       | —       | DMA0IP<2:0>  | —       | —       | 4444       |
| IPC2     | 00A8     | —      | —      | U1RXIP<2:0> | —      | —      | SPI1IP<2:0>  | —       | —      | —      | —      | SPI1EIP<2:0> | —       | —       | T3IP<2:0>    | —       | —       | 4444       |
| IPC3     | 00AA     | —      | —      | —           | —      | —      | DMA1IP<2:0>  | —       | —      | —      | —      | AD1IP<2:0>   | —       | —       | U1TXIP<2:0>  | —       | —       | 0444       |
| IPC4     | 00AC     | —      | —      | CNIP<2:0>   | —      | —      | —            | —       | —      | —      | —      | M12C1IP<2:0> | —       | —       | S12C1IP<2:0> | —       | —       | 4044       |
| IPC5     | 00AE     | —      | —      | IC8IP<2:0>  | —      | —      | IC7IP<2:0>   | —       | —      | —      | —      | AD2IP<2:0>   | —       | —       | INT1IP<2:0>  | —       | —       | 4444       |
| IPC6     | 00B0     | —      | —      | T4IP<2:0>   | —      | —      | OC4IP<2:0>   | —       | —      | —      | —      | OC3IP<2:0>   | —       | —       | DMA2IP<2:0>  | —       | —       | 4444       |
| IPC7     | 00B2     | —      | —      | U2TXIP<2:0> | —      | —      | U2RXIP<2:0>  | —       | —      | —      | —      | INT2IP<2:0>  | —       | —       | T5IP<2:0>    | —       | —       | 4444       |
| IPC8     | 00B4     | —      | —      | C1IP<2:0>   | —      | —      | C1RXIP<2:0>  | —       | —      | —      | —      | SPI2IP<2:0>  | —       | —       | SPI2EIP<2:0> | —       | —       | 4444       |
| IPC9     | 00B6     | —      | —      | IC5IP<2:0>  | —      | —      | IC4IP<2:0>   | —       | —      | —      | —      | IC3IP<2:0>   | —       | —       | DMA3IP<2:0>  | —       | —       | 4444       |
| IPC10    | 00B8     | —      | —      | OC7IP<2:0>  | —      | —      | OC6IP<2:0>   | —       | —      | —      | —      | OC5IP<2:0>   | —       | —       | IC6IP<2:0>   | —       | —       | 4444       |
| IPC11    | 00BA     | —      | —      | T6IP<2:0>   | —      | —      | DMA4IP<2:0>  | —       | —      | —      | —      | —            | —       | —       | OC8IP<2:0>   | —       | —       | 4404       |
| IPC12    | 00BC     | —      | —      | T8IP<2:0>   | —      | —      | M12C2IP<2:0> | —       | —      | —      | —      | S12C2IP<2:0> | —       | —       | T7IP<2:0>    | —       | —       | 4444       |
| IPC13    | 00BE     | —      | —      | C2RXIP<2:0> | —      | —      | INT4IP<2:0>  | —       | —      | —      | —      | INT3IP<2:0>  | —       | —       | T9IP<2:0>    | —       | —       | 4444       |
| IPC14    | 00C0     | —      | —      | —           | —      | —      | —            | —       | —      | —      | —      | —            | —       | —       | C2IP<2:0>    | —       | —       | 0004       |
| IPC15    | 00C2     | —      | —      | —           | —      | —      | —            | —       | —      | —      | —      | DMA5IP<2:0>  | —       | —       | —            | —       | —       | 0040       |
| IPC16    | 00C4     | —      | —      | —           | —      | —      | —            | —       | —      | —      | —      | U1EIP<2:0>   | —       | —       | —            | —       | —       | 0440       |
| IPC17    | 00C6     | —      | —      | C2TXIP<2:0> | —      | —      | —            | —       | —      | —      | —      | DMA7IP<2:0>  | —       | —       | DMA6IP<2:0>  | —       | —       | 4444       |
| INTTREG  | 00E0     | —      | —      | —           | —      | —      | ILR<3:0>     | —       | —      | —      | —      | —            | —       | —       | —            | —       | —       | 0000       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**TABLE 4-6: TIMER REGISTER MAP**

| SFR Name | SFR Addr | Bit 15 | Bit 14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8                                                      | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | All Resets |
|----------|----------|--------|--------|--------|--------|--------|--------|-------|------------------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|------------|
| TMR1     | 0100     |        |        |        |        |        |        |       | Timer1 Register                                            |       |       |       |       |       |       |       |       | xxxx       |
| PR1      | 0102     |        |        |        |        |        |        |       | Period Register 1                                          |       |       |       |       |       |       |       |       | FFFF       |
| T1CON    | 0104     | TON    | —      | TSIDL  | —      | —      | —      | —     | —                                                          | —     | TGATE | —     | —     | —     | TSYNC | TCS   | —     | 0000       |
| TMR2     | 0106     |        |        |        |        |        |        |       | Timer2 Register                                            |       |       |       |       |       |       |       |       | xxxx       |
| TMR3HLD  | 0108     |        |        |        |        |        |        |       | Timer3 Holding Register (for 32-bit timer operations only) |       |       |       |       |       |       |       |       | xxxx       |
| TMR3     | 010A     |        |        |        |        |        |        |       | Timer3 Register                                            |       |       |       |       |       |       |       |       | xxxx       |
| PR2      | 010C     |        |        |        |        |        |        |       | Period Register 2                                          |       |       |       |       |       |       |       |       | FFFF       |
| PR3      | 010E     |        |        |        |        |        |        |       | Period Register 3                                          |       |       |       |       |       |       |       |       | FFFF       |
| T2CON    | 0110     | TON    | —      | TSIDL  | —      | —      | —      | —     | —                                                          | —     | TGATE | —     | —     | —     | —     | TCS   | —     | 0000       |
| T3CON    | 0112     | TON    | —      | TSIDL  | —      | —      | —      | —     | —                                                          | —     | TGATE | —     | —     | —     | —     | TCS   | —     | 0000       |
| TMR4     | 0114     |        |        |        |        |        |        |       | Timer4 Register                                            |       |       |       |       |       |       |       |       | xxxx       |
| TMR5HLD  | 0116     |        |        |        |        |        |        |       | Timer5 Holding Register (for 32-bit operations only)       |       |       |       |       |       |       |       |       | xxxx       |
| TMR5     | 0118     |        |        |        |        |        |        |       | Timer5 Register                                            |       |       |       |       |       |       |       |       | xxxx       |
| PR4      | 011A     |        |        |        |        |        |        |       | Period Register 4                                          |       |       |       |       |       |       |       |       | FFFF       |
| PR5      | 011C     |        |        |        |        |        |        |       | Period Register 5                                          |       |       |       |       |       |       |       |       | FFFF       |
| T4CON    | 011E     | TON    | —      | TSIDL  | —      | —      | —      | —     | —                                                          | —     | TGATE | —     | —     | —     | —     | TCS   | —     | 0000       |
| T5CON    | 0120     | TON    | —      | TSIDL  | —      | —      | —      | —     | —                                                          | —     | TGATE | —     | —     | —     | —     | TCS   | —     | 0000       |
| TMR6     | 0122     |        |        |        |        |        |        |       | Timer6 Register                                            |       |       |       |       |       |       |       |       | xxxx       |
| TMR7HLD  | 0124     |        |        |        |        |        |        |       | Timer7 Holding Register (for 32-bit operations only)       |       |       |       |       |       |       |       |       | xxxx       |
| TMR7     | 0126     |        |        |        |        |        |        |       | Timer7 Register                                            |       |       |       |       |       |       |       |       | xxxx       |
| PR6      | 0128     |        |        |        |        |        |        |       | Period Register 6                                          |       |       |       |       |       |       |       |       | FFFF       |
| PR7      | 012A     |        |        |        |        |        |        |       | Period Register 7                                          |       |       |       |       |       |       |       |       | FFFF       |
| T6CON    | 012C     | TON    | —      | TSIDL  | —      | —      | —      | —     | —                                                          | —     | TGATE | —     | —     | —     | —     | TCS   | —     | 0000       |
| T7CON    | 012E     | TON    | —      | TSIDL  | —      | —      | —      | —     | —                                                          | —     | TGATE | —     | —     | —     | —     | TCS   | —     | 0000       |
| TMR8     | 0130     |        |        |        |        |        |        |       | Timer8 Register                                            |       |       |       |       |       |       |       |       | xxxx       |
| TMR9HLD  | 0132     |        |        |        |        |        |        |       | Timer9 Holding Register (for 32-bit operations only)       |       |       |       |       |       |       |       |       | xxxx       |
| TMR9     | 0134     |        |        |        |        |        |        |       | Timer9 Register                                            |       |       |       |       |       |       |       |       | xxxx       |
| PR8      | 0136     |        |        |        |        |        |        |       | Period Register 8                                          |       |       |       |       |       |       |       |       | FFFF       |
| PR9      | 0138     |        |        |        |        |        |        |       | Period Register 9                                          |       |       |       |       |       |       |       |       | FFFF       |
| T8CON    | 013A     | TON    | —      | TSIDL  | —      | —      | —      | —     | —                                                          | —     | TGATE | —     | —     | —     | —     | TCS   | —     | 0000       |
| T9CON    | 013C     | TON    | —      | TSIDL  | —      | —      | —      | —     | —                                                          | —     | TGATE | —     | —     | —     | —     | TCS   | —     | 0000       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

# PIC24HJXXXGPX06/X08/X10

**TABLE 4-7: INPUT CAPTURE REGISTER MAP**

| SFR Name | SFR Addr | Bit 15                   | Bit 14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6    | Bit 5 | Bit 4 | Bit 3 | Bit 2    | Bit 1 | Bit 0 | All Resets |       |
|----------|----------|--------------------------|--------|--------|--------|--------|--------|-------|-------|-------|----------|-------|-------|-------|----------|-------|-------|------------|-------|
| IC1BUF   | 0140     | Input 1 Capture Register |        |        |        |        |        |       |       |       |          |       |       |       |          |       |       |            | xxxxx |
| IC1CON   | 0142     | —                        | —      | ICSIDL | —      | —      | —      | —     | —     | ICTMR | ICI<1:0> | ICOV  | ICBNE | ICBNE | ICM<2:0> |       |       | 0000       |       |
| IC2BUF   | 0144     | Input 2 Capture Register |        |        |        |        |        |       |       |       |          |       |       |       |          |       |       |            | xxxxx |
| IC2CON   | 0146     | —                        | —      | ICSIDL | —      | —      | —      | —     | —     | ICTMR | ICI<1:0> | ICOV  | ICBNE | ICBNE | ICM<2:0> |       |       | 0000       |       |
| IC3BUF   | 0148     | Input 3 Capture Register |        |        |        |        |        |       |       |       |          |       |       |       |          |       |       |            | xxxxx |
| IC3CON   | 014A     | —                        | —      | ICSIDL | —      | —      | —      | —     | —     | ICTMR | ICI<1:0> | ICOV  | ICBNE | ICBNE | ICM<2:0> |       |       | 0000       |       |
| IC4BUF   | 014C     | Input 4 Capture Register |        |        |        |        |        |       |       |       |          |       |       |       |          |       |       |            | xxxxx |
| IC4CON   | 014E     | —                        | —      | ICSIDL | —      | —      | —      | —     | —     | ICTMR | ICI<1:0> | ICOV  | ICBNE | ICBNE | ICM<2:0> |       |       | 0000       |       |
| IC5BUF   | 0150     | Input 5 Capture Register |        |        |        |        |        |       |       |       |          |       |       |       |          |       |       |            | xxxxx |
| IC5CON   | 0152     | —                        | —      | ICSIDL | —      | —      | —      | —     | —     | ICTMR | ICI<1:0> | ICOV  | ICBNE | ICBNE | ICM<2:0> |       |       | 0000       |       |
| IC6BUF   | 0154     | Input 6 Capture Register |        |        |        |        |        |       |       |       |          |       |       |       |          |       |       |            | xxxxx |
| IC6CON   | 0156     | —                        | —      | ICSIDL | —      | —      | —      | —     | —     | ICTMR | ICI<1:0> | ICOV  | ICBNE | ICBNE | ICM<2:0> |       |       | 0000       |       |
| IC7BUF   | 0158     | Input 7 Capture Register |        |        |        |        |        |       |       |       |          |       |       |       |          |       |       |            | xxxxx |
| IC7CON   | 015A     | —                        | —      | ICSIDL | —      | —      | —      | —     | —     | ICTMR | ICI<1:0> | ICOV  | ICBNE | ICBNE | ICM<2:0> |       |       | 0000       |       |
| IC8BUF   | 015C     | Input 8 Capture Register |        |        |        |        |        |       |       |       |          |       |       |       |          |       |       |            | xxxxx |
| IC8CON   | 015E     | —                        | —      | ICSIDL | —      | —      | —      | —     | —     | ICTMR | ICI<1:0> | ICOV  | ICBNE | ICBNE | ICM<2:0> |       |       | 0000       |       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**TABLE 4-8: OUTPUT COMPARE REGISTER MAP**

| SFR Name | SFR Addr | Bit 15 | Bit 14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9                               | Bit 8 | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3  | Bit 2 | Bit 1    | Bit 0 | All Resets |
|----------|----------|--------|--------|--------|--------|--------|--------|-------------------------------------|-------|-------|-------|-------|-------|--------|-------|----------|-------|------------|
| OC1RS    | 0180     |        |        |        |        |        |        | Output Compare 1 Secondary Register |       |       |       |       |       |        |       |          |       | xxxx       |
| OC1R     | 0182     |        |        |        |        |        |        | Output Compare 1 Register           |       |       |       |       |       |        |       |          |       | xxxx       |
| OC1CON   | 0184     | —      | —      | —      | —      | —      | —      | —                                   | —     | —     | —     | —     | OCFLT | OCTSEL |       | OCM<2:0> |       | 0000       |
| OC2RS    | 0186     |        |        |        |        |        |        | Output Compare 2 Secondary Register |       |       |       |       |       |        |       |          |       | xxxx       |
| OC2R     | 0188     |        |        |        |        |        |        | Output Compare 2 Register           |       |       |       |       |       |        |       |          |       | xxxx       |
| OC2CON   | 018A     | —      | —      | —      | —      | —      | —      | —                                   | —     | —     | —     | —     | OCFLT | OCTSEL |       | OCM<2:0> |       | 0000       |
| OC3RS    | 018C     |        |        |        |        |        |        | Output Compare 3 Secondary Register |       |       |       |       |       |        |       |          |       | xxxx       |
| OC3R     | 018E     |        |        |        |        |        |        | Output Compare 3 Register           |       |       |       |       |       |        |       |          |       | xxxx       |
| OC3CON   | 0190     | —      | —      | —      | —      | —      | —      | —                                   | —     | —     | —     | —     | OCFLT | OCTSEL |       | OCM<2:0> |       | 0000       |
| OC4RS    | 0192     |        |        |        |        |        |        | Output Compare 4 Secondary Register |       |       |       |       |       |        |       |          |       | xxxx       |
| OC4R     | 0194     |        |        |        |        |        |        | Output Compare 4 Register           |       |       |       |       |       |        |       |          |       | xxxx       |
| OC4CON   | 0196     | —      | —      | —      | —      | —      | —      | —                                   | —     | —     | —     | —     | OCFLT | OCTSEL |       | OCM<2:0> |       | 0000       |
| OC5RS    | 0198     |        |        |        |        |        |        | Output Compare 5 Secondary Register |       |       |       |       |       |        |       |          |       | xxxx       |
| OC5R     | 019A     |        |        |        |        |        |        | Output Compare 5 Register           |       |       |       |       |       |        |       |          |       | xxxx       |
| OC5CON   | 019C     | —      | —      | —      | —      | —      | —      | —                                   | —     | —     | —     | —     | OCFLT | OCTSEL |       | OCM<2:0> |       | 0000       |
| OC6RS    | 019E     |        |        |        |        |        |        | Output Compare 6 Secondary Register |       |       |       |       |       |        |       |          |       | xxxx       |
| OC6R     | 01A0     |        |        |        |        |        |        | Output Compare 6 Register           |       |       |       |       |       |        |       |          |       | xxxx       |
| OC6CON   | 01A2     | —      | —      | —      | —      | —      | —      | —                                   | —     | —     | —     | —     | OCFLT | OCTSEL |       | OCM<2:0> |       | 0000       |
| OC7RS    | 01A4     |        |        |        |        |        |        | Output Compare 7 Secondary Register |       |       |       |       |       |        |       |          |       | xxxx       |
| OC7R     | 01A6     |        |        |        |        |        |        | Output Compare 7 Register           |       |       |       |       |       |        |       |          |       | xxxx       |
| OC7CON   | 01A8     | —      | —      | —      | —      | —      | —      | —                                   | —     | —     | —     | —     | OCFLT | OCTSEL |       | OCM<2:0> |       | 0000       |
| OC8RS    | 01AA     |        |        |        |        |        |        | Output Compare 8 Secondary Register |       |       |       |       |       |        |       |          |       | xxxx       |
| OC8R     | 01AC     |        |        |        |        |        |        | Output Compare 8 Register           |       |       |       |       |       |        |       |          |       | xxxx       |
| OC8CON   | 01AE     | —      | —      | —      | —      | —      | —      | —                                   | —     | —     | —     | —     | OCFLT | OCTSEL |       | OCM<2:0> |       | 0000       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

# PIC24HJXXXGPX06/X08/X10

**TABLE 4-9: I2C1 REGISTER MAP**

| SFR Name | SFR Addr | Bit 15  | Bit 14 | Bit 13  | Bit 12 | Bit 11 | Bit 10 | Bit 9  | Bit 8 | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | All Resets |
|----------|----------|---------|--------|---------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------------|
| I2C1RCV  | 0200     | —       | —      | —       | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | 0000       |
| I2C1TRN  | 0202     | —       | —      | —       | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | 00FF       |
| I2C1BRG  | 0204     | —       | —      | —       | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | 0000       |
| I2C1CON  | 0206     | I2CEN   | —      | I2CSIDL | SCLREL | IPMIEN | A10M   | DISSLW | SMEN  | GCEN  | STREN | ACKDT | ACKEN | RCEN  | PEN   | RSEN  | SEN   | 1000       |
| I2C1STAT | 0208     | ACKSTAT | TRSTAT | —       | —      | —      | BCL    | GCSTAT | ADD10 | IWCOL | I2COV | D_A   | P     | S     | R_W   | RBF   | TBF   | 0000       |
| I2C1ADD  | 020A     | —       | —      | —       | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | 0000       |
| I2C1MSK  | 020C     | —       | —      | —       | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | 0000       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**TABLE 4-10: I2C2 REGISTER MAP**

| SFR Name | SFR Addr | Bit 15  | Bit 14 | Bit 13  | Bit 12 | Bit 11 | Bit 10 | Bit 9  | Bit 8 | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | All Resets |
|----------|----------|---------|--------|---------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------------|
| I2C2RCV  | 0210     | —       | —      | —       | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | 0000       |
| I2C2TRN  | 0212     | —       | —      | —       | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | 00FF       |
| I2C2BRG  | 0214     | —       | —      | —       | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | 0000       |
| I2C2CON  | 0216     | I2CEN   | —      | I2CSIDL | SCLREL | IPMIEN | A10M   | DISSLW | SMEN  | GCEN  | STREN | ACKDT | ACKEN | RCEN  | PEN   | RSEN  | SEN   | 1000       |
| I2C2STAT | 0218     | ACKSTAT | TRSTAT | —       | —      | —      | BCL    | GCSTAT | ADD10 | IWCOL | I2COV | D_A   | P     | S     | R_W   | RBF   | TBF   | 0000       |
| I2C2ADD  | 021A     | —       | —      | —       | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | 0000       |
| I2C2MSK  | 021C     | —       | —      | —       | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | 0000       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**TABLE 4-11: UART1 REGISTER MAP**

| SFR Name | SFR Addr | Bit 15   | Bit 14 | Bit 13   | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6  | Bit 5 | Bit 4  | Bit 3 | Bit 2      | Bit 1 | Bit 0 | All Resets |
|----------|----------|----------|--------|----------|--------|--------|--------|-------|-------|-------|--------|-------|--------|-------|------------|-------|-------|------------|
| U1MODE   | 0220     | UARTEN   | —      | USIDL    | IREN   | RTSMID | —      | UEN1  | UEN0  | WAKE  | LPBACK | ABAUD | URXINV | BRGH  | PDSEL<1:0> | STSEL | —     | 0000       |
| U1STA    | 0222     | UTXISEL1 | UTXINV | UTXISEL0 | —      | UTXBRK | UTXEN  | UTXBF | TRMT  | —     | —      | —     | —      | —     | —          | —     | —     | 0110       |
| U1TXREG  | 0224     | —        | —      | —        | —      | —      | —      | —     | —     | —     | —      | —     | —      | —     | —          | —     | —     | xxxx       |
| U1RXREG  | 0226     | —        | —      | —        | —      | —      | —      | —     | —     | —     | —      | —     | —      | —     | —          | —     | —     | 0000       |
| U1BRG    | 0228     | —        | —      | —        | —      | —      | —      | —     | —     | —     | —      | —     | —      | —     | —          | —     | —     | 0000       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**TABLE 4-12: UART2 REGISTER MAP**

| SFR Name | SFR Addr | Bit 15   | Bit 14 | Bit 13   | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7        | Bit 6  | Bit 5 | Bit 4  | Bit 3 | Bit 2       | Bit 1 | Bit 0 | All Resets |
|----------|----------|----------|--------|----------|--------|--------|--------|-------|-------|--------------|--------|-------|--------|-------|-------------|-------|-------|------------|
| U2MODE   | 0230     | UARTEN   | —      | USIDL    | IREN   | RTSMO  | —      | UEN1  | UEN0  | WAKE         | LPBACK | ABAUD | URXINV | BRGH  | PDSSEL<1:0> | —     | STSEL | 0000       |
| U2STA    | 0232     | UTXISEL1 | UTXINV | UTXISEL0 | —      | UTXBRK | UTXEN  | UTXBF | TRMT  | URXISEL<1:0> | —      | ADDEN | RIDLE  | PERR  | FERR        | OERR  | URXDA | 0110       |
| U2TXREG  | 0234     | —        | —      | —        | —      | —      | —      | —     | —     | —            | —      | —     | —      | —     | —           | —     | —     | xxxx       |
| U2RXREG  | 0236     | —        | —      | —        | —      | —      | —      | —     | —     | —            | —      | —     | —      | —     | —           | —     | —     | 0000       |
| U2BRG    | 0238     | —        | —      | —        | —      | —      | —      | —     | —     | —            | —      | —     | —      | —     | —           | —     | —     | 0000       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**TABLE 4-13: SPI1 REGISTER MAP**

| SFR Name | SFR Addr | Bit 15 | Bit 14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6  | Bit 5 | Bit 4 | Bit 3     | Bit 2 | Bit 1     | Bit 0  | All Resets |
|----------|----------|--------|--------|--------|--------|--------|--------|-------|-------|-------|--------|-------|-------|-----------|-------|-----------|--------|------------|
| SP1STAT  | 0240     | SPIEN  | —      | SPIIDL | —      | —      | —      | —     | —     | —     | SPIROV | —     | —     | —         | —     | SPIRBF    | SPIRBF | 0000       |
| SP1CON1  | 0242     | —      | —      | —      | DISSCK | DISSDO | MODE16 | SMP   | CKE   | SSEN  | CKP    | MSTEN | —     | SPRE<2:0> | —     | PPRE<1:0> | —      | 0000       |
| SP1CON2  | 0244     | FRMEN  | SPIFSD | FRMPOL | —      | —      | —      | —     | —     | —     | —      | —     | —     | —         | —     | FRMDLY    | —      | 0000       |
| SP1BUF   | 0248     | —      | —      | —      | —      | —      | —      | —     | —     | —     | —      | —     | —     | —         | —     | —         | —      | 0000       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**TABLE 4-14: SPI2 REGISTER MAP**

| SFR Name | SFR Addr | Bit 15 | Bit 14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6  | Bit 5 | Bit 4 | Bit 3     | Bit 2 | Bit 1     | Bit 0  | All Resets |
|----------|----------|--------|--------|--------|--------|--------|--------|-------|-------|-------|--------|-------|-------|-----------|-------|-----------|--------|------------|
| SP2STAT  | 0260     | SPIEN  | —      | SPIIDL | —      | —      | —      | —     | —     | —     | SPIROV | —     | —     | —         | —     | SPIRBF    | SPIRBF | 0000       |
| SP2CON1  | 0262     | —      | —      | —      | DISSCK | DISSDO | MODE16 | SMP   | CKE   | SSEN  | CKP    | MSTEN | —     | SPRE<2:0> | —     | PPRE<1:0> | —      | 0000       |
| SP2CON2  | 0264     | FRMEN  | SPIFSD | FRMPOL | —      | —      | —      | —     | —     | —     | —      | —     | —     | —         | —     | FRMDLY    | —      | 0000       |
| SP2BUF   | 0268     | —      | —      | —      | —      | —      | —      | —     | —     | —     | —      | —     | —     | —         | —     | —         | —      | 0000       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

# PIC24HJXXXGPX06/X08/X10

**TABLE 4-15: ADC1 REGISTER MAP**

| File Name               | Addr      | Bit 15    | Bit 14 | Bit 13 | Bit 12  | Bit 11 | Bit 10       | Bit 9     | Bit 8     | Bit 7  | Bit 6  | Bit 5  | Bit 4     | Bit 3  | Bit 2        | Bit 1  | Bit 0   | All Resets |      |
|-------------------------|-----------|-----------|--------|--------|---------|--------|--------------|-----------|-----------|--------|--------|--------|-----------|--------|--------------|--------|---------|------------|------|
| ADC Data Buffer 0       |           |           |        |        |         |        |              |           |           |        |        |        |           |        |              |        |         |            |      |
| AD1BUF0                 | 0300      |           |        |        |         |        |              |           |           |        |        |        |           |        |              |        |         | XXXXX      |      |
| AD1CON1                 | 0320      | ADON      | —      | ADSIDL | ADDMABM | —      | AD12B        | FORM<1:0> | SSRC<2:0> |        | —      |        | —         | SIMSAM | ASAM         | SAMP   | DONE    | 0000       |      |
| AD1CON2                 | 0322      | VCFG<2:0> |        | —      | —       | —      | CSCNA        | CHPS<1:0> | BUFS      |        | —      |        | SMPI<3:0> |        | BUFM         |        | ALTS    | 0000       |      |
| AD1CON3                 | 0324      | ADRC      | —      | —      | —       | —      | SAMC<4:0>    |           | ADCS<7:0> |        |        |        |           |        |              |        |         |            | 0000 |
| AD1CHS123               | 0326      | —         | —      | —      | —       | —      | CH123NB<1:0> | CH123SB   | —         |        | —      |        | —         |        | CH123NA<1:0> |        | CH123SA | 0000       |      |
| AD1CHS0                 | 0328      | CH0NB     | —      | —      | —       | —      | CH0SB<4:0>   |           | CH0NA     |        | —      |        | —         |        | CH0SA<4:0>   |        | 0000    |            |      |
| AD1PCFGH <sup>(1)</sup> | 032A      | PCFG31    | PCFG30 | PCFG29 | PCFG28  | PCFG27 | PCFG26       | PCFG25    | PCFG24    | PCFG23 | PCFG22 | PCFG21 | PCFG20    | PCFG19 | PCFG18       | PCFG17 | PCFG16  | 0000       |      |
| AD1PCFGL                | 032C      | PCFG15    | PCFG14 | PCFG13 | PCFG12  | PCFG11 | PCFG10       | PCFG9     | PCFG8     | PCFG7  | PCFG6  | PCFG5  | PCFG4     | PCFG3  | PCFG2        | PCFG1  | PCFG0   | 0000       |      |
| AD1CSSH <sup>(1)</sup>  | 032E      | CSS31     | CSS30  | CSS29  | CSS28   | CSS27  | CSS26        | CSS25     | CSS24     | CSS23  | CSS22  | CSS21  | CSS20     | CSS19  | CSS18        | CSS17  | CSS16   | 0000       |      |
| AD1CSSL                 | 0330      | CSS15     | CSS14  | CSS13  | CSS12   | CSS11  | CSS10        | CSS9      | CSS8      | CSS7   | CSS6   | CSS5   | CSS4      | CSS3   | CSS2         | CSS1   | CSS0    | 0000       |      |
| AD1CON4                 | 0332      | —         | —      | —      | —       | —      | —            | —         | —         | —      | —      |        | —         |        | DMABL<2:0>   |        | 0000    |            |      |
| Reserved                | 0334-033E | —         | —      | —      | —       | —      | —            | —         | —         | —      | —      |        | —         |        | —            |        | —       | 0000       |      |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**Note 1:** Not all ANX inputs are available on all devices. See the device pin diagrams for available ANX inputs.

**TABLE 4-16: ADC2 REGISTER MAP**

| File Name         | Addr      | Bit 15    | Bit 14 | Bit 13 | Bit 12    | Bit 11     | Bit 10       | Bit 9     | Bit 8 | Bit 7     | Bit 6 | Bit 5  | Bit 4        | Bit 3 | Bit 2      | Bit 1   | Bit 0 | All Resets |        |
|-------------------|-----------|-----------|--------|--------|-----------|------------|--------------|-----------|-------|-----------|-------|--------|--------------|-------|------------|---------|-------|------------|--------|
| ADC Data Buffer 0 |           |           |        |        |           |            |              |           |       |           |       |        |              |       |            |         |       |            |        |
| ADC2BUF0          | 0340      |           |        |        |           |            |              |           |       |           |       |        |              |       |            |         |       |            | xxxxxx |
| AD2CON1           | 0360      | ADON      | —      | ADSIDL | ADDMABM   | —          | AD12B        | FORM<1:0> | —     | SSRC<2:0> | —     | SIMSAM | ASAM         | SAMP  | DONE       |         | 0000  |            |        |
| AD2CON2           | 0362      | VCFG<2:0> |        | —      | —         | —          | CSCNA        | CHPS<1:0> | —     | BUFS      | —     | —      | SMPI<3:0>    |       | —          | BUFM    | ALTS  | 0000       |        |
| AD2CON3           | 0364      | ADRC      | —      | —      | SAMC<4:0> |            |              | ADCS<7:0> |       |           |       |        |              |       |            |         |       | 0000       |        |
| AD2CHS123         | 0366      | —         | —      | —      | —         | —          | CH123NB<1:0> | CH123SB   | —     | —         | —     | —      | CH123NA<1:0> |       |            | CH123SA | 0000  |            |        |
| AD2CHS0           | 0368      | CH0NB     | —      | —      | —         | CH0SB<3:0> |              |           | CH0NA | —         | —     | —      | CH0SA<3:0>   |       |            | 0000    |       |            |        |
| Reserved          | 036A      | —         | —      | —      | —         | —          | —            | —         | —     | —         | —     | —      | —            | —     | —          | —       | 0000  |            |        |
| AD2PCFGL          | 036C      | PCFG15    | PCFG14 | PCFG13 | PCFG12    | PCFG11     | PCFG10       | PCFG9     | PCFG8 | PCFG7     | PCFG6 | PCFG5  | PCFG4        | PCFG3 | PCFG2      | PCFG1   | PCFG0 | 0000       |        |
| Reserved          | 036E      | —         | —      | —      | —         | —          | —            | —         | —     | —         | —     | —      | —            | —     | —          | —       | 0000  |            |        |
| AD2CSSL           | 0370      | CSS15     | CSS14  | CSS13  | CSS12     | CSS11      | CSS10        | CSS9      | CSS8  | CSS7      | CSS6  | CSS5   | CSS4         | CSS3  | CSS2       | CSS1    | CSS0  | 0000       |        |
| AD2CON4           | 0372      | —         | —      | —      | —         | —          | —            | —         | —     | —         | —     | —      | —            | —     | DMABL<2:0> |         |       | 0000       |        |
| Reserved          | 0374-037E | —         | —      | —      | —         | —          | —            | —         | —     | —         | —     | —      | —            | —     | —          | —       | —     | 0000       |        |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**TABLE 4-17: DMA REGISTER MAP**

| File Name | Addr | Bit 15 | Bit 14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0       | All Resets |
|-----------|------|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|------------|
| DMA0CON   | 0380 | CHEN   | SIZE   | DIR    | HALF   | NULLW  | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | MODE<1:0>   | 0000       |
| DMA0REQ   | 0382 | FORCE  | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | IRQSEL<6:0> | 0000       |
| DMA0STA   | 0384 | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA0STB   | 0386 | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA0PAD   | 0388 | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA0CNT   | 038A | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA1CON   | 038C | CHEN   | SIZE   | DIR    | HALF   | NULLW  | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | MODE<1:0>   | 0000       |
| DMA1REQ   | 038E | FORCE  | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA1STA   | 0390 | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA1STB   | 0392 | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA1PAD   | 0394 | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA1CNT   | 0396 | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA2CON   | 0398 | CHEN   | SIZE   | DIR    | HALF   | NULLW  | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | MODE<1:0>   | 0000       |
| DMA2REQ   | 039A | FORCE  | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA2STA   | 039C | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA2STB   | 039E | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA2PAD   | 03A0 | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA2CNT   | 03A2 | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA3CON   | 03A4 | CHEN   | SIZE   | DIR    | HALF   | NULLW  | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | MODE<1:0>   | 0000       |
| DMA3REQ   | 03A6 | FORCE  | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA3STA   | 03A8 | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA3STB   | 03AA | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA3PAD   | 03AC | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA3CNT   | 03AE | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA4CON   | 03B0 | CHEN   | SIZE   | DIR    | HALF   | NULLW  | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | MODE<1:0>   | 0000       |
| DMA4REQ   | 03B2 | FORCE  | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA4STA   | 03B4 | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA4STB   | 03B6 | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA4PAD   | 03B8 | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA4CNT   | 03BA | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA5CON   | 03BC | CHEN   | SIZE   | DIR    | HALF   | NULLW  | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | MODE<1:0>   | 0000       |
| DMA5REQ   | 03BE | FORCE  | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA5STA   | 03C0 | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |
| DMA5STB   | 03C2 | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —           | 0000       |

**Legend:** — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

# PIC24HJXXXGPX06/X08/X10

**TABLE 4-17: DMA REGISTER MAP (CONTINUED)**

| File Name | Addr | Bit 15 | Bit 14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9  | Bit 8  | Bit 7  | Bit 6  | Bit 5  | Bit 4  | Bit 3  | Bit 2  | Bit 1  | Bit 0       | All Resets |
|-----------|------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-------------|------------|
| DMA5PAD   | 03C4 | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —           | 0000       |
| DMA5CNT   | 03C6 | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —           | 0000       |
| DMA6CON   | 03C8 | CHEN   | SIZE   | DIR    | HALF   | NULLW  | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | MODE<1:0>   | 0000       |
| DMA6REQ   | 03CA | FORCE  | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | IRQSEL<6:0> | 0000       |
| DMA6STA   | 03CC | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —           | 0000       |
| DMA6STB   | 03CE | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —           | 0000       |
| DMA6PAD   | 03D0 | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —           | 0000       |
| DMA6CNT   | 03D2 | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —           | 0000       |
| DMA7CON   | 03D4 | CHEN   | SIZE   | DIR    | HALF   | NULLW  | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | MODE<1:0>   | 0000       |
| DMA7REQ   | 03D6 | FORCE  | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | IRQSEL<6:0> | 0000       |
| DMA7STA   | 03D8 | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —           | 0000       |
| DMA7STB   | 03DA | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —           | 0000       |
| DMA7PAD   | 03DC | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —           | 0000       |
| DMA7CNT   | 03DE | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —           | 0000       |
| DMA6S0    | 03E0 | PWCOL7 | PWCOL6 | PWCOL5 | PWCOL4 | PWCOL3 | PWCOL2 | PWCOL1 | PWCOL0 | XWCOL7 | XWCOL6 | XWCOL5 | XWCOL4 | XWCOL3 | XWCOL2 | XWCOL1 | XWCOL0      | 0000       |
| DMA6S1    | 03E2 | —      | —      | —      | —      | —      | —      | —      | —      | PPST7  | PPST6  | PPST5  | PPST4  | PPST3  | PPST2  | PPST1  | PPST0       | 0000       |
| DSADR     | 03E4 | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | —           | 0000       |

**Legend:** — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**TABLE 4-18: ECAN1 REGISTER MAP WHEN C1CTRL1.WIN = 0 OR 1 FOR PIC24HJXXXGP506/510/610 DEVICES ONLY**

| File Name  | Addr | Bit 15      | Bit 14      | Bit 13      | Bit 12      | Bit 11      | Bit 10      | Bit 9      | Bit 8      | Bit 7  | Bit 6       | Bit 5  | Bit 4  | Bit 3  | Bit 2  | Bit 1  | Bit 0  | All Resets |
|------------|------|-------------|-------------|-------------|-------------|-------------|-------------|------------|------------|--------|-------------|--------|--------|--------|--------|--------|--------|------------|
| C1CTRL1    | 0400 | —           | —           | CSIDL       | ABAT        | —           | —           | REQOP<2:0> | —          | —      | OPMODE<2:0> | —      | —      | CANCAP | —      | —      | WIN    | 0480       |
| C1CTRL2    | 0402 | —           | —           | —           | —           | —           | —           | —          | —          | —      | —           | —      | —      | —      | —      | —      | —      | 0000       |
| C1VEC      | 0404 | —           | —           | —           | —           | —           | —           | —          | —          | —      | —           | —      | —      | —      | —      | —      | —      | 0000       |
| C1FCTRL    | 0406 | —           | —           | —           | —           | —           | —           | —          | —          | —      | —           | —      | —      | —      | —      | —      | —      | 0000       |
| C1FIFO     | 0408 | —           | —           | —           | —           | —           | —           | —          | —          | —      | —           | —      | —      | —      | —      | —      | —      | 0000       |
| C1INTF     | 040A | —           | —           | TXBO        | TXBP        | TXWAR       | TXWAR       | RXWAR      | EWARN      | IVRIF  | WAKIF       | ERRIF  | —      | FIFOIF | RBOVIF | RBIF   | TBIF   | 0000       |
| C1INTE     | 040C | —           | —           | —           | —           | —           | —           | —          | —          | —      | —           | —      | —      | FIFOIE | RBOVIE | RBIE   | TBIE   | 0000       |
| C1IEC      | 040E | —           | —           | —           | —           | —           | —           | —          | —          | —      | —           | —      | —      | —      | —      | —      | —      | 0000       |
| C1CFG1     | 0410 | —           | —           | —           | —           | —           | —           | —          | —          | —      | —           | —      | —      | —      | —      | —      | —      | 0000       |
| C1CFG2     | 0412 | —           | WAKFIL      | —           | —           | —           | —           | —          | —          | —      | —           | —      | —      | —      | —      | —      | —      | 0000       |
| C1FEN1     | 0414 | FLTEN15     | FLTEN14     | FLTEN13     | FLTEN12     | FLTEN11     | FLTEN10     | FLTEN9     | FLTEN8     | FLTEN7 | FLTEN6      | FLTEN5 | FLTEN4 | FLTEN3 | FLTEN2 | FLTEN1 | FLTEN0 | F0FF       |
| C1FMSKSEL1 | 0418 | F7MSK<1:0>  | F6MSK<1:0>  | F5MSK<1:0>  | F4MSK<1:0>  | F3MSK<1:0>  | F2MSK<1:0>  | F1MSK<1:0> | F0MSK<1:0> | —      | —           | —      | —      | —      | —      | —      | —      | 0000       |
| C1FMSKSEL2 | 041A | F15MSK<1:0> | F14MSK<1:0> | F13MSK<1:0> | F12MSK<1:0> | F11MSK<1:0> | F10MSK<1:0> | F9MSK<1:0> | F8MSK<1:0> | —      | —           | —      | —      | —      | —      | —      | —      | 0000       |

**Legend:** — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**TABLE 4-19: ECAN1 REGISTER MAP WHEN C1CTRL1.WIN = 0 FOR PIC24HJXXXGP506/510/610 DEVICES ONLY**

| File Name | Addr      | Bit 15  | Bit 14  | Bit 13  | Bit 12  | Bit 11  | Bit 10  | Bit 9   | Bit 8   | Bit 7   | Bit 6   | Bit 5   | Bit 4   | Bit 3   | Bit 2   | Bit 1   | Bit 0   | All Resets |
|-----------|-----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|------------|
| C1RXFUL1  | 0400-041E | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | 0000       |
| C1RXFUL2  | 0422      | RXFUL31 | RXFUL30 | RXFUL29 | RXFUL28 | RXFUL27 | RXFUL26 | RXFUL25 | RXFUL24 | RXFUL23 | RXFUL22 | RXFUL21 | RXFUL20 | RXFUL19 | RXFUL18 | RXFUL17 | RXFUL16 | 0000       |
| C1RXOVF1  | 0428      | RXOVF15 | RXOVF14 | RXOVF13 | RXOVF12 | RXOVF11 | RXOVF10 | RXOVF9  | RXOVF8  | RXOVF7  | RXOVF6  | RXOVF5  | RXOVF4  | RXOVF3  | RXOVF2  | RXOVF1  | RXOVF0  | 0000       |
| C1RXOVF2  | 042A      | RXOVF31 | RXOVF30 | RXOVF29 | RXOVF28 | RXOVF27 | RXOVF26 | RXOVF25 | RXOVF24 | RXOVF23 | RXOVF22 | RXOVF21 | RXOVF20 | RXOVF19 | RXOVF18 | RXOVF17 | RXOVF16 | 0000       |
| C1TR01CO  | 0430      | TXEN1   | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | 0000       |
| C1TR23CO  | 0432      | TXEN3   | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | 0000       |
| C1TR45CO  | 0434      | TXEN5   | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | 0000       |
| C1TR67CO  | 0436      | TXEN7   | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | TX      | 0000       |
| C1RXD     | 0440      | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | xxxx       |
| C1TXD     | 0442      | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | xxxx       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

# PIC24HJXXXGPX06/X08/X10

**TABLE 4-20: ECAN1 REGISTER MAP WHEN C1CTRL1.WIN = 1 FOR PIC24HJXXXGP506/510/610 DEVICES ONLY**

| File Name  | Addr      | Bit 15                      | Bit 14     | Bit 13    | Bit 12 | Bit 11 | Bit 10     | Bit 9 | Bit 8 | Bit 7 | Bit 6      | Bit 5 | Bit 4    | Bit 3 | Bit 2      | Bit 1      | Bit 0 | All Resets |
|------------|-----------|-----------------------------|------------|-----------|--------|--------|------------|-------|-------|-------|------------|-------|----------|-------|------------|------------|-------|------------|
|            | 0400-041E | See definition when WIN = x |            |           |        |        |            |       |       |       |            |       |          |       |            |            |       |            |
| C1BUFNT1   | 0420      |                             | F3BP<3:0>  |           |        |        | F2BP<3:0>  |       |       |       | F1BP<3:0>  |       |          |       | F0BP<3:0>  |            |       | 0000       |
| C1BUFNT2   | 0422      |                             | F7BP<3:0>  |           |        |        | F6BP<3:0>  |       |       |       | F5BP<3:0>  |       |          |       | F4BP<3:0>  |            |       | 0000       |
| C1BUFNT3   | 0424      |                             | F11BP<3:0> |           |        |        | F10BP<3:0> |       |       |       | F9BP<3:0>  |       |          |       | F8BP<3:0>  |            |       | 0000       |
| C1BUFNT4   | 0426      |                             | F15BP<3:0> |           |        |        | F14BP<3:0> |       |       |       | F13BP<3:0> |       |          |       | F12BP<3:0> |            |       | 0000       |
| C1RXM0SID  | 0430      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       | —        | MIDE  | —          | EID<17:16> |       | xxxx       |
| C1RXM0EID  | 0432      |                             |            | EID<15:8> |        |        |            |       |       |       |            |       | EID<7:0> |       |            |            |       | xxxx       |
| C1RXM1SID  | 0434      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       | —        | MIDE  | —          | EID<17:16> |       | xxxx       |
| C1RXM1EID  | 0436      |                             |            | EID<15:8> |        |        |            |       |       |       |            |       | EID<7:0> |       |            |            |       | xxxx       |
| C1RXM2SID  | 0438      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       | —        | MIDE  | —          | EID<17:16> |       | xxxx       |
| C1RXM2EID  | 043A      |                             |            | EID<15:8> |        |        |            |       |       |       |            |       | EID<7:0> |       |            |            |       | xxxx       |
| C1RXF0SID  | 0440      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       | —        | EXIDE | —          | EID<17:16> |       | xxxx       |
| C1RXF0EID  | 0442      |                             |            | EID<15:8> |        |        |            |       |       |       |            |       | EID<7:0> |       |            |            |       | xxxx       |
| C1RXF1SID  | 0444      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       | —        | EXIDE | —          | EID<17:16> |       | xxxx       |
| C1RXF1EID  | 0446      |                             |            | EID<15:8> |        |        |            |       |       |       |            |       | EID<7:0> |       |            |            |       | xxxx       |
| C1RXF2SID  | 0448      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       | —        | EXIDE | —          | EID<17:16> |       | xxxx       |
| C1RXF2EID  | 044A      |                             |            | EID<15:8> |        |        |            |       |       |       |            |       | EID<7:0> |       |            |            |       | xxxx       |
| C1RXF3SID  | 044C      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       | —        | EXIDE | —          | EID<17:16> |       | xxxx       |
| C1RXF3EID  | 044E      |                             |            | EID<15:8> |        |        |            |       |       |       |            |       | EID<7:0> |       |            |            |       | xxxx       |
| C1RXF4SID  | 0450      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       | —        | EXIDE | —          | EID<17:16> |       | xxxx       |
| C1RXF4EID  | 0452      |                             |            | EID<15:8> |        |        |            |       |       |       |            |       | EID<7:0> |       |            |            |       | xxxx       |
| C1RXF5SID  | 0454      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       | —        | EXIDE | —          | EID<17:16> |       | xxxx       |
| C1RXF5EID  | 0456      |                             |            | EID<15:8> |        |        |            |       |       |       |            |       | EID<7:0> |       |            |            |       | xxxx       |
| C1RXF6SID  | 0458      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       | —        | EXIDE | —          | EID<17:16> |       | xxxx       |
| C1RXF6EID  | 045A      |                             |            | EID<15:8> |        |        |            |       |       |       |            |       | EID<7:0> |       |            |            |       | xxxx       |
| C1RXF7SID  | 045C      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       | —        | EXIDE | —          | EID<17:16> |       | xxxx       |
| C1RXF7EID  | 045E      |                             |            | EID<15:8> |        |        |            |       |       |       |            |       | EID<7:0> |       |            |            |       | xxxx       |
| C1RXF8SID  | 0460      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       | —        | EXIDE | —          | EID<17:16> |       | xxxx       |
| C1RXF8EID  | 0462      |                             |            | EID<15:8> |        |        |            |       |       |       |            |       | EID<7:0> |       |            |            |       | xxxx       |
| C1RXF9SID  | 0464      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       | —        | EXIDE | —          | EID<17:16> |       | xxxx       |
| C1RXF9EID  | 0466      |                             |            | EID<15:8> |        |        |            |       |       |       |            |       | EID<7:0> |       |            |            |       | xxxx       |
| C1RXF10SID | 0468      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       | —        | EXIDE | —          | EID<17:16> |       | xxxx       |
| C1RXF10EID | 046A      |                             |            | EID<15:8> |        |        |            |       |       |       |            |       | EID<7:0> |       |            |            |       | xxxx       |
| C1RXF11SID | 046C      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       | —        | EXIDE | —          | EID<17:16> |       | xxxx       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**TABLE 4-20: ECAN1 REGISTER MAP WHEN C1CTRL1.WIN = 1 FOR PIC24HJXXXGP506/510/610 DEVICES ONLY (CONTINUED)**

| File Name  | Addr | Bit 15 | Bit 14 | Bit 13 | Bit 12    | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6    | Bit 5 | Bit 4    | Bit 3    | Bit 2 | Bit 1 | Bit 0      | All Resets |
|------------|------|--------|--------|--------|-----------|--------|--------|-------|-------|-------|----------|-------|----------|----------|-------|-------|------------|------------|
| C1RXF11EID | 046E |        |        |        | EID<15:8> |        |        |       |       |       |          |       | EID<7:0> |          |       |       |            | xxxx       |
| C1RXF12SID | 0470 |        |        |        | SID<10:3> |        |        |       |       |       | SID<2:0> |       | —        | EXIDE    | —     |       | EID<17:16> | xxxx       |
| C1RXF12EID | 0472 |        |        |        | EID<15:8> |        |        |       |       |       |          |       |          | EID<7:0> |       |       |            | xxxx       |
| C1RXF13SID | 0474 |        |        |        | SID<10:3> |        |        |       |       |       | SID<2:0> |       | —        | EXIDE    | —     |       | EID<17:16> | xxxx       |
| C1RXF13EID | 0476 |        |        |        | EID<15:8> |        |        |       |       |       |          |       |          | EID<7:0> |       |       |            | xxxx       |
| C1RXF14SID | 0478 |        |        |        | SID<10:3> |        |        |       |       |       | SID<2:0> |       | —        | EXIDE    | —     |       | EID<17:16> | xxxx       |
| C1RXF14EID | 047A |        |        |        | EID<15:8> |        |        |       |       |       |          |       |          | EID<7:0> |       |       |            | xxxx       |
| C1RXF15SID | 047C |        |        |        | SID<10:3> |        |        |       |       |       | SID<2:0> |       | —        | EXIDE    | —     |       | EID<17:16> | xxxx       |
| C1RXF15EID | 047E |        |        |        | EID<15:8> |        |        |       |       |       |          |       |          | EID<7:0> |       |       |            | xxxx       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

# PIC24HJXXXGPX06/X08/X10

**TABLE 4-21: ECAN2 REGISTER MAP WHEN C2CTRL1.WIN = 0 OR 1 FOR PIC24HJ256GP610 DEVICES ONLY**

| File Name  | Addr | Bit 15      | Bit 14      | Bit 13      | Bit 12      | Bit 11      | Bit 10      | Bit 9      | Bit 8      | Bit 7      | Bit 6       | Bit 5      | Bit 4      | Bit 3      | Bit 2      | Bit 1      | Bit 0      | All Resets |
|------------|------|-------------|-------------|-------------|-------------|-------------|-------------|------------|------------|------------|-------------|------------|------------|------------|------------|------------|------------|------------|
| C2CTRL1    | 0500 | —           | —           | CSIDL       | ABAT        | —           | —           | REQOP<2:0> | —          | —          | OPMODE<2:0> | —          | —          | CANCAP     | —          | —          | WIN        | 0480       |
| C2CTRL2    | 0502 | —           | —           | —           | —           | —           | —           | —          | —          | —          | —           | —          | —          | —          | —          | —          | —          | 0000       |
| C2VEC      | 0504 | —           | —           | —           | —           | —           | —           | —          | —          | —          | —           | —          | —          | —          | —          | —          | —          | 0000       |
| C2FCTRL    | 0506 | —           | —           | —           | —           | —           | —           | —          | —          | —          | —           | —          | —          | —          | —          | —          | —          | 0000       |
| C2FIFO     | 0508 | —           | —           | —           | —           | —           | —           | —          | —          | —          | —           | —          | —          | —          | —          | —          | —          | 0000       |
| C2INTF     | 050A | —           | —           | TXBO        | TXBP        | RXBP        | TXWAR       | RXWAR      | EWARN      | IVRIF      | WAKIF       | ERRIF      | —          | FIFOIF     | RBOVIF     | RBIF       | TBIF       | 0000       |
| C2INTE     | 050C | —           | —           | —           | —           | —           | —           | —          | —          | IVRIE      | WAKIE       | ERRIE      | —          | FIFOIE     | RBOVIE     | RBIE       | TBIE       | 0000       |
| C2EC       | 050E | —           | —           | —           | —           | —           | —           | —          | —          | —          | —           | —          | —          | —          | —          | —          | —          | 0000       |
| C2CFG1     | 0510 | —           | —           | —           | —           | —           | —           | —          | —          | —          | —           | —          | —          | —          | —          | —          | —          | 0000       |
| C2CFG2     | 0512 | —           | —           | WAKFIL      | —           | —           | —           | —          | —          | —          | —           | —          | —          | —          | —          | —          | —          | 0000       |
| C2FEN1     | 0514 | FLTEN15     | FLTEN14     | FLTEN13     | FLTEN12     | FLTEN11     | FLTEN10     | FLTEN9     | FLTEN8     | FLTEN7     | FLTEN6      | FLTEN5     | FLTEN4     | FLTEN3     | FLTEN2     | FLTEN1     | FLTEN0     | FFFF       |
| C2FMSKSEL1 | 0518 | F7MSK<1:0>  | F6MSK<1:0>  | F5MSK<1:0>  | F4MSK<1:0>  | F3MSK<1:0>  | F2MSK<1:0>  | F1MSK<1:0> | F0MSK<1:0> | F9MSK<1:0> | F8MSK<1:0>  | F7MSK<1:0> | F6MSK<1:0> | F5MSK<1:0> | F4MSK<1:0> | F3MSK<1:0> | F2MSK<1:0> | 0000       |
| C2FMSKSEL2 | 051A | F15MSK<1:0> | F14MSK<1:0> | F13MSK<1:0> | F12MSK<1:0> | F11MSK<1:0> | F10MSK<1:0> | F9MSK<1:0> | F8MSK<1:0> | F7MSK<1:0> | F6MSK<1:0>  | F5MSK<1:0> | F4MSK<1:0> | F3MSK<1:0> | F2MSK<1:0> | F1MSK<1:0> | F0MSK<1:0> | 0000       |

**Legend:** — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**TABLE 4-22: ECAN2 REGISTER MAP WHEN C2CTRL1.WIN = 0 FOR PIC24HJ256GP610 DEVICES ONLY**

| File Name | Addr      | Bit 15  | Bit 14  | Bit 13  | Bit 12  | Bit 11  | Bit 10  | Bit 9   | Bit 8   | Bit 7   | Bit 6   | Bit 5   | Bit 4   | Bit 3   | Bit 2   | Bit 1   | Bit 0   | All Resets |
|-----------|-----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|------------|
| C2RXFUL1  | 0500-051E | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | 0000       |
| C2RXFUL2  | 0520      | RXFUL15 | RXFUL14 | RXFUL13 | RXFUL12 | RXFUL11 | RXFUL10 | RXFUL9  | RXFUL8  | RXFUL7  | RXFUL6  | RXFUL5  | RXFUL4  | RXFUL3  | RXFUL2  | RXFUL1  | RXFUL0  | 0000       |
| C2RXOVF1  | 0528      | RXOVF15 | RXOVF14 | RXOVF13 | RXOVF12 | RXOVF11 | RXOVF10 | RXOVF09 | RXOVF08 | RXOVF07 | RXOVF06 | RXOVF05 | RXOVF04 | RXOVF03 | RXOVF02 | RXOVF01 | RXOVF00 | 0000       |
| C2RXOVF2  | 052A      | RXOVF31 | RXOVF30 | RXOVF29 | RXOVF28 | RXOVF27 | RXOVF26 | RXOVF25 | RXOVF24 | RXOVF23 | RXOVF22 | RXOVF21 | RXOVF20 | RXOVF19 | RXOVF18 | RXOVF17 | RXOVF16 | 0000       |
| C2TR01CON | 0530      | TXEN1   | TXEN0   | TXEN1   | TXEN0   | TXEN1   | TXEN0   | TXEN1   | TXEN0   | TXEN1   | TXEN0   | TXEN1   | TXEN0   | TXEN1   | TXEN0   | TXEN1   | TXEN0   | 0000       |
| C2TR23CON | 0532      | TXEN3   | TXEN2   | TXEN1   | TXEN0   | TXEN3   | TXEN2   | TXEN1   | TXEN0   | TXEN3   | TXEN2   | TXEN1   | TXEN0   | TXEN3   | TXEN2   | TXEN1   | TXEN0   | 0000       |
| C2TR45CON | 0534      | TXEN5   | TXEN4   | TXEN3   | TXEN2   | TXEN5   | TXEN4   | TXEN3   | TXEN2   | TXEN5   | TXEN4   | TXEN3   | TXEN2   | TXEN5   | TXEN4   | TXEN3   | TXEN2   | 0000       |
| C2TR67CON | 0536      | TXEN7   | TXEN6   | TXEN5   | TXEN4   | TXEN7   | TXEN6   | TXEN5   | TXEN4   | TXEN7   | TXEN6   | TXEN5   | TXEN4   | TXEN7   | TXEN6   | TXEN5   | TXEN4   | xxxx       |
| C2RXD     | 0540      | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | xxxx       |
| C2TXD     | 0542      | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | —       | xxxx       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**TABLE 4-23: ECAN2 REGISTER MAP WHEN C2CTRL1.WIN = 1 FOR PIC24HJ256GP610 DEVICES ONLY**

| File Name  | Addr      | Bit 15                      | Bit 14     | Bit 13    | Bit 12 | Bit 11 | Bit 10     | Bit 9 | Bit 8 | Bit 7 | Bit 6      | Bit 5 | Bit 4 | Bit 3 | Bit 2      | Bit 1      | Bit 0 | All Resets |
|------------|-----------|-----------------------------|------------|-----------|--------|--------|------------|-------|-------|-------|------------|-------|-------|-------|------------|------------|-------|------------|
|            | 0500-051E | See definition when WIN = x |            |           |        |        |            |       |       |       |            |       |       |       |            |            |       |            |
| C2BUFPNT1  | 0520      |                             | F3BP<3:0>  |           |        |        | F2BP<3:0>  |       |       |       | F1BP<3:0>  |       |       |       | F0BP<3:0>  |            |       | 0000       |
| C2BUFPNT2  | 0522      |                             | F7BP<3:0>  |           |        |        | F6BP<3:0>  |       |       |       | F5BP<3:0>  |       |       |       | F4BP<3:0>  |            |       | 0000       |
| C2BUFPNT3  | 0524      |                             | F12BP<3:0> |           |        |        | F10BP<3:0> |       |       |       | F9BP<3:0>  |       |       |       | F8BP<3:0>  |            |       | 0000       |
| C2BUFPNT4  | 0526      |                             | F15BP<3:0> |           |        |        | F14BP<3:0> |       |       |       | F13BP<3:0> |       |       |       | F12BP<3:0> |            |       | 0000       |
| C2RXM0SID  | 0530      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       |       | MIDE  |            | EID<17:16> |       | xxxx       |
| C2RXM0EID  | 0532      |                             |            | EID<15:8> |        |        |            |       |       |       | SID<2:0>   |       |       | MIDE  |            | EID<17:16> |       | xxxx       |
| C2RXM1SID  | 0534      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       |       | MIDE  |            | EID<17:16> |       | xxxx       |
| C2RXM1EID  | 0536      |                             |            | EID<15:8> |        |        |            |       |       |       | SID<2:0>   |       |       | MIDE  |            | EID<17:16> |       | xxxx       |
| C2RXM2SID  | 0538      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       |       | MIDE  |            | EID<17:16> |       | xxxx       |
| C2RXM2EID  | 053A      |                             |            | EID<15:8> |        |        |            |       |       |       | SID<2:0>   |       |       | MIDE  |            | EID<17:16> |       | xxxx       |
| C2RXF0SID  | 0540      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       |       | EXIDE |            | EID<17:16> |       | xxxx       |
| C2RXF0EID  | 0542      |                             |            | EID<15:8> |        |        |            |       |       |       | SID<2:0>   |       |       | EXIDE |            | EID<17:16> |       | xxxx       |
| C2RXF1SID  | 0544      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       |       | EXIDE |            | EID<17:16> |       | xxxx       |
| C2RXF1EID  | 0546      |                             |            | EID<15:8> |        |        |            |       |       |       | SID<2:0>   |       |       | EXIDE |            | EID<17:16> |       | xxxx       |
| C2RXF2SID  | 0548      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       |       | EXIDE |            | EID<17:16> |       | xxxx       |
| C2RXF2EID  | 054A      |                             |            | EID<15:8> |        |        |            |       |       |       | SID<2:0>   |       |       | EXIDE |            | EID<17:16> |       | xxxx       |
| C2RXF3SID  | 054C      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       |       | EXIDE |            | EID<17:16> |       | xxxx       |
| C2RXF3EID  | 054E      |                             |            | EID<15:8> |        |        |            |       |       |       | SID<2:0>   |       |       | EXIDE |            | EID<17:16> |       | xxxx       |
| C2RXF4SID  | 0550      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       |       | EXIDE |            | EID<17:16> |       | xxxx       |
| C2RXF4EID  | 0552      |                             |            | EID<15:8> |        |        |            |       |       |       | SID<2:0>   |       |       | EXIDE |            | EID<17:16> |       | xxxx       |
| C2RXF5SID  | 0554      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       |       | EXIDE |            | EID<17:16> |       | xxxx       |
| C2RXF5EID  | 0556      |                             |            | EID<15:8> |        |        |            |       |       |       | SID<2:0>   |       |       | EXIDE |            | EID<17:16> |       | xxxx       |
| C2RXF6SID  | 0558      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       |       | EXIDE |            | EID<17:16> |       | xxxx       |
| C2RXF6EID  | 055A      |                             |            | EID<15:8> |        |        |            |       |       |       | SID<2:0>   |       |       | EXIDE |            | EID<17:16> |       | xxxx       |
| C2RXF7SID  | 055C      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       |       | EXIDE |            | EID<17:16> |       | xxxx       |
| C2RXF7EID  | 055E      |                             |            | EID<15:8> |        |        |            |       |       |       | SID<2:0>   |       |       | EXIDE |            | EID<17:16> |       | xxxx       |
| C2RXF8SID  | 0560      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       |       | EXIDE |            | EID<17:16> |       | xxxx       |
| C2RXF8EID  | 0562      |                             |            | EID<15:8> |        |        |            |       |       |       | SID<2:0>   |       |       | EXIDE |            | EID<17:16> |       | xxxx       |
| C2RXF9SID  | 0564      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       |       | EXIDE |            | EID<17:16> |       | xxxx       |
| C2RXF9EID  | 0566      |                             |            | EID<15:8> |        |        |            |       |       |       | SID<2:0>   |       |       | EXIDE |            | EID<17:16> |       | xxxx       |
| C2RXF10SID | 0568      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       |       | EXIDE |            | EID<17:16> |       | xxxx       |
| C2RXF10EID | 056A      |                             |            | EID<15:8> |        |        |            |       |       |       | SID<2:0>   |       |       | EXIDE |            | EID<17:16> |       | xxxx       |
| C2RXF11SID | 056C      |                             |            | SID<10:3> |        |        |            |       |       |       | SID<2:0>   |       |       | EXIDE |            | EID<17:16> |       | xxxx       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

# PIC24HJXXXGPX06/X08/X10

**TABLE 4-23: ECAN2 REGISTER MAP WHEN C2CTRL1.WIN = 1 FOR PIC24HJ256GP610 DEVICES ONLY (CONTINUED)**

| File Name  | Addr | Bit 15 | Bit 14 | Bit 13 | Bit 12    | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6    | Bit 5 | Bit 4    | Bit 3 | Bit 2 | Bit 1 | Bit 0      | All Resets |
|------------|------|--------|--------|--------|-----------|--------|--------|-------|-------|-------|----------|-------|----------|-------|-------|-------|------------|------------|
| C2RXF11EID | 056E |        |        |        | EID<15:8> |        |        |       |       |       |          |       | EID<7:0> |       |       |       |            | xxxx       |
| C2RXF12SID | 0570 |        |        |        | SID<10:3> |        |        |       |       |       | SID<2:0> |       | —        | EXIDE | —     |       | EID<17:16> | xxxx       |
| C2RXF12EID | 0572 |        |        |        | EID<15:8> |        |        |       |       |       |          |       | EID<7:0> |       |       |       |            | xxxx       |
| C2RXF13SID | 0574 |        |        |        | SID<10:3> |        |        |       |       |       | SID<2:0> |       | —        | EXIDE | —     |       | EID<17:16> | xxxx       |
| C2RXF13EID | 0576 |        |        |        | EID<15:8> |        |        |       |       |       |          |       | EID<7:0> |       |       |       |            | xxxx       |
| C2RXF14SID | 0578 |        |        |        | SID<10:3> |        |        |       |       |       | SID<2:0> |       | —        | EXIDE | —     |       | EID<17:16> | xxxx       |
| C2RXF14EID | 057A |        |        |        | EID<15:8> |        |        |       |       |       |          |       | EID<7:0> |       |       |       |            | xxxx       |
| C2RXF15SID | 057C |        |        |        | SID<10:3> |        |        |       |       |       | SID<2:0> |       | —        | EXIDE | —     |       | EID<17:16> | xxxx       |
| C2RXF15EID | 057E |        |        |        | EID<15:8> |        |        |       |       |       |          |       | EID<7:0> |       |       |       |            | xxxx       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**TABLE 4-24: PORTA REGISTER MAP<sup>(1)</sup>**

| File Name | Addr | Bit 15  | Bit 14  | Bit 13  | Bit 12  | Bit 11 | Bit 10  | Bit 9  | Bit 8 | Bit 7  | Bit 6  | Bit 5  | Bit 4  | Bit 3  | Bit 2  | Bit 1  | Bit 0  | All Resets |
|-----------|------|---------|---------|---------|---------|--------|---------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|------------|
| TRISA     | 02C0 | TRISA15 | TRISA14 | TRISA13 | TRISA12 | —      | TRISA10 | TRISA9 | —     | TRISA7 | TRISA6 | TRISA5 | TRISA4 | TRISA3 | TRISA2 | TRISA1 | TRISA0 | FFFF       |
| PORTA     | 02C2 | RA15    | RA14    | RA13    | RA12    | —      | RA10    | RA9    | —     | RA7    | RA6    | RA5    | RA4    | RA3    | RA2    | RA1    | RA0    | xxxx       |
| LATA      | 02C4 | LATA15  | LATA14  | LATA13  | LATA12  | —      | LATA10  | LATA9  | —     | LATA7  | LATA6  | LATA5  | LATA4  | LATA3  | LATA2  | LATA1  | LATA0  | xxxx       |
| ODCA      | 06C0 | ODCA15  | ODCA14  | —       | —       | —      | —       | —      | —     | —      | —      | ODCA5  | ODCA4  | ODCA3  | ODCA2  | ODCA1  | ODCA0  | 0000       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**Note 1:** The actual set of I/O port pins varies from one device to another. Please refer to the corresponding pinout diagrams.

**TABLE 4-25: PORTB REGISTER MAP<sup>(1)</sup>**

| File Name | Addr | Bit 15  | Bit 14  | Bit 13  | Bit 12  | Bit 11  | Bit 10  | Bit 9  | Bit 8  | Bit 7  | Bit 6  | Bit 5  | Bit 4  | Bit 3  | Bit 2  | Bit 1  | Bit 0  | All Resets |
|-----------|------|---------|---------|---------|---------|---------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------------|
| TRISB     | 02C6 | TRISB15 | TRISB14 | TRISB13 | TRISB12 | TRISB11 | TRISB10 | TRISB9 | TRISB8 | TRISB7 | TRISB6 | TRISB5 | TRISB4 | TRISB3 | TRISB2 | TRISB1 | TRISB0 | FFFF       |
| PORTB     | 02C8 | RB15    | RB14    | RB13    | RB12    | RB11    | RB10    | RB9    | RB8    | RB7    | RB6    | RB5    | RB4    | RB3    | RB2    | RB1    | RB0    | xxxx       |
| LATB      | 02CA | LATB15  | LATB14  | LATB13  | LATB12  | LATB11  | LATB10  | LATB9  | LATB8  | LATB7  | LATB6  | LATB5  | LATB4  | LATB3  | LATB2  | LATB1  | LATB0  | xxxx       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**Note 1:** The actual set of I/O port pins varies from one device to another. Please refer to the corresponding pinout diagrams.

**TABLE 4-26: PORTC REGISTER MAP<sup>(1)</sup>**

| File Name | Addr | Bit 15  | Bit 14  | Bit 13  | Bit 12  | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6 | Bit 5 | Bit 4  | Bit 3  | Bit 2  | Bit 1  | Bit 0 | All Resets |
|-----------|------|---------|---------|---------|---------|--------|--------|-------|-------|-------|-------|-------|--------|--------|--------|--------|-------|------------|
| TRISC     | 02CC | TRISC15 | TRISC14 | TRISC13 | TRISC12 | —      | —      | —     | —     | —     | —     | —     | TRISC4 | TRISC3 | TRISC2 | TRISC1 | —     | F01E       |
| PORTC     | 02CE | RC15    | RC14    | RC13    | RC12    | —      | —      | —     | —     | —     | —     | —     | RC4    | RC3    | RC2    | RC1    | —     | xxxx       |
| LATC      | 02D0 | LATC15  | LATC14  | LATC13  | LATC12  | —      | —      | —     | —     | —     | —     | —     | LATC4  | LATC3  | LATC2  | LATC1  | —     | xxxx       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**Note 1:** The actual set of I/O port pins varies from one device to another. Please refer to the corresponding pinout diagrams.

**TABLE 4-27: PORTD REGISTER MAP<sup>(1)</sup>**

| File Name | Addr | Bit 15  | Bit 14  | Bit 13  | Bit 12  | Bit 11  | Bit 10  | Bit 9  | Bit 8  | Bit 7  | Bit 6  | Bit 5  | Bit 4  | Bit 3  | Bit 2  | Bit 1  | Bit 0  | All Resets |
|-----------|------|---------|---------|---------|---------|---------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------------|
| TRISD     | 02D2 | TRISD15 | TRISD14 | TRISD13 | TRISD12 | TRISD11 | TRISD10 | TRISD9 | TRISD8 | TRISD7 | TRISD6 | TRISD5 | TRISD4 | TRISD3 | TRISD2 | TRISD1 | TRISD0 | FFFF       |
| PORTD     | 02D4 | RD15    | RD14    | RD13    | RD12    | RD11    | RD10    | RD9    | RD8    | RD7    | RD6    | RD5    | RD4    | RD3    | RD2    | RD1    | RD0    | xxxx       |
| LATD      | 02D6 | LATD15  | LATD14  | LATD13  | LATD12  | LATD11  | LATD10  | LATD9  | LATD8  | LATD7  | LATD6  | LATD5  | LATD4  | LATD3  | LATD2  | LATD1  | LATD0  | xxxx       |
| ODCD      | 06D2 | ODCD15  | ODCD14  | ODCD13  | ODCD12  | ODCD11  | ODCD10  | ODCD9  | ODCD8  | ODCD7  | ODCD6  | ODCD5  | ODCD4  | ODCD3  | ODCD2  | ODCD1  | ODCD0  | 0000       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**Note 1:** The actual set of I/O port pins varies from one device to another. Please refer to the corresponding pinout diagrams.

**TABLE 4-28: PORTE REGISTER MAP<sup>(1)</sup>**

| File Name | Addr | Bit 15 | Bit 14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7  | Bit 6  | Bit 5  | Bit 4  | Bit 3  | Bit 2  | Bit 1  | Bit 0  | All Resets |
|-----------|------|--------|--------|--------|--------|--------|--------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|------------|
| TRISE     | 02D8 | —      | —      | —      | —      | —      | —      | —     | —     | TRISE7 | TRISE6 | TRISE5 | TRISE4 | TRISE3 | TRISE2 | TRISE1 | TRISE0 | 00FF       |
| PORTE     | 02DA | —      | —      | —      | —      | —      | —      | —     | —     | RE7    | RE6    | RE5    | RE4    | RE3    | RE2    | RE1    | RE0    | xxxx       |
| LATE      | 02DC | —      | —      | —      | —      | —      | —      | —     | —     | LATE7  | LATE6  | LATE5  | LATE4  | LATE3  | LATE2  | LATE1  | LATE0  | xxxx       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**Note 1:** The actual set of I/O port pins varies from one device to another. Please refer to the corresponding pinout diagrams.

**TABLE 4-29: PORTF REGISTER MAP<sup>(1)</sup>**

| File Name           | Addr | Bit 15 | Bit 14 | Bit 13  | Bit 12  | Bit 11 | Bit 10 | Bit 9 | Bit 8  | Bit 7  | Bit 6  | Bit 5  | Bit 4  | Bit 3  | Bit 2  | Bit 1  | Bit 0  | All Resets |
|---------------------|------|--------|--------|---------|---------|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------------|
| TRISF               | 02DE | —      | —      | TRISF13 | TRISF12 | —      | —      | —     | TRISF8 | TRISF7 | TRISF6 | TRISF5 | TRISF4 | TRISF3 | TRISF2 | TRISF1 | TRISF0 | 31FF       |
| PORTF               | 02E0 | —      | —      | RF13    | RF12    | —      | —      | —     | RF8    | RF7    | RF6    | RF5    | RF4    | RF3    | RF2    | RF1    | RF0    | xxxx       |
| LATF                | 02E2 | —      | —      | LATF13  | LATF12  | —      | —      | —     | LATF8  | LATF7  | LATF6  | LATF5  | LATF4  | LATF3  | LATF2  | LATF1  | LATF0  | xxxx       |
| ODCF <sup>(2)</sup> | 06DE | —      | —      | ODCF13  | ODCF12  | —      | —      | —     | ODCF8  | ODCF7  | ODCF6  | ODCF5  | ODCF4  | ODCF3  | ODCF2  | ODCF1  | ODCF0  | 0000       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**Note 1:** The actual set of I/O port pins varies from one device to another. Please refer to the corresponding pinout diagrams.

**TABLE 4-30: PORTG REGISTER MAP<sup>(1)</sup>**

| File Name           | Addr | Bit 15  | Bit 14  | Bit 13  | Bit 12  | Bit 11 | Bit 10 | Bit 9 | Bit 8  | Bit 7  | Bit 6  | Bit 5 | Bit 4 | Bit 3  | Bit 2  | Bit 1  | Bit 0  | All Resets |
|---------------------|------|---------|---------|---------|---------|--------|--------|-------|--------|--------|--------|-------|-------|--------|--------|--------|--------|------------|
| TRISG               | 02E4 | TRISG15 | TRISG14 | TRISG13 | TRISG12 | —      | —      | —     | TRISG9 | TRISG8 | TRISG6 | —     | —     | TRISG3 | TRISG2 | TRISG1 | TRISG0 | F3CF       |
| PORTG               | 02E6 | RG15    | RG14    | RG13    | RG12    | —      | —      | —     | RG9    | RG8    | RG6    | —     | —     | RG3    | RG2    | RG1    | RG0    | xxxx       |
| LATG                | 02E8 | LATG15  | LATG14  | LATG13  | LATG12  | —      | —      | —     | LATG9  | LATG8  | LATG7  | —     | —     | LATG3  | LATG2  | LATG1  | LATG0  | xxxx       |
| ODCG <sup>(2)</sup> | 06E4 | ODCG15  | ODCG14  | ODCG13  | ODCG12  | —      | —      | —     | ODCG9  | ODCG8  | ODCG7  | —     | —     | ODCG3  | ODCG2  | ODCG1  | ODCG0  | 0000       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**Note 1:** The actual set of I/O port pins varies from one device to another. Please refer to the corresponding pinout diagrams.

**TABLE 4-31: SYSTEM CONTROL REGISTER MAP**

| File Name | Addr | Bit 15 | Bit 14 | Bit 13    | Bit 12 | Bit 11 | Bit 10    | Bit 9 | Bit 8 | Bit 7   | Bit 6 | Bit 5  | Bit 4 | Bit 3 | Bit 2 | Bit 1   | Bit 0 | All Resets          |
|-----------|------|--------|--------|-----------|--------|--------|-----------|-------|-------|---------|-------|--------|-------|-------|-------|---------|-------|---------------------|
| RCON      | 0740 | TRAPR  | IOPUWR | —         | —      | —      | —         | —     | VREGS | EXTR    | SWR   | SWDTEN | WDTO  | SLEEP | IDLE  | BOR     | POR   | xxxx <sup>(1)</sup> |
| OSCCON    | 0742 | —      | —      | COSC<2:0> | —      | —      | NOSC<2:0> | —     | —     | CLKLOCK | —     | LOCK   | —     | CF    | —     | LPOSCEN | OSWEN | 0300 <sup>(2)</sup> |
| CLKDIV    | 0744 | ROI    | —      | DOZE<2:0> | —      | DOZEN  | —         | —     | —     | —       | —     | —      | —     | —     | —     | —       | —     | 3040                |
| PLLFBD    | 0746 | —      | —      | —         | —      | —      | —         | —     | —     | —       | —     | —      | —     | —     | —     | —       | —     | 3040                |
| OSCTUN    | 0748 | —      | —      | —         | —      | —      | —         | —     | —     | —       | —     | —      | —     | —     | —     | —       | —     | 0030                |
|           |      |        |        |           |        |        |           |       |       |         |       |        |       |       |       |         |       | 0000                |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**Note 1:** RCON register Reset values dependent on type of Reset.

**2:** OSCCON register Reset values dependent on the FOSC Configuration bits and by type of Reset.

**TABLE 4-32: NVM REGISTER MAP**

| File Name | Addr | Bit 15 | Bit 14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | All Resets          |
|-----------|------|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|---------------------|
| NVMCON    | 0760 | WR     | WREN   | WRERR  | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | 0000 <sup>(1)</sup> |
| NVMKEY    | 0766 | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     | —     | —     | 0000                |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

**Note 1:** Reset value shown is for POR only. Value on other Reset states is dependent on the state of memory write or erase operations at the time of Reset.

**TABLE 4-33: PMD REGISTER MAP**

| File Name | Addr | Bit 15 | Bit 14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7  | Bit 6 | Bit 5 | Bit 4  | Bit 3  | Bit 2 | Bit 1  | Bit 0 | All Resets |
|-----------|------|--------|--------|--------|--------|--------|--------|-------|-------|--------|-------|-------|--------|--------|-------|--------|-------|------------|
| PMD1      | 0770 | T5MD   | T4MD   | T3MD   | T2MD   | T1MD   | —      | —     | —     | I2C1MD | U2MD  | U1MD  | SPI2MD | SPI1MD | C2MD  | C1MD   | AD1MD | 0000       |
| PMD2      | 0772 | IC8MD  | IC7MD  | IC6MD  | IC5MD  | IC4MD  | IC3MD  | IC2MD | IC1MD | OC8MD  | OC7MD | OC6MD | OC5MD  | OC4MD  | OC3MD | OC2MD  | OC1MD | 0000       |
| PMD3      | 0774 | T9MD   | T8MD   | T7MD   | T6MD   | —      | —      | —     | —     | —      | —     | —     | —      | —      | —     | I2C2MD | AD2MD | 0000       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal for PinHigh devices.

# PIC24HJXXXGPX06/X08/X10

## 4.2.6 SOFTWARE STACK

In addition to its use as a working register, the W15 register in the PIC24HJXXXGPX06/X08/X10 devices is also used as a software Stack Pointer. The Stack Pointer always points to the first available free word and grows from lower to higher addresses. It pre-decrements for stack pops and post-increments for stack pushes, as shown in Figure 4-5. For a PC push during any `CALL` instruction, the MSB of the PC is zero-extended before the push, ensuring that the MSB is always clear.


**Note:** A PC push during exception processing concatenates the SRL register to the MSB of the PC prior to the push.

The Stack Pointer Limit register (SPLIM) associated with the Stack Pointer sets an upper address boundary for the stack. SPLIM is uninitialized at Reset. As is the case for the Stack Pointer, SPLIM<0> is forced to '0' because all stack operations must be word-aligned. Whenever an EA is generated using W15 as a source or destination pointer, the resulting address is compared with the value in SPLIM. If the contents of the Stack Pointer (W15) and the SPLIM register are equal and a push operation is performed, a stack error trap will not occur. The stack error trap will occur on a subsequent push operation. Thus, for example, if it is desirable to cause a stack error trap when the stack grows beyond address 0x2000 in RAM, initialize the SPLIM with the value 0x1FFE.

Similarly, a Stack Pointer underflow (stack error) trap is generated when the Stack Pointer address is found to be less than 0x0800. This prevents the stack from interfering with the Special Function Register (SFR) space.

A write to the SPLIM register should not be immediately followed by an indirect read operation using W15.

**FIGURE 4-5: CALL STACK FRAME**

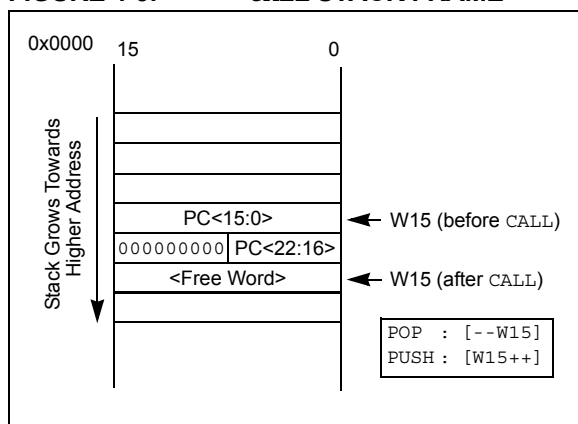

## 4.2.7 DATA RAM PROTECTION FEATURE

The PIC24H product family supports Data RAM protection features that enable segments of RAM to be protected when used in conjunction with Boot and Secure Code Segment Security. BSRAM (Secure RAM segment for BS) is accessible only from the Boot Segment Flash code, when enabled. SSRAM (Secure RAM segment for RAM) is accessible only from the Secure Segment Flash code, when enabled. See Table 4-1 for an overview of the BSRAM and SSRAM SFRs.

## 4.3 Instruction Addressing Modes

The addressing modes in Table 4-34 form the basis of the addressing modes optimized to support the specific features of individual instructions. The addressing modes provided in the `MAC` class of instructions are somewhat different from those in the other instruction types.

### 4.3.1 FILE REGISTER INSTRUCTIONS

Most file register instructions use a 13-bit address field (f) to directly address data present in the first 8192 bytes of data memory (Near Data Space). Most file register instructions employ a working register, W0, which is denoted as WREG in these instructions. The destination is typically either the same file register or WREG (with the exception of the `MUL` instruction), which writes the result to a register or register pair. The `MOV` instruction allows additional flexibility and can access the entire data space.

### 4.3.2 MCU INSTRUCTIONS

The 3-operand MCU instructions are of the form:

Operand 3 = Operand 1 <function> Operand 2

where Operand 1 is always a working register (i.e., the addressing mode can only be Register Direct) which is referred to as Wb. Operand 2 can be a W register, fetched from data memory, or a 5-bit literal. The result location can be either a W register or a data memory location. The following addressing modes are supported by MCU instructions:

- Register Direct
- Register Indirect
- Register Indirect Post-Modified
- Register Indirect Pre-Modified
- 5-bit or 10-bit Literal

**Note:** Not all instructions support all the addressing modes given above. Individual instructions may support different subsets of these addressing modes.

**TABLE 4-34: FUNDAMENTAL ADDRESSING MODES SUPPORTED**

| Addressing Mode                        | Description                                                                                            |
|----------------------------------------|--------------------------------------------------------------------------------------------------------|
| File Register Direct                   | The address of the file register is specified explicitly.                                              |
| Register Direct                        | The contents of a register are accessed directly.                                                      |
| Register Indirect                      | The contents of Wn forms the EA.                                                                       |
| Register Indirect Post-Modified        | The contents of Wn forms the EA. Wn is post-modified (incremented or decremented) by a constant value. |
| Register Indirect Pre-Modified         | Wn is pre-modified (incremented or decremented) by a signed constant value to form the EA.             |
| Register Indirect with Register Offset | The sum of Wn and Wb forms the EA.                                                                     |
| Register Indirect with Literal Offset  | The sum of Wn and a literal forms the EA.                                                              |

## 4.3.3 MOVE INSTRUCTIONS

Move instructions provide a greater degree of addressing flexibility than other instructions. In addition to the Addressing modes supported by most MCU instructions, move instructions also support Register Indirect with Register Offset Addressing mode, also referred to as Register Indexed mode.

**Note:** For the MOV instructions, the Addressing mode specified in the instruction can differ for the source and destination EA. However, the 4-bit Wb (Register Offset) field is shared between both source and destination (but typically only used by one).

In summary, the following Addressing modes are supported by move instructions:

- Register Direct
- Register Indirect
- Register Indirect Post-modified
- Register Indirect Pre-modified
- Register Indirect with Register Offset (Indexed)
- Register Indirect with Literal Offset
- 8-bit Literal
- 16-bit Literal

**Note:** Not all instructions support all the Addressing modes given above. Individual instructions may support different subsets of these Addressing modes.

## 4.3.4 OTHER INSTRUCTIONS

Besides the various addressing modes outlined above, some instructions use literal constants of various sizes. For example, BRA (branch) instructions use 16-bit signed literals to specify the branch destination directly, whereas the DISI instruction uses a 14-bit unsigned literal field. In some instructions, the source of an operand or result is implied by the opcode itself. Certain operations, such as NOP, do not have any operands.

## 4.4 Interfacing Program and Data Memory Spaces

The PIC24HJXXXGPX06/X08/X10 architecture uses a 24-bit wide program space and a 16-bit wide data space. The architecture is also a modified Harvard scheme, meaning that data can also be present in the program space. To use this data successfully, it must be accessed in a way that preserves the alignment of information in both spaces.

Aside from normal execution, the PIC24HJXXXGPX06/X08/X10 architecture provides two methods by which program space can be accessed during operation:

- Using table instructions to access individual bytes or words anywhere in the program space
- Remapping a portion of the program space into the data space (Program Space Visibility)

Table instructions allow an application to read or write to small areas of the program memory. This capability makes the method ideal for accessing data tables that need to be updated from time to time. It also allows access to all bytes of the program word. The remapping method allows an application to access a large block of data on a read-only basis, which is ideal for look ups from a large table of static data. It can only access the least significant word of the program word.

### 4.4.1 ADDRESSING PROGRAM SPACE

Since the address ranges for the data and program spaces are 16 and 24 bits, respectively, a method is needed to create a 23-bit or 24-bit program address from 16-bit data registers. The solution depends on the interface method to be used.

For table operations, the 8-bit Table Page register (TBLPAG) is used to define a 32K word region within the program space. This is concatenated with a 16-bit EA to arrive at a full 24-bit program space address. In this format, the Most Significant bit of TBLPAG is used to determine if the operation occurs in the user memory (TBLPAG<7> = 0) or the configuration memory (TBLPAG<7> = 1).

# PIC24HJXXXGPX06/X08/X10

For remapping operations, the 8-bit Program Space Visibility register (PSVPAG) is used to define a 16K word page in the program space. When the Most Significant bit of the EA is '1', PSVPAG is concatenated with the lower 15 bits of the EA to form a 23-bit program space address. Unlike table operations, this limits remapping operations strictly to the user memory area.


Table 4-35 and Figure 4-6 show how the program EA is created for table operations and remapping accesses from the data EA. Here, P<23:0> refers to a program space word, whereas D<15:0> refers to a data space word.

**TABLE 4-35: PROGRAM SPACE ADDRESS CONSTRUCTION**

| Access Type                                    | Access Space  | Program Space Address                           |                                                |               |                              |     |
|------------------------------------------------|---------------|-------------------------------------------------|------------------------------------------------|---------------|------------------------------|-----|
|                                                |               | <23>                                            | <22:16>                                        | <15>          | <14:1>                       | <0> |
| Instruction Access<br>(Code Execution)         | User          | 0                                               | PC<22:1>                                       |               |                              | 0   |
|                                                |               | 0xxx   xxxx   xxxx   xxxx   xxxx   xxx0         |                                                |               |                              |     |
| TBLRD/TBLWT<br>(Byte/Word Read/Write)          | User          | TBLPAG<7:0>                                     |                                                | Data EA<15:0> |                              |     |
|                                                |               | 0xxx   xxxx           xxxx   xxxx   xxxx   xxxx |                                                |               |                              |     |
|                                                | Configuration | TBLPAG<7:0>                                     |                                                | Data EA<15:0> |                              |     |
|                                                |               | 1xxx   xxxx           xxxx   xxxx   xxxx   xxxx |                                                |               |                              |     |
| Program Space Visibility<br>(Block Remap/Read) | User          | 0                                               | PSVPAG<7:0>                                    |               | Data EA<14:0> <sup>(1)</sup> |     |
|                                                |               | 0                                               | xxxx   xxxx           xxx   xxxx   xxxx   xxxx |               |                              |     |

**Note 1:** Data EA<15> is always '1' in this case, but is not used in calculating the program space address. Bit 15 of the address is PSVPAG<0>.

**FIGURE 4-6: DATA ACCESS FROM PROGRAM SPACE ADDRESS GENERATION**

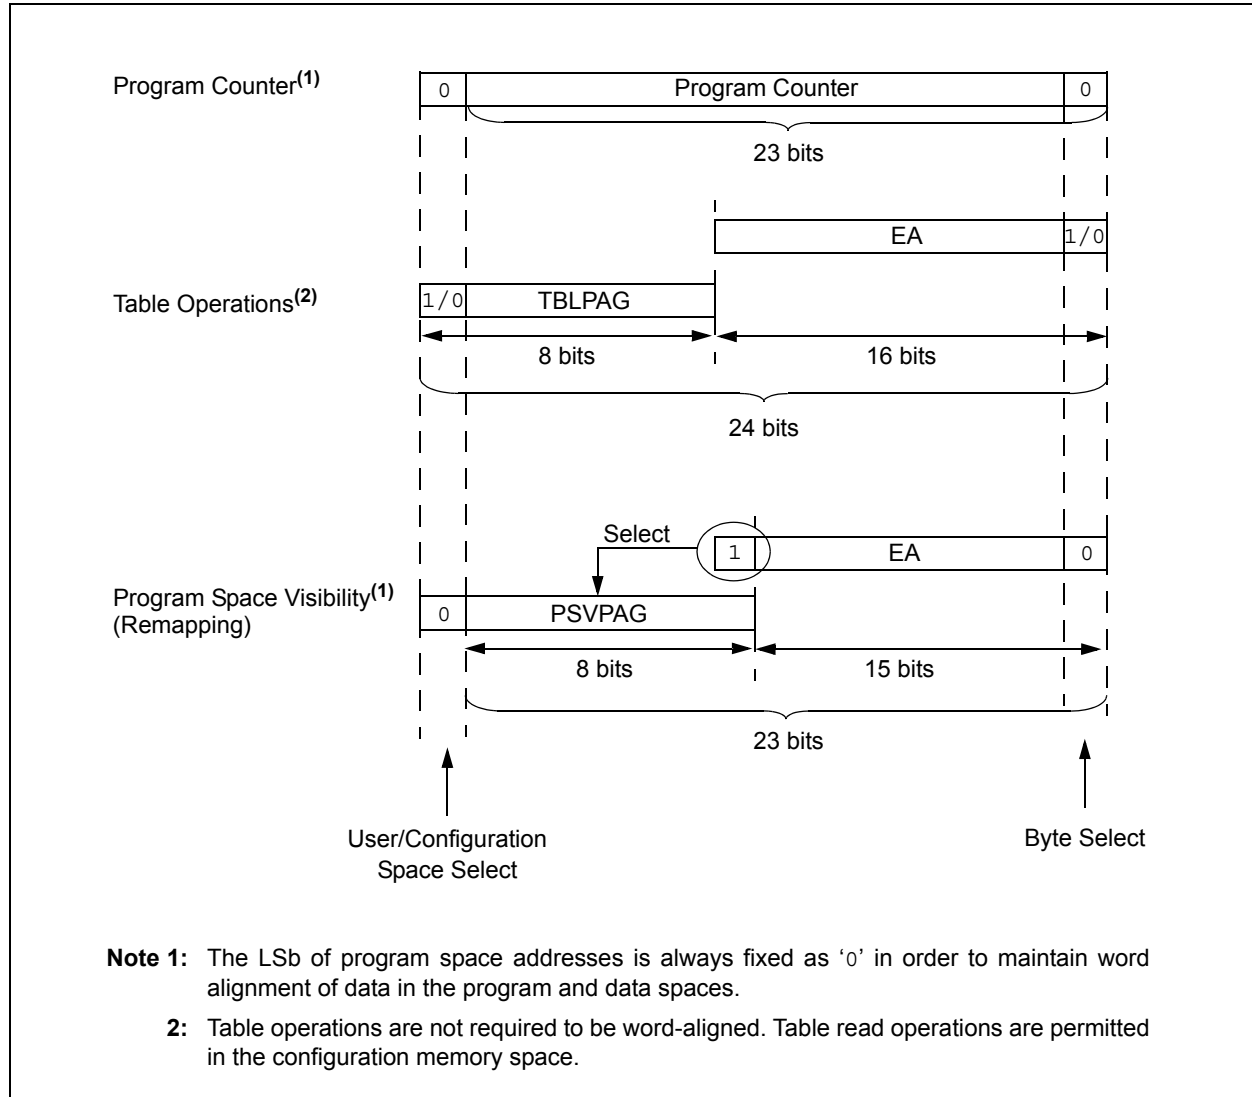

# PIC24HJXXXGPX06/X08/X10

## 4.4.2 DATA ACCESS FROM PROGRAM MEMORY USING TABLE INSTRUCTIONS

The **TBLRDL** and **TBLWTL** instructions offer a direct method of reading or writing the lower word of any address within the program space without going through data space. The **TBLRDH** and **TBLWTH** instructions are the only method to read or write the upper 8 bits of a program space word as data.

The PC is incremented by two for each successive 24-bit program word. This allows program memory addresses to directly map to data space addresses. Program memory can thus be regarded as two 16-bit, word wide address spaces, residing side by side, each with the same address range. **TBLRDL** and **TBLWTL** access the space which contains the least significant data word and **TBLRDH** and **TBLWTH** access the space which contains the upper data byte.

Two table instructions are provided to move byte or word sized (16-bit) data to and from program space. Both function as either byte or word operations.

1. **TBLRDL** (Table Read Low): In Word mode, it maps the lower word of the program space location ( $P<15:0>$ ) to a data address ( $D<15:0>$ ).

In Byte mode, either the upper or lower byte of the lower program word is mapped to the lower byte of a data address. The upper byte is selected when Byte Select is '1'; the lower byte is selected when it is '0'.


2. **TBLRDH** (Table Read High): In Word mode, it maps the entire upper word of a program address ( $P<23:16>$ ) to a data address. Note that  $D<15:8>$ , the 'phantom byte', will always be '0'.

In Byte mode, it maps the upper or lower byte of the program word to  $D<7:0>$  of the data address, as above. Note that the data will always be '0' when the upper 'phantom' byte is selected (Byte Select = 1).

In a similar fashion, two table instructions, **TBLWTH** and **TBLWTL**, are used to write individual bytes or words to a program space address. The details of their operation are explained in **Section 5.0 "Flash Program Memory"**.

For all table operations, the area of program memory space to be accessed is determined by the Table Page register (**TBLPAG**). **TBLPAG** covers the entire program memory space of the device, including user and configuration spaces. When **TBLPAG<7>** = 0, the table page is located in the user memory space. When **TBLPAG<7>** = 1, the page is located in configuration space.

**FIGURE 4-7: ACCESSING PROGRAM MEMORY WITH TABLE INSTRUCTIONS**

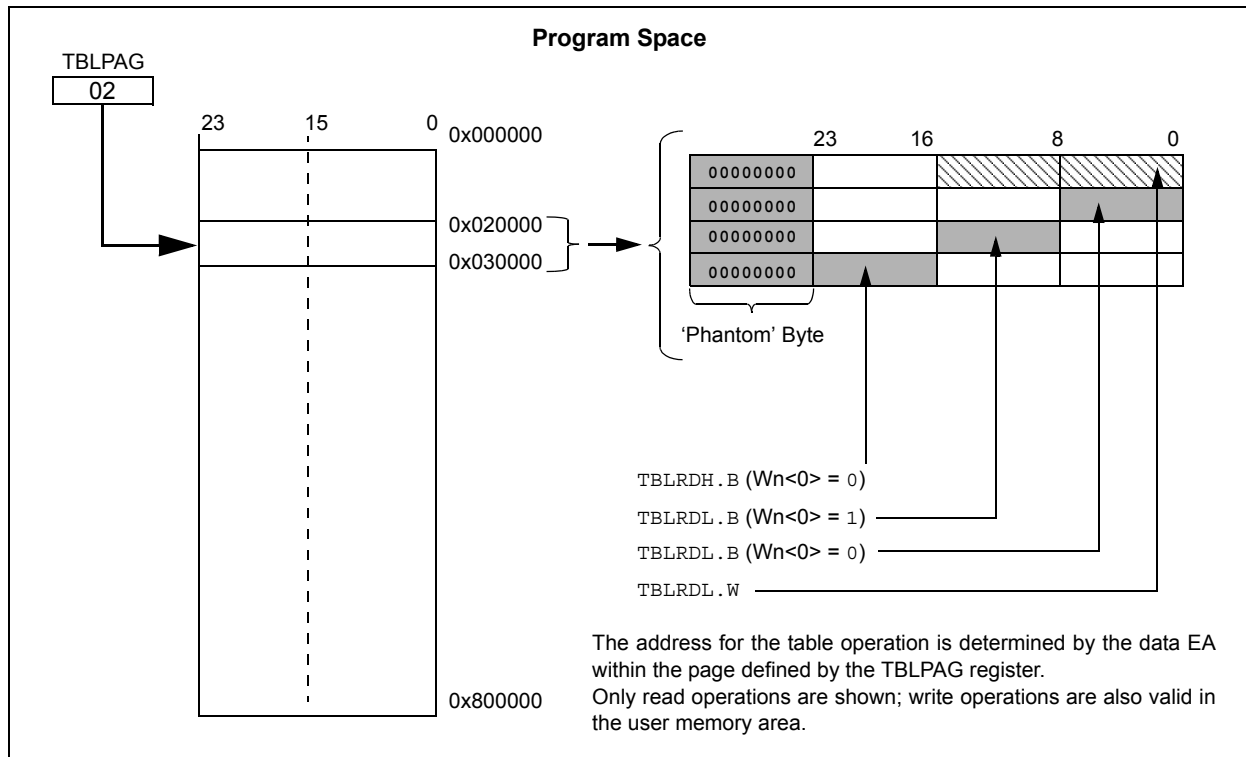

## 4.4.3 READING DATA FROM PROGRAM MEMORY USING PROGRAM SPACE VISIBILITY

The upper 32 Kbytes of data space may optionally be mapped into any 16K word page of the program space. This option provides transparent access of stored constant data from the data space without the need to use special instructions (i.e., `TBLRDH/H`).

Program space access through the data space occurs if the Most Significant bit of the data space EA is '1' and program space visibility is enabled by setting the PSV bit in the Core Control register (`CORCON<2>`). The location of the program memory space to be mapped into the data space is determined by the Program Space Visibility Page register (`PSVPAG`). This 8-bit register defines any one of 256 possible pages of 16K words in program space. In effect, `PSVPAG` functions as the upper 8 bits of the program memory address, with the 15 bits of the EA functioning as the lower bits. Note that by incrementing the PC by 2 for each program memory word, the lower 15 bits of data space addresses directly map to the lower 15 bits in the corresponding program space addresses.

Data reads to this area add an additional cycle to the instruction being executed, since two program memory fetches are required.

Although each data space address, 8000h and higher, maps directly into a corresponding program memory address (see Figure 4-8), only the lower 16 bits of the

24-bit program word are used to contain the data. The upper 8 bits of any program space location used as data should be programmed with '1111 1111' or '0000 0000' to force a NOP. This prevents possible issues should the area of code ever be accidentally executed.

**Note:** PSV access is temporarily disabled during table reads/writes.


For operations that use PSV and are executed outside a `REPEAT` loop, the `MOV` and `MOV.D` instructions require one instruction cycle in addition to the specified execution time. All other instructions require two instruction cycles in addition to the specified execution time.

For operations that use PSV, which are executed inside a `REPEAT` loop, there will be some instances that require two instruction cycles in addition to the specified execution time of the instruction:

- Execution in the first iteration
- Execution in the last iteration
- Execution prior to exiting the loop due to an interrupt
- Execution upon re-entering the loop after an interrupt is serviced

Any other iteration of the `REPEAT` loop will allow the instruction accessing data, using PSV, to execute in a single cycle.

**FIGURE 4-8: PROGRAM SPACE VISIBILITY OPERATION**

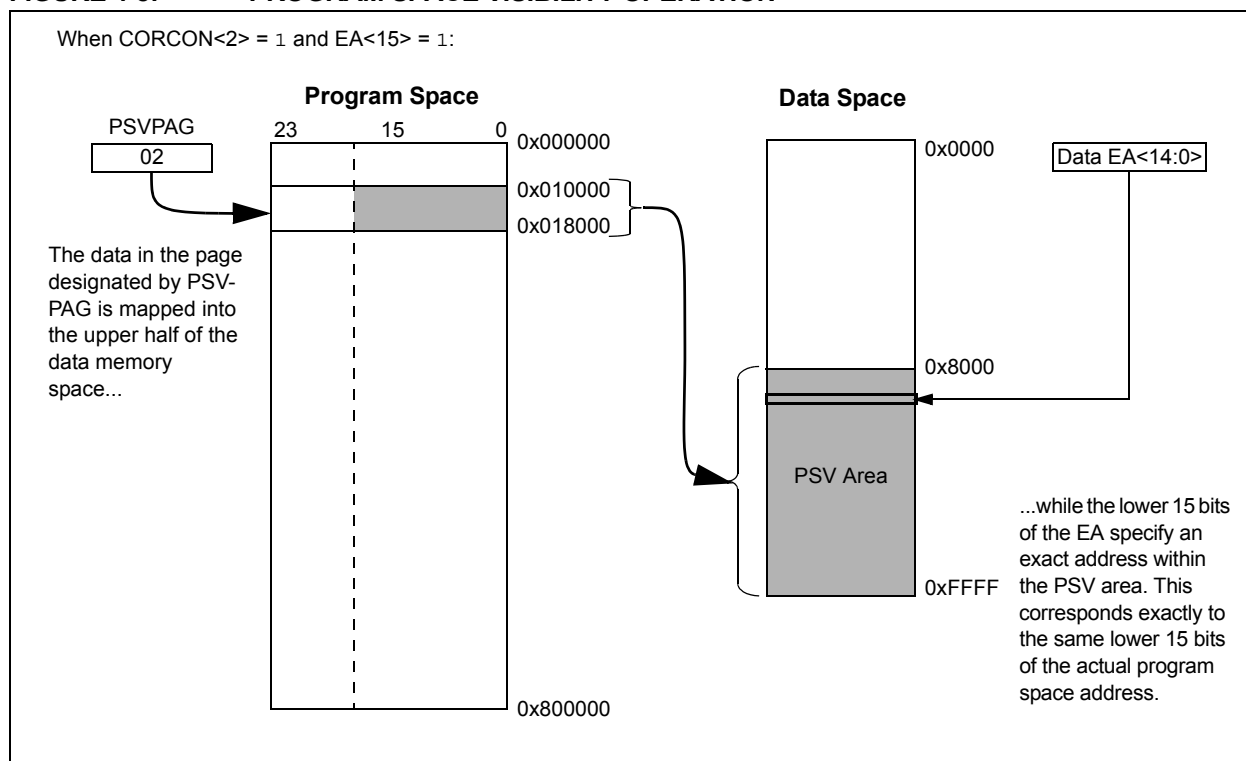

# PIC24HJXXXGPX06/X08/X10

---

NOTES:

## 5.0 FLASH PROGRAM MEMORY

**Note:** This data sheet summarizes the features of the PIC24HJXXXGPX06/X08/X10 family of devices. However, it is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the “PIC24H Family Reference Manual”, **Section 5. “Flash Programming”** (DS70228), which is available from the Microchip website ([www.microchip.com](http://www.microchip.com)).

The PIC24HJXXXGPX06/X08/X10 devices contain internal Flash program memory for storing and executing application code. The memory is readable, writable and erasable during normal operation over the entire VDD range.

Flash memory can be programmed in two ways:

1. In-Circuit Serial Programming™ (ICSP™) programming capability
2. Run-Time Self-Programming (RTSP)

ICSP programming capability allows a PIC24HJXXXGPX06/X08/X10 device to be serially programmed while in the end application circuit. This is simply done with two lines for programming clock and programming data (one of the alternate programming pin pairs: PGECx/PGEDx, and three other lines for power (VDD), ground (VSS) and Master Clear (MCLR). This allows customers to manufacture boards with unprogrammed devices and then program the digital

signal controller just before shipping the product. This also allows the most recent firmware or a custom firmware to be programmed.

RTSP is accomplished using TBLRD (table read) and TBLWT (table write) instructions. With RTSP, the user can write program memory data either in blocks or ‘rows’ of 64 instructions (192 bytes) at a time, or single instructions and erase program memory in blocks or ‘pages’ of 512 instructions (1536 bytes) at a time.


### 5.1 Table Instructions and Flash Programming

Regardless of the method used, all programming of Flash memory is done with the table read and table write instructions. These allow direct read and write access to the program memory space from the data memory while the device is in normal operating mode. The 24-bit target address in the program memory is formed using bits<7:0> of the TBLPAG register and the Effective Address (EA) from a W register specified in the table instruction, as shown in Figure 5-1.

The TBLRDL and the TBLWTL instructions are used to read or write to bits<15:0> of program memory. TBLRDL and TBLWTL can access program memory in both Word and Byte modes.

The TBLRDH and TBLWTH instructions are used to read or write to bits<23:16> of program memory. TBLRDH and TBLWTH can also access program memory in Word or Byte mode.

**FIGURE 5-1: ADDRESSING FOR TABLE REGISTERS**

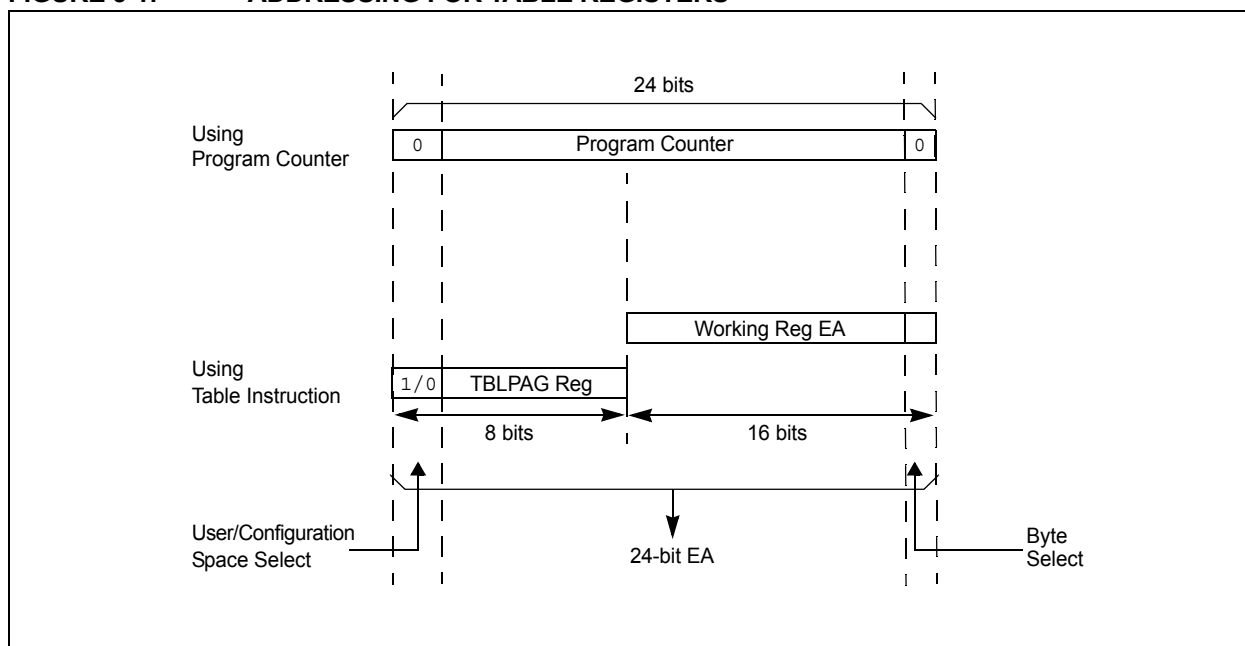

## 5.2 RTSP Operation

The PIC24HJXXXGPX06/X08/X10 Flash program memory array is organized into rows of 64 instructions or 192 bytes. RTSP allows the user to erase a page of memory, which consists of eight rows (512 instructions) at a time, and to program one row or one word at a time. Table 24-12 displays typical erase and programming times. The 8-row erase pages and single row write rows are edge-aligned, from the beginning of program memory, on boundaries of 1536 bytes and 192 bytes, respectively.

The program memory implements holding buffers that can contain 64 instructions of programming data. Prior to the actual programming operation, the write data must be loaded into the buffers in sequential order. The instruction words loaded must always be from a group of 64 boundary.

The basic sequence for RTSP programming is to set up a Table Pointer, then do a series of TBLWT instructions to load the buffers. Programming is performed by setting the control bits in the NVMCON register. A total of 64 TBLWTL and TBLWTH instructions are required to load the instructions.

All of the table write operations are single-word writes (two instruction cycles) because only the buffers are written. A programming cycle is required for programming each row.

## 5.3 Programming Operations

A complete programming sequence is necessary for programming or erasing the internal Flash in RTSP mode. The processor stalls (waits) until the programming operation is finished.

The programming time depends on the FRC accuracy (see Table 24-19) and the value of the FRC Oscillator Tuning register (see Register 9-4). Use the following formula to calculate the minimum and maximum values for the Row Write Time, Page Erase Time and Word Write Cycle Time parameters (see Table 24-12).

### EQUATION 5-1: PROGRAMMING TIME

$$\frac{T}{7.37 \text{ MHz} \times (\text{FRC Accuracy})\% \times (\text{FRC Tuning})\%}$$

For example, if the device is operating at +85°C, the FRC accuracy will be ±2%. If the TUN<5:0> bits (see Register 9-4) are set to 'b111111, the Minimum Row Write Time is:

$$T_{RW} = \frac{11064 \text{ Cycles}}{7.37 \text{ MHz} \times (1 + 0.02) \times (1 - 0.00375)} = 1.48 \text{ ms}$$

and, the Maximum Row Write Time is:

$$T_{RW} = \frac{11064 \text{ Cycles}}{7.37 \text{ MHz} \times (1 - 0.02) \times (1 - 0.00375)} = 1.54 \text{ ms}$$

Setting the WR bit (NVMCON<15>) starts the operation, and the WR bit is automatically cleared when the operation is finished.

## 5.4 Control Registers

There are two SFRs used to read and write the program Flash memory: NVMCON and NVMKEY.

The NVMCON register (Register 5-1) controls which blocks are to be erased, which memory type is to be programmed and the start of the programming cycle.

NVMKEY is a write-only register that is used for write protection. To start a programming or erase sequence, the user must consecutively write 0x55 and 0xAA to the NVMKEY register. Refer to **Section 5.3 “Programming Operations”** for further details.

# PIC24HJXXXGPX06/X08/X10

## REGISTER 5-1: NVMCON: FLASH MEMORY CONTROL REGISTER

| R/SO-0 <sup>(1)</sup> | R/W-0 <sup>(1)</sup> | R/W-0 <sup>(1)</sup> | U-0 | U-0 | U-0 | U-0 | U-0   |
|-----------------------|----------------------|----------------------|-----|-----|-----|-----|-------|
| WR                    | WREN                 | WRERR                | —   | —   | —   | —   | —     |
| bit 15                |                      |                      |     |     |     |     | bit 8 |

| U-0   | R/W-0 <sup>(1)</sup> | U-0 | U-0 | R/W-0 <sup>(1)</sup>      | R/W-0 <sup>(1)</sup> | R/W-0 <sup>(1)</sup> | R/W-0 <sup>(1)</sup> |
|-------|----------------------|-----|-----|---------------------------|----------------------|----------------------|----------------------|
| —     | ERASE                | —   | —   | NVMOP<3:0> <sup>(2)</sup> |                      |                      |                      |
| bit 7 |                      |     |     |                           |                      |                      | bit 0                |

|                   |                                    |
|-------------------|------------------------------------|
| <b>Legend:</b>    | SO = Settable only bit             |
| R = Readable bit  | W = Writable bit                   |
| -n = Value at POR | '1' = Bit is set                   |
|                   | U = Unimplemented bit, read as '0' |
|                   | '0' = Bit is cleared               |
|                   | x = Bit is unknown                 |

- bit 15 **WR:** Write Control bit
- 1 = Initiates a Flash memory program or erase operation. The operation is self-timed and the bit is cleared by hardware once operation is complete.
  - 0 = Program or erase operation is complete and inactive
- bit 14 **WREN:** Write Enable bit
- 1 = Enable Flash program/erase operations
  - 0 = Inhibit Flash program/erase operations
- bit 13 **WRERR:** Write Sequence Error Flag bit
- 1 = An improper program or erase sequence attempt or termination has occurred (bit is set automatically on any set attempt of the WR bit)
  - 0 = The program or erase operation completed normally
- bit 12-7 **Unimplemented:** Read as '0'
- bit 6 **ERASE:** Erase/Program Enable bit
- 1 = Perform the erase operation specified by NVMOP<3:0> on the next WR command
  - 0 = Perform the program operation specified by NVMOP<3:0> on the next WR command
- bit 5-4 **Unimplemented:** Read as '0'
- bit 3-0 **NVMOP<3:0>:** NVM Operation Select bits<sup>(2)</sup>
- 1111 = Memory bulk erase operation (ERASE = 1) or no operation (ERASE = 0)
  - 1110 = Reserved
  - 1101 = Erase General Segment and FGS Configuration Register (ERASE = 1) or no operation (ERASE = 0)
  - 1100 = Erase Secure Segment and FSS Configuration Register (ERASE = 1) or no operation (ERASE = 0)
  - 1011-0100 = Reserved
  - 0011 = Memory word program operation (ERASE = 0) or no operation (ERASE = 1)
  - 0010 = Memory page erase operation (ERASE = 1) or no operation (ERASE = 0)
  - 0001 = Memory row program operation (ERASE = 0) or no operation (ERASE = 1)
  - 0000 = Program or erase a single Configuration register byte

**Note 1:** These bits can only be reset on POR.

**2:** All other combinations of NVMOP<3:0> are unimplemented.

# PIC24HJXXXGPX06/X08/X10

## 5.4.1 PROGRAMMING ALGORITHM FOR FLASH PROGRAM MEMORY

The user can program one row of program Flash memory at a time. To do this, it is necessary to erase the 8-row erase page that contains the desired row. The general process is:

1. Read eight rows of program memory (512 instructions) and store in data RAM.
2. Update the program data in RAM with the desired new data.
3. Erase the page (see Example 5-1):
  - a) Set the NVMOP bits (NVMCON<3:0>) to '0010' to configure for block erase. Set the ERASE (NVMCON<6>) and WREN (NVMCON<14>) bits.
  - b) Write the starting address of the page to be erased into the TBLPAG and W registers.
  - c) Perform a dummy table write operation (TBLWTL) to any address within the page that needs to be erased.
  - d) Write 0x55 to NVMKEY.
  - e) Write 0xAA to NVMKEY.
  - f) Set the WR bit (NVMCON<15>). The erase cycle begins and the CPU stalls for the duration of the erase cycle. When the erase is done, the WR bit is cleared automatically.
4. Write the first 64 instructions from data RAM into the program memory buffers (see Example 5-2).
5. Write the program block to Flash memory:
  - a) Set the NVMOP bits to '0001' to configure for row programming. Clear the ERASE bit and set the WREN bit.
  - b) Write 0x55 to NVMKEY.
  - c) Write 0xAA to NVMKEY.
  - d) Set the WR bit. The programming cycle begins and the CPU stalls for the duration of the write cycle. When the write to Flash memory is done, the WR bit is cleared automatically.
6. Repeat steps 4 and 5, using the next available 64 instructions from the block in data RAM by incrementing the value in TBLPAG, until all 512 instructions are written back to Flash memory.

For protection against accidental operations, the write initiate sequence for NVMKEY must be used to allow any erase or program operation to proceed. After the programming command has been executed, the user must wait for the programming time until programming is complete. The two instructions following the start of the programming sequence should be NOPs, as shown in Example 5-3.

### EXAMPLE 5-1: ERASING A PROGRAM MEMORY PAGE

```
; Set up NVMCON for block erase operation
MOV    #0x4042, W0
MOV    W0, NVMCON
; Init pointer to row to be ERASED
MOV    #tblpage(PROG_ADDR), W0
MOV    W0, TBLPAG
MOV    #tbloffset(PROG_ADDR), W0
TBLWTL W0, [W0]
DISI   #5
MOV    #0x55, W0
MOV    W0, NVMKEY
MOV    #0xAA, W1
MOV    W1, NVMKEY
BSET   NVMCON, #WR
NOP
NOP
```

; Initialize NVMCON  
; Initialize PM Page Boundary SFR  
; Initialize in-page EA<15:0> pointer  
; Set base address of erase block  
; Block all interrupts with priority <7  
; for next 5 instructions  
; Write the 55 key  
; Write the AA key  
; Start the erase sequence  
; Insert two NOPs after the erase  
; command is asserted

**Note:** A program memory page erase operation is set up by performing a dummy table write (TBLWTL) operation to any address within the page. This methodology is different from the page erase operation on dsPIC30F/33F devices in which the erase page was selected using a dedicated pair of registers (NVMADRU and NVMADR).

## EXAMPLE 5-2: LOADING THE WRITE BUFFERS

```
; Set up NVMCON for row programming operations
MOV    #0x4001, W0                ;
MOV    W0, NVMCON                 ; Initialize NVMCON
; Set up a pointer to the first program memory location to be written
; program memory selected, and writes enabled
MOV    #0x0000, W0                ;
MOV    W0, TBLPAG                 ; Initialize PM Page Boundary SFR
MOV    #0x6000, W0                ; An example program memory address
; Perform the TBLWT instructions to write the latches
; 0th_program_word
MOV    #LOW_WORD_0, W2            ;
MOV    #HIGH_BYTE_0, W3          ;
TBLWTL W2, [W0]                  ; Write PM low word into program latch
TBLWTH W3, [W0++]                ; Write PM high byte into program latch
; 1st_program_word
MOV    #LOW_WORD_1, W2            ;
MOV    #HIGH_BYTE_1, W3          ;
TBLWTL W2, [W0]                  ; Write PM low word into program latch
TBLWTH W3, [W0++]                ; Write PM high byte into program latch
; 2nd_program_word
MOV    #LOW_WORD_2, W2            ;
MOV    #HIGH_BYTE_2, W3          ;
TBLWTL W2, [W0]                  ; Write PM low word into program latch
TBLWTH W3, [W0++]                ; Write PM high byte into program latch
.
.
.
; 63rd_program_word
MOV    #LOW_WORD_31, W2           ;
MOV    #HIGH_BYTE_31, W3         ;
TBLWTL W2, [W0]                  ; Write PM low word into program latch
TBLWTH W3, [W0++]                ; Write PM high byte into program latch
```

## EXAMPLE 5-3: INITIATING A PROGRAMMING SEQUENCE

```
DISI    #5                        ; Block all interrupts with priority <7
                                           ; for next 5 instructions
MOV     #0x55, W0
MOV     W0, NVMKEY                 ; Write the 55 key
MOV     #0xAA, W1
MOV     W1, NVMKEY                 ; Write the AA key
BSET    NVMCON, #WR                ; Start the erase sequence
NOP                                           ; Insert two NOPs after the
NOP                                           ; erase command is asserted
```

# PIC24HJXXXGPX06/X08/X10

---

NOTES:

## 6.0 RESET

**Note:** This data sheet summarizes the features of the PIC24HJXXXGPX06/X08/X10 family of devices. However, it is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the “PIC24H Family Reference Manual”, **Section 8. “Reset”** (DS70229), which is available from the Microchip website ([www.microchip.com](http://www.microchip.com)).

The Reset module combines all Reset sources and controls the device Master Reset Signal,  $\overline{\text{SYSRST}}$ . The following is a list of device Reset sources:

- POR: Power-on Reset
- BOR: Brown-out Reset
- $\overline{\text{MCLR}}$ : Master Clear Pin Reset
- SWR: RESET Instruction
- WDT: Watchdog Timer Reset
- TRAPR: Trap Conflict Reset
- IOPUWR: Illegal Opcode and Uninitialized W Register Reset

A simplified block diagram of the Reset module is shown in Figure 6-1.

Any active source of Reset will make the  $\overline{\text{SYSRST}}$  signal active. Many registers associated with the CPU and peripherals are forced to a known Reset state. Most registers are unaffected by a Reset; their status is unknown on POR and unchanged by all other Resets.


**Note:** Refer to the specific peripheral or CPU section of this manual for register Reset states.

All types of device Reset will set a corresponding status bit in the RCON register to indicate the type of Reset (see Register 6-1). A POR will clear all bits, except for the POR bit (RCON<0>), that are set. The user can set or clear any bit at any time during code execution. The RCON bits only serve as status bits. Setting a particular Reset status bit in software does not cause a device Reset to occur.

The RCON register also has other bits associated with the Watchdog Timer and device power-saving states. The function of these bits is discussed in other sections of this manual.

**Note:** The status bits in the RCON register should be cleared after they are read so that the next RCON register value after a device Reset will be meaningful.

**FIGURE 6-1: RESET SYSTEM BLOCK DIAGRAM**

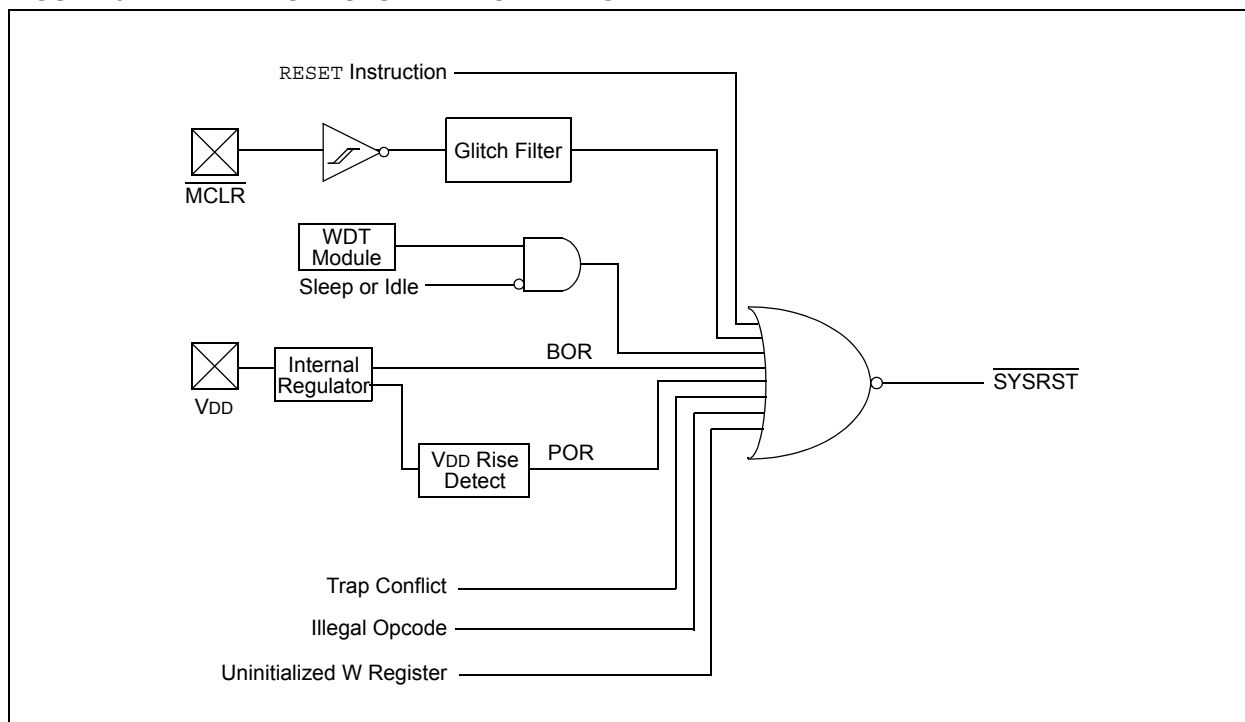

# PIC24HJXXXGPX06/X08/X10

**REGISTER 6-1: RCON: RESET CONTROL REGISTER<sup>(1)</sup>**

| R/W-0  | R/W-0  | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 |
|--------|--------|-----|-----|-----|-----|-----|-------|
| TRAPR  | IOPUWR | —   | —   | —   | —   | —   | VREGS |
| bit 15 |        |     |     |     |     |     | bit 8 |

| R/W-0 | R/W-0 | R/W-0                 | R/W-0 | R/W-0 | R/W-0 | R/W-1 | R/W-1 |
|-------|-------|-----------------------|-------|-------|-------|-------|-------|
| EXTR  | SWR   | SWDTEN <sup>(2)</sup> | WDTO  | SLEEP | IDLE  | BOR   | POR   |
| bit 7 |       |                       |       |       |       |       | bit 0 |

**Legend:**

R = Readable bit  
-n = Value at POR

W = Writable bit  
'1' = Bit is set

U = Unimplemented bit, read as '0'  
'0' = Bit is cleared  
x = Bit is unknown

- bit 15 **TRAPR:** Trap Reset Flag bit  
1 = A Trap Conflict Reset has occurred  
0 = A Trap Conflict Reset has not occurred
- bit 14 **IOPUWR:** Illegal Opcode or Uninitialized W Access Reset Flag bit  
1 = An illegal opcode detection, an illegal address mode or uninitialized W register used as an Address Pointer caused a Reset  
0 = An illegal opcode or uninitialized W Reset has not occurred
- bit 13-9 **Unimplemented:** Read as '0'
- bit 8 **VREGS:** Voltage Regulator Standby During Sleep bit  
1 = Voltage regulator is active during Sleep  
0 = Voltage regulator goes into Standby mode during Sleep
- bit 7 **EXTR:** External Reset ( $\overline{\text{MCLR}}$ ) Pin bit  
1 = A Master Clear (pin) Reset has occurred  
0 = A Master Clear (pin) Reset has not occurred
- bit 6 **SWR:** Software Reset (Instruction) Flag bit  
1 = A RESET instruction has been executed  
0 = A RESET instruction has not been executed
- bit 5 **SWDTEN:** Software Enable/Disable of WDT bit<sup>(2)</sup>  
1 = WDT is enabled  
0 = WDT is disabled
- bit 4 **WDTO:** Watchdog Timer Time-out Flag bit  
1 = WDT time-out has occurred  
0 = WDT time-out has not occurred
- bit 3 **SLEEP:** Wake-up from Sleep Flag bit  
1 = Device has been in Sleep mode  
0 = Device has not been in Sleep mode
- bit 2 **IDLE:** Wake-up from Idle Flag bit  
1 = Device was in Idle mode  
0 = Device was not in Idle mode
- bit 1 **BOR:** Brown-out Reset Flag bit  
1 = A Brown-out Reset has occurred  
0 = A Brown-out Reset has not occurred
- bit 0 **POR:** Power-on Reset Flag bit  
1 = A Power-on Reset has occurred  
0 = A Power-on Reset has not occurred

**Note 1:** All of the Reset status bits may be set or cleared in software. Setting one of these bits in software does not cause a device Reset.

**2:** If the FWDTEN Configuration bit is '1' (unprogrammed), the WDT is always enabled, regardless of the SWDTEN bit setting.

**TABLE 6-1: RESET FLAG BIT OPERATION**

| Flag Bit          | Setting Event                                     | Clearing Event              |
|-------------------|---------------------------------------------------|-----------------------------|
| TRAPR (RCON<15>)  | Trap conflict event                               | POR, BOR                    |
| IOPUWR (RCON<14>) | Illegal opcode or uninitialized W register access | POR, BOR                    |
| EXTR (RCON<7>)    | MCLR Reset                                        | POR                         |
| SWR (RCON<6>)     | RESET instruction                                 | POR, BOR                    |
| WDTO (RCON<4>)    | WDT time-out                                      | PWRSV instruction, POR, BOR |
| SLEEP (RCON<3>)   | PWRSV #SLEEP instruction                          | POR, BOR                    |
| IDLE (RCON<2>)    | PWRSV #IDLE instruction                           | POR, BOR                    |
| BOR (RCON<1>)     | BOR, POR                                          | —                           |
| POR (RCON<0>)     | POR                                               | —                           |

**Note:** All Reset flag bits may be set or cleared by the user software.

## 6.1 Clock Source Selection at Reset

If clock switching is enabled, the system clock source at device Reset is chosen, as shown in Table 6-2. If clock switching is disabled, the system clock source is always selected according to the oscillator Configuration bits. Refer to **Section 9.0 “Oscillator Configuration”** for further details.

**TABLE 6-2: OSCILLATOR SELECTION vs. TYPE OF RESET (CLOCK SWITCHING ENABLED)**

| Reset Type | Clock Source Determinant                   |
|------------|--------------------------------------------|
| POR        | Oscillator Configuration bits (FNOSC<2:0>) |
| BOR        |                                            |
| MCLR       | COSC Control bits (OSCCON<14:12>)          |
| WDTR       |                                            |
| SWR        |                                            |

## 6.2 Device Reset Times

The Reset times for various types of device Reset are summarized in Table 6-3. The system Reset signal is released after the POR and PWRT delay times expire.

The time at which the device actually begins to execute code also depends on the system oscillator delays, which include the Oscillator Start-up Timer (OST) and the PLL lock time. The OST and PLL lock times occur in parallel with the applicable reset delay times.

The FSCM delay determines the time at which the FSCM begins to monitor the system clock source after the reset signal is released.

# PIC24HJXXXGPX06/X08/X10

**TABLE 6-3: RESET DELAY TIMES FOR VARIOUS DEVICE RESETS**

| Reset Type      | Clock Source  | SYSRST Delay           | System Clock Delay | FSCM Delay | Notes            |
|-----------------|---------------|------------------------|--------------------|------------|------------------|
| POR             | EC, FRC, LPRC | TPOR + TSTARTUP + TRST | —                  | —          | 1, 2, 3          |
|                 | ECPLL, FRCPLL | TPOR + TSTARTUP + TRST | TLOCK              | TFSCM      | 1, 2, 3, 5, 6    |
|                 | XT, HS, SOSC  | TPOR + TSTARTUP + TRST | TOST               | TFSCM      | 1, 2, 3, 4, 6    |
|                 | XTPLL, HSPLL  | TPOR + TSTARTUP + TRST | TOST + TLOCK       | TFSCM      | 1, 2, 3, 4, 5, 6 |
| MCLR            | Any Clock     | TRST                   | —                  | —          | 3                |
| WDT             | Any Clock     | TRST                   | —                  | —          | 3                |
| Software        | Any clock     | TRST                   | —                  | —          | 3                |
| Illegal Opcode  | Any Clock     | TRST                   | —                  | —          | 3                |
| Uninitialized W | Any Clock     | TRST                   | —                  | —          | 3                |
| Trap Conflict   | Any Clock     | TRST                   | —                  | —          | 3                |

**Note 1:** TPOR = Power-on Reset delay (10  $\mu$ s nominal).

**2:** TSTARTUP = Conditional POR delay of 20  $\mu$ s nominal (if on-chip regulator is enabled) or 64 ms nominal Power-up Timer delay (if regulator is disabled). TSTARTUP is also applied to all returns from powered-down states, including waking from Sleep mode, only if the regulator is enabled.

**3:** TRST = Internal state Reset time (20  $\mu$ s nominal).

**4:** TOST = Oscillator Start-up Timer. A 10-bit counter counts 1024 oscillator periods before releasing the oscillator clock to the system.

**5:** TLOCK = PLL lock time (20  $\mu$ s nominal).

**6:** TFSCM = Fail-Safe Clock Monitor delay (100  $\mu$ s nominal).

## 6.2.1 POR AND LONG OSCILLATOR START-UP TIMES

The oscillator start-up circuitry and its associated delay timers are not linked to the device Reset delays that occur at power-up. Some crystal circuits (especially low-frequency crystals) have a relatively long start-up time. Therefore, one or more of the following conditions is possible after the Reset signal is released:

- The oscillator circuit has not begun to oscillate.
- The Oscillator Start-up Timer has not expired (if a crystal oscillator is used).
- The PLL has not achieved a lock (if PLL is used).

The device will not begin to execute code until a valid clock source has been released to the system. Therefore, the oscillator and PLL start-up delays must be considered when the Reset delay time must be known.

## 6.2.2 FAIL-SAFE CLOCK MONITOR (FSCM) AND DEVICE RESETS

If the FSCM is enabled, it begins to monitor the system clock source when the Reset signal is released. If a valid clock source is not available at this time, the device automatically switches to the FRC oscillator and the user can switch to the desired crystal oscillator in the Trap Service Routine.

## 6.2.2.1 FSCM Delay for Crystal and PLL Clock Sources

When the system clock source is provided by a crystal oscillator and/or the PLL, a small delay, TFSCM, is automatically inserted after the POR and PWRT delay times. The FSCM does not begin to monitor the system clock source until this delay expires. The FSCM delay time is nominally 500  $\mu$ s and provides additional time for the oscillator and/or PLL to stabilize. In most cases, the FSCM delay prevents an oscillator failure trap at a device Reset when the PWRT is disabled.

## 6.3 Special Function Register Reset States

Most of the Special Function Registers (SFRs) associated with the CPU and peripherals are reset to a particular value at a device Reset. The SFRs are grouped by their peripheral or CPU function and their Reset values are specified in each section of this manual.

The Reset value for each SFR does not depend on the type of Reset, with the exception of two registers. The Reset value for the Reset Control register, RCON, depends on the type of device Reset. The Reset value for the Oscillator Control register, OSCCON, depends on the type of Reset and the programmed values of the oscillator Configuration bits in the FOSC Configuration register.

## 7.0 INTERRUPT CONTROLLER

**Note:** This data sheet summarizes the features of the PIC24HJXXXGPX06/X08/X10 family of devices. However, it is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the “PIC24H Family Reference Manual”, **Section 6. “Interrupts”** (DS70224), which is available from the Microchip website ([www.microchip.com](http://www.microchip.com)).

The PIC24HJXXXGPX06/X08/X10 interrupt controller reduces the numerous peripheral interrupt request signals to a single interrupt request signal to the PIC24HJXXXGPX06/X08/X10 CPU. It has the following features:

- Up to 8 processor exceptions and software traps
- 7 user-selectable priority levels
- Interrupt Vector Table (IVT) with up to 118 vectors
- A unique vector for each interrupt or exception source
- Fixed priority within a specified user priority level
- Alternate Interrupt Vector Table (AIVT) for debug support
- Fixed interrupt entry and return latencies

### 7.1 Interrupt Vector Table

The Interrupt Vector Table (IVT) is shown in Figure 7-1. The IVT resides in program memory, starting at location 000004h. The IVT contains 126 vectors consisting of 8 nonmaskable trap vectors plus up to 118 sources of interrupt. In general, each interrupt source has its own vector. Each interrupt vector contains a 24-bit wide address. The value programmed into each interrupt vector location is the starting address of the associated Interrupt Service Routine (ISR).

Interrupt vectors are prioritized in terms of their natural priority; this priority is linked to their position in the vector table. All other things being equal, lower addresses have a higher natural priority. For example, the interrupt associated with vector 0 will take priority over interrupts at any other vector address.

PIC24HJXXXGPX06/X08/X10 devices implement up to 61 unique interrupts and 5 nonmaskable traps. These are summarized in Table 7-1 and Table 7-2.

### 7.1.1 ALTERNATE VECTOR TABLE

The Alternate Interrupt Vector Table (AIVT) is located after the IVT, as shown in Figure 7-1. Access to the AIVT is provided by the ALTIVT control bit (INTCON2<15>). If the ALTIVT bit is set, all interrupt and exception processes use the alternate vectors instead of the default vectors. The alternate vectors are organized in the same manner as the default vectors.

The AIVT supports debugging by providing a means to switch between an application and a support environment without requiring the interrupt vectors to be reprogrammed. This feature also enables switching between applications for evaluation of different software algorithms at run time. If the AIVT is not needed, the AIVT should be programmed with the same addresses used in the IVT.


## 7.2 Reset Sequence

A device Reset is not a true exception because the interrupt controller is not involved in the Reset process. The PIC24HJXXXGPX06/X08/X10 device clears its registers in response to a Reset which forces the PC to zero. The digital signal controller then begins program execution at location 0x000000. The user programs a GOTO instruction at the Reset address which redirects program execution to the appropriate start-up routine.

**Note:** Any unimplemented or unused vector locations in the IVT and AIVT should be programmed with the address of a default interrupt handler routine that contains a RESET instruction.

# PIC24HJXXXGPX06/X08/X10

FIGURE 7-1: PIC24HJXXXGPX06/X08/X10 INTERRUPT VECTOR TABLE

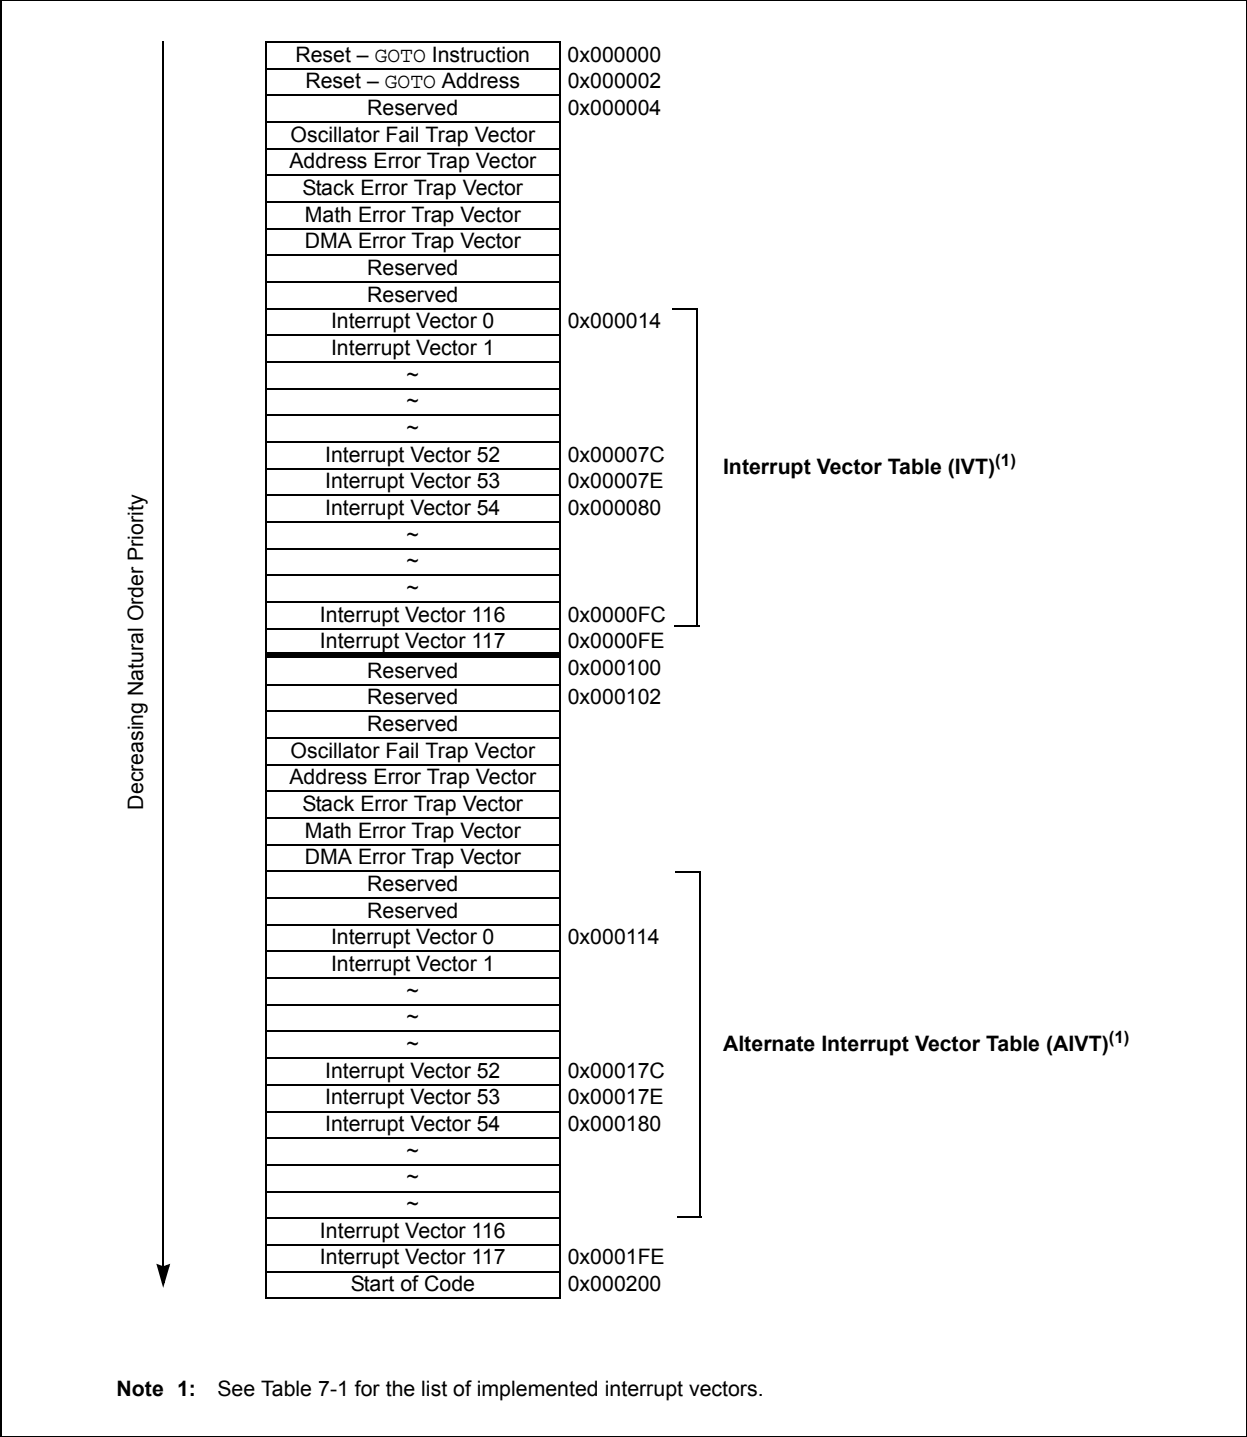

# PIC24HJXXXGPX06/X08/X10

**TABLE 7-1: INTERRUPT VECTORS**

| Vector Number | Interrupt Request (IRQ) Number | IVT Address | AIVT Address | Interrupt Source                     |
|---------------|--------------------------------|-------------|--------------|--------------------------------------|
| 8             | 0                              | 0x000014    | 0x000114     | INT0 – External Interrupt 0          |
| 9             | 1                              | 0x000016    | 0x000116     | IC1 – Input Compare 1                |
| 10            | 2                              | 0x000018    | 0x000118     | OC1 – Output Compare 1               |
| 11            | 3                              | 0x00001A    | 0x00011A     | T1 – Timer1                          |
| 12            | 4                              | 0x00001C    | 0x00011C     | DMA0 – DMA Channel 0                 |
| 13            | 5                              | 0x00001E    | 0x00011E     | IC2 – Input Capture 2                |
| 14            | 6                              | 0x000020    | 0x000120     | OC2 – Output Compare 2               |
| 15            | 7                              | 0x000022    | 0x000122     | T2 – Timer2                          |
| 16            | 8                              | 0x000024    | 0x000124     | T3 – Timer3                          |
| 17            | 9                              | 0x000026    | 0x000126     | SPI1E – SPI1 Error                   |
| 18            | 10                             | 0x000028    | 0x000128     | SPI1 – SPI1 Transfer Done            |
| 19            | 11                             | 0x00002A    | 0x00012A     | U1RX – UART1 Receiver                |
| 20            | 12                             | 0x00002C    | 0x00012C     | U1TX – UART1 Transmitter             |
| 21            | 13                             | 0x00002E    | 0x00012E     | ADC1 – Analog-to-Digital Converter 1 |
| 22            | 14                             | 0x000030    | 0x000130     | DMA1 – DMA Channel 1                 |
| 23            | 15                             | 0x000032    | 0x000132     | Reserved                             |
| 24            | 16                             | 0x000034    | 0x000134     | SI2C1 – I2C1 Slave Events            |
| 25            | 17                             | 0x000036    | 0x000136     | MI2C1 – I2C1 Master Events           |
| 26            | 18                             | 0x000038    | 0x000138     | Reserved                             |
| 27            | 19                             | 0x00003A    | 0x00013A     | CN - Change Notification Interrupt   |
| 28            | 20                             | 0x00003C    | 0x00013C     | INT1 – External Interrupt 1          |
| 29            | 21                             | 0x00003E    | 0x00013E     | ADC2 – Analog-to-Digital Converter 2 |
| 30            | 22                             | 0x000040    | 0x000140     | IC7 – Input Capture 7                |
| 31            | 23                             | 0x000042    | 0x000142     | IC8 – Input Capture 8                |
| 32            | 24                             | 0x000044    | 0x000144     | DMA2 – DMA Channel 2                 |
| 33            | 25                             | 0x000046    | 0x000146     | OC3 – Output Compare 3               |
| 34            | 26                             | 0x000048    | 0x000148     | OC4 – Output Compare 4               |
| 35            | 27                             | 0x00004A    | 0x00014A     | T4 – Timer4                          |
| 36            | 28                             | 0x00004C    | 0x00014C     | T5 – Timer5                          |
| 37            | 29                             | 0x00004E    | 0x00014E     | INT2 – External Interrupt 2          |
| 38            | 30                             | 0x000050    | 0x000150     | U2RX – UART2 Receiver                |
| 39            | 31                             | 0x000052    | 0x000152     | U2TX – UART2 Transmitter             |
| 40            | 32                             | 0x000054    | 0x000154     | SPI2E – SPI2 Error                   |
| 41            | 33                             | 0x000056    | 0x000156     | SPI1 – SPI1 Transfer Done            |
| 42            | 34                             | 0x000058    | 0x000158     | C1RX – ECAN1 Receive Data Ready      |
| 43            | 35                             | 0x00005A    | 0x00015A     | C1 – ECAN1 Event                     |
| 44            | 36                             | 0x00005C    | 0x00015C     | DMA3 – DMA Channel 3                 |
| 45            | 37                             | 0x00005E    | 0x00015E     | IC3 – Input Capture 3                |
| 46            | 38                             | 0x000060    | 0x000160     | IC4 – Input Capture 4                |
| 47            | 39                             | 0x000062    | 0x000162     | IC5 – Input Capture 5                |
| 48            | 40                             | 0x000064    | 0x000164     | IC6 – Input Capture 6                |
| 49            | 41                             | 0x000066    | 0x000166     | OC5 – Output Compare 5               |
| 50            | 42                             | 0x000068    | 0x000168     | OC6 – Output Compare 6               |
| 51            | 43                             | 0x00006A    | 0x00016A     | OC7 – Output Compare 7               |
| 52            | 44                             | 0x00006C    | 0x00016C     | OC8 – Output Compare 8               |
| 53            | 45                             | 0x00006E    | 0x00016E     | Reserved                             |

# PIC24HJXXXGPX06/X08/X10

**TABLE 7-1: INTERRUPT VECTORS (CONTINUED)**

| Vector Number | Interrupt Request (IRQ) Number | IVT Address           | AIVT Address          | Interrupt Source                   |
|---------------|--------------------------------|-----------------------|-----------------------|------------------------------------|
| 54            | 46                             | 0x000070              | 0x000170              | DMA4 – DMA Channel 4               |
| 55            | 47                             | 0x000072              | 0x000172              | T6 – Timer6                        |
| 56            | 48                             | 0x000074              | 0x000174              | T7 – Timer7                        |
| 57            | 49                             | 0x000076              | 0x000176              | SI2C2 – I2C2 Slave Events          |
| 58            | 50                             | 0x000078              | 0x000178              | MI2C2 – I2C2 Master Events         |
| 59            | 51                             | 0x00007A              | 0x00017A              | T8 – Timer8                        |
| 60            | 52                             | 0x00007C              | 0x00017C              | T9 – Timer9                        |
| 61            | 53                             | 0x00007E              | 0x00017E              | INT3 – External Interrupt 3        |
| 62            | 54                             | 0x000080              | 0x000180              | INT4 – External Interrupt 4        |
| 63            | 55                             | 0x000082              | 0x000182              | C2RX – ECAN2 Receive Data Ready    |
| 64            | 56                             | 0x000084              | 0x000184              | C2 – ECAN2 Event                   |
| 65-68         | 57-60                          | 0x000086-<br>0x00008C | 0x000186-<br>0x00018C | Reserved                           |
| 69            | 61                             | 0x00008E              | 0x00018E              | DMA5 – DMA Channel 5               |
| 70-72         | 62-64                          | 0x000090-<br>0x000094 | 0x000190-<br>0x000194 | Reserved                           |
| 73            | 65                             | 0x000096              | 0x000196              | U1E – UART1 Error                  |
| 74            | 66                             | 0x000098              | 0x000198              | U2E – UART2 Error                  |
| 75            | 67                             | 0x00009A              | 0x00019A              | Reserved                           |
| 76            | 68                             | 0x00009C              | 0x00019C              | DMA6 – DMA Channel 6               |
| 77            | 69                             | 0x00009E              | 0x00019E              | DMA7 – DMA Channel 7               |
| 78            | 70                             | 0x0000A0              | 0x0001A0              | C1TX – ECAN1 Transmit Data Request |
| 79            | 71                             | 0x0000A2              | 0x0001A2              | C2TX – ECAN2 Transmit Data Request |
| 80-125        | 72-117                         | 0x0000A4-<br>0x0000FE | 0x0001A4-<br>0x0001FE | Reserved                           |

**TABLE 7-2: TRAP VECTORS**

| Vector Number | IVT Address | AIVT Address | Trap Source        |
|---------------|-------------|--------------|--------------------|
| 0             | 0x000004    | 0x000104     | Reserved           |
| 1             | 0x000006    | 0x000106     | Oscillator Failure |
| 2             | 0x000008    | 0x000108     | Address Error      |
| 3             | 0x00000A    | 0x00010A     | Stack Error        |
| 4             | 0x00000C    | 0x00010C     | Math Error         |
| 5             | 0x00000E    | 0x00010E     | DMA Error Trap     |
| 6             | 0x000010    | 0x000110     | Reserved           |
| 7             | 0x000012    | 0x000112     | Reserved           |

## 7.3 Interrupt Control and Status Registers

PIC24HJXXXGPX06/X08/X10 devices implement a total of 30 registers for the interrupt controller:

- INTCON1
- INTCON2
- IFS0 through IFS4
- IEC0 through IEC4
- IPC0 through IPC17
- INTTREG

Global interrupt control functions are controlled from INTCON1 and INTCON2. INTCON1 contains the Interrupt Nesting Disable (NSTDIS) bit as well as the control and status flags for the processor trap sources. The INTCON2 register controls the external interrupt request signal behavior and the use of the Alternate Interrupt Vector Table.

The IFS registers maintain all of the interrupt request flags. Each source of interrupt has a Status bit, which is set by the respective peripherals or external signal and is cleared via software.

The IEC registers maintain all of the interrupt enable bits. These control bits are used to individually enable interrupts from the peripherals or external signals.

The IPC registers are used to set the interrupt priority level for each source of interrupt. Each user interrupt source can be assigned to one of eight priority levels.

The INTTREG register contains the associated interrupt vector number and the new CPU interrupt priority level, which are latched into vector number (VEC- $\text{NUM}<6:0>$ ) and Interrupt level (ILR<3:0>) bit fields in the INTTREG register. The new interrupt priority level is the priority of the pending interrupt.

The interrupt sources are assigned to the IFSx, IECx and IPCx registers in the same sequence that they are listed in Table 7-1. For example, the INT0 (External Interrupt 0) is shown as having vector number 8 and a natural order priority of 0. Thus, the INT0IF bit is found in IFS0<0>, the INT0IE bit in IEC0<0>, and the INT0IP bits in the first position of IPC0 (IPC0<2:0>).

Although they are not specifically part of the interrupt control hardware, two of the CPU Control registers contain bits that control interrupt functionality. The CPU STATUS register, SR, contains the IPL<2:0> bits (SR<7:5>). These bits indicate the current CPU interrupt priority level. The user can change the current CPU priority level by writing to the IPL bits.

The CORCON register contains the IPL3 bit which, together with IPL<2:0>, also indicates the current CPU priority level. IPL3 is a read-only bit so that trap events cannot be masked by the user software.

All Interrupt registers are described in **Register 7-1, SR: CPU Status Register<sup>(1)</sup>** through **Register 7-32, IPC17: Interrupt Priority Control Register 17**, in the following pages.

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-1: SR: CPU STATUS REGISTER<sup>(1)</sup>

|        |     |     |     |     |     |     |       |
|--------|-----|-----|-----|-----|-----|-----|-------|
| U-0    | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 |
| —      | —   | —   | —   | —   | —   | —   | DC    |
| bit 15 |     |     |     |     |     |     | bit 8 |

|                      |                      |                      |     |       |       |       |       |
|----------------------|----------------------|----------------------|-----|-------|-------|-------|-------|
| R/W-0 <sup>(3)</sup> | R/W-0 <sup>(3)</sup> | R/W-0 <sup>(3)</sup> | R-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| IPL2 <sup>(2)</sup>  | IPL1 <sup>(2)</sup>  | IPL0 <sup>(2)</sup>  | RA  | N     | OV    | Z     | C     |
| bit 7                |                      |                      |     |       |       |       | bit 0 |

### Legend:

|                    |                      |                                    |
|--------------------|----------------------|------------------------------------|
| C = Clear only bit | R = Readable bit     | U = Unimplemented bit, read as '0' |
| S = Set only bit   | W = Writable bit     | -n = Value at POR                  |
| '1' = Bit is set   | '0' = Bit is cleared | x = Bit is unknown                 |

bit 7-5 **IPL<2:0>**: CPU Interrupt Priority Level Status bits<sup>(2)</sup>

111 = CPU Interrupt Priority Level is 7 (15), user interrupts disabled  
 110 = CPU Interrupt Priority Level is 6 (14)  
 101 = CPU Interrupt Priority Level is 5 (13)  
 100 = CPU Interrupt Priority Level is 4 (12)  
 011 = CPU Interrupt Priority Level is 3 (11)  
 010 = CPU Interrupt Priority Level is 2 (10)  
 001 = CPU Interrupt Priority Level is 1 (9)  
 000 = CPU Interrupt Priority Level is 0 (8)

**Note 1:** For complete register details, see **Register 3-1, SR: CPU STATUS Register**.

**2:** The IPL<2:0> bits are concatenated with the IPL<3> bit (CORCON<3>) to form the CPU Interrupt Priority Level. The value in parentheses indicates the IPL if IPL<3> = 1. User interrupts are disabled when IPL<3> = 1.

**3:** The IPL<2:0> Status bits are read-only when NSTDIS (INTCON1<15>) = 1.

## REGISTER 7-2: CORCON: CORE CONTROL REGISTER<sup>(1)</sup>

|        |     |     |     |     |     |     |       |
|--------|-----|-----|-----|-----|-----|-----|-------|
| U-0    | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0   |
| —      | —   | —   | —   | —   | —   | —   | —     |
| bit 15 |     |     |     |     |     |     | bit 8 |

|       |     |     |     |                     |       |     |       |
|-------|-----|-----|-----|---------------------|-------|-----|-------|
| U-0   | U-0 | U-0 | U-0 | R/C-0               | R/W-0 | U-0 | U-0   |
| —     | —   | —   | —   | IPL3 <sup>(2)</sup> | PSV   | —   | —     |
| bit 7 |     |     |     |                     |       |     | bit 0 |

### Legend:

|                      |                      |                                    |                   |                  |
|----------------------|----------------------|------------------------------------|-------------------|------------------|
| C = Clear only bit   | R = Readable bit     | W = Writable bit                   | -n = Value at POR | '1' = Bit is set |
| '0' = Bit is cleared | 'x' = Bit is unknown | U = Unimplemented bit, read as '0' |                   |                  |

bit 3 **IPL3**: CPU Interrupt Priority Level Status bit 3<sup>(2)</sup>

1 = CPU interrupt priority level is greater than 7  
 0 = CPU interrupt priority level is 7 or less

**Note 1:** For complete register details, see **Register 3-2, CORCON: CORE Control Register**.

**2:** The IPL3 bit is concatenated with the IPL<2:0> bits (SR<7:5>) to form the CPU Interrupt Priority Level.

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-3: INTCON1: INTERRUPT CONTROL REGISTER 1

|        |     |     |     |     |     |     |       |
|--------|-----|-----|-----|-----|-----|-----|-------|
| R/W-0  | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0   |
| NSTDIS | —   | —   | —   | —   | —   | —   | —     |
| bit 15 |     |     |     |     |     |     | bit 8 |

|       |         |         |         |         |        |         |       |
|-------|---------|---------|---------|---------|--------|---------|-------|
| U-0   | R/W-0   | R/W-0   | R/W-0   | R/W-0   | R/W-0  | R/W-0   | U-0   |
| —     | DIV0ERR | DMACERR | MATHERR | ADDRERR | STKERR | OSCFAIL | —     |
| bit 7 |         |         |         |         |        |         | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

- bit 15      **NSTDIS:** Interrupt Nesting Disable bit  
1 = Interrupt nesting is disabled  
0 = Interrupt nesting is enabled
- bit 14-7    **Unimplemented:** Read as '0'
- bit 6      **DIV0ERR:** Arithmetic Error Status bit  
1 = Math error trap was caused by a divide by zero  
0 = Math error trap was not caused by a divide by zero
- bit 5      **DMACERR:** DMA Controller Error Status bit  
1 = DMA controller error trap has occurred  
0 = DMA controller error trap has not occurred
- bit 4      **MATHERR:** Arithmetic Error Status bit  
1 = Math error trap has occurred  
0 = Math error trap has not occurred
- bit 3      **ADDRERR:** Address Error Trap Status bit  
1 = Address error trap has occurred  
0 = Address error trap has not occurred
- bit 2      **STKERR:** Stack Error Trap Status bit  
1 = Stack error trap has occurred  
0 = Stack error trap has not occurred
- bit 1      **OSCFAIL:** Oscillator Failure Trap Status bit  
1 = Oscillator failure trap has occurred  
0 = Oscillator failure trap has not occurred
- bit 0      **Unimplemented:** Read as '0'

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-4: INTCON2: INTERRUPT CONTROL REGISTER 2

|        |      |     |     |     |     |     |       |
|--------|------|-----|-----|-----|-----|-----|-------|
| R/W-0  | R-0  | U-0 | U-0 | U-0 | U-0 | U-0 | U-0   |
| ALTIVT | DISI | —   | —   | —   | —   | —   | —     |
| bit 15 |      |     |     |     |     |     | bit 8 |

|       |     |     |        |        |        |        |        |
|-------|-----|-----|--------|--------|--------|--------|--------|
| U-0   | U-0 | U-0 | R/W-0  | R/W-0  | R/W-0  | R/W-0  | R/W-0  |
| —     | —   | —   | INT4EP | INT3EP | INT2EP | INT1EP | INT0EP |
| bit 7 |     |     |        |        |        |        | bit 0  |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **ALTIVT:** Enable Alternate Interrupt Vector Table bit

1 = Use alternate vector table

0 = Use standard (default) vector table

bit 14 **DISI:** DISI Instruction Status bit

1 = DISI instruction is active

0 = DISI instruction is not active

bit 13-5 **Unimplemented:** Read as '0'

bit 4 **INT4EP:** External Interrupt 4 Edge Detect Polarity Select bit

1 = Interrupt on negative edge

0 = Interrupt on positive edge

bit 3 **INT3EP:** External Interrupt 3 Edge Detect Polarity Select bit

1 = Interrupt on negative edge

0 = Interrupt on positive edge

bit 2 **INT2EP:** External Interrupt 2 Edge Detect Polarity Select bit

1 = Interrupt on negative edge

0 = Interrupt on positive edge

bit 1 **INT1EP:** External Interrupt 1 Edge Detect Polarity Select bit

1 = Interrupt on negative edge

0 = Interrupt on positive edge

bit 0 **INT0EP:** External Interrupt 0 Edge Detect Polarity Select bit

1 = Interrupt on negative edge

0 = Interrupt on positive edge

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-5: IFS0: INTERRUPT FLAG STATUS REGISTER 0

|        |        |       |        |        |        |         |       |
|--------|--------|-------|--------|--------|--------|---------|-------|
| U-0    | R/W-0  | R/W-0 | R/W-0  | R/W-0  | R/W-0  | R/W-0   | R/W-0 |
| —      | DMA1IF | AD1IF | U1TXIF | U1RXIF | SPI1IF | SPI1EIF | T3IF  |
| bit 15 |        |       |        |        |        |         | bit 8 |

|       |       |       |         |       |       |       |        |
|-------|-------|-------|---------|-------|-------|-------|--------|
| R/W-0 | R/W-0 | R/W-0 | R/W-0   | R/W-0 | R/W-0 | R/W-0 | R/W-0  |
| T2IF  | OC2IF | IC2IF | DMA01IF | T1IF  | OC1IF | IC1IF | INT0IF |
| bit 7 |       |       |         |       |       |       | bit 0  |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

|        |                                                                                                                                                                |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| bit 15 | <b>Unimplemented:</b> Read as '0'                                                                                                                              |
| bit 14 | <b>DMA1IF:</b> DMA Channel 1 Data Transfer Complete Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred  |
| bit 13 | <b>AD1IF:</b> ADC1 Conversion Complete Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred               |
| bit 12 | <b>U1TXIF:</b> UART1 Transmitter Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred                     |
| bit 11 | <b>U1RXIF:</b> UART1 Receiver Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred                        |
| bit 10 | <b>SPI1IF:</b> SPI1 Event Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred                            |
| bit 9  | <b>SPI1EIF:</b> SPI1 Fault Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred                           |
| bit 8  | <b>T3IF:</b> Timer3 Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred                                  |
| bit 7  | <b>T2IF:</b> Timer2 Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred                                  |
| bit 6  | <b>OC2IF:</b> Output Compare Channel 2 Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred               |
| bit 5  | <b>IC2IF:</b> Input Capture Channel 2 Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred                |
| bit 4  | <b>DMA01IF:</b> DMA Channel 0 Data Transfer Complete Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred |
| bit 3  | <b>T1IF:</b> Timer1 Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred                                  |

# PIC24HJXXXGPX06/X08/X10

---

## REGISTER 7-5: IFS0: INTERRUPT FLAG STATUS REGISTER 0 (CONTINUED)

- bit 2      **OC1IF:** Output Compare Channel 1 Interrupt Flag Status bit  
1 = Interrupt request has occurred  
0 = Interrupt request has not occurred
- bit 1      **IC1IF:** Input Capture Channel 1 Interrupt Flag Status bit  
1 = Interrupt request has occurred  
0 = Interrupt request has not occurred
- bit 0      **INT0IF:** External Interrupt 0 Flag Status bit  
1 = Interrupt request has occurred  
0 = Interrupt request has not occurred

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-6: IFS1: INTERRUPT FLAG STATUS REGISTER 1

|        |        |        |       |       |       |       |         |
|--------|--------|--------|-------|-------|-------|-------|---------|
| R/W-0  | R/W-0  | R/W-0  | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0   |
| U2TXIF | U2RXIF | INT2IF | T5IF  | T4IF  | OC4IF | OC3IF | DMA21IF |
| bit 15 |        |        |       |       |       |       | bit 8   |

|       |       |       |        |       |     |         |         |
|-------|-------|-------|--------|-------|-----|---------|---------|
| R/W-0 | R/W-0 | R/W-0 | R/W-0  | R/W-0 | U-0 | R/W-0   | R/W-0   |
| IC8IF | IC7IF | AD2IF | INT1IF | CNIF  | —   | MI2C1IF | SI2C1IF |
| bit 7 |       |       |        |       |     |         | bit 0   |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

- bit 15      **U2TXIF:** UART2 Transmitter Interrupt Flag Status bit  
1 = Interrupt request has occurred  
0 = Interrupt request has not occurred
- bit 14      **U2RXIF:** UART2 Receiver Interrupt Flag Status bit  
1 = Interrupt request has occurred  
0 = Interrupt request has not occurred
- bit 13      **INT2IF:** External Interrupt 2 Flag Status bit  
1 = Interrupt request has occurred  
0 = Interrupt request has not occurred
- bit 12      **T5IF:** Timer5 Interrupt Flag Status bit  
1 = Interrupt request has occurred  
0 = Interrupt request has not occurred
- bit 11      **T4IF:** Timer4 Interrupt Flag Status bit  
1 = Interrupt request has occurred  
0 = Interrupt request has not occurred
- bit 10      **OC4IF:** Output Compare Channel 4 Interrupt Flag Status bit  
1 = Interrupt request has occurred  
0 = Interrupt request has not occurred
- bit 9        **OC3IF:** Output Compare Channel 3 Interrupt Flag Status bit  
1 = Interrupt request has occurred  
0 = Interrupt request has not occurred
- bit 8        **DMA21IF:** DMA Channel 2 Data Transfer Complete Interrupt Flag Status bit  
1 = Interrupt request has occurred  
0 = Interrupt request has not occurred
- bit 7        **IC8IF:** Input Capture Channel 8 Interrupt Flag Status bit  
1 = Interrupt request has occurred  
0 = Interrupt request has not occurred
- bit 6        **IC7IF:** Input Capture Channel 7 Interrupt Flag Status bit  
1 = Interrupt request has occurred  
0 = Interrupt request has not occurred
- bit 5        **AD2IF:** ADC2 Conversion Complete Interrupt Flag Status bit  
1 = Interrupt request has occurred  
0 = Interrupt request has not occurred
- bit 4        **INT1IF:** External Interrupt 1 Flag Status bit  
1 = Interrupt request has occurred  
0 = Interrupt request has not occurred

# PIC24HJXXXGPX06/X08/X10

---

## REGISTER 7-6: IFS1: INTERRUPT FLAG STATUS REGISTER 1 (CONTINUED)

|       |                                                                                                                                                  |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| bit 3 | <b>CNIF:</b> Input Change Notification Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred |
| bit 2 | <b>Unimplemented:</b> Read as '0'                                                                                                                |
| bit 1 | <b>MI2C1IF:</b> I2C1 Master Events Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred     |
| bit 0 | <b>SI2C1IF:</b> I2C1 Slave Events Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred      |

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-7: IFS2: INTERRUPT FLAG STATUS REGISTER 2

|        |        |     |       |       |       |       |       |
|--------|--------|-----|-------|-------|-------|-------|-------|
| R/W-0  | R/W-0  | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| T6IF   | DMA4IF | —   | OC8IF | OC7IF | OC6IF | OC5IF | IC6IF |
| bit 15 |        |     |       |       |       |       | bit 8 |

|       |       |       |        |       |        |        |         |
|-------|-------|-------|--------|-------|--------|--------|---------|
| R/W-0 | R/W-0 | R/W-0 | R/W-0  | R/W-0 | R/W-0  | R/W-0  | R/W-0   |
| IC5IF | IC4IF | IC3IF | DMA3IF | C1IF  | C1RXIF | SPI2IF | SPI2EIF |
| bit 7 |       |       |        |       |        |        | bit 0   |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

|        |                                                                                                                                                               |
|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| bit 15 | <b>T6IF:</b> Timer6 Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred                                 |
| bit 14 | <b>DMA4IF:</b> DMA Channel 4 Data Transfer Complete Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred |
| bit 13 | <b>Unimplemented:</b> Read as '0'                                                                                                                             |
| bit 12 | <b>OC8IF:</b> Output Compare Channel 8 Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred              |
| bit 11 | <b>OC7IF:</b> Output Compare Channel 7 Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred              |
| bit 10 | <b>OC6IF:</b> Output Compare Channel 6 Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred              |
| bit 9  | <b>OC5IF:</b> Output Compare Channel 5 Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred              |
| bit 8  | <b>IC6IF:</b> Input Capture Channel 6 Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred               |
| bit 7  | <b>IC5IF:</b> Input Capture Channel 5 Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred               |
| bit 6  | <b>IC4IF:</b> Input Capture Channel 4 Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred               |
| bit 5  | <b>IC3IF:</b> Input Capture Channel 3 Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred               |
| bit 4  | <b>DMA3IF:</b> DMA Channel 3 Data Transfer Complete Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred |
| bit 3  | <b>C1IF:</b> ECAN1 Event Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred                            |

# PIC24HJXXXGPX06/X08/X10

---

## REGISTER 7-7: IFS2: INTERRUPT FLAG STATUS REGISTER 2 (CONTINUED)

- bit 2      **C1RXIF:** ECAN1 Receive Data Ready Interrupt Flag Status bit  
1 = Interrupt request has occurred  
0 = Interrupt request has not occurred
- bit 1      **SPI2IF:** SPI2 Event Interrupt Flag Status bit  
1 = Interrupt request has occurred  
0 = Interrupt request has not occurred
- bit 0      **SPI2EIF:** SPI2 Error Interrupt Flag Status bit  
1 = Interrupt request has occurred  
0 = Interrupt request has not occurred

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-8: IFS3: INTERRUPT FLAG STATUS REGISTER 3

|        |     |        |     |     |     |     |       |
|--------|-----|--------|-----|-----|-----|-----|-------|
| U-0    | U-0 | R/W-0  | U-0 | U-0 | U-0 | U-0 | R/W-0 |
| —      | —   | DMA5IF | —   | —   | —   | —   | C2IF  |
| bit 15 |     |        |     |     |     |     | bit 8 |

|        |        |        |       |       |         |         |       |
|--------|--------|--------|-------|-------|---------|---------|-------|
| R/W-0  | R/W-0  | R/W-0  | R/W-0 | R/W-0 | R/W-0   | R/W-0   | R/W-0 |
| C2RXIF | INT4IF | INT3IF | T9IF  | T8IF  | MI2C2IF | SI2C2IF | T7IF  |
| bit 7  |        |        |       |       |         |         | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

- bit 15-14 **Unimplemented:** Read as '0'
- bit 13 **DMA5IF:** DMA Channel 5 Data Transfer Complete Interrupt Flag Status bit  
 1 = Interrupt request has occurred  
 0 = Interrupt request has not occurred
- bit 12-9 **Unimplemented:** Read as '0'
- bit 8 **C2IF:** ECAN2 Event Interrupt Flag Status bit  
 1 = Interrupt request has occurred  
 0 = Interrupt request has not occurred
- bit 7 **C2RXIF:** ECAN2 Receive Data Ready Interrupt Flag Status bit  
 1 = Interrupt request has occurred  
 0 = Interrupt request has not occurred
- bit 6 **INT4IF:** External Interrupt 4 Flag Status bit  
 1 = Interrupt request has occurred  
 0 = Interrupt request has not occurred
- bit 5 **INT3IF:** External Interrupt 3 Flag Status bit  
 1 = Interrupt request has occurred  
 0 = Interrupt request has not occurred
- bit 4 **T9IF:** Timer9 Interrupt Flag Status bit  
 1 = Interrupt request has occurred  
 0 = Interrupt request has not occurred
- bit 3 **T8IF:** Timer8 Interrupt Flag Status bit  
 1 = Interrupt request has occurred  
 0 = Interrupt request has not occurred
- bit 2 **MI2C2IF:** I2C2 Master Events Interrupt Flag Status bit  
 1 = Interrupt request has occurred  
 0 = Interrupt request has not occurred
- bit 1 **SI2C2IF:** I2C2 Slave Events Interrupt Flag Status bit  
 1 = Interrupt request has occurred  
 0 = Interrupt request has not occurred
- bit 0 **T7IF:** Timer7 Interrupt Flag Status bit  
 1 = Interrupt request has occurred  
 0 = Interrupt request has not occurred

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-9: IFS4: INTERRUPT FLAG STATUS REGISTER 4

|        |     |     |     |       |     |     |     |
|--------|-----|-----|-----|-------|-----|-----|-----|
| U-0    | U-0 | U-0 | U-0 | U-0   | U-0 | U-0 | U-0 |
| —      | —   | —   | —   | —     | —   | —   | —   |
| bit 15 |     |     |     | bit 8 |     |     |     |

|        |        |        |        |       |       |       |     |
|--------|--------|--------|--------|-------|-------|-------|-----|
| R/W-0  | R/W-0  | R/W-0  | R/W-0  | U-0   | R/W-0 | R/W-0 | U-0 |
| C2TXIF | C1TXIF | DMA7IF | DMA6IF | —     | U2EIF | U1EIF | —   |
| bit 7  |        |        |        | bit 0 |       |       |     |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

|          |                                                                                                                                                               |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| bit 15-8 | <b>Unimplemented:</b> Read as '0'                                                                                                                             |
| bit 7    | <b>C2TXIF:</b> ECAN2 Transmit Data Request Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred          |
| bit 6    | <b>C1TXIF:</b> ECAN1 Transmit Data Request Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred          |
| bit 5    | <b>DMA7IF:</b> DMA Channel 7 Data Transfer Complete Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred |
| bit 4    | <b>DMA6IF:</b> DMA Channel 6 Data Transfer Complete Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred |
| bit 3    | <b>Unimplemented:</b> Read as '0'                                                                                                                             |
| bit 2    | <b>U2EIF:</b> UART2 Error Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred                           |
| bit 1    | <b>U1EIF:</b> UART1 Error Interrupt Flag Status bit<br>1 = Interrupt request has occurred<br>0 = Interrupt request has not occurred                           |
| bit 0    | <b>Unimplemented:</b> Read as '0'                                                                                                                             |

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-10: IEC0: INTERRUPT ENABLE CONTROL REGISTER 0

|        |        |       |        |        |        |         |       |
|--------|--------|-------|--------|--------|--------|---------|-------|
| U-0    | R/W-0  | R/W-0 | R/W-0  | R/W-0  | R/W-0  | R/W-0   | R/W-0 |
| —      | DMA1IE | AD1IE | U1TXIE | U1RXIE | SPI1IE | SPI1EIE | T3IE  |
| bit 15 |        |       |        |        |        |         | bit 8 |

|       |       |       |        |       |       |       |        |
|-------|-------|-------|--------|-------|-------|-------|--------|
| R/W-0 | R/W-0 | R/W-0 | R/W-0  | R/W-0 | R/W-0 | R/W-0 | R/W-0  |
| T2IE  | OC2IE | IC2IE | DMA0IE | T1IE  | OC1IE | IC1IE | INT0IE |
| bit 7 |       |       |        |       |       |       | bit 0  |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

|        |                                                                                                                                                |
|--------|------------------------------------------------------------------------------------------------------------------------------------------------|
| bit 15 | <b>Unimplemented:</b> Read as '0'                                                                                                              |
| bit 14 | <b>DMA1IE:</b> DMA Channel 1 Data Transfer Complete Interrupt Enable bit<br>1 = Interrupt request enabled<br>0 = Interrupt request not enabled |
| bit 13 | <b>AD1IE:</b> ADC1 Conversion Complete Interrupt Enable bit<br>1 = Interrupt request enabled<br>0 = Interrupt request not enabled              |
| bit 12 | <b>U1TXIE:</b> UART1 Transmitter Interrupt Enable bit<br>1 = Interrupt request enabled<br>0 = Interrupt request not enabled                    |
| bit 11 | <b>U1RXIE:</b> UART1 Receiver Interrupt Enable bit<br>1 = Interrupt request enabled<br>0 = Interrupt request not enabled                       |
| bit 10 | <b>SPI1IE:</b> SPI1 Event Interrupt Enable bit<br>1 = Interrupt request enabled<br>0 = Interrupt request not enabled                           |
| bit 9  | <b>SPI1EIE:</b> SPI1 Error Interrupt Enable bit<br>1 = Interrupt request enabled<br>0 = Interrupt request not enabled                          |
| bit 8  | <b>T3IE:</b> Timer3 Interrupt Enable bit<br>1 = Interrupt request enabled<br>0 = Interrupt request not enabled                                 |
| bit 7  | <b>T2IE:</b> Timer2 Interrupt Enable bit<br>1 = Interrupt request enabled<br>0 = Interrupt request not enabled                                 |
| bit 6  | <b>OC2IE:</b> Output Compare Channel 2 Interrupt Enable bit<br>1 = Interrupt request enabled<br>0 = Interrupt request not enabled              |
| bit 5  | <b>IC2IE:</b> Input Capture Channel 2 Interrupt Enable bit<br>1 = Interrupt request enabled<br>0 = Interrupt request not enabled               |
| bit 4  | <b>DMA0IE:</b> DMA Channel 0 Data Transfer Complete Interrupt Enable bit<br>1 = Interrupt request enabled<br>0 = Interrupt request not enabled |
| bit 3  | <b>T1IE:</b> Timer1 Interrupt Enable bit<br>1 = Interrupt request enabled<br>0 = Interrupt request not enabled                                 |

# PIC24HJXXXGPX06/X08/X10

---

## REGISTER 7-10: IEC0: INTERRUPT ENABLE CONTROL REGISTER 0 (CONTINUED)

- bit 2      **OC1IE:** Output Compare Channel 1 Interrupt Enable bit  
            1 = Interrupt request enabled  
            0 = Interrupt request not enabled
- bit 1      **IC1IE:** Input Capture Channel 1 Interrupt Enable bit  
            1 = Interrupt request enabled  
            0 = Interrupt request not enabled
- bit 0      **INT0IE:** External Interrupt 0 Enable bit  
            1 = Interrupt request enabled  
            0 = Interrupt request not enabled

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-11: IEC1: INTERRUPT ENABLE CONTROL REGISTER 1

|        |        |        |       |       |       |       |        |
|--------|--------|--------|-------|-------|-------|-------|--------|
| R/W-0  | R/W-0  | R/W-0  | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0  |
| U2TXIE | U2RXIE | INT2IE | T5IE  | T4IE  | OC4IE | OC3IE | DMA2IE |
| bit 15 |        |        |       |       |       |       | bit 8  |

|       |       |       |        |       |     |         |         |
|-------|-------|-------|--------|-------|-----|---------|---------|
| R/W-0 | R/W-0 | R/W-0 | R/W-0  | R/W-0 | U-0 | R/W-0   | R/W-0   |
| IC8IE | IC7IE | AD2IE | INT1IE | CNIE  | —   | MI2C1IE | SI2C1IE |
| bit 7 |       |       |        |       |     |         | bit 0   |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

- bit 15      **U2TXIE:** UART2 Transmitter Interrupt Enable bit  
                  1 = Interrupt request enabled  
                  0 = Interrupt request not enabled
- bit 14      **U2RXIE:** UART2 Receiver Interrupt Enable bit  
                  1 = Interrupt request enabled  
                  0 = Interrupt request not enabled
- bit 13      **INT2IE:** External Interrupt 2 Enable bit  
                  1 = Interrupt request enabled  
                  0 = Interrupt request not enabled
- bit 12      **T5IE:** Timer5 Interrupt Enable bit  
                  1 = Interrupt request enabled  
                  0 = Interrupt request not enabled
- bit 11      **T4IE:** Timer4 Interrupt Enable bit  
                  1 = Interrupt request enabled  
                  0 = Interrupt request not enabled
- bit 10      **OC4IE:** Output Compare Channel 4 Interrupt Enable bit  
                  1 = Interrupt request enabled  
                  0 = Interrupt request not enabled
- bit 9        **OC3IE:** Output Compare Channel 3 Interrupt Enable bit  
                  1 = Interrupt request enabled  
                  0 = Interrupt request not enabled
- bit 8        **DMA2IE:** DMA Channel 2 Data Transfer Complete Interrupt Enable bit  
                  1 = Interrupt request enabled  
                  0 = Interrupt request not enabled
- bit 7        **IC8IE:** Input Capture Channel 8 Interrupt Enable bit  
                  1 = Interrupt request enabled  
                  0 = Interrupt request not enabled
- bit 6        **IC7IE:** Input Capture Channel 7 Interrupt Enable bit  
                  1 = Interrupt request enabled  
                  0 = Interrupt request not enabled
- bit 5        **AD2IE:** ADC2 Conversion Complete Interrupt Enable bit  
                  1 = Interrupt request enabled  
                  0 = Interrupt request not enabled
- bit 4        **INT1IE:** External Interrupt 1 Enable bit  
                  1 = Interrupt request enabled  
                  0 = Interrupt request not enabled

# PIC24HJXXXGPX06/X08/X10

---

## REGISTER 7-11: IEC1: INTERRUPT ENABLE CONTROL REGISTER 1 (CONTINUED)

- bit 3 **CNIE:** Input Change Notification Interrupt Enable bit
  - 1 = Interrupt request enabled
  - 0 = Interrupt request not enabled
- bit 2 **Unimplemented:** Read as '0'
- bit 1 **MI2C1IE:** I2C1 Master Events Interrupt Enable bit
  - 1 = Interrupt request enabled
  - 0 = Interrupt request not enabled
- bit 0 **SI2C1IE:** I2C1 Slave Events Interrupt Enable bit
  - 1 = Interrupt request enabled
  - 0 = Interrupt request not enabled

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-12: IEC2: INTERRUPT ENABLE CONTROL REGISTER 2

|        |        |     |       |       |       |       |       |
|--------|--------|-----|-------|-------|-------|-------|-------|
| R/W-0  | R/W-0  | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| T6IE   | DMA4IE | —   | OC8IE | OC7IE | OC6IE | OC5IE | IC6IE |
| bit 15 |        |     |       |       |       |       | bit 8 |

|       |       |       |        |       |        |        |         |
|-------|-------|-------|--------|-------|--------|--------|---------|
| R/W-0 | R/W-0 | R/W-0 | R/W-0  | R/W-0 | R/W-0  | R/W-0  | R/W-0   |
| IC5IE | IC4IE | IC3IE | DMA3IE | C1IE  | C1RXIE | SPI2IE | SPI2EIE |
| bit 7 |       |       |        |       |        |        | bit 0   |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

- bit 15      **T6IE:** Timer6 Interrupt Enable bit  
                  1 = Interrupt request enabled  
                  0 = Interrupt request not enabled
- bit 14      **DMA4IE:** DMA Channel 4 Data Transfer Complete Interrupt Enable bit  
                  1 = Interrupt request enabled  
                  0 = Interrupt request not enabled
- bit 13      **Unimplemented:** Read as '0'
- bit 12      **OC8IE:** Output Compare Channel 8 Interrupt Enable bit  
                  1 = Interrupt request enabled  
                  0 = Interrupt request not enabled
- bit 11      **OC7IE:** Output Compare Channel 7 Interrupt Enable bit  
                  1 = Interrupt request enabled  
                  0 = Interrupt request not enabled
- bit 10      **OC6IE:** Output Compare Channel 6 Interrupt Enable bit  
                  1 = Interrupt request enabled  
                  0 = Interrupt request not enabled
- bit 9        **OC5IE:** Output Compare Channel 5 Interrupt Enable bit  
                  1 = Interrupt request enabled  
                  0 = Interrupt request not enabled
- bit 8        **IC6IE:** Input Capture Channel 6 Interrupt Enable bit  
                  1 = Interrupt request enabled  
                  0 = Interrupt request not enabled
- bit 7        **IC5IE:** Input Capture Channel 5 Interrupt Enable bit  
                  1 = Interrupt request enabled  
                  0 = Interrupt request not enabled
- bit 6        **IC4IE:** Input Capture Channel 4 Interrupt Enable bit  
                  1 = Interrupt request enabled  
                  0 = Interrupt request not enabled
- bit 5        **IC3IE:** Input Capture Channel 3 Interrupt Enable bit  
                  1 = Interrupt request enabled  
                  0 = Interrupt request not enabled
- bit 4        **DMA3IE:** DMA Channel 3 Data Transfer Complete Interrupt Enable bit  
                  1 = Interrupt request enabled  
                  0 = Interrupt request not enabled
- bit 3        **C1IE:** ECAN1 Event Interrupt Enable bit  
                  1 = Interrupt request enabled  
                  0 = Interrupt request not enabled

# PIC24HJXXXGPX06/X08/X10

---

## REGISTER 7-12: IEC2: INTERRUPT ENABLE CONTROL REGISTER 2 (CONTINUED)

bit 2      **C1RXIE:** ECAN1 Receive Data Ready Interrupt Enable bit

1 = Interrupt request enabled

0 = Interrupt request not enabled

bit 1      **SPI2IE:** SPI2 Event Interrupt Enable bit

1 = Interrupt request enabled

0 = Interrupt request not enabled

bit 0      **SPI2EIE:** SPI2 Error Interrupt Enable bit

1 = Interrupt request enabled

0 = Interrupt request not enabled

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-13: IEC3: INTERRUPT ENABLE CONTROL REGISTER 3

|        |     |        |     |     |     |     |       |
|--------|-----|--------|-----|-----|-----|-----|-------|
| U-0    | U-0 | R/W-0  | U-0 | U-0 | U-0 | U-0 | R/W-0 |
| —      | —   | DMA5IE | —   | —   | —   | —   | C2IE  |
| bit 15 |     |        |     |     |     |     | bit 8 |

|        |        |        |       |       |         |         |       |
|--------|--------|--------|-------|-------|---------|---------|-------|
| R/W-0  | R/W-0  | R/W-0  | R/W-0 | R/W-0 | R/W-0   | R/W-0   | R/W-0 |
| C2RXIE | INT4IE | INT3IE | T9IE  | T8IE  | MI2C2IE | SI2C2IE | T7IE  |
| bit 7  |        |        |       |       |         |         | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-14 **Unimplemented:** Read as '0'

bit 13 **DMA5IE:** DMA Channel 5 Data Transfer Complete Interrupt Enable bit

1 = Interrupt request enabled

0 = Interrupt request not enabled

bit 12-9 **Unimplemented:** Read as '0'

bit 8 **C2IE:** ECAN2 Event Interrupt Enable bit

1 = Interrupt request enabled

0 = Interrupt request not enabled

bit 7 **C2RXIE:** ECAN2 Receive Data Ready Interrupt Enable bit

1 = Interrupt request enabled

0 = Interrupt request not enabled

bit 6 **INT4IE:** External Interrupt 4 Enable bit

1 = Interrupt request enabled

0 = Interrupt request not enabled

bit 5 **INT3IE:** External Interrupt 3 Enable bit

1 = Interrupt request enabled

0 = Interrupt request not enabled

bit 4 **T9IE:** Timer9 Interrupt Enable bit

1 = Interrupt request enabled

0 = Interrupt request not enabled

bit 3 **T8IE:** Timer8 Interrupt Enable bit

1 = Interrupt request enabled

0 = Interrupt request not enabled

bit 2 **MI2C2IE:** I2C2 Master Events Interrupt Enable bit

1 = Interrupt request enabled

0 = Interrupt request not enabled

bit 1 **SI2C2IE:** I2C2 Slave Events Interrupt Enable bit

1 = Interrupt request enabled

0 = Interrupt request not enabled

bit 0 **T7IE:** Timer7 Interrupt Enable bit

1 = Interrupt request enabled

0 = Interrupt request not enabled

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-14: IEC4: INTERRUPT ENABLE CONTROL REGISTER 4

|        |     |     |     |     |     |     |       |
|--------|-----|-----|-----|-----|-----|-----|-------|
| U-0    | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0   |
| —      | —   | —   | —   | —   | —   | —   | —     |
| bit 15 |     |     |     |     |     |     | bit 8 |

|        |        |        |        |     |       |       |       |
|--------|--------|--------|--------|-----|-------|-------|-------|
| R/W-0  | R/W-0  | R/W-0  | R/W-0  | U-0 | R/W-0 | R/W-0 | U-0   |
| C2TXIE | C1TXIE | DMA7IE | DMA6IE | —   | U2EIE | U1EIE | —     |
| bit 7  |        |        |        |     |       |       | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

- bit 15-8 **Unimplemented:** Read as '0'
- bit 7 **C2TXIE:** ECAN2 Transmit Data Request Interrupt Enable bit  
1 = Interrupt request enabled  
0 = Interrupt request not enabled
- bit 6 **C1TXIE:** ECAN1 Transmit Data Request Interrupt Enable bit  
1 = Interrupt request enabled  
0 = Interrupt request not enabled
- bit 5 **DMA7IE:** DMA Channel 7 Data Transfer Complete Enable Status bit  
1 = Interrupt request enabled  
0 = Interrupt request not enabled
- bit 4 **DMA6IE:** DMA Channel 6 Data Transfer Complete Enable Status bit  
1 = Interrupt request enabled  
0 = Interrupt request not enabled
- bit 3 **Unimplemented:** Read as '0'
- bit 2 **U2EIE:** UART2 Error Interrupt Enable bit  
1 = Interrupt request enabled  
0 = Interrupt request not enabled
- bit 1 **U1EIE:** UART1 Error Interrupt Enable bit  
1 = Interrupt request enabled  
0 = Interrupt request not enabled
- bit 0 **Unimplemented:** Read as '0'

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-15: IPC0: INTERRUPT PRIORITY CONTROL REGISTER 0

| U-0    | R/W-1     | R/W-0 | R/W-0 | U-0   | R/W-1      | R/W-0 | R/W-0 |
|--------|-----------|-------|-------|-------|------------|-------|-------|
| —      | T1IP<2:0> |       |       | —     | OC1IP<2:0> |       |       |
| bit 15 |           |       |       | bit 8 |            |       |       |

| U-0   | R/W-1      | R/W-0 | R/W-0 | U-0   | R/W-1       | R/W-0 | R/W-0 |
|-------|------------|-------|-------|-------|-------------|-------|-------|
| —     | IC1IP<2:0> |       |       | —     | INT0IP<2:0> |       |       |
| bit 7 |            |       |       | bit 0 |             |       |       |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **Unimplemented:** Read as '0'

bit 14-12 **T1IP<2:0>:** Timer1 Interrupt Priority bits  
 111 = Interrupt is priority 7 (highest priority interrupt)  
 •  
 •  
 •  
 001 = Interrupt is priority 1  
 000 = Interrupt source is disabled

bit 11 **Unimplemented:** Read as '0'

bit 10-8 **OC1IP<2:0>:** Output Compare Channel 1 Interrupt Priority bits  
 111 = Interrupt is priority 7 (highest priority interrupt)  
 •  
 •  
 •  
 001 = Interrupt is priority 1  
 000 = Interrupt source is disabled

bit 7 **Unimplemented:** Read as '0'

bit 6-4 **IC1IP<2:0>:** Input Capture Channel 1 Interrupt Priority bits  
 111 = Interrupt is priority 7 (highest priority interrupt)  
 •  
 •  
 •  
 001 = Interrupt is priority 1  
 000 = Interrupt source is disabled

bit 3 **Unimplemented:** Read as '0'

bit 2-0 **INT0IP<2:0>:** External Interrupt 0 Priority bits  
 111 = Interrupt is priority 7 (highest priority interrupt)  
 •  
 •  
 •  
 001 = Interrupt is priority 1  
 000 = Interrupt source is disabled

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-16: IPC1: INTERRUPT PRIORITY CONTROL REGISTER 1

|        |           |       |       |       |            |       |       |
|--------|-----------|-------|-------|-------|------------|-------|-------|
| U-0    | R/W-1     | R/W-0 | R/W-0 | U-0   | R/W-1      | R/W-0 | R/W-0 |
| —      | T2IP<2:0> |       |       | —     | OC2IP<2:0> |       |       |
| bit 15 |           |       |       | bit 8 |            |       |       |

|       |            |       |       |       |             |       |       |
|-------|------------|-------|-------|-------|-------------|-------|-------|
| U-0   | R/W-1      | R/W-0 | R/W-0 | U-0   | R/W-1       | R/W-0 | R/W-0 |
| —     | IC2IP<2:0> |       |       | —     | DMA0IP<2:0> |       |       |
| bit 7 |            |       |       | bit 0 |             |       |       |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **Unimplemented:** Read as '0'

bit 14-12 **T2IP<2:0>:** Timer2 Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 11 **Unimplemented:** Read as '0'

bit 10-8 **OC2IP<2:0>:** Output Compare Channel 2 Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 7 **Unimplemented:** Read as '0'

bit 6-4 **IC2IP<2:0>:** Input Capture Channel 2 Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 3 **Unimplemented:** Read as '0'

bit 2-0 **DMA0IP<2:0>:** DMA Channel 0 Data Transfer Complete Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-17: IPC2: INTERRUPT PRIORITY CONTROL REGISTER 2

|        |             |       |       |       |             |       |       |
|--------|-------------|-------|-------|-------|-------------|-------|-------|
| U-0    | R/W-1       | R/W-0 | R/W-0 | U-0   | R/W-1       | R/W-0 | R/W-0 |
| —      | U1RXIP<2:0> |       |       | —     | SPI1IP<2:0> |       |       |
| bit 15 |             |       |       | bit 8 |             |       |       |

|       |              |       |       |       |           |       |       |
|-------|--------------|-------|-------|-------|-----------|-------|-------|
| U-0   | R/W-1        | R/W-0 | R/W-0 | U-0   | R/W-1     | R/W-0 | R/W-0 |
| —     | SPI1EIP<2:0> |       |       | —     | T3IP<2:0> |       |       |
| bit 7 |              |       |       | bit 0 |           |       |       |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **Unimplemented:** Read as '0'

bit 14-12 **U1RXIP<2:0>:** UART1 Receiver Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 11 **Unimplemented:** Read as '0'

bit 10-8 **SPI1IP<2:0>:** SPI1 Event Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 7 **Unimplemented:** Read as '0'

bit 6-4 **SPI1EIP<2:0>:** SPI1 Error Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 3 **Unimplemented:** Read as '0'

bit 2-0 **T3IP<2:0>:** Timer3 Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-18: IPC3: INTERRUPT PRIORITY CONTROL REGISTER 3

|        |     |     |     |     |             |       |       |
|--------|-----|-----|-----|-----|-------------|-------|-------|
| U-0    | U-0 | U-0 | U-0 | U-0 | R/W-1       | R/W-0 | R/W-0 |
| —      | —   | —   | —   | —   | DMA1IP<2:0> |       |       |
| bit 15 |     |     |     |     |             | bit 8 |       |

|       |            |       |       |       |             |       |       |
|-------|------------|-------|-------|-------|-------------|-------|-------|
| U-0   | R/W-1      | R/W-0 | R/W-0 | U-0   | R/W-1       | R/W-0 | R/W-0 |
| —     | AD1IP<2:0> |       |       | —     | U1TXIP<2:0> |       |       |
| bit 7 |            |       |       | bit 0 |             |       |       |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-11 **Unimplemented:** Read as '0'

bit 10-8 **DMA1IP<2:0>:** DMA Channel 1 Data Transfer Complete Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 7 **Unimplemented:** Read as '0'

bit 6-4 **AD1IP<2:0>:** ADC1 Conversion Complete Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 3 **Unimplemented:** Read as '0'

bit 2-0 **U1TXIP<2:0>:** UART1 Transmitter Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-19: IPC4: INTERRUPT PRIORITY CONTROL REGISTER 4

|        |           |       |       |       |     |     |     |
|--------|-----------|-------|-------|-------|-----|-----|-----|
| U-0    | R/W-1     | R/W-0 | R/W-0 | U-0   | U-0 | U-0 | U-0 |
| —      | CNIP<2:0> |       |       | —     | —   | —   | —   |
| bit 15 |           |       |       | bit 8 |     |     |     |

|       |              |       |       |     |              |       |       |
|-------|--------------|-------|-------|-----|--------------|-------|-------|
| U-0   | R/W-1        | R/W-0 | R/W-0 | U-0 | R/W-1        | R/W-0 | R/W-0 |
| —     | MI2C1IP<2:0> |       |       | —   | SI2C1IP<2:0> |       |       |
| bit 7 |              |       |       |     |              |       | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **Unimplemented:** Read as '0'

bit 14-12 **CNIP<2:0>:** Change Notification Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 11-7 **Unimplemented:** Read as '0'

bit 6-4 **MI2C1IP<2:0>:** I2C1 Master Events Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 3 **Unimplemented:** Read as '0'

bit 2-0 **SI2C1IP<2:0>:** I2C1 Slave Events Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-20: IPC5: INTERRUPT PRIORITY CONTROL REGISTER 5

|        |            |       |       |       |            |       |       |
|--------|------------|-------|-------|-------|------------|-------|-------|
| U-0    | R/W-1      | R/W-0 | R/W-0 | U-0   | R/W-1      | R/W-0 | R/W-0 |
| —      | IC8IP<2:0> |       |       | —     | IC7IP<2:0> |       |       |
| bit 15 |            |       |       | bit 8 |            |       |       |

|       |            |       |       |       |             |       |       |
|-------|------------|-------|-------|-------|-------------|-------|-------|
| U-0   | R/W-1      | R/W-0 | R/W-0 | U-0   | R/W-1       | R/W-0 | R/W-0 |
| —     | AD2IP<2:0> |       |       | —     | INT1IP<2:0> |       |       |
| bit 7 |            |       |       | bit 0 |             |       |       |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **Unimplemented:** Read as '0'

bit 14-12 **IC8IP<2:0>:** Input Capture Channel 8 Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 11 **Unimplemented:** Read as '0'

bit 10-8 **IC7IP<2:0>:** Input Capture Channel 7 Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 7 **Unimplemented:** Read as '0'

bit 6-4 **AD2IP<2:0>:** ADC2 Conversion Complete Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 3 **Unimplemented:** Read as '0'

bit 2-0 **INT1IP<2:0>:** External Interrupt 1 Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-21: IPC6: INTERRUPT PRIORITY CONTROL REGISTER 6

|        |           |       |       |       |            |       |       |
|--------|-----------|-------|-------|-------|------------|-------|-------|
| U-0    | R/W-1     | R/W-0 | R/W-0 | U-0   | R/W-1      | R/W-0 | R/W-0 |
| —      | T4IP<2:0> |       |       | —     | OC4IP<2:0> |       |       |
| bit 15 |           |       |       | bit 8 |            |       |       |

|       |            |       |       |       |             |       |       |
|-------|------------|-------|-------|-------|-------------|-------|-------|
| U-0   | R/W-1      | R/W-0 | R/W-0 | U-0   | R/W-1       | R/W-0 | R/W-0 |
| —     | OC3IP<2:0> |       |       | —     | DMA2IP<2:0> |       |       |
| bit 7 |            |       |       | bit 0 |             |       |       |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **Unimplemented:** Read as '0'

bit 14-12 **T4IP<2:0>:** Timer4 Interrupt Priority bits  
 111 = Interrupt is priority 7 (highest priority interrupt)  
 •  
 •  
 •  
 001 = Interrupt is priority 1  
 000 = Interrupt source is disabled

bit 11 **Unimplemented:** Read as '0'

bit 10-8 **OC4IP<2:0>:** Output Compare Channel 4 Interrupt Priority bits  
 111 = Interrupt is priority 7 (highest priority interrupt)  
 •  
 •  
 •  
 001 = Interrupt is priority 1  
 000 = Interrupt source is disabled

bit 7 **Unimplemented:** Read as '0'

bit 6-4 **OC3IP<2:0>:** Output Compare Channel 3 Interrupt Priority bits  
 111 = Interrupt is priority 7 (highest priority interrupt)  
 •  
 •  
 •  
 001 = Interrupt is priority 1  
 000 = Interrupt source is disabled

bit 3 **Unimplemented:** Read as '0'

bit 2-0 **DMA2IP<2:0>:** DMA Channel 2 Data Transfer Complete Interrupt Priority bits  
 111 = Interrupt is priority 7 (highest priority interrupt)  
 •  
 •  
 •  
 001 = Interrupt is priority 1  
 000 = Interrupt source is disabled

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-22: IPC7: INTERRUPT PRIORITY CONTROL REGISTER 7

|        |             |       |       |       |             |       |       |
|--------|-------------|-------|-------|-------|-------------|-------|-------|
| U-0    | R/W-1       | R/W-0 | R/W-0 | U-0   | R/W-1       | R/W-0 | R/W-0 |
| —      | U2TXIP<2:0> |       |       | —     | U2RXIP<2:0> |       |       |
| bit 15 |             |       |       | bit 8 |             |       |       |

|       |             |       |       |       |           |       |       |
|-------|-------------|-------|-------|-------|-----------|-------|-------|
| U-0   | R/W-1       | R/W-0 | R/W-0 | U-0   | R/W-1     | R/W-0 | R/W-0 |
| —     | INT2IP<2:0> |       |       | —     | T5IP<2:0> |       |       |
| bit 7 |             |       |       | bit 0 |           |       |       |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

- bit 15      **Unimplemented:** Read as '0'
- bit 14-12    **U2TXIP<2:0>:** UART2 Transmitter Interrupt Priority bits  
               111 = Interrupt is priority 7 (highest priority interrupt)  
               •  
               •  
               •  
               001 = Interrupt is priority 1  
               000 = Interrupt source is disabled
- bit 11      **Unimplemented:** Read as '0'
- bit 10-8    **U2RXIP<2:0>:** UART2 Receiver Interrupt Priority bits  
               111 = Interrupt is priority 7 (highest priority interrupt)  
               •  
               •  
               •  
               001 = Interrupt is priority 1  
               000 = Interrupt source is disabled
- bit 7      **Unimplemented:** Read as '0'
- bit 6-4    **INT2IP<2:0>:** External Interrupt 2 Priority bits  
               111 = Interrupt is priority 7 (highest priority interrupt)  
               •  
               •  
               •  
               001 = Interrupt is priority 1  
               000 = Interrupt source is disabled
- bit 3      **Unimplemented:** Read as '0'
- bit 2-0    **T5IP<2:0>:** Timer5 Interrupt Priority bits  
               111 = Interrupt is priority 7 (highest priority interrupt)  
               •  
               •  
               •  
               001 = Interrupt is priority 1  
               000 = Interrupt source is disabled

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-23: IPC8: INTERRUPT PRIORITY CONTROL REGISTER 8

|        |           |       |       |       |             |       |       |
|--------|-----------|-------|-------|-------|-------------|-------|-------|
| U-0    | R/W-1     | R/W-0 | R/W-0 | U-0   | R/W-1       | R/W-0 | R/W-0 |
| —      | C1IP<2:0> |       |       | —     | C1RXIP<2:0> |       |       |
| bit 15 |           |       |       | bit 8 |             |       |       |

|       |             |       |       |       |              |       |       |
|-------|-------------|-------|-------|-------|--------------|-------|-------|
| U-0   | R/W-1       | R/W-0 | R/W-0 | U-0   | R/W-1        | R/W-0 | R/W-0 |
| —     | SPI2IP<2:0> |       |       | —     | SPI2EIP<2:0> |       |       |
| bit 7 |             |       |       | bit 0 |              |       |       |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **Unimplemented:** Read as '0'

bit 14-12 **C1IP<2:0>:** ECAN1 Event Interrupt Priority bits  
 111 = Interrupt is priority 7 (highest priority interrupt)  
 •  
 •  
 •  
 001 = Interrupt is priority 1  
 000 = Interrupt source is disabled

bit 11 **Unimplemented:** Read as '0'

bit 10-8 **C1RXIP<2:0>:** ECAN1 Receive Data Ready Interrupt Priority bits  
 111 = Interrupt is priority 7 (highest priority interrupt)  
 •  
 •  
 •  
 001 = Interrupt is priority 1  
 000 = Interrupt source is disabled

bit 7 **Unimplemented:** Read as '0'

bit 6-4 **SPI2IP<2:0>:** SPI2 Event Interrupt Priority bits  
 111 = Interrupt is priority 7 (highest priority interrupt)  
 •  
 •  
 •  
 001 = Interrupt is priority 1  
 000 = Interrupt source is disabled

bit 3 **Unimplemented:** Read as '0'

bit 2-0 **SPI2EIP<2:0>:** SPI2 Error Interrupt Priority bits  
 111 = Interrupt is priority 7 (highest priority interrupt)  
 •  
 •  
 •  
 001 = Interrupt is priority 1  
 000 = Interrupt source is disabled

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-24: IPC9: INTERRUPT PRIORITY CONTROL REGISTER 9

|        |            |       |       |       |            |       |       |
|--------|------------|-------|-------|-------|------------|-------|-------|
| U-0    | R/W-1      | R/W-0 | R/W-0 | U-0   | R/W-1      | R/W-0 | R/W-0 |
| —      | IC5IP<2:0> |       |       | —     | IC4IP<2:0> |       |       |
| bit 15 |            |       |       | bit 8 |            |       |       |

|       |            |       |       |       |             |       |       |
|-------|------------|-------|-------|-------|-------------|-------|-------|
| U-0   | R/W-1      | R/W-0 | R/W-0 | U-0   | R/W-1       | R/W-0 | R/W-0 |
| —     | IC3IP<2:0> |       |       | —     | DMA3IP<2:0> |       |       |
| bit 7 |            |       |       | bit 0 |             |       |       |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **Unimplemented:** Read as '0'

bit 14-12 **IC5IP<2:0>:** Input Capture Channel 5 Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 11 **Unimplemented:** Read as '0'

bit 10-8 **IC4IP<2:0>:** Input Capture Channel 4 Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 7 **Unimplemented:** Read as '0'

bit 6-4 **IC3IP<2:0>:** Input Capture Channel 3 Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 3 **Unimplemented:** Read as '0'

bit 2-0 **DMA3IP<2:0>:** DMA Channel 3 Data Transfer Complete Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-25: IPC10: INTERRUPT PRIORITY CONTROL REGISTER 10

|        |            |       |       |       |            |       |       |
|--------|------------|-------|-------|-------|------------|-------|-------|
| U-0    | R/W-1      | R/W-0 | R/W-0 | U-0   | R/W-1      | R/W-0 | R/W-0 |
| —      | OC7IP<2:0> |       |       | —     | OC6IP<2:0> |       |       |
| bit 15 |            |       |       | bit 8 |            |       |       |

|       |            |       |       |       |            |       |       |
|-------|------------|-------|-------|-------|------------|-------|-------|
| U-0   | R/W-1      | R/W-0 | R/W-0 | U-0   | R/W-1      | R/W-0 | R/W-0 |
| —     | OC5IP<2:0> |       |       | —     | IC6IP<2:0> |       |       |
| bit 7 |            |       |       | bit 0 |            |       |       |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **Unimplemented:** Read as '0'

bit 14-12 **OC7IP<2:0>:** Output Compare Channel 7 Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 11 **Unimplemented:** Read as '0'

bit 10-8 **OC6IP<2:0>:** Output Compare Channel 6 Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 7 **Unimplemented:** Read as '0'

bit 6-4 **OC5IP<2:0>:** Output Compare Channel 5 Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 3 **Unimplemented:** Read as '0'

bit 2-0 **IC6IP<2:0>:** Input Capture Channel 6 Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-26: IPC11: INTERRUPT PRIORITY CONTROL REGISTER 11

|        |           |       |       |       |             |       |       |
|--------|-----------|-------|-------|-------|-------------|-------|-------|
| U-0    | R/W-1     | R/W-0 | R/W-0 | U-0   | R/W-1       | R/W-0 | R/W-0 |
| —      | T6IP<2:0> |       |       | —     | DMA4IP<2:0> |       |       |
| bit 15 |           |       |       | bit 8 |             |       |       |

|       |     |     |     |     |            |       |       |
|-------|-----|-----|-----|-----|------------|-------|-------|
| U-0   | U-0 | U-0 | U-0 | U-0 | R/W-1      | R/W-0 | R/W-0 |
| —     | —   | —   | —   | —   | OC8IP<2:0> |       |       |
| bit 7 |     |     |     |     | bit 0      |       |       |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **Unimplemented:** Read as '0'

bit 14-12 **T6IP<2:0>:** Timer6 Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 11 **Unimplemented:** Read as '0'

bit 10-8 **DMA4IP<2:0>:** DMA Channel 4 Data Transfer Complete Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 7-3 **Unimplemented:** Read as '0'

bit 2-0 **OC8IP<2:0>:** Output Compare Channel 8 Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-27: IPC12: INTERRUPT PRIORITY CONTROL REGISTER 12

|        |           |       |       |       |              |       |       |
|--------|-----------|-------|-------|-------|--------------|-------|-------|
| U-0    | R/W-1     | R/W-0 | R/W-0 | U-0   | R/W-1        | R/W-0 | R/W-0 |
| —      | T8IP<2:0> |       |       | —     | MI2C2IP<2:0> |       |       |
| bit 15 |           |       |       | bit 8 |              |       |       |

|       |              |       |       |       |           |       |       |
|-------|--------------|-------|-------|-------|-----------|-------|-------|
| U-0   | R/W-1        | R/W-0 | R/W-0 | U-0   | R/W-1     | R/W-0 | R/W-0 |
| —     | SI2C2IP<2:0> |       |       | —     | T7IP<2:0> |       |       |
| bit 7 |              |       |       | bit 0 |           |       |       |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **Unimplemented:** Read as '0'

bit 14-12 **T8IP<2:0>:** Timer8 Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 11 **Unimplemented:** Read as '0'

bit 10-8 **MI2C2IP<2:0>:** I2C2 Master Events Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 7 **Unimplemented:** Read as '0'

bit 6-4 **SI2C2IP<2:0>:** I2C2 Slave Events Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 3 **Unimplemented:** Read as '0'

bit 2-0 **T7IP<2:0>:** Timer7 Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-28: IPC13: INTERRUPT PRIORITY CONTROL REGISTER 13

|        |             |       |       |       |             |       |       |
|--------|-------------|-------|-------|-------|-------------|-------|-------|
| U-0    | R/W-1       | R/W-0 | R/W-0 | U-0   | R/W-1       | R/W-0 | R/W-0 |
| —      | C2RXIP<2:0> |       |       | —     | INT4IP<2:0> |       |       |
| bit 15 |             |       |       | bit 8 |             |       |       |

|       |             |       |       |       |           |       |       |
|-------|-------------|-------|-------|-------|-----------|-------|-------|
| U-0   | R/W-1       | R/W-0 | R/W-0 | U-0   | R/W-1     | R/W-0 | R/W-0 |
| —     | INT3IP<2:0> |       |       | —     | T9IP<2:0> |       |       |
| bit 7 |             |       |       | bit 0 |           |       |       |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **Unimplemented:** Read as '0'

bit 14-12 **C2RXIP<2:0>:** ECAN2 Receive Data Ready Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 11 **Unimplemented:** Read as '0'

bit 10-8 **INT4IP<2:0>:** External Interrupt 4 Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 7 **Unimplemented:** Read as '0'

bit 6-4 **INT3IP<2:0>:** External Interrupt 3 Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 3 **Unimplemented:** Read as '0'

bit 2-0 **T9IP<2:0>:** Timer9 Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-29: IPC14: INTERRUPT PRIORITY CONTROL REGISTER 14

|        |     |     |     |     |     |     |       |
|--------|-----|-----|-----|-----|-----|-----|-------|
| U-0    | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0   |
| —      | —   | —   | —   | —   | —   | —   | —     |
| bit 15 |     |     |     |     |     |     | bit 8 |

|       |     |     |     |     |           |       |       |
|-------|-----|-----|-----|-----|-----------|-------|-------|
| U-0   | U-0 | U-0 | U-0 | U-0 | R/W-1     | R/W-0 | R/W-0 |
| —     | —   | —   | —   | —   | C2IP<2:0> |       |       |
| bit 7 |     |     |     |     |           |       | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-3

**Unimplemented:** Read as '0'

bit 2-0

**C2IP<2:0>:** ECAN2 Event Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

- 
- 
- 

001 = Interrupt is priority 1

000 = Interrupt source is disabled

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-30: IPC15: INTERRUPT PRIORITY CONTROL REGISTER 15

|        |     |     |     |     |     |     |       |
|--------|-----|-----|-----|-----|-----|-----|-------|
| U-0    | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0   |
| —      | —   | —   | —   | —   | —   | —   | —     |
| bit 15 |     |     |     |     |     |     | bit 8 |

|       |             |       |       |     |     |     |       |
|-------|-------------|-------|-------|-----|-----|-----|-------|
| U-0   | R/W-1       | R/W-0 | R/W-0 | U-0 | U-0 | U-0 | U-0   |
| —     | DMA5IP<2:0> |       |       | —   | —   | —   | —     |
| bit 7 |             |       |       |     |     |     | bit 0 |

|                   |                  |                                    |                    |
|-------------------|------------------|------------------------------------|--------------------|
| <b>Legend:</b>    |                  |                                    |                    |
| R = Readable bit  | W = Writable bit | U = Unimplemented bit, read as '0' |                    |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared               | x = Bit is unknown |

- bit 15-7

**Unimplemented:** Read as '0'
- bit 6-4

**DMA5IP<2:0>:** DMA Channel 5 Data Transfer Complete Interrupt Priority bits  
111 = Interrupt is priority 7 (highest priority interrupt)  
•  
•  
•  
001 = Interrupt is priority 1  
000 = Interrupt source is disabled
- bit 3-0

**Unimplemented:** Read as '0'

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-31: IPC16: INTERRUPT PRIORITY CONTROL REGISTER 16

|        |     |     |     |     |            |       |       |
|--------|-----|-----|-----|-----|------------|-------|-------|
| U-0    | U-0 | U-0 | U-0 | U-0 | R/W-1      | R/W-0 | R/W-0 |
| —      | —   | —   | —   | —   | U2EIP<2:0> |       |       |
| bit 15 |     |     |     |     |            |       | bit 8 |

|       |            |       |       |       |     |     |     |
|-------|------------|-------|-------|-------|-----|-----|-----|
| U-0   | R/W-1      | R/W-0 | R/W-0 | U-0   | U-0 | U-0 | U-0 |
| —     | U1EIP<2:0> |       |       | —     | —   | —   | —   |
| bit 7 |            |       |       | bit 0 |     |     |     |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-11 **Unimplemented:** Read as '0'

bit 10-8 **U2EIP<2:0>:** UART2 Error Interrupt Priority bits  
 111 = Interrupt is priority 7 (highest priority interrupt)  
 •  
 •  
 •  
 001 = Interrupt is priority 1  
 000 = Interrupt source is disabled

bit 7 **Unimplemented:** Read as '0'

bit 6-4 **U1EIP<2:0>:** UART1 Error Interrupt Priority bits  
 111 = Interrupt is priority 7 (highest priority interrupt)  
 •  
 •  
 •  
 001 = Interrupt is priority 1  
 000 = Interrupt source is disabled

bit 3-0 **Unimplemented:** Read as '0'

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-32: IPC17: INTERRUPT PRIORITY CONTROL REGISTER 17

|        |             |       |       |       |             |       |       |
|--------|-------------|-------|-------|-------|-------------|-------|-------|
| U-0    | R/W-1       | R/W-0 | R/W-0 | U-0   | R/W-1       | R/W-0 | R/W-0 |
| —      | C2TXIP<2:0> |       |       | —     | C1TXIP<2:0> |       |       |
| bit 15 |             |       |       | bit 8 |             |       |       |

|       |             |       |       |       |             |       |       |
|-------|-------------|-------|-------|-------|-------------|-------|-------|
| U-0   | R/W-1       | R/W-0 | R/W-0 | U-0   | R/W-1       | R/W-0 | R/W-0 |
| —     | DMA7IP<2:0> |       |       | —     | DMA6IP<2:0> |       |       |
| bit 7 |             |       |       | bit 0 |             |       |       |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **Unimplemented:** Read as '0'

bit 14-12 **C2TXIP<2:0>:** ECAN2 Transmit Data Request Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 11 **Unimplemented:** Read as '0'

bit 10-8 **C1TXIP<2:0>:** ECAN1 Transmit Data Request Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 7 **Unimplemented:** Read as '0'

bit 6-4 **DMA7IP<2:0>:** DMA Channel 7 Data Transfer Complete Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

bit 3 **Unimplemented:** Read as '0'

bit 2-0 **DMA6IP<2:0>:** DMA Channel 6 Data Transfer Complete Interrupt Priority bits

111 = Interrupt is priority 7 (highest priority interrupt)

•  
•  
•

001 = Interrupt is priority 1

000 = Interrupt source is disabled

# PIC24HJXXXGPX06/X08/X10

## REGISTER 7-33: INTTREG: INTERRUPT CONTROL AND STATUS REGISTER

|        |     |     |     |          |     |     |     |
|--------|-----|-----|-----|----------|-----|-----|-----|
| U-0    | U-0 | U-0 | U-0 | R-0      | R-0 | R-0 | R-0 |
| —      | —   | —   | —   | ILR<3:0> |     |     |     |
| bit 15 |     |     |     | bit 8    |     |     |     |

|       |             |     |     |       |     |     |     |
|-------|-------------|-----|-----|-------|-----|-----|-----|
| U-0   | U-0         | R-0 | R-0 | R-0   | R-0 | R-0 | R-0 |
| —     | VECNUM<6:0> |     |     |       |     |     |     |
| bit 7 |             |     |     | bit 0 |     |     |     |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-12 **Unimplemented:** Read as '0'

bit 11-8 **ILR<3:0>:** New CPU Interrupt Priority Level bits

1111 = CPU Interrupt Priority Level is 15

•  
•  
•

0001 = CPU Interrupt Priority Level is 1

0000 = CPU Interrupt Priority Level is 0

bit 7 **Unimplemented:** Read as '0'

bit 6-0 **VECNUM<6:0>:** Vector Number of Pending Interrupt bits

1111111 = Interrupt Vector pending is number 135

•  
•  
•

0000001 = Interrupt Vector pending is number 9

0000000 = Interrupt Vector pending is number 8

## 7.4 Interrupt Setup Procedures

### 7.4.1 INITIALIZATION

To configure an interrupt source:

1. Set the NSTDIS bit (INTCON1<15>) if nested interrupts are not desired.
2. Select the user-assigned priority level for the interrupt source by writing the control bits in the appropriate IPCx register. The priority level will depend on the specific application and type of interrupt source. If multiple priority levels are not desired, the IPCx register control bits for all enabled interrupt sources may be programmed to the same non-zero value.

**Note:** At a device Reset, the IPCx registers are initialized, such that all user interrupt sources are assigned to priority level 4.

3. Clear the interrupt flag status bit associated with the peripheral in the associated IFSx register.
4. Enable the interrupt source by setting the interrupt enable control bit associated with the source in the appropriate IECx register.

### 7.4.2 INTERRUPT SERVICE ROUTINE

The method that is used to declare an ISR and initialize the IVT with the correct vector address will depend on the programming language (i.e., C or assembler) and the language development toolsuite that is used to develop the application. In general, the user must clear the interrupt flag in the appropriate IFSx register for the source of interrupt that the ISR handles. Otherwise, the ISR will be re-entered immediately after exiting the routine. If the ISR is coded in assembly language, it must be terminated using a `RETFIE` instruction to unstack the saved PC value, SRL value and old CPU priority level.

### 7.4.3 TRAP SERVICE ROUTINE

A Trap Service Routine (TSR) is coded like an ISR, except that the appropriate trap status flag in the INTCON1 register must be cleared to avoid re-entry into the TSR.

### 7.4.4 INTERRUPT DISABLE

All user interrupts can be disabled using the following procedure:

1. Push the current SR value onto the software stack using the `PUSH` instruction.
2. Force the CPU to priority level 7 by inclusive ORing the value 0x0E with SRL.

To enable user interrupts, the `POP` instruction may be used to restore the previous SR value.

Note that only user interrupts with a priority level of 7 or less can be disabled. Trap sources (level 8-level 15) cannot be disabled.

The `DISI` instruction provides a convenient way to disable interrupts of priority levels 1-6 for a fixed period of time. Level 7 interrupt sources are not disabled by the `DISI` instruction.

## 8.0 DIRECT MEMORY ACCESS (DMA)

**Note:** This data sheet summarizes the features of the PIC24HJXXXGPX06/X08/X10 family of devices. However, it is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the “PIC24H Family Reference Manual”, Section 22. “Direct Memory Access (DMA)” (DS70223), which is available from the Microchip website ([www.microchip.com](http://www.microchip.com)).

Direct Memory Access (DMA) is a very efficient mechanism of copying data between peripheral SFRs (e.g., UART Receive register, Input Capture 1 buffer), and buffers or variables stored in RAM, with minimal CPU intervention. The DMA controller can automatically copy entire blocks of data without requiring the user software to read or write the peripheral Special Function Registers (SFRs) every time a peripheral interrupt occurs. The DMA controller uses a dedicated bus for data transfers and, therefore, does not steal cycles from the code execution flow of the CPU. To exploit the DMA capability, the corresponding user buffers or variables must be located in DMA RAM.

The PIC24HJXXXGPX06/X08/X10 peripherals that can utilize DMA are listed in Table 8-1 along with their associated Interrupt Request (IRQ) numbers.

**TABLE 8-1: PERIPHERALS WITH DMA SUPPORT**

| Peripheral         | IRQ Number |
|--------------------|------------|
| INT0               | 0          |
| Input Capture 1    | 1          |
| Input Capture 2    | 5          |
| Output Compare 1   | 2          |
| Output Compare 2   | 6          |
| Timer2             | 7          |
| Timer3             | 8          |
| SPI1               | 10         |
| SPI2               | 33         |
| UART1 Reception    | 11         |
| UART1 Transmission | 12         |
| UART2 Reception    | 30         |
| UART2 Transmission | 31         |
| ADC1               | 13         |
| ADC2               | 21         |
| ECAN1 Reception    | 34         |
| ECAN1 Transmission | 70         |
| ECAN2 Reception    | 55         |
| ECAN2 Transmission | 71         |

The DMA controller features eight identical data transfer channels.

Each channel has its own set of control and status registers. Each DMA channel can be configured to copy data either from buffers stored in dual port DMA RAM to peripheral SFRs, or from peripheral SFRs to buffers in DMA RAM.


The DMA controller supports the following features:

- Word or byte sized data transfers.
- Transfers from peripheral to DMA RAM or DMA RAM to peripheral.
- Indirect Addressing of DMA RAM locations with or without automatic post-increment.
- Peripheral Indirect Addressing – In some peripherals, the DMA RAM read/write addresses may be partially derived from the peripheral.
- One-Shot Block Transfers – Terminating DMA transfer after one block transfer.
- Continuous Block Transfers – Reloading DMA RAM buffer start address after every block transfer is complete.
- Ping-Pong Mode – Switching between two DMA RAM start addresses between successive block transfers, thereby filling two buffers alternately.
- Automatic or manual initiation of block transfers
- Each channel can select from 19 possible sources of data sources or destinations.

For each DMA channel, a DMA interrupt request is generated when a block transfer is complete. Alternatively, an interrupt can be generated when half of the block has been filled.

# PIC24HJXXXGPX06/X08/X10

FIGURE 8-1: TOP LEVEL SYSTEM ARCHITECTURE USING A DEDICATED TRANSACTION BUS

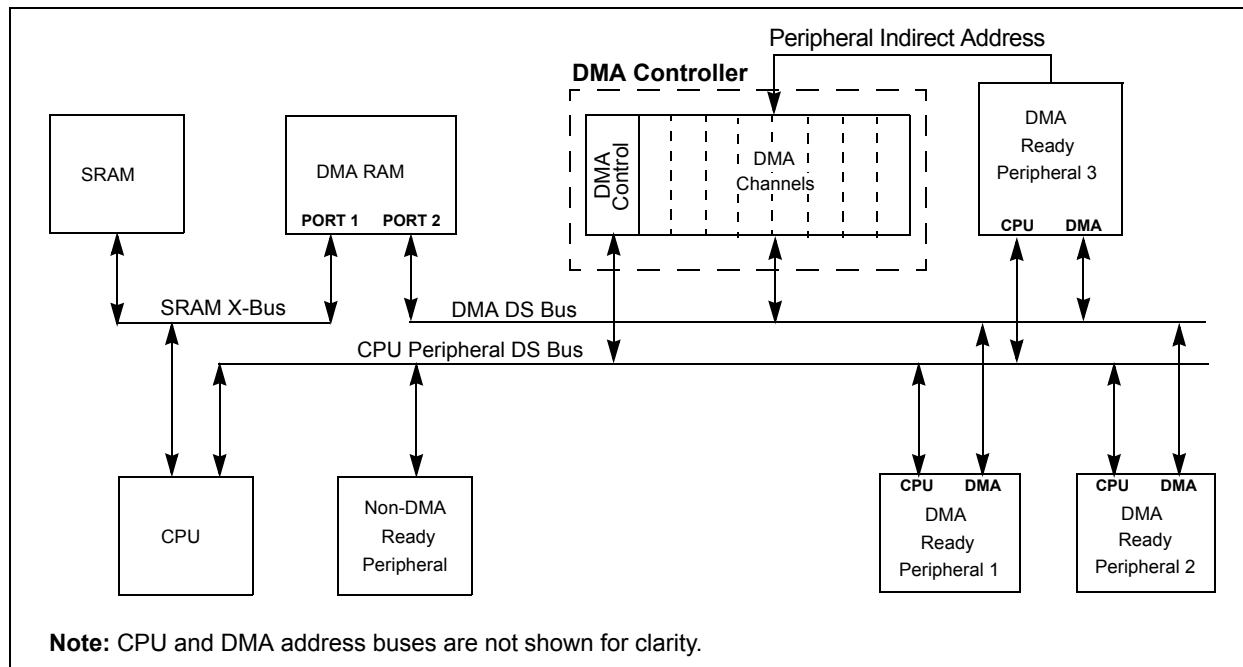

## 8.1 DMAC Registers

Each DMAC Channel  $x$  ( $x = 0, 1, 2, 3, 4, 5, 6$  or  $7$ ) contains the following registers:

- A 16-bit DMA Channel Control register (DMAxCON)
- A 16-bit DMA Channel IRQ Select register (DMAxREQ)
- A 16-bit DMA RAM Primary Start Address Offset register (DMAxSTA)
- A 16-bit DMA RAM Secondary Start Address Offset register (DMAxSTB)
- A 16-bit DMA Peripheral Address register (DMAxPAD)
- A 10-bit DMA Transfer Count register (DMAxCNT)

An additional pair of status registers, DMACS0 and DMACS1 are common to all DMAC channels.

# PIC24HJXXXGPX06/X08/X10

## REGISTER 8-1: DMAxCON: DMA CHANNEL x CONTROL REGISTER

|        |       |       |       |       |     |       |     |
|--------|-------|-------|-------|-------|-----|-------|-----|
| R/W-0  | R/W-0 | R/W-0 | R/W-0 | R/W-0 | U-0 | U-0   | U-0 |
| CHEN   | SIZE  | DIR   | HALF  | NULLW | —   | —     | —   |
| bit 15 |       |       |       |       |     | bit 8 |     |

|       |     |            |       |     |     |           |       |
|-------|-----|------------|-------|-----|-----|-----------|-------|
| U-0   | U-0 | R/W-0      | R/W-0 | U-0 | U-0 | R/W-0     | R/W-0 |
| —     | —   | AMODE<1:0> |       | —   | —   | MODE<1:0> |       |
| bit 7 |     |            |       |     |     |           | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

- bit 15      **CHEN:** Channel Enable bit  
                  1 = Channel enabled  
                  0 = Channel disabled
- bit 14      **SIZE:** Data Transfer Size bit  
                  1 = Byte  
                  0 = Word
- bit 13      **DIR:** Transfer Direction bit (source/destination bus select)  
                  1 = Read from DMA RAM address, write to peripheral address  
                  0 = Read from peripheral address, write to DMA RAM address
- bit 12      **HALF:** Early Block Transfer Complete Interrupt Select bit  
                  1 = Initiate block transfer complete interrupt when half of the data has been moved  
                  0 = Initiate block transfer complete interrupt when all of the data has been moved
- bit 11      **NULLW:** Null Data Peripheral Write Mode Select bit  
                  1 = Null data write to peripheral in addition to DMA RAM write (DIR bit must also be clear)  
                  0 = Normal operation
- bit 10-6    **Unimplemented:** Read as '0'
- bit 5-4      **AMODE<1:0>:** DMA Channel Operating Mode Select bits  
                  11 = Reserved  
                  10 = Peripheral Indirect Addressing mode  
                  01 = Register Indirect without Post-Increment mode  
                  00 = Register Indirect with Post-Increment mode
- bit 3-2      **Unimplemented:** Read as '0'
- bit 1-0      **MODE<1:0>:** DMA Channel Operating Mode Select bits  
                  11 = One-Shot, Ping-Pong modes enabled (one block transfer from/to each DMA RAM buffer)  
                  10 = Continuous, Ping-Pong modes enabled  
                  01 = One-Shot, Ping-Pong modes disabled  
                  00 = Continuous, Ping-Pong modes disabled

# PIC24HJXXXGPX06/X08/X10

## REGISTER 8-2: DMAxREQ: DMA CHANNEL x IRQ SELECT REGISTER

|                      |     |     |     |     |     |     |       |
|----------------------|-----|-----|-----|-----|-----|-----|-------|
| R/W-0                | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0   |
| FORCE <sup>(1)</sup> | —   | —   | —   | —   | —   | —   | —     |
| bit 15               |     |     |     |     |     |     | bit 8 |

|       |                        |                        |                        |                        |                        |                        |                        |
|-------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| U-0   | R/W-0                  | R/W-0                  | R/W-0                  | R/W-0                  | R/W-0                  | R/W-0                  | R/W-0                  |
| —     | IRQSEL6 <sup>(2)</sup> | IRQSEL5 <sup>(2)</sup> | IRQSEL4 <sup>(2)</sup> | IRQSEL3 <sup>(2)</sup> | IRQSEL2 <sup>(2)</sup> | IRQSEL1 <sup>(2)</sup> | IRQSEL0 <sup>(2)</sup> |
| bit 7 |                        |                        |                        |                        |                        |                        | bit 0                  |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **FORCE:** Force DMA Transfer bit<sup>(1)</sup>

1 = Force a single DMA transfer (Manual mode)

0 = Automatic DMA transfer initiation by DMA request

bit 14-7 **Unimplemented:** Read as '0'

bit 6-0 **IRQSEL<6:0>:** DMA Peripheral IRQ Number Select bits<sup>(2)</sup>

0000000-1111111 = DMAIRQ0-DMAIRQ127 selected to be Channel DMAREQ

**Note 1:** The FORCE bit cannot be cleared by the user. The FORCE bit is cleared by hardware when the forced DMA transfer is complete.

**2:** Please see Table 8-1 for a complete listing of IRQ numbers for all interrupt sources.

# PIC24HJXXXGPX06/X08/X10

## REGISTER 8-3: DMAxSTA: DMA CHANNEL x RAM START ADDRESS OFFSET REGISTER A

|           |       |       |       |       |       |       |       |
|-----------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0     | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| STA<15:8> |       |       |       |       |       |       |       |
| bit 15    |       |       |       | bit 8 |       |       |       |

|          |       |       |       |       |       |       |       |
|----------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0    | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| STA<7:0> |       |       |       |       |       |       |       |
| bit 7    |       |       |       | bit 0 |       |       |       |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-0 **STA<15:0>**: Primary DMA RAM Start Address bits (source or destination)

## REGISTER 8-4: DMAxSTB: DMA CHANNEL x RAM START ADDRESS OFFSET REGISTER B

|           |       |       |       |       |       |       |       |
|-----------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0     | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| STB<15:8> |       |       |       |       |       |       |       |
| bit 15    |       |       |       | bit 8 |       |       |       |

|          |       |       |       |       |       |       |       |
|----------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0    | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| STB<7:0> |       |       |       |       |       |       |       |
| bit 7    |       |       |       | bit 0 |       |       |       |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-0 **STB<15:0>**: Secondary DMA RAM Start Address bits (source or destination)

# PIC24HJXXXGPX06/X08/X10

**REGISTER 8-5: DMAxPAD: DMA CHANNEL x PERIPHERAL ADDRESS REGISTER<sup>(1)</sup>**

|           |       |       |       |       |       |       |       |
|-----------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0     | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| PAD<15:8> |       |       |       |       |       |       |       |
| bit 15    |       |       |       | bit 8 |       |       |       |

|          |       |       |       |       |       |       |       |
|----------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0    | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| PAD<7:0> |       |       |       |       |       |       |       |
| bit 7    |       |       |       | bit 0 |       |       |       |

**Legend:**

R = Readable bit      W = Writable bit      U = Unimplemented bit, read as '0'  
-n = Value at POR      '1' = Bit is set      '0' = Bit is cleared      x = Bit is unknown

bit 15-0      **PAD<15:0>**: Peripheral Address Register bits

**Note 1:** If the channel is enabled (i.e., active), writes to this register may result in unpredictable behavior of the DMA channel and should be avoided.

**REGISTER 8-6: DMAxCNT: DMA CHANNEL x TRANSFER COUNT REGISTER<sup>(1)</sup>**

|        |     |     |     |     |     |                         |       |
|--------|-----|-----|-----|-----|-----|-------------------------|-------|
| U-0    | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0                   | R/W-0 |
| —      | —   | —   | —   | —   | —   | CNT<9:8> <sup>(2)</sup> |       |
| bit 15 |     |     |     |     |     | bit 8                   |       |

|                         |       |       |       |       |       |       |       |
|-------------------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0                   | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| CNT<7:0> <sup>(2)</sup> |       |       |       |       |       |       |       |
| bit 7                   |       |       |       | bit 0 |       |       |       |

**Legend:**

R = Readable bit      W = Writable bit      U = Unimplemented bit, read as '0'  
-n = Value at POR      '1' = Bit is set      '0' = Bit is cleared      x = Bit is unknown

bit 15-10      **Unimplemented:** Read as '0'

bit 9-0      **CNT<9:0>**: DMA Transfer Count Register bits<sup>(2)</sup>

**Note 1:** If the channel is enabled (i.e., active), writes to this register may result in unpredictable behavior of the DMA channel and should be avoided.

**2:** Number of DMA transfers = CNT<9:0> + 1.

# PIC24HJXXXGPX06/X08/X10

## REGISTER 8-7: DMACS0: DMA CONTROLLER STATUS REGISTER 0

| R/C-0  | R/C-0  | R/C-0  | R/C-0  | R/C-0  | R/C-0  | R/C-0  | R/C-0  |
|--------|--------|--------|--------|--------|--------|--------|--------|
| PWCOL7 | PWCOL6 | PWCOL5 | PWCOL4 | PWCOL3 | PWCOL2 | PWCOL1 | PWCOL0 |
| bit 15 |        |        |        |        |        |        | bit 8  |

| R/C-0  | R/C-0  | R/C-0  | R/C-0  | R/C-0  | R/C-0  | R/C-0  | R/C-0  |
|--------|--------|--------|--------|--------|--------|--------|--------|
| XWCOL7 | XWCOL6 | XWCOL5 | XWCOL4 | XWCOL3 | XWCOL2 | XWCOL1 | XWCOL0 |
| bit 7  |        |        |        |        |        |        | bit 0  |

|                   |                    |                                              |
|-------------------|--------------------|----------------------------------------------|
| <b>Legend:</b>    | C = Clear only bit |                                              |
| R = Readable bit  | W = Writable bit   | U = Unimplemented bit, read as '0'           |
| -n = Value at POR | '1' = Bit is set   | '0' = Bit is cleared      x = Bit is unknown |

|        |                                                                                                                                 |
|--------|---------------------------------------------------------------------------------------------------------------------------------|
| bit 15 | <b>PWCOL7:</b> Channel 7 Peripheral Write Collision Flag bit<br>1 = Write collision detected<br>0 = No write collision detected |
| bit 14 | <b>PWCOL6:</b> Channel 6 Peripheral Write Collision Flag bit<br>1 = Write collision detected<br>0 = No write collision detected |
| bit 13 | <b>PWCOL5:</b> Channel 5 Peripheral Write Collision Flag bit<br>1 = Write collision detected<br>0 = No write collision detected |
| bit 12 | <b>PWCOL4:</b> Channel 4 Peripheral Write Collision Flag bit<br>1 = Write collision detected<br>0 = No write collision detected |
| bit 11 | <b>PWCOL3:</b> Channel 3 Peripheral Write Collision Flag bit<br>1 = Write collision detected<br>0 = No write collision detected |
| bit 10 | <b>PWCOL2:</b> Channel 2 Peripheral Write Collision Flag bit<br>1 = Write collision detected<br>0 = No write collision detected |
| bit 9  | <b>PWCOL1:</b> Channel 1 Peripheral Write Collision Flag bit<br>1 = Write collision detected<br>0 = No write collision detected |
| bit 8  | <b>PWCOL0:</b> Channel 0 Peripheral Write Collision Flag bit<br>1 = Write collision detected<br>0 = No write collision detected |
| bit 7  | <b>XWCOL7:</b> Channel 7 DMA RAM Write Collision Flag bit<br>1 = Write collision detected<br>0 = No write collision detected    |
| bit 6  | <b>XWCOL6:</b> Channel 6 DMA RAM Write Collision Flag bit<br>1 = Write collision detected<br>0 = No write collision detected    |
| bit 5  | <b>XWCOL5:</b> Channel 5 DMA RAM Write Collision Flag bit<br>1 = Write collision detected<br>0 = No write collision detected    |
| bit 4  | <b>XWCOL4:</b> Channel 4 DMA RAM Write Collision Flag bit<br>1 = Write collision detected<br>0 = No write collision detected    |

# PIC24HJXXXGPX06/X08/X10

---

## REGISTER 8-7:    **DMACS0: DMA CONTROLLER STATUS REGISTER 0 (CONTINUED)**

- bit 3            **XWCOL3:** Channel 3 DMA RAM Write Collision Flag bit  
                 1 = Write collision detected  
                 0 = No write collision detected
- bit 2            **XWCOL2:** Channel 2 DMA RAM Write Collision Flag bit  
                 1 = Write collision detected  
                 0 = No write collision detected
- bit 1            **XWCOL1:** Channel 1 DMA RAM Write Collision Flag bit  
                 1 = Write collision detected  
                 0 = No write collision detected
- bit 0            **XWCOL0:** Channel 0 DMA RAM Write Collision Flag bit  
                 1 = Write collision detected  
                 0 = No write collision detected

# PIC24HJXXXGPX06/X08/X10

## REGISTER 8-8: DMACS1: DMA CONTROLLER STATUS REGISTER 1

|        |     |     |     |            |     |     |     |
|--------|-----|-----|-----|------------|-----|-----|-----|
| U-0    | U-0 | U-0 | U-0 | R-1        | R-1 | R-1 | R-1 |
| —      | —   | —   | —   | LSTCH<3:0> |     |     |     |
| bit 15 |     |     |     | bit 8      |     |     |     |

|       |       |       |       |       |       |       |       |
|-------|-------|-------|-------|-------|-------|-------|-------|
| R-0   | R-0   | R-0   | R-0   | R-0   | R-0   | R-0   | R-0   |
| PPST7 | PPST6 | PPST5 | PPST4 | PPST3 | PPST2 | PPST1 | PPST0 |
| bit 7 |       |       |       | bit 0 |       |       |       |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-12 **Unimplemented:** Read as '0'

bit 11-8 **LSTCH<3:0>:** Last DMA Channel Active bits

1111 = No DMA transfer has occurred since system Reset

1110-1000 = Reserved

0111 = Last data transfer was by DMA Channel 7

0110 = Last data transfer was by DMA Channel 6

0101 = Last data transfer was by DMA Channel 5

0100 = Last data transfer was by DMA Channel 4

0011 = Last data transfer was by DMA Channel 3

0010 = Last data transfer was by DMA Channel 2

0001 = Last data transfer was by DMA Channel 1

0000 = Last data transfer was by DMA Channel 0

bit 7 **PPST7:** Channel 7 Ping-Pong Mode Status Flag bit

1 = DMA7STB register selected

0 = DMA7STA register selected

bit 6 **PPST6:** Channel 6 Ping-Pong Mode Status Flag bit

1 = DMA6STB register selected

0 = DMA6STA register selected

bit 5 **PPST5:** Channel 5 Ping-Pong Mode Status Flag bit

1 = DMA5STB register selected

0 = DMA5STA register selected

bit 4 **PPST4:** Channel 4 Ping-Pong Mode Status Flag bit

1 = DMA4STB register selected

0 = DMA4STA register selected

bit 3 **PPST3:** Channel 3 Ping-Pong Mode Status Flag bit

1 = DMA3STB register selected

0 = DMA3STA register selected

bit 2 **PPST2:** Channel 2 Ping-Pong Mode Status Flag bit

1 = DMA2STB register selected

0 = DMA2STA register selected

bit 1 **PPST1:** Channel 1 Ping-Pong Mode Status Flag bit

1 = DMA1STB register selected

0 = DMA1STA register selected

bit 0 **PPST0:** Channel 0 Ping-Pong Mode Status Flag bit

1 = DMA0STB register selected

0 = DMA0STA register selected

# PIC24HJXXXGPX06/X08/X10

## REGISTER 8-9: DSADR: MOST RECENT DMA RAM ADDRESS

|             |     |     |     |     |     |     |     |
|-------------|-----|-----|-----|-----|-----|-----|-----|
| R-0         | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
| DSADR<15:8> |     |     |     |     |     |     |     |
| bit 15      |     |     |     |     |     |     |     |
| bit 8       |     |     |     |     |     |     |     |

|            |     |     |     |     |     |     |     |
|------------|-----|-----|-----|-----|-----|-----|-----|
| R-0        | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
| DSADR<7:0> |     |     |     |     |     |     |     |
| bit 7      |     |     |     |     |     |     |     |
| bit 0      |     |     |     |     |     |     |     |

|                   |                  |                                    |                    |  |  |  |  |
|-------------------|------------------|------------------------------------|--------------------|--|--|--|--|
| <b>Legend:</b>    |                  |                                    |                    |  |  |  |  |
| R = Readable bit  | W = Writable bit | U = Unimplemented bit, read as '0' |                    |  |  |  |  |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared               | x = Bit is unknown |  |  |  |  |

bit 15-0      **DSADR<15:0>**: Most Recent DMA RAM Address Accessed by DMA Controller bits

# PIC24HJXXXGPX06/X08/X10

## 9.0 OSCILLATOR CONFIGURATION

**Note:** This data sheet summarizes the features of the PIC24HJXXXGPX06/X08/X10 family of devices. However, it is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the “PIC24H Family Reference Manual”, **Section 7. “Oscillator”** (DS70227), which is available from the Microchip website ([www.microchip.com](http://www.microchip.com)).


The PIC24HJXXXGPX06/X08/X10 oscillator system provides:

- Various external and internal oscillator options as clock sources

- An on-chip PLL to scale the internal operating frequency to the required system clock frequency
- The internal FRC oscillator can also be used with the PLL, thereby allowing full-speed operation without any external clock generation hardware
- Clock switching between various clock sources
- Programmable clock postscaler for system power savings
- A Fail-Safe Clock Monitor (FSCM) that detects clock failure and takes fail-safe measures
- A Clock Control register (OSCCON)
- Nonvolatile Configuration bits for main oscillator selection.

A simplified diagram of the oscillator system is shown in Figure 9-1.

**FIGURE 9-1: PIC24HJXXXGPX06/X08/X10 OSCILLATOR SYSTEM DIAGRAM**

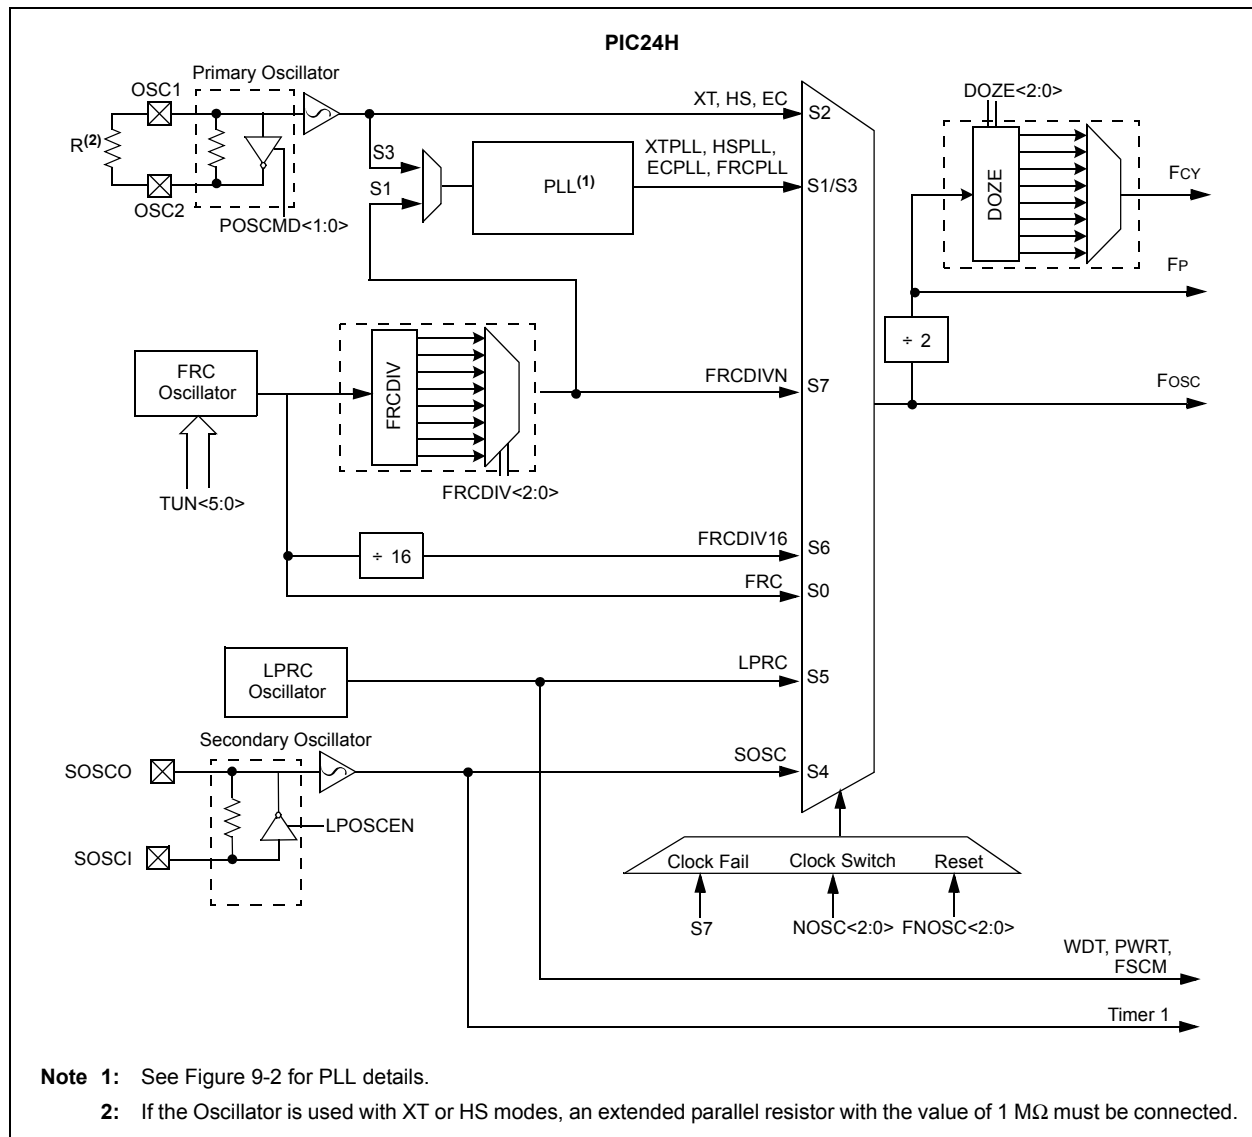

# PIC24HJXXXGPX06/X08/X10

## 9.1 CPU Clocking System

There are seven system clock options provided by the PIC24HJXXXGPX06/X08/X10:

- FRC Oscillator
- FRC Oscillator with PLL
- Primary (XT, HS or EC) Oscillator
- Primary Oscillator with PLL
- Secondary (LP) Oscillator
- LPRC Oscillator
- FRC Oscillator with postscaler

### 9.1.1 SYSTEM CLOCK SOURCES

The FRC (Fast RC) internal oscillator runs at a nominal frequency of 7.37 MHz. The user software can tune the FRC frequency. User software can optionally specify a factor (ranging from 1:2 to 1:256) by which the FRC clock frequency is divided. This factor is selected using the  $\text{FRCDIV}<2:0>$  ( $\text{CLKDIV}<10:8>$ ) bits.

The primary oscillator can use one of the following as its clock source:

1. XT (Crystal): Crystals and ceramic resonators in the range of 3 MHz to 10 MHz. The crystal is connected to the OSC1 and OSC2 pins.
2. HS (High-Speed Crystal): Crystals in the range of 10 MHz to 40 MHz. The crystal is connected to the OSC1 and OSC2 pins.
3. EC (External Clock): External clock signal is directly applied to the OSC1 pin.

The secondary (LP) oscillator is designed for low power and uses a 32.768 kHz crystal or ceramic resonator. The LP oscillator uses the SOSCI and SOSCO pins.

The LPRC (Low-Power RC) internal oscillator runs at a nominal frequency of 32.768 kHz. It is also used as a reference clock by the Watchdog Timer (WDT) and Fail-Safe Clock Monitor (FSCM).

The clock signals generated by the FRC and primary oscillators can be optionally applied to an on-chip Phase Locked Loop (PLL) to provide a wide range of output frequencies for device operation. PLL configuration is described in **Section 9.1.3 “PLL Configuration”**.

The FRC frequency depends on the FRC accuracy (see Table 24-19) and the value of the FRC Oscillator Tuning register (see Register 9-4).

### 9.1.2 SYSTEM CLOCK SELECTION

The oscillator source that is used at a device Power-on Reset event is selected using Configuration bit settings. The oscillator Configuration bit settings are located in the Configuration registers in the program memory. (Refer to **Section 21.1 “Configuration Bits”** for further details.) The Initial Oscillator Selection Configuration bits,  $\text{FNOSC}<2:0>$  ( $\text{FOSCSEL}<2:0>$ ), and the Primary Oscillator Mode Select Configuration bits,  $\text{POSCMD}<1:0>$

( $\text{FOSC}<1:0>$ ), select the oscillator source that is used at a Power-on Reset. The FRC primary oscillator is the default (unprogrammed) selection.

The Configuration bits allow users to choose between twelve different clock modes, shown in Table 9-1.

The output of the oscillator (or the output of the PLL if a PLL mode has been selected)  $F_{\text{OSC}}$  is divided by 2 to generate the device instruction clock ( $F_{\text{CY}}$ ) and the peripheral clock time base ( $F_{\text{P}}$ ).  $F_{\text{CY}}$  defines the operating speed of the device, and speeds up to 40 MHz are supported by the PIC24HJXXXGPX06/X08/X10 architecture.

Instruction execution speed or device operating frequency,  $F_{\text{CY}}$ , is given by:

#### EQUATION 9-1: DEVICE OPERATING FREQUENCY

$$F_{\text{CY}} = \frac{F_{\text{OSC}}}{2}$$

### 9.1.3 PLL CONFIGURATION

The primary oscillator and internal FRC oscillator can optionally use an on-chip PLL to obtain higher speeds of operation. The PLL provides a significant amount of flexibility in selecting the device operating speed. A block diagram of the PLL is shown in Figure 9-2.

The output of the primary oscillator or FRC, denoted as ‘ $F_{\text{IN}}$ ’, is divided down by a prescale factor ( $N_1$ ) of 2, 3, ... or 33 before being provided to the PLL’s Voltage Controlled Oscillator (VCO). The input to the VCO must be selected to be in the range of 0.8 MHz to 8 MHz. Since the minimum prescale factor is 2, this implies that  $F_{\text{IN}}$  must be chosen to be in the range of 1.6 MHz to 16 MHz. The prescale factor ‘ $N_1$ ’ is selected using the  $\text{PLLPRE}<4:0>$  bits ( $\text{CLKDIV}<4:0>$ ).

The PLL Feedback Divisor, selected using the  $\text{PLLDIV}<8:0>$  bits ( $\text{PLLFB}<8:0>$ ), provides a factor ‘ $M$ ’, by which the input to the VCO is multiplied. This factor must be selected such that the resulting VCO output frequency is in the range of 100 MHz to 200 MHz.

The VCO output is further divided by a postscale factor ‘ $N_2$ ’. This factor is selected using the  $\text{PLLPOST}<1:0>$  bits ( $\text{CLKDIV}<7:6>$ ). ‘ $N_2$ ’ can be either 2, 4 or 8, and must be selected such that the PLL output frequency ( $F_{\text{OSC}}$ ) is in the range of 12.5 MHz to 80 MHz, which generates device operating speeds of 6.25-40 MIPS.

For a primary oscillator or FRC oscillator, output ‘ $F_{\text{IN}}$ ’, the PLL output ‘ $F_{\text{OSC}}$ ’ is given by:

#### EQUATION 9-2: $F_{\text{OSC}}$ CALCULATION

$$F_{\text{OSC}} = F_{\text{IN}} \cdot \left( \frac{M}{N_1 \cdot N_2} \right)$$

# PIC24HJXXXGPX06/X08/X10


For example, suppose a 10 MHz crystal is being used, with "XT with PLL" being the selected oscillator mode. If PLLPRE<4:0> = 0, then N1 = 2. This yields a VCO input of 10/2 = 5 MHz, which is within the acceptable range of 0.8-8 MHz. If PLLDIV<8:0> = 0x1E, then M = 32. This yields a VCO output of 5 x 32 = 160 MHz, which is within the 100-200 MHz range needed.

If PLLPOST<1:0> = 0, then N2 = 2. This provides a Fosc of 160/2 = 80 MHz. The resultant device operating speed is 80/2 = 40 MIPS.

## EQUATION 9-3: XT WITH PLL MODE EXAMPLE

$$F_{CY} = \frac{F_{OSC}}{2} = \frac{1}{2} \left( \frac{10000000 \cdot 32}{2 \cdot 2} \right) = 40 \text{ MIPS}$$

**FIGURE 9-2: PIC24HJXXXGPX06/X08/X10 PLL BLOCK DIAGRAM**

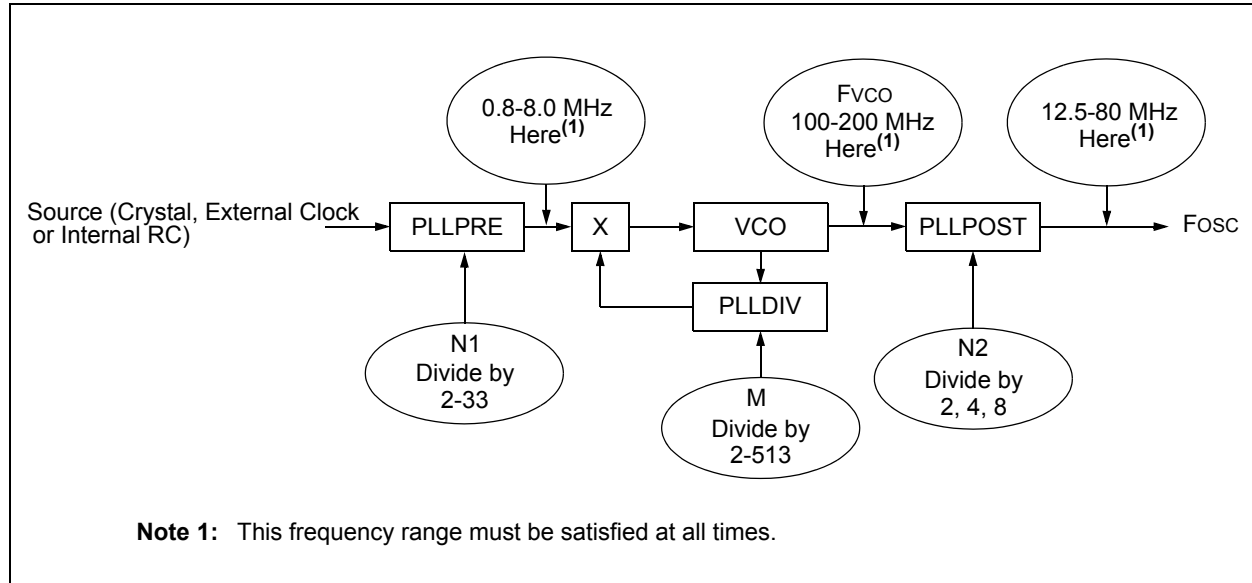

**TABLE 9-1: CONFIGURATION BIT VALUES FOR CLOCK SELECTION**

| Oscillator Mode                                 | Oscillator Source | POSCMD<1:0> | FNOSC<2:0> | Note |
|-------------------------------------------------|-------------------|-------------|------------|------|
| Fast RC Oscillator with Divide-by-N (FRCDIVN)   | Internal          | xx          | 111        | 1, 2 |
| Fast RC Oscillator with Divide-by-16 (FRCDIV16) | Internal          | xx          | 110        | 1    |
| Low-Power RC Oscillator (LPRC)                  | Internal          | xx          | 101        | 1    |
| Secondary (Timer1) Oscillator (SOSC)            | Secondary         | xx          | 100        | 1    |
| Primary Oscillator (HS) with PLL (HSPLL)        | Primary           | 10          | 011        | —    |
| Primary Oscillator (XT) with PLL (XTPLL)        | Primary           | 01          | 011        | —    |
| Primary Oscillator (EC) with PLL (ECPLL)        | Primary           | 00          | 011        | 1    |
| Primary Oscillator (HS)                         | Primary           | 10          | 010        | —    |
| Primary Oscillator (XT)                         | Primary           | 01          | 010        | —    |
| Primary Oscillator (EC)                         | Primary           | 00          | 010        | 1    |
| Fast RC Oscillator with PLL (FRCPLL)            | Internal          | xx          | 001        | 1    |
| Fast RC Oscillator (FRC)                        | Internal          | xx          | 000        | 1    |

**Note 1:** OSC2 pin function is determined by the OSCIOFNC Configuration bit.

**2:** This is the default oscillator mode for an unprogrammed (erased) device.

# PIC24HJXXXGPX06/X08/X10

## REGISTER 9-1: OSCCON: OSCILLATOR CONTROL REGISTER<sup>(1)</sup>

|        |           |     |     |       |                          |       |       |
|--------|-----------|-----|-----|-------|--------------------------|-------|-------|
| U-0    | R-0       | R-0 | R-0 | U-0   | R/W-y                    | R/W-y | R/W-y |
| —      | COSC<2:0> |     |     | —     | NOSC<2:0> <sup>(2)</sup> |       |       |
| bit 15 |           |     |     | bit 8 |                          |       |       |

|         |     |      |     |       |     |         |       |
|---------|-----|------|-----|-------|-----|---------|-------|
| R/W-0   | U-0 | R-0  | U-0 | R/C-0 | U-0 | R/W-0   | R/W-0 |
| CLKLOCK | —   | LOCK | —   | CF    | —   | LPOSCEN | OSWEN |
| bit 7   |     |      |     |       |     |         | bit 0 |

|                   |                                              |                                    |
|-------------------|----------------------------------------------|------------------------------------|
| <b>Legend:</b>    | y = Value set from Configuration bits on POR | C = Clear only bit                 |
| R = Readable bit  | W = Writable bit                             | U = Unimplemented bit, read as '0' |
| -n = Value at POR | '1' = Bit is set                             | '0' = Bit is cleared               |
|                   |                                              | x = Bit is unknown                 |

- bit 15 **Unimplemented:** Read as '0'
- bit 14-12 **COSC<2:0>:** Current Oscillator Selection bits (read-only)
- 000 = Fast RC oscillator (FRC)
  - 001 = Fast RC oscillator (FRC) with PLL
  - 010 = Primary oscillator (XT, HS, EC)
  - 011 = Primary oscillator (XT, HS, EC) with PLL
  - 100 = Secondary oscillator (SOSC)
  - 101 = Low-Power RC oscillator (LPRC)
  - 110 = Fast RC oscillator (FRC) with Divide-by-16
  - 111 = Fast RC oscillator (FRC) with Divide-by-n
- bit 11 **Unimplemented:** Read as '0'
- bit 10-8 **NOSC<2:0>:** New Oscillator Selection bits<sup>(2)</sup>
- 000 = Fast RC oscillator (FRC)
  - 001 = Fast RC oscillator (FRC) with PLL
  - 010 = Primary oscillator (XT, HS, EC)
  - 011 = Primary oscillator (XT, HS, EC) with PLL
  - 100 = Secondary oscillator (SOSC)
  - 101 = Low-Power RC oscillator (LPRC)
  - 110 = Fast RC oscillator (FRC) with Divide-by-16
  - 111 = Fast RC oscillator (FRC) with Divide-by-n
- bit 7 **CLKLOCK:** Clock Lock Enable bit
- 1 = If (FCKSM0 = 1), then clock and PLL configurations are locked
  - If (FCKSM0 = 0), then clock and PLL configurations may be modified
  - 0 = Clock and PLL selections are not locked, configurations may be modified
- bit 6 **Unimplemented:** Read as '0'
- bit 5 **LOCK:** PLL Lock Status bit (read-only)
- 1 = Indicates that PLL is in lock, or PLL start-up timer is satisfied
  - 0 = Indicates that PLL is out of lock, start-up timer is in progress or PLL is disabled
- bit 4 **Unimplemented:** Read as '0'
- bit 3 **CF:** Clock Fail Detect bit (read/clear by application)
- 1 = FSCM has detected clock failure
  - 0 = FSCM has not detected clock failure
- bit 2 **Unimplemented:** Read as '0'

**Note 1:** Writes to this register require an unlock sequence. Refer to **Section 7. "Oscillator"** (DS70227) in the "PIC24H Family Reference Manual" (available from the Microchip website) for details.

**2:** Direct clock switches between any primary oscillator mode with PLL and FRCPLL mode are not permitted. This applies to clock switches in either direction. In these instances, the application must switch to FRC mode as a transition clock source between the two PLL modes.

## REGISTER 9-1: OSCCON: OSCILLATOR CONTROL REGISTER<sup>(1)</sup> (CONTINUED)

- bit 1      **LPOSCEN**: Secondary (LP) Oscillator Enable bit  
            1 = Enable secondary oscillator  
            0 = Disable secondary oscillator
- bit 0      **OSWEN**: Oscillator Switch Enable bit  
            1 = Request oscillator switch to selection specified by NOSC<2:0> bits  
            0 = Oscillator switch is complete

- Note 1:** Writes to this register require an unlock sequence. Refer to **Section 7. “Oscillator”** (DS70227) in the *“PIC24H Family Reference Manual”* (available from the Microchip website) for details.
- 2:** Direct clock switches between any primary oscillator mode with PLL and FRCPLL mode are not permitted. This applies to clock switches in either direction. In these instances, the application must switch to FRC mode as a transition clock source between the two PLL modes.

# PIC24HJXXXGPX06/X08/X10

## REGISTER 9-2: CLKDIV: CLOCK DIVISOR REGISTER

|        |           |       |       |                      |             |       |       |
|--------|-----------|-------|-------|----------------------|-------------|-------|-------|
| R/W-0  | R/W-0     | R/W-1 | R/W-1 | R/W-0                | R/W-0       | R/W-0 | R/W-0 |
| ROI    | DOZE<2:0> |       |       | DOZEN <sup>(1)</sup> | FRCDIV<2:0> |       |       |
| bit 15 |           |       |       |                      |             |       | bit 8 |

|              |       |     |             |       |       |       |       |
|--------------|-------|-----|-------------|-------|-------|-------|-------|
| R/W-0        | R/W-1 | U-0 | R/W-0       | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| PLLPOST<1:0> |       | —   | PLLPRE<4:0> |       |       |       |       |
| bit 7        |       |     |             |       |       |       | bit 0 |

|                   |                                              |                                    |                    |
|-------------------|----------------------------------------------|------------------------------------|--------------------|
| <b>Legend:</b>    | y = Value set from Configuration bits on POR |                                    |                    |
| R = Readable bit  | W = Writable bit                             | U = Unimplemented bit, read as '0' |                    |
| -n = Value at POR | '1' = Bit is set                             | '0' = Bit is cleared               | x = Bit is unknown |

- bit 15      **ROI:** Recover on Interrupt bit  
1 = Interrupts will clear the DOZEN bit and the processor clock/peripheral clock ratio is set to 1:1  
0 = Interrupts have no effect on the DOZEN bit
- bit 14-12      **DOZE<2:0>:** Processor Clock Reduction Select bits  
000 = Fcy/1  
001 = Fcy/2  
010 = Fcy/4  
011 = Fcy/8 (default)  
100 = Fcy/16  
101 = Fcy/32  
110 = Fcy/64  
111 = Fcy/128
- bit 11      **DOZEN:** DOZE Mode Enable bit<sup>(1)</sup>  
1 = DOZE<2:0> field specifies the ratio between the peripheral clocks and the processor clocks  
0 = Processor clock/peripheral clock ratio forced to 1:1
- bit 10-8      **FRCDIV<2:0>:** Internal Fast RC Oscillator Postscaler bits  
000 = FRC divide by 1 (default)  
001 = FRC divide by 2  
010 = FRC divide by 4  
011 = FRC divide by 8  
100 = FRC divide by 16  
101 = FRC divide by 32  
110 = FRC divide by 64  
111 = FRC divide by 256
- bit 7-6      **PLLPOST<1:0>:** PLL VCO Output Divider Select bits (also denoted as 'N2', PLL postscaler)  
00 = Output/2  
01 = Output/4 (default)  
10 = Reserved  
11 = Output/8
- bit 5      **Unimplemented:** Read as '0'
- bit 4-0      **PLLPRE<4:0>:** PLL Phase Detector Input Divider bits (also denoted as 'N1', PLL prescaler)  
00000 = Input/2 (default)  
00001 = Input/3  
•  
•  
•  
11111 = Input/33

**Note 1:** This bit is cleared when the ROI bit is set and an interrupt occurs.

# PIC24HJXXXGPX06/X08/X10

## REGISTER 9-3: PLLFBD: PLL FEEDBACK DIVISOR REGISTER

|        |     |     |     |     |     |     |           |
|--------|-----|-----|-----|-----|-----|-----|-----------|
| U-0    | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0     |
| —      | —   | —   | —   | —   | —   | —   | PLLDIV<8> |
| bit 15 |     |     |     |     |     |     | bit 8     |

|             |       |       |       |       |       |       |       |
|-------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0       | R/W-0 | R/W-1 | R/W-1 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| PLLDIV<7:0> |       |       |       |       |       |       |       |
| bit 7       |       |       |       |       |       |       | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-9

**Unimplemented:** Read as '0'

bit 8-0

**PLLDIV<8:0>:** PLL Feedback Divisor bits (also denoted as 'M', PLL multiplier)

000000000 = 2

000000001 = 3

000000010 = 4

•

•

•

000110000 = 50 (default)

•

•

•

111111111 = 513

# PIC24HJXXXGPX06/X08/X10

REGISTER 9-4: OSCTUN: FRC OSCILLATOR TUNING REGISTER

|        |     |     |     |     |     |       |     |
|--------|-----|-----|-----|-----|-----|-------|-----|
| U-0    | U-0 | U-0 | U-0 | U-0 | U-0 | U-0   | U-0 |
| —      | —   | —   | —   | —   | —   | —     | —   |
| bit 15 |     |     |     |     |     | bit 8 |     |

|       |     |                         |       |       |       |       |       |
|-------|-----|-------------------------|-------|-------|-------|-------|-------|
| U-0   | U-0 | R/W-0                   | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| —     | —   | TUN<5:0> <sup>(1)</sup> |       |       |       |       |       |
| bit 7 |     |                         |       |       |       | bit 0 |       |

|                   |                  |                                    |                    |
|-------------------|------------------|------------------------------------|--------------------|
| <b>Legend:</b>    |                  |                                    |                    |
| R = Readable bit  | W = Writable bit | U = Unimplemented bit, read as '0' |                    |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared               | x = Bit is unknown |

bit 15-6      **Unimplemented:** Read as '0'

bit 5-0      **TUN<5:0>:** FRC Oscillator Tuning bits<sup>(1)</sup>

011111 = Center frequency + 11.625% (8.23 MHz)

011110 = Center frequency + 11.25% (8.20 MHz)

•

•

•

000001 = Center frequency + 0.375% (7.40 MHz)

000000 = Center frequency (7.37 MHz nominal)

111111 = Center frequency – 0.375% (7.345 MHz)

•

•

•

100001 = Center frequency – 11.625% (6.52 MHz)

100000 = Center frequency – 12% (6.49 MHz)

**Note 1:** OSCTUN functionality has been provided to help customers compensate for temperature effects on the FRC frequency over a wide range of temperatures. The tuning step size is an approximation and is neither characterized nor tested.

## 9.2 Clock Switching Operation

Applications are free to switch between any of the four clock sources (Primary, LP, FRC and LPRC) under software control at any time. To limit the possible side effects that could result from this flexibility, PIC24HJXXXGPX06/X08/X10 devices have a safe-guard lock built into the switch process.

**Note:** Primary Oscillator mode has three different submodes (XT, HS and EC) which are determined by the POSCMD<1:0> Configuration bits. While an application can switch to and from Primary Oscillator mode in software, it cannot switch between the different primary submodes without reprogramming the device.

### 9.2.1 ENABLING CLOCK SWITCHING

To enable clock switching, the FCKSM1 Configuration bit in the Configuration register must be programmed to '0'. (Refer to **Section 21.1 "Configuration Bits"** for further details.) If the FCKSM1 Configuration bit is unprogrammed ('1'), the clock switching function and Fail-Safe Clock Monitor function are disabled. This is the default setting.

The NOSC control bits (OSCCON<10:8>) do not control the clock selection when clock switching is disabled. However, the COSC bits (OSCCON<14:12>) reflect the clock source selected by the FNOSC Configuration bits.

The OSWEN control bit (OSCCON<0>) has no effect when clock switching is disabled. It is held at '0' at all times.

### 9.2.2 OSCILLATOR SWITCHING SEQUENCE

At a minimum, performing a clock switch requires this basic sequence:

1. If desired, read the COSC bits (OSCCON<14:12>) to determine the current oscillator source.
2. Perform the unlock sequence to allow a write to the OSCCON register high byte.
3. Write the appropriate value to the NOSC control bits (OSCCON<10:8>) for the new oscillator source.
4. Perform the unlock sequence to allow a write to the OSCCON register low byte.
5. Set the OSWEN bit to initiate the oscillator switch.

Once the basic sequence is completed, the system clock hardware responds automatically as follows:

1. The clock switching hardware compares the COSC status bits with the new value of the NOSC control bits. If they are the same, then the clock switch is a redundant operation. In this case, the OSWEN bit is cleared automatically and the clock switch is aborted.

2. If a valid clock switch has been initiated, the LOCK (OSCCON<5>) and the CF (OSCCON<3>) status bits are cleared.
3. The new oscillator is turned on by the hardware if it is not currently running. If a crystal oscillator must be turned on, the hardware waits until the Oscillator Start-up Timer (OST) expires. If the new source is using the PLL, the hardware waits until a PLL lock is detected (LOCK = 1).
4. The hardware waits for 10 clock cycles from the new clock source and then performs the clock switch.
5. The hardware clears the OSWEN bit to indicate a successful clock transition. In addition, the NOSC bit values are transferred to the COSC status bits.
6. The old clock source is turned off at this time, with the exception of LPRC (if WDT or FSCM are enabled) or LP (if LPOSCEN remains set).

**Note 1:** The processor continues to execute code throughout the clock switching sequence. Timing sensitive code should not be executed during this time.

**2:** Direct clock switches between any primary oscillator mode with PLL and FRCPLL mode are not permitted. This applies to clock switches in either direction. In these instances, the application must switch to FRC mode as a transition clock source between the two PLL modes.

**3:** Refer to **Section 7. "Oscillator"** (DS70227) in the "PIC24H Family Reference Manual" for details.

## 9.3 Fail-Safe Clock Monitor (FSCM)

The Fail-Safe Clock Monitor (FSCM) allows the device to continue to operate even in the event of an oscillator failure. The FSCM function is enabled by programming. If the FSCM function is enabled, the LPRC internal oscillator runs at all times (except during Sleep mode) and is not subject to control by the Watchdog Timer.

If an oscillator failure occurs, the FSCM generates a clock failure trap event and switches the system clock over to the FRC oscillator. Then the application program can either attempt to restart the oscillator or execute a controlled shutdown. The trap can be treated as a warm Reset by simply loading the Reset address into the oscillator fail trap vector.

If the PLL multiplier is used to scale the system clock, the internal FRC is also multiplied by the same factor on clock failure. Essentially, the device switches to FRC with PLL on a clock failure.

# PIC24HJXXXGPX06/X08/X10

---

NOTES:

## 10.0 POWER-SAVING FEATURES

**Note:** This data sheet summarizes the features of the PIC24HJXXXGPX06/X08/X10 family of devices. However, it is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the “PIC24H Family Reference Manual”, **Section 9. “Watchdog Timer and Power-Saving Modes”** (DS70236), which is available from the Microchip website ([www.microchip.com](http://www.microchip.com)).

The PIC24HJXXXGPX06/X08/X10 devices provide the ability to manage power consumption by selectively managing clocking to the CPU and the peripherals. In general, a lower clock frequency and a reduction in the number of circuits being clocked constitutes lower consumed power. PIC24HJXXXGPX06/X08/X10 devices can manage power consumption in four different ways:

- Clock frequency
- Instruction-based Sleep and Idle modes
- Software-controlled Doze mode
- Selective peripheral control in software

Combinations of these methods can be used to selectively tailor an application's power consumption while still maintaining critical application features, such as timing-sensitive communications.

### 10.1 Clock Frequency and Clock Switching

PIC24HJXXXGPX06/X08/X10 devices allow a wide range of clock frequencies to be selected under application control. If the system clock configuration is not locked, users can choose low-power or high-precision oscillators by simply changing the NOSC bits (OSC-CON<10:8>). The process of changing a system clock during operation, as well as limitations to the process, are discussed in more detail in **Section 9.0 “Oscillator Configuration”**.

## 10.2 Instruction-Based Power-Saving Modes

PIC24HJXXXGPX06/X08/X10 devices have two special power-saving modes that are entered through the execution of a special `PWRSV` instruction. Sleep mode stops clock operation and halts all code execution. Idle mode halts the CPU and code execution, but allows peripheral modules to continue operation. The assembly syntax of the `PWRSV` instruction is shown in Example 10-1.

**Note:** `SLEEP_MODE` and `IDLE_MODE` are constants defined in the assembler include file for the selected device.

Sleep and Idle modes can be exited as a result of an enabled interrupt, WDT time-out or a device Reset. When the device exits these modes, it is said to “wake-up”.

### 10.2.1 SLEEP MODE

Sleep mode has these features:

- The system clock source is shut down. If an on-chip oscillator is used, it is turned off.
- The device current consumption is reduced to a minimum, provided that no I/O pin is sourcing current.
- The Fail-Safe Clock Monitor does not operate during Sleep mode since the system clock source is disabled.
- The LPRC clock continues to run in Sleep mode if the WDT is enabled.
- The WDT, if enabled, is automatically cleared prior to entering Sleep mode.
- Some device features or peripherals may continue to operate in Sleep mode. This includes items such as the input change notification on the I/O ports, or peripherals that use an external clock input. Any peripheral that requires the system clock source for its operation is disabled in Sleep mode.

The device will wake-up from Sleep mode on any of these events:

- Any interrupt source that is individually enabled.
- Any form of device Reset.
- A WDT time-out.

On wake-up from Sleep, the processor restarts with the same clock source that was active when Sleep mode was entered.

### EXAMPLE 10-1: `PWRSV` INSTRUCTION SYNTAX

```
PWRSV #SLEEP_MODE    ; Put the device into SLEEP mode
PWRSV #IDLE_MODE      ; Put the device into IDLE mode
```

# PIC24HJXXXGPX06/X08/X10

## 10.2.2 IDLE MODE

Idle mode has these features:

- The CPU stops executing instructions.
- The WDT is automatically cleared.
- The system clock source remains active. By default, all peripheral modules continue to operate normally from the system clock source, but can also be selectively disabled (see **Section 10.4 “Peripheral Module Disable”**).
- If the WDT or FSCM is enabled, the LPRC also remains active.

The device will wake from Idle mode on any of these events:

- Any interrupt that is individually enabled.
- Any device Reset.
- A WDT time-out.

On wake-up from Idle, the clock is reapplied to the CPU and instruction execution begins immediately, starting with the instruction following the `PWRSV` instruction, or the first instruction in the ISR.

## 10.2.3 INTERRUPTS COINCIDENT WITH POWER SAVE INSTRUCTIONS

Any interrupt that coincides with the execution of a `PWRSV` instruction is held off until entry into Sleep or Idle mode has completed. The device then wakes up from Sleep or Idle mode.

## 10.3 Doze Mode

Generally, changing clock speed and invoking one of the power-saving modes are the preferred strategies for reducing power consumption. There may be circumstances, however, where this is not practical. For example, it may be necessary for an application to maintain uninterrupted synchronous communication, even while it is doing nothing else. Reducing system clock speed may introduce communication errors, while using a power-saving mode may stop communications completely.

Doze mode is a simple and effective alternative method to reduce power consumption while the device is still executing code. In this mode, the system clock continues to operate from the same source and at the same speed. Peripheral modules continue to be clocked at the same speed, while the CPU clock speed is reduced. Synchronization between the two clock domains is maintained, allowing the peripherals to access the SFRs while the CPU executes code at a slower rate.

Doze mode is enabled by setting the DOZEN bit (`CLKDIV<11>`). The ratio between peripheral and core clock speed is determined by the `DOZE<2:0>` bits (`CLKDIV<14:12>`). There are eight possible configurations, from 1:1 to 1:128, with 1:1 being the default setting.

It is also possible to use Doze mode to selectively reduce power consumption in event-driven applications. This allows clock-sensitive functions, such as synchronous communications, to continue without interruption while the CPU idles, waiting for something to invoke an interrupt routine. Enabling the automatic return to full-speed CPU operation on interrupts is enabled by setting the ROI bit (`CLKDIV<15>`). By default, interrupt events have no effect on Doze mode operation.

For example, suppose the device is operating at 20 MIPS and the CAN module has been configured for 500 kbps based on this device operating speed. If the device is now placed in Doze mode with a clock frequency ratio of 1:4, the CAN module continues to communicate at the required bit rate of 500 kbps, but the CPU now starts executing instructions at a frequency of 5 MIPS.

## 10.4 Peripheral Module Disable

The Peripheral Module Disable (PMD) registers provide a method to disable a peripheral module by stopping all clock sources supplied to that module. When a peripheral is disabled via the appropriate PMD control bit, the peripheral is in a minimum power consumption state. The control and status registers associated with the peripheral are also disabled, so writes to those registers will have no effect and read values will be invalid.

A peripheral module is only enabled if both the associated bit in the PMD register is cleared and the peripheral is supported by the specific dsPIC® DSC variant. If the peripheral is present in the device, it is enabled in the PMD register by default.

**Note:** If a PMD bit is set, the corresponding module is disabled after a delay of 1 instruction cycle. Similarly, if a PMD bit is cleared, the corresponding module is enabled after a delay of 1 instruction cycle (assuming the module control registers are already configured to enable module operation).

# PIC24HJXXXGPX06/X08/X10

**REGISTER 10-1: PMD1: PERIPHERAL MODULE DISABLE CONTROL REGISTER 1**

|        |       |       |       |       |     |       |     |
|--------|-------|-------|-------|-------|-----|-------|-----|
| R/W-0  | R/W-0 | R/W-0 | R/W-0 | R/W-0 | U-0 | U-0   | U-0 |
| T5MD   | T4MD  | T3MD  | T2MD  | T1MD  | —   | —     | —   |
| bit 15 |       |       |       |       |     | bit 8 |     |

|        |       |       |        |        |       |       |       |
|--------|-------|-------|--------|--------|-------|-------|-------|
| R/W-0  | R/W-0 | R/W-0 | R/W-0  | R/W-0  | R/W-0 | R/W-0 | R/W-0 |
| I2C1MD | U2MD  | U1MD  | SPI2MD | SPI1MD | C2MD  | C1MD  | AD1MD |
| bit 7  |       |       |        |        |       | bit 0 |       |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **T5MD:** Timer5 Module Disable bit

1 = Timer5 module is disabled  
0 = Timer5 module is enabled

bit 14 **T4MD:** Timer4 Module Disable bit

1 = Timer4 module is disabled  
0 = Timer4 module is enabled

bit 13 **T3MD:** Timer3 Module Disable bit

1 = Timer3 module is disabled  
0 = Timer3 module is enabled

bit 12 **T2MD:** Timer2 Module Disable bit

1 = Timer2 module is disabled  
0 = Timer2 module is enabled

bit 11 **T1MD:** Timer1 Module Disable bit

1 = Timer1 module is disabled  
0 = Timer1 module is enabled

bit 10-8 **Unimplemented:** Read as '0'

bit 7 **I2C1MD:** I<sup>2</sup>C1 Module Disable bit

1 = I<sup>2</sup>C1 module is disabled  
0 = I<sup>2</sup>C1 module is enabled

bit 6 **U2MD:** UART2 Module Disable bit

1 = UART2 module is disabled  
0 = UART2 module is enabled

bit 5 **U1MD:** UART1 Module Disable bit

1 = UART1 module is disabled  
0 = UART1 module is enabled

bit 4 **SPI2MD:** SPI2 Module Disable bit

1 = SPI2 module is disabled  
0 = SPI2 module is enabled

bit 3 **SPI1MD:** SPI1 Module Disable bit

1 = SPI1 module is disabled  
0 = SPI1 module is enabled

bit 2 **C2MD:** ECAN2 Module Disable bit

1 = ECAN2 module is disabled  
0 = ECAN2 module is enabled

# PIC24HJXXXGPX06/X08/X10

---

**REGISTER 10-1:   PMD1: PERIPHERAL MODULE DISABLE CONTROL REGISTER 1 (CONTINUED)**

- bit 1           **C1MD:** ECAN1 Module Disable bit
  - 1 = ECAN1 module is disabled
  - 0 = ECAN1 module is enabled
- bit 0           **AD1MD:** ADC1 Module Disable bit
  - 1 = ADC1 module is disabled
  - 0 = ADC1 module is enabled

# PIC24HJXXXGPX06/X08/X10

## REGISTER 10-2: PMD2: PERIPHERAL MODULE DISABLE CONTROL REGISTER 2

|        |       |       |       |       |       |       |       |
|--------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0  | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| IC8MD  | IC7MD | IC6MD | IC5MD | IC4MD | IC3MD | IC2MD | IC1MD |
| bit 15 |       |       |       |       |       | bit 8 |       |

|       |       |       |       |       |       |       |       |
|-------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| OC8MD | OC7MD | OC6MD | OC5MD | OC4MD | OC3MD | OC2MD | OC1MD |
| bit 7 |       |       |       |       |       | bit 0 |       |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

- bit 15      **IC8MD:** Input Capture 8 Module Disable bit  
                  1 = Input Capture 8 module is disabled  
                  0 = Input Capture 8 module is enabled
- bit 14      **IC7MD:** Input Capture 7 Module Disable bit  
                  1 = Input Capture 7 module is disabled  
                  0 = Input Capture 7 module is enabled
- bit 13      **IC6MD:** Input Capture 6 Module Disable bit  
                  1 = Input Capture 6 module is disabled  
                  0 = Input Capture 6 module is enabled
- bit 12      **IC5MD:** Input Capture 5 Module Disable bit  
                  1 = Input Capture 5 module is disabled  
                  0 = Input Capture 5 module is enabled
- bit 11      **IC4MD:** Input Capture 4 Module Disable bit  
                  1 = Input Capture 4 module is disabled  
                  0 = Input Capture 4 module is enabled
- bit 10      **IC3MD:** Input Capture 3 Module Disable bit  
                  1 = Input Capture 3 module is disabled  
                  0 = Input Capture 3 module is enabled
- bit 9        **IC2MD:** Input Capture 2 Module Disable bit  
                  1 = Input Capture 2 module is disabled  
                  0 = Input Capture 2 module is enabled
- bit 8        **IC1MD:** Input Capture 1 Module Disable bit  
                  1 = Input Capture 1 module is disabled  
                  0 = Input Capture 1 module is enabled
- bit 7        **OC8MD:** Output Compare 8 Module Disable bit  
                  1 = Output Compare 8 module is disabled  
                  0 = Output Compare 8 module is enabled
- bit 6        **OC7MD:** Output Compare 4 Module Disable bit  
                  1 = Output Compare 7 module is disabled  
                  0 = Output Compare 7 module is enabled
- bit 5        **OC6MD:** Output Compare 6 Module Disable bit  
                  1 = Output Compare 6 module is disabled  
                  0 = Output Compare 6 module is enabled
- bit 4        **OC5MD:** Output Compare 5 Module Disable bit  
                  1 = Output Compare 5 module is disabled  
                  0 = Output Compare 5 module is enabled

# PIC24HJXXXGPX06/X08/X10

---

## REGISTER 10-2: PMD2: PERIPHERAL MODULE DISABLE CONTROL REGISTER 2 (CONTINUED)

|       |                                                                                                                                        |
|-------|----------------------------------------------------------------------------------------------------------------------------------------|
| bit 3 | <b>OC4MD:</b> Output Compare 4 Module Disable bit<br>1 = Output Compare 4 module is disabled<br>0 = Output Compare 4 module is enabled |
| bit 2 | <b>OC3MD:</b> Output Compare 3 Module Disable bit<br>1 = Output Compare 3 module is disabled<br>0 = Output Compare 3 module is enabled |
| bit 1 | <b>OC2MD:</b> Output Compare 2 Module Disable bit<br>1 = Output Compare 2 module is disabled<br>0 = Output Compare 2 module is enabled |
| bit 0 | <b>OC1MD:</b> Output Compare 1 Module Disable bit<br>1 = Output Compare 1 module is disabled<br>0 = Output Compare 1 module is enabled |

# PIC24HJXXXGPX06/X08/X10

**REGISTER 10-3: PMD3: PERIPHERAL MODULE DISABLE CONTROL REGISTER 3**

|        |       |       |       |       |     |     |     |
|--------|-------|-------|-------|-------|-----|-----|-----|
| R/W-0  | R/W-0 | R/W-0 | R/W-0 | U-0   | U-0 | U-0 | U-0 |
| T9MD   | T8MD  | T7MD  | T6MD  | —     | —   | —   | —   |
| bit 15 |       |       |       | bit 8 |     |     |     |

|       |     |     |     |     |     |        |       |
|-------|-----|-----|-----|-----|-----|--------|-------|
| U-0   | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0  | R/W-0 |
| —     | —   | —   | —   | —   | —   | I2C2MD | AD2MD |
| bit 7 |     |     |     |     |     | bit 0  |       |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

- bit 15      **T9MD:** Timer9 Module Disable bit  
                  1 = Timer9 module is disabled  
                  0 = Timer9 module is enabled
- bit 14      **T8MD:** Timer8 Module Disable bit  
                  1 = Timer8 module is disabled  
                  0 = Timer8 module is enabled
- bit 13      **T7MD:** Timer7 Module Disable bit  
                  1 = Timer7 module is disabled  
                  0 = Timer7 module is enabled
- bit 12      **T6MD:** Timer6 Module Disable bit  
                  1 = Timer6 module is disabled  
                  0 = Timer6 module is enabled
- bit 11-2    **Unimplemented:** Read as '0'
- bit 1      **I2C2MD:** I2C2 Module Disable bit  
                  1 = I2C2 module is disabled  
                  0 = I2C2 module is enabled
- bit 0      **AD2MD:** AD2 Module Disable bit  
                  1 = AD2 module is disabled  
                  0 = AD2 module is enabled

# PIC24HJXXXGPX06/X08/X10

---

NOTES:

# PIC24HJXXXGPX06/X08/X10

## 11.0 I/O PORTS

**Note:** This data sheet summarizes the features of the PIC24HJXXXGPX06/X08/X10 family of devices. However, it is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the “PIC24H Family Reference Manual”, **Section 10. “I/O Ports”** (DS70230), which is available from the Microchip website ([www.microchip.com](http://www.microchip.com)).

All of the device pins (except VDD, VSS, MCLR and OSC1/CLKIN) are shared between the peripherals and the parallel I/O ports. All I/O input ports feature Schmitt Trigger inputs for improved noise immunity.

### 11.1 Parallel I/O (PIO) Ports

A parallel I/O port that shares a pin with a peripheral is, in general, subservient to the peripheral. The peripheral's output buffer data and control signals are provided to a pair of multiplexers. The multiplexers select whether the peripheral or the associated port has ownership of the output data and control signals of the I/O pin. The logic also prevents “loop through”, in which a port's digital output can drive the input of a peripheral that shares the same pin. Figure 11-1 shows how ports are shared with other peripherals and the associated I/O pin to which they are connected.

When a peripheral is enabled and actively driving an associated pin, the use of the pin as a general purpose output pin is disabled. The I/O pin may be read, but the output driver for the parallel port bit will be disabled. If a peripheral is enabled, but the peripheral is not actively driving a pin, that pin may be driven by a port.


All port pins have three registers directly associated with their operation as digital I/O. The data direction register (TRISx) determines whether the pin is an input or an output. If the data direction bit is a ‘1’, then the pin is an input. All port pins are defined as inputs after a Reset. Reads from the latch (LATx), read the latch. Writes to the latch, write the latch. Reads from the port (PORTx), read the port pins, while writes to the port pins, write the latch.

Any bit and its associated data and control registers that are not valid for a particular device will be disabled. That means the corresponding LATx and TRISx registers and the port pins will read as zeros.

When a pin is shared with another peripheral or function that is defined as an input only, it is nevertheless regarded as a dedicated port because there is no other competing source of outputs. An example is the INT4 pin.

**Note:** The voltage on a digital input pin can be between -0.3V to 5.6V.

**FIGURE 11-1: BLOCK DIAGRAM OF A TYPICAL SHARED PORT STRUCTURE**

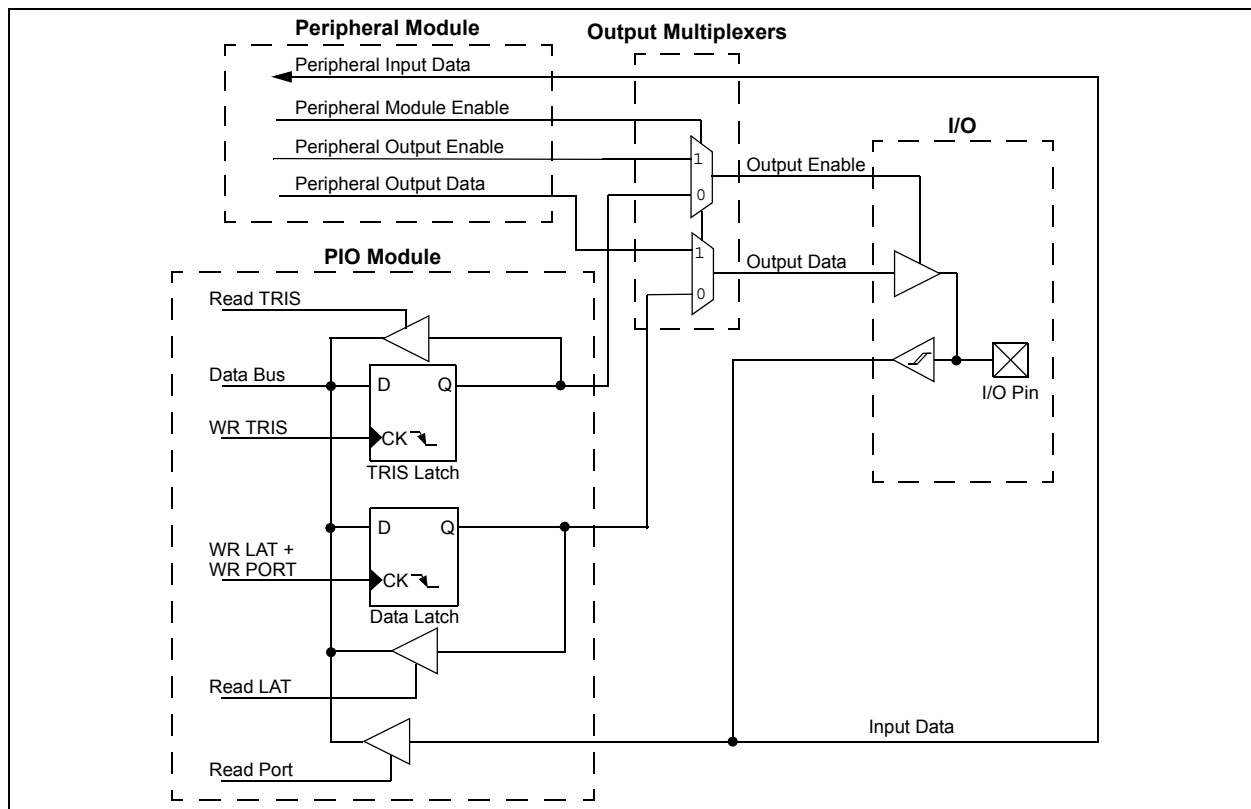

# PIC24HJXXXGPX06/X08/X10

## 11.2 Open-Drain Configuration

In addition to the PORT, LAT and TRIS registers for data control, some port pins can also be individually configured for either digital or open-drain output. This is controlled by the Open-Drain Control register, ODCx, associated with each port. Setting any of the bits configures the corresponding pin to act as an open-drain output.

The open-drain feature allows the generation of outputs higher than VDD (e.g., 5V) on any desired digital only pins by using external pull-up resistors. The maximum open-drain voltage allowed is the same as the maximum VIH specification.

See the “Pin Diagrams” for the available pins and their functionality.

## 11.3 Configuring Analog Port Pins

The use of the ADxPCFGH, ADxPCFGL and TRIS registers control the operation of the Analog-to-Digital port pins. The port pins that are desired as analog inputs must have their corresponding TRIS bit set (input). If the TRIS bit is cleared (output), the digital output level (VOH or VOL) is converted.

Clearing any bit in the ADxPCFGH or ADxPCFGL register configures the corresponding bit to be an analog pin. This is also the Reset state of any I/O pin that has an analog (ANx) function associated with it.

**Note:** In devices with two ADC modules, if the corresponding PCFG bit in either AD1PCFGH(L) and AD2PCFGH(L) is cleared, the pin is configured as an analog input.

When reading the PORT register, all pins configured as analog input channels will read as cleared (a low level).

Pins configured as digital inputs will not convert an analog input. Analog levels on any pin that is defined as a digital input (including the ANx pins) can cause the input buffer to consume current that exceeds the device specifications.

**Note:** The voltage on an analog input pin can be between -0.3V to (VDD + 0.3 V).

## 11.4 I/O Port Write/Read Timing

One instruction cycle is required between a port direction change or port write operation and a read operation of the same port. Typically, this instruction would be a NOP.

## 11.5 Input Change Notification

The input change notification function of the I/O ports allows the PIC24HJXXXGPX06/X08/X10 devices to generate interrupt requests to the processor in response to a change-of-state on selected input pins. This feature is capable of detecting input change-of-states even in Sleep mode, when the clocks are disabled. Depending on the device pin count, there are up to 24 external signals (CN0 through CN23) that can be selected (enabled) for generating an interrupt request on a change-of-state.

There are four control registers associated with the CN module. The CNEN1 and CNEN2 registers contain the CN interrupt enable (CNxIE) control bits for each of the CN input pins. Setting any of these bits enables a CN interrupt for the corresponding pins.

Each CN pin also has a weak pull-up connected to it. The pull-ups act as a current source that is connected to the pin and eliminate the need for external resistors when push button or keypad devices are connected. The pull-ups are enabled separately using the CNPU1 and CNPU2 registers, which contain the weak pull-up enable (CNxPUE) bits for each of the CN pins. Setting any of the control bits enables the weak pull-ups for the corresponding pins.

**Note:** Pull-ups on change notification pins should always be disabled whenever the port pin is configured as a digital output.

### EXAMPLE 11-1: PORT WRITE/READ EXAMPLE

```
MOV    0xFF00, W0          ; Configure PORTB<15:8> as inputs
MOV    W0, TRISBB          ; and PORTB<7:0> as outputs
NOP                                ; Delay 1 cycle
btss   PORTB, #13          ; Next Instruction
```

## 12.0 TIMER1

**Note:** This data sheet summarizes the features of the PIC24HJXXXGPX06/X08/X10 family of devices. However, it is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the “PIC24H Family Reference Manual”, **Section 11. “Timers”** (DS70244), which is available from the Microchip website ([www.microchip.com](http://www.microchip.com)).

The Timer1 module is a 16-bit timer, which can serve as the time counter for the real-time clock, or operate as a free-running interval timer/counter. Timer1 can operate in three modes:

- 16-bit Timer
- 16-bit Synchronous Counter
- 16-bit Asynchronous Counter

Timer1 also supports these features:


- Timer gate operation
- Selectable prescaler settings
- Timer operation during CPU Idle and Sleep modes
- Interrupt on 16-bit Period register match or falling edge of external gate signal

Figure 12-1 presents a block diagram of the 16-bit timer module.

To configure Timer1 for operation:

1. Set the TON bit (= 1) in the T1CON register.
2. Select the timer prescaler ratio using the TCKPS<1:0> bits in the T1CON register.
3. Set the Clock and Gating modes using the TCS and TGATE bits in the T1CON register.
4. Set or clear the TSYNC bit in T1CON to select synchronous or asynchronous operation.
5. Load the timer period value into the PR1 register.
6. If interrupts are required, set the interrupt enable bit, T1IE. Use the priority bits, T1IP<2:0>, to set the interrupt priority.

**FIGURE 12-1: 16-BIT TIMER1 MODULE BLOCK DIAGRAM**

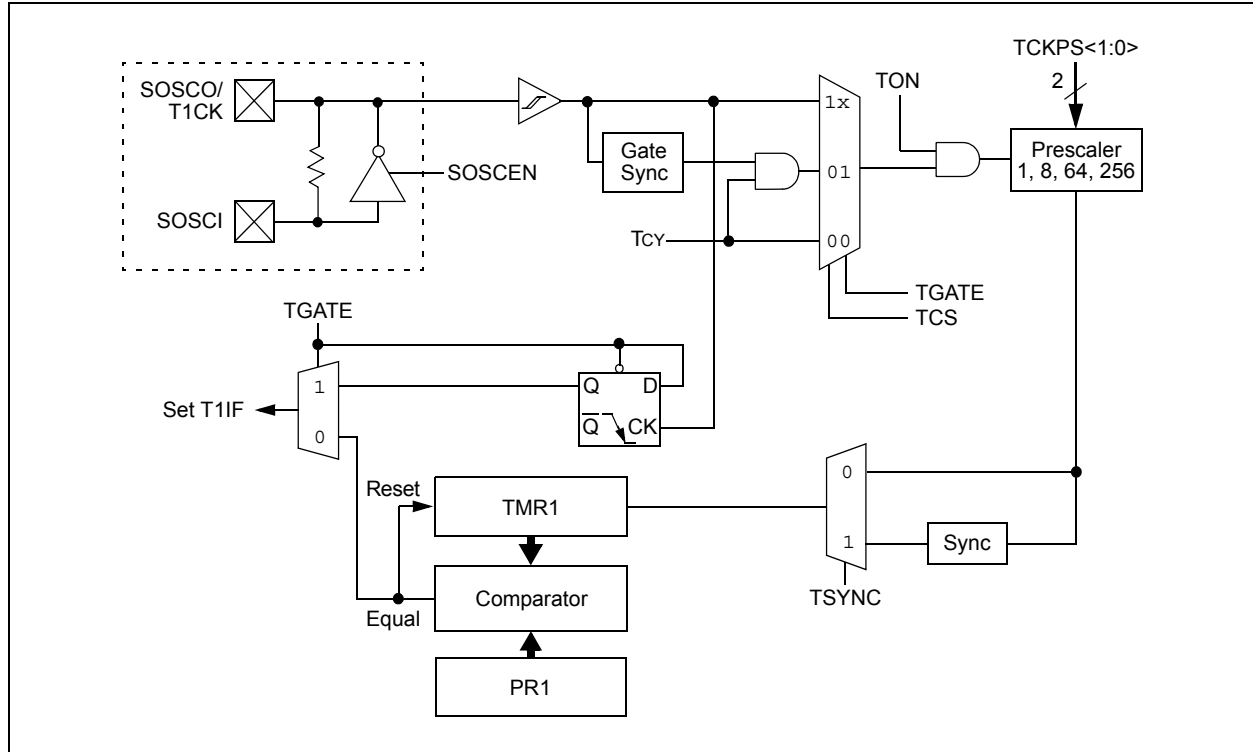

# PIC24HJXXXGPX06/X08/X10

## REGISTER 12-1: T1CON: TIMER1 CONTROL REGISTER

|        |     |       |     |     |     |     |       |
|--------|-----|-------|-----|-----|-----|-----|-------|
| R/W-0  | U-0 | R/W-0 | U-0 | U-0 | U-0 | U-0 | U-0   |
| TON    | —   | TSIDL | —   | —   | —   | —   | —     |
| bit 15 |     |       |     |     |     |     | bit 8 |

|       |       |            |       |     |       |       |       |
|-------|-------|------------|-------|-----|-------|-------|-------|
| U-0   | R/W-0 | R/W-0      | R/W-0 | U-0 | R/W-0 | R/W-0 | U-0   |
| —     | TGATE | TCKPS<1:0> |       | —   | TSYNC | TCS   | —     |
| bit 7 |       |            |       |     |       |       | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

- bit 15      **TON:** Timer1 On bit  
               1 = Starts 16-bit Timer1  
               0 = Stops 16-bit Timer1
- bit 14      **Unimplemented:** Read as '0'
- bit 13      **TSIDL:** Stop in Idle Mode bit  
               1 = Discontinue module operation when device enters Idle mode  
               0 = Continue module operation in Idle mode
- bit 12-7    **Unimplemented:** Read as '0'
- bit 6        **TGATE:** Timer1 Gated Time Accumulation Enable bit  
               When T1CS = 1:  
               This bit is ignored.  
               When T1CS = 0:  
               1 = Gated time accumulation enabled  
               0 = Gated time accumulation disabled
- bit 5-4     **TCKPS<1:0>:** Timer1 Input Clock Prescale Select bits  
               11 = 1:256  
               10 = 1:64  
               01 = 1:8  
               00 = 1:1
- bit 3        **Unimplemented:** Read as '0'
- bit 2        **TSYNC:** Timer1 External Clock Input Synchronization Select bit  
               When TCS = 1:  
               1 = Synchronize external clock input  
               0 = Do not synchronize external clock input  
               When TCS = 0:  
               This bit is ignored.
- bit 1        **TCS:** Timer1 Clock Source Select bit  
               1 = External clock from pin T1CK (on the rising edge)  
               0 = Internal clock (Fcy)
- bit 0        **Unimplemented:** Read as '0'

## 13.0 TIMER2/3, TIMER4/5, TIMER6/7 AND TIMER8/9

**Note:** This data sheet summarizes the features of the PIC24HJXXXGPX06/X08/X10 family of devices. However, it is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the “PIC24H Family Reference Manual”, **Section 11. “Timers”** (DS70244), which is available from the Microchip website ([www.microchip.com](http://www.microchip.com)).

The Timer2/3, Timer4/5, Timer6/7 and Timer8/9 modules are 32-bit timers, which can also be configured as four independent 16-bit timers with selectable operating modes.

As a 32-bit timer, Timer2/3, Timer4/5, Timer6/7 and Timer8/9 operate in three modes:

- Two Independent 16-bit Timers (e.g., Timer2 and Timer3) with all 16-bit operating modes (except Asynchronous Counter mode)
- Single 32-bit Timer
- Single 32-bit Synchronous Counter

They also support these features:

- Timer Gate Operation
- Selectable Prescaler Settings
- Timer Operation during Idle and Sleep modes
- Interrupt on a 32-bit Period Register Match
- Time Base for Input Capture and Output Compare Modules (Timer2 and Timer3 only)
- ADC1 Event Trigger (Timer2/3 only)
- ADC2 Event Trigger (Timer4/5 only)

Individually, all eight of the 16-bit timers can function as synchronous timers or counters. They also offer the features listed above, except for the event trigger; this is implemented only with Timer2/3. The operating modes and enabled features are determined by setting the appropriate bit(s) in the T2CON, T3CON, T4CON, T5CON, T6CON, T7CON, T8CON and T9CON registers. T2CON, T4CON, T6CON and T8CON are shown in generic form in Register 13-1. T3CON, T5CON, T7CON and T9CON are shown in Register 13-2.

For 32-bit timer/counter operation, Timer2, Timer4, Timer6 or Timer8 is the least significant word; Timer3, Timer5, Timer7 or Timer9 is the most significant word of the 32-bit timers.

**Note:** For 32-bit operation, T3CON, T5CON, T7CON and T9CON control bits are ignored. Only T2CON, T4CON, T6CON and T8CON control bits are used for setup and control. Timer2, Timer4, Timer6 and Timer8 clock and gate inputs are utilized for the 32-bit timer modules, but an interrupt is generated with the Timer3, Timer5, Timer7 and Timer9 interrupt flags.

To configure Timer2/3, Timer4/5, Timer6/7 or Timer8/9 for 32-bit operation:

1. Set the corresponding T32 control bit.
2. Select the prescaler ratio for Timer2, Timer4, Timer6 or Timer8 using the TCKPS<1:0> bits.
3. Set the Clock and Gating modes using the corresponding TCS and TGATE bits.
4. Load the timer period value. PR3, PR5, PR7 or PR9 contains the most significant word of the value, while PR2, PR4, PR6 or PR8 contains the least significant word.
5. If interrupts are required, set the interrupt enable bit, T3IE, T5IE, T7IE or T9IE. Use the priority bits, T3IP<2:0>, T5IP<2:0>, T7IP<2:0> or T9IP<2:0>, to set the interrupt priority. While Timer2, Timer4, Timer6 or Timer8 control the timer, the interrupt appears as a Timer3, Timer5, Timer7 or Timer9 interrupt.
6. Set the corresponding TON bit.

The timer value at any point is stored in the register pair, TMR3:TMR2, TMR5:TMR4, TMR7:TMR6 or TMR9:TMR8. TMR3, TMR5, TMR7 or TMR9 always contains the most significant word of the count, while TMR2, TMR4, TMR6 or TMR8 contains the least significant word.

To configure any of the timers for individual 16-bit operation:


1. Clear the T32 bit corresponding to that timer.
2. Select the timer prescaler ratio using the TCKPS<1:0> bits.
3. Set the Clock and Gating modes using the TCS and TGATE bits.
4. Load the timer period value into the PRx register.
5. If interrupts are required, set the interrupt enable bit, TxIE. Use the priority bits, TxIP<2:0>, to set the interrupt priority.
6. Set the TON bit.

# PIC24HJXXXGPX06/X08/X10


A block diagram for a 32-bit timer pair (Timer4/5) example is shown in Figure 13-1 and a timer (Timer4) operating in 16-bit mode example is shown in Figure 13-2.

**Note:** Only Timer2 and Timer3 can trigger a DMA data transfer.

**FIGURE 13-1: TIMER2/3 (32-BIT) BLOCK DIAGRAM<sup>(1)</sup>**

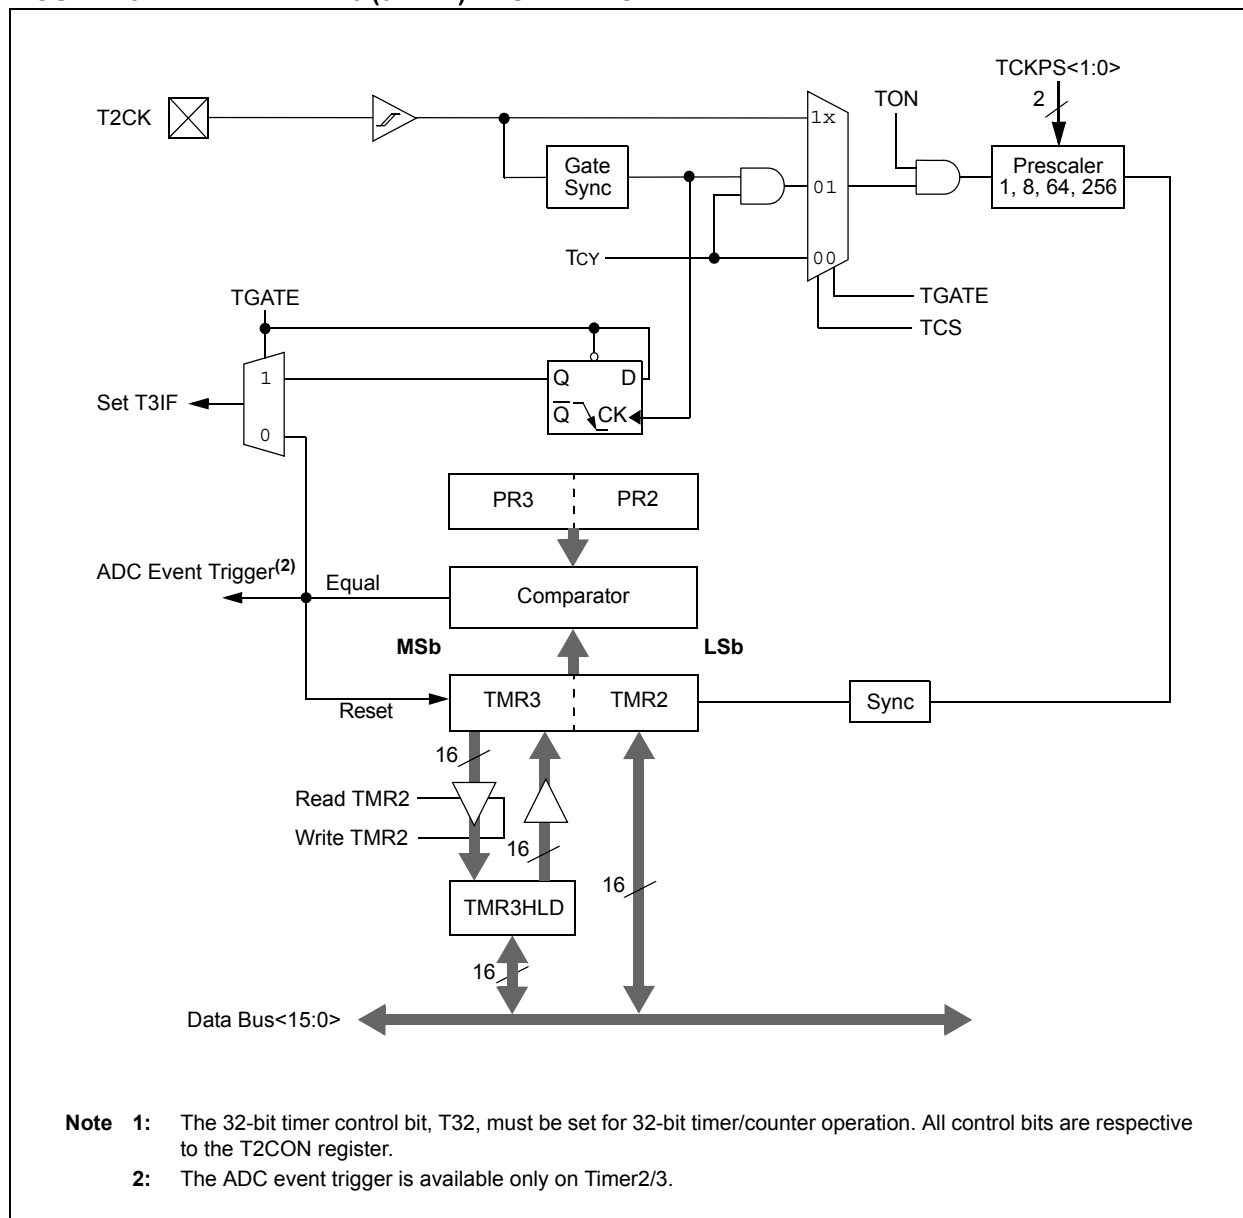

# PIC24HJXXXGPX06/X08/X10

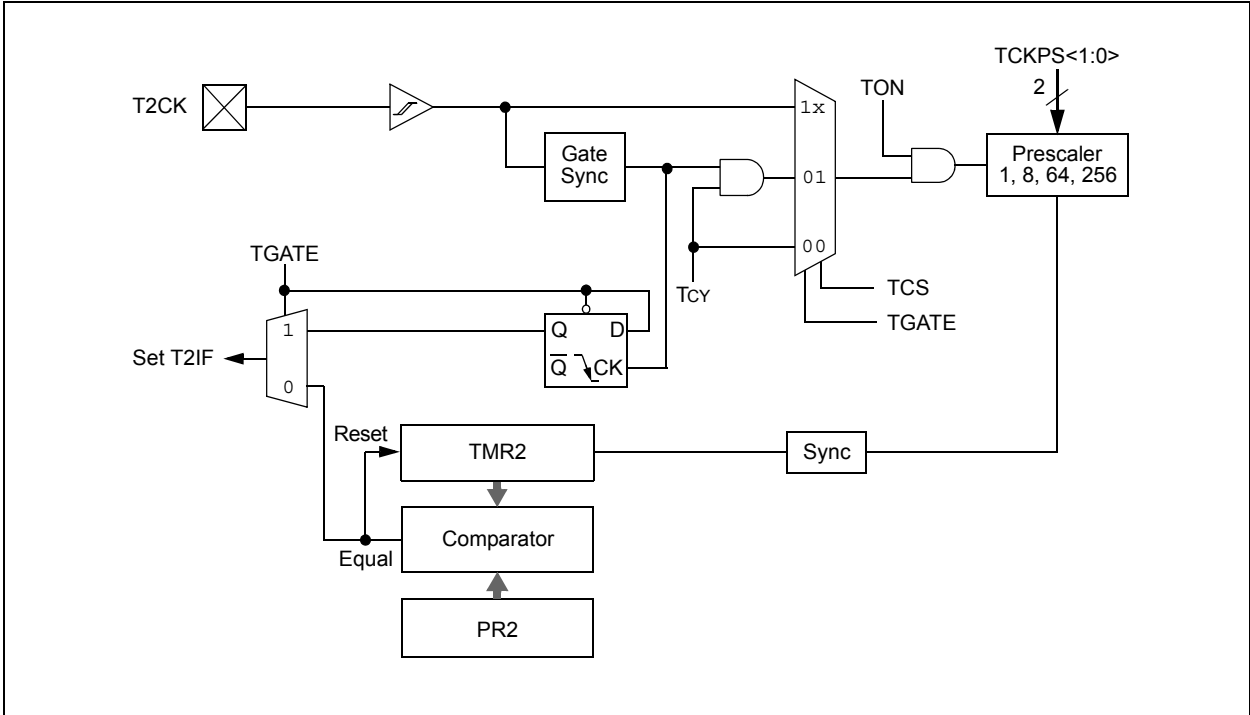**FIGURE 13-2: TIMER2 (16-BIT) BLOCK DIAGRAM**

# PIC24HJXXXGPX06/X08/X10

## REGISTER 13-1: TxCON (T2CON, T4CON, T6CON OR T8CON) CONTROL REGISTER

|        |     |       |     |     |     |       |     |
|--------|-----|-------|-----|-----|-----|-------|-----|
| R/W-0  | U-0 | R/W-0 | U-0 | U-0 | U-0 | U-0   | U-0 |
| TON    | —   | TSIDL | —   | —   | —   | —     | —   |
| bit 15 |     |       |     |     |     | bit 8 |     |

|       |       |            |       |       |     |                    |     |
|-------|-------|------------|-------|-------|-----|--------------------|-----|
| U-0   | R/W-0 | R/W-0      | R/W-0 | R/W-0 | U-0 | R/W-0              | U-0 |
| —     | TGATE | TCKPS<1:0> |       | T32   | —   | TCS <sup>(1)</sup> | —   |
| bit 7 |       |            |       |       |     | bit 0              |     |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **TON:** Timerx On bit

When T32 = 1:

1 = Starts 32-bit Timerx/y

0 = Stops 32-bit Timerx/y

When T32 = 0:

1 = Starts 16-bit Timerx

0 = Stops 16-bit Timerx

bit 14 **Unimplemented:** Read as '0'

bit 13 **TSIDL:** Stop in Idle Mode bit

1 = Discontinue module operation when device enters Idle mode

0 = Continue module operation in Idle mode

bit 12-7 **Unimplemented:** Read as '0'

bit 6 **TGATE:** Timerx Gated Time Accumulation Enable bit

When TCS = 1:

This bit is ignored.

When TCS = 0:

1 = Gated time accumulation enabled

0 = Gated time accumulation disabled

bit 5-4 **TCKPS<1:0>:** Timerx Input Clock Prescale Select bits

11 = 1:256

10 = 1:64

01 = 1:8

00 = 1:1

bit 3 **T32:** 32-bit Timer Mode Select bit

1 = Timerx and Timery form a single 32-bit timer

0 = Timerx and Timery act as two 16-bit timers

bit 2 **Unimplemented:** Read as '0'

bit 1 **TCS:** Timerx Clock Source Select bit<sup>(1)</sup>

1 = External clock from pin TxCK (on the rising edge)

0 = Internal clock (Fcy)

bit 0 **Unimplemented:** Read as '0'

**Note 1:** The TxCK pin is not available for all timers. Refer to the “Pin Diagrams” section for the available pins.

# PIC24HJXXXGPX06/X08/X10

## REGISTER 13-2: TyCON (T3CON, T5CON, T7CON OR T9CON) CONTROL REGISTER

|                    |     |                      |     |     |     |     |       |
|--------------------|-----|----------------------|-----|-----|-----|-----|-------|
| R/W-0              | U-0 | R/W-0                | U-0 | U-0 | U-0 | U-0 | U-0   |
| TON <sup>(1)</sup> | —   | TSIDL <sup>(2)</sup> | —   | —   | —   | —   | —     |
| bit 15             |     |                      |     |     |     |     | bit 8 |

|       |                      |                           |       |     |     |                      |       |
|-------|----------------------|---------------------------|-------|-----|-----|----------------------|-------|
| U-0   | R/W-0                | R/W-0                     | R/W-0 | U-0 | U-0 | R/W-0                | U-0   |
| —     | TGATE <sup>(1)</sup> | TCKPS<1:0> <sup>(1)</sup> |       | —   | —   | TCS <sup>(1,3)</sup> | —     |
| bit 7 |                      |                           |       |     |     |                      | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

|          |                                                                                                                                                                                                                               |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| bit 15   | <b>TON:</b> Timery On bit <sup>(1)</sup><br>1 = Starts 16-bit Timery<br>0 = Stops 16-bit Timery                                                                                                                               |
| bit 14   | <b>Unimplemented:</b> Read as '0'                                                                                                                                                                                             |
| bit 13   | <b>TSIDL:</b> Stop in Idle Mode bit <sup>(2)</sup><br>1 = Discontinue module operation when device enters Idle mode<br>0 = Continue module operation in Idle mode                                                             |
| bit 12-7 | <b>Unimplemented:</b> Read as '0'                                                                                                                                                                                             |
| bit 6    | <b>TGATE:</b> Timery Gated Time Accumulation Enable bit <sup>(1)</sup><br><u>When TCS = 1:</u><br>This bit is ignored.<br><u>When TCS = 0:</u><br>1 = Gated time accumulation enabled<br>0 = Gated time accumulation disabled |
| bit 5-4  | <b>TCKPS&lt;1:0&gt;:</b> Timer3 Input Clock Prescale Select bits <sup>(1)</sup><br>11 = 1:256<br>10 = 1:64<br>01 = 1:8<br>00 = 1:1                                                                                            |
| bit 3-2  | <b>Unimplemented:</b> Read as '0'                                                                                                                                                                                             |
| bit 1    | <b>TCS:</b> Timery Clock Source Select bit <sup>(1,3)</sup><br>1 = External clock from pin TyCK (on the rising edge)<br>0 = Internal clock (Fcy)                                                                              |
| bit 0    | <b>Unimplemented:</b> Read as '0'                                                                                                                                                                                             |

**Note 1:** When 32-bit operation is enabled (T2CON<3> = 1), these bits have no effect on Timery operation; all timer functions are set through T2CON.

**2:** When 32-bit timer operation is enabled (T32 = 1) in the Timer Control register (TxCON<3>), the TSIDL bit must be cleared to operate the 32-bit timer in Idle mode.

**3:** The TyCK pin is not available for all timers. Refer to the “Pin Diagrams” section for the available pins.

# PIC24HJXXXGPX06/X08/X10

---

NOTES:

# PIC24HJXXXGPX06/X08/X10

## 14.0 INPUT CAPTURE

**Note:** This data sheet summarizes the features of the PIC24HJXXXGPX06/X08/X10 family of devices. However, it is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the “*PIC24H Family Reference Manual*”, **Section 12. “Input Capture”** (DS70248), which is available from the Microchip website ([www.microchip.com](http://www.microchip.com)).

The input capture module is useful in applications requiring frequency (period) and pulse measurement. The PIC24HJXXGPX06/X08/X10 devices support up to eight input capture channels.

The input capture module captures the 16-bit value of the selected Time Base register when an event occurs at the ICx pin. The events that cause a capture event are listed below in three categories:

1. Simple Capture Event modes
  - Capture timer value on every falling edge of input at ICx pin
  - Capture timer value on every rising edge of input at ICx pin

2. Capture timer value on every edge (rising and falling)
3. Prescaler Capture Event modes
  - Capture timer value on every 4th rising edge of input at ICx pin
  - Capture timer value on every 16th rising edge of input at ICx pin


Each input capture channel can select between one of two 16-bit timers (Timer2 or Timer3) for the time base. The selected timer can use either an internal or external clock.

Other operational features include:

- Device wake-up from capture pin during CPU Sleep and Idle modes
- Interrupt on input capture event
- 4-word FIFO buffer for capture values
  - Interrupt optionally generated after 1, 2, 3 or 4 buffer locations are filled
- Input capture can also be used to provide additional sources of external interrupts

**Note:** Only IC1 and IC2 can trigger a DMA data transfer. If DMA data transfers are required, the FIFO buffer size must be set to 1 (IC1<1:0>= 00).

**FIGURE 14-1: INPUT CAPTURE BLOCK DIAGRAM**

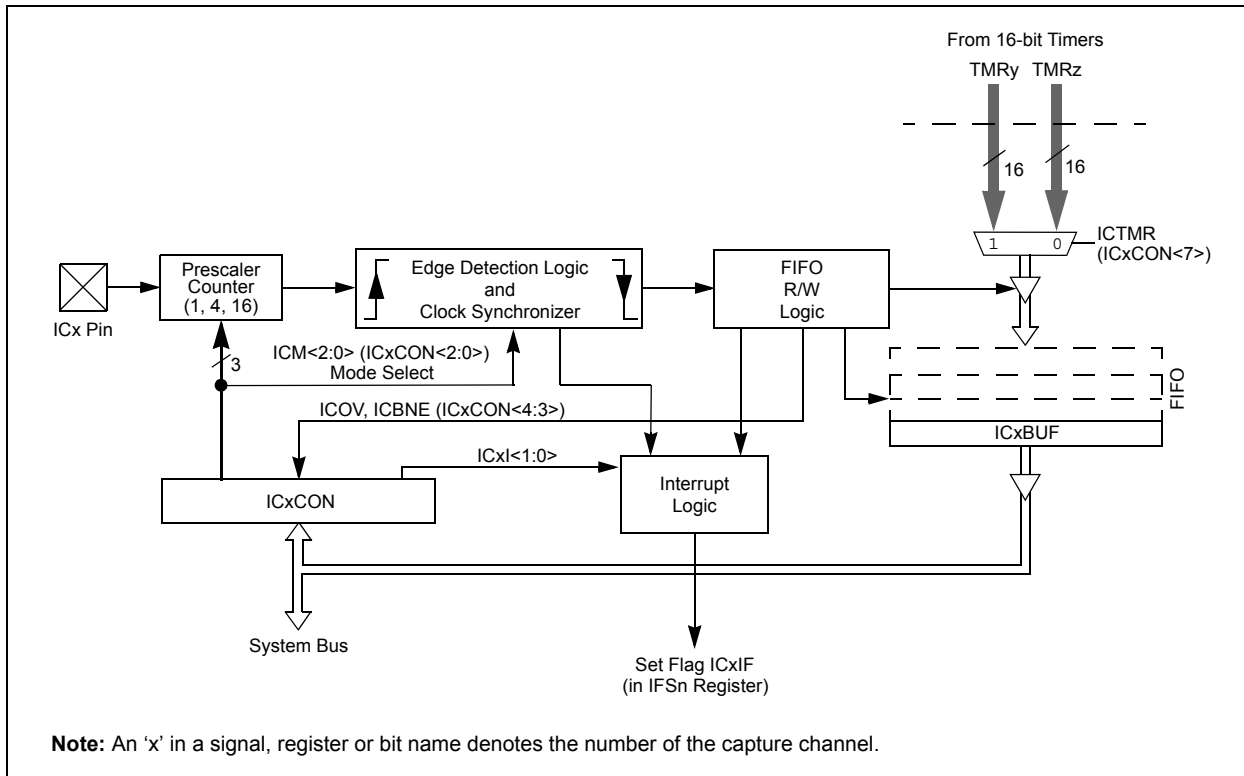

# PIC24HJXXXGPX06/X08/X10

## 14.1 Input Capture Registers

REGISTER 14-1: ICxCON: INPUT CAPTURE x CONTROL REGISTER

|        |     |        |     |     |     |     |       |
|--------|-----|--------|-----|-----|-----|-----|-------|
| U-0    | U-0 | R/W-0  | U-0 | U-0 | U-0 | U-0 | U-0   |
| —      | —   | ICSIDL | —   | —   | —   | —   | —     |
| bit 15 |     |        |     |     |     |     | bit 8 |

|                      |          |       |         |          |       |       |       |
|----------------------|----------|-------|---------|----------|-------|-------|-------|
| R/W-0                | R/W-0    | R/W-0 | R-0, HC | R-0, HC  | R/W-0 | R/W-0 | R/W-0 |
| ICTMR <sup>(1)</sup> | ICI<1:0> | ICOV  | ICBNE   | ICM<2:0> |       |       |       |
| bit 7                |          |       |         |          |       |       | bit 0 |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-14      **Unimplemented:** Read as '0'

bit 13      **ICSIDL:** Input Capture Module Stop in Idle Control bit

1 = Input capture module will halt in CPU Idle mode

0 = Input capture module will continue to operate in CPU Idle mode

bit 12-8      **Unimplemented:** Read as '0'

bit 7      **ICTMR:** Input Capture Timer Select bits<sup>(1)</sup>

1 = TMR2 contents are captured on capture event

0 = TMR3 contents are captured on capture event

bit 6-5      **ICI<1:0>:** Select Number of Captures per Interrupt bits

11 = Interrupt on every fourth capture event

10 = Interrupt on every third capture event

01 = Interrupt on every second capture event

00 = Interrupt on every capture event

bit 4      **ICOV:** Input Capture Overflow Status Flag bit (read-only)

1 = Input capture overflow occurred

0 = No input capture overflow occurred

bit 3      **ICBNE:** Input Capture Buffer Empty Status bit (read-only)

1 = Input capture buffer is not empty, at least one more capture value can be read

0 = Input capture buffer is empty

bit 2-0      **ICM<2:0>:** Input Capture Mode Select bits

111 = Input capture functions as interrupt pin only when device is in Sleep or Idle mode  
(Rising edge detect only, all other control bits are not applicable.)

110 = Unused (module disabled)

101 = Capture mode, every 16th rising edge

100 = Capture mode, every 4th rising edge

011 = Capture mode, every rising edge

010 = Capture mode, every falling edge

001 = Capture mode, every edge (rising and falling)

(ICI<1:0> bits do not control interrupt generation for this mode.)

000 = Input capture module turned off

**Note 1:** Timer selections may vary. Refer to the device data sheet for details.

## 15.0 OUTPUT COMPARE

**Note:** This data sheet summarizes the features of the PIC24HJXXXGPX06/X08/X10 families of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the “PIC24H Family Reference Manual”, Section 13. “Output Compare” (DS70247), which is available on the Microchip web site ([www.microchip.com](http://www.microchip.com)).


The output compare module can select either Timer2 or Timer3 for its time base. The module compares the value of the timer with the value of one or two Compare registers depending on the operating mode selected.

The state of the output pin changes when the timer value matches the Compare register value. The output compare module generates either a single output pulse, or a sequence of output pulses, by changing the state of the output pin on the compare match events. The output compare module can also generate interrupts on compare match events.

The output compare module has multiple operating modes:

- Active-Low One-Shot mode
- Active-High One-Shot mode
- Toggle mode
- Delayed One-Shot mode
- Continuous Pulse mode
- PWM mode without Fault Protection
- PWM mode with Fault Protection

**FIGURE 15-1: OUTPUT COMPARE MODULE BLOCK DIAGRAM**

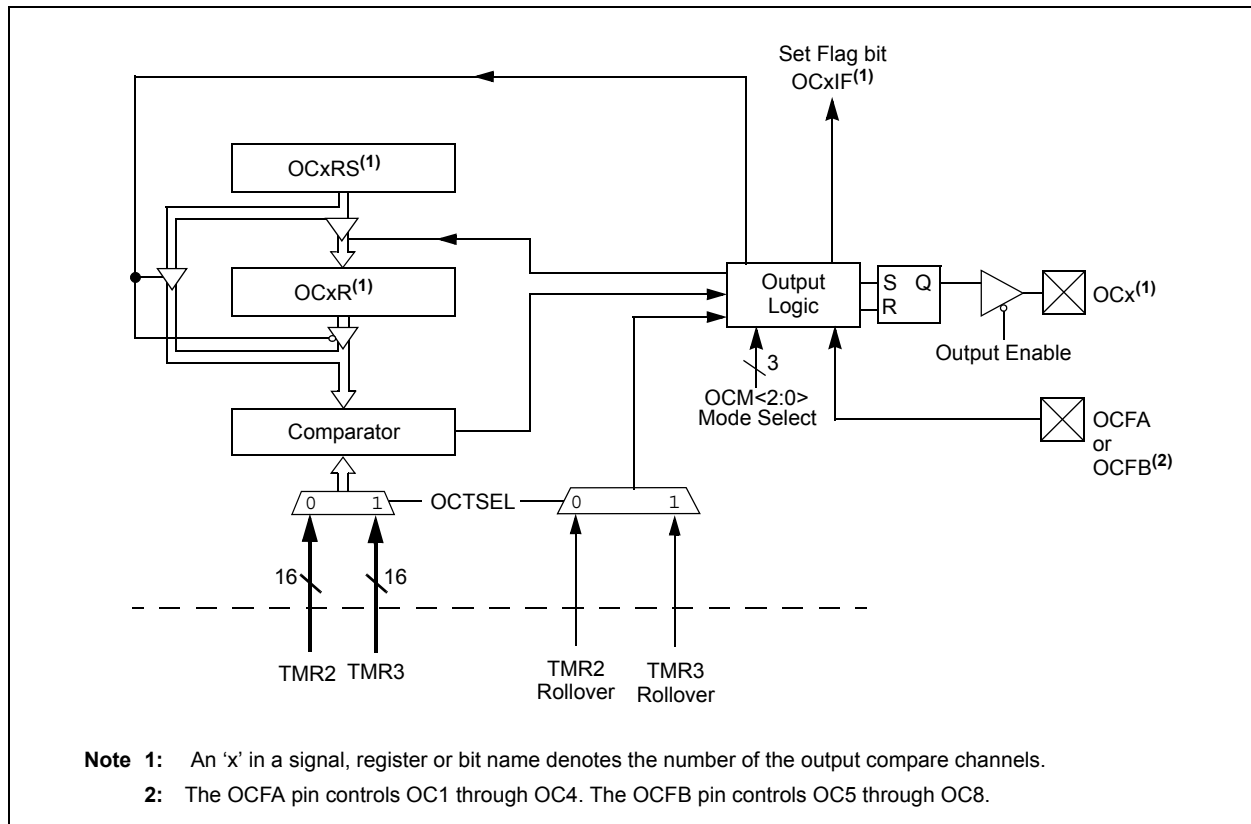

# PIC24HJXXXGPX06/X08/X10

## 15.1 Output Compare Modes

Configure the Output Compare modes by setting the appropriate Output Compare Mode (OCM<2:0>) bits in the Output Compare Control (OCxCON<2:0>) register. Table 15-1 lists the different bit settings for the Output Compare modes. Figure 15-2 illustrates the output compare operation for various modes. The user


application must disable the associated timer when writing to the Output Compare Control registers to avoid malfunctions.

**Note:** See **Section 13. “Output Compare”** in the *“PIC24H Family Reference Manual”* (DS70247) for OCxR and OCxRS register restrictions.

**TABLE 15-1: OUTPUT COMPARE MODES**

| OCM<2:0> | Mode                         | OCx Pin Initial State                            | OCx Interrupt Generation         |
|----------|------------------------------|--------------------------------------------------|----------------------------------|
| 000      | Module Disabled              | Controlled by GPIO register                      | —                                |
| 001      | Active-Low One-Shot          | 0                                                | OCx rising edge                  |
| 010      | Active-High One-Shot         | 1                                                | OCx falling edge                 |
| 011      | Toggle                       | Current output is maintained                     | OCx rising and falling edge      |
| 100      | Delayed One-Shot             | 0                                                | OCx falling edge                 |
| 101      | Continuous Pulse             | 0                                                | OCx falling edge                 |
| 110      | PWM without Fault Protection | '0', if OCxR is zero<br>'1', if OCxR is non-zero | No interrupt                     |
| 111      | PWM with Fault Protection    | '0', if OCxR is zero<br>'1', if OCxR is non-zero | OCFA falling edge for OC1 to OC4 |

**FIGURE 15-2: OUTPUT COMPARE OPERATION**

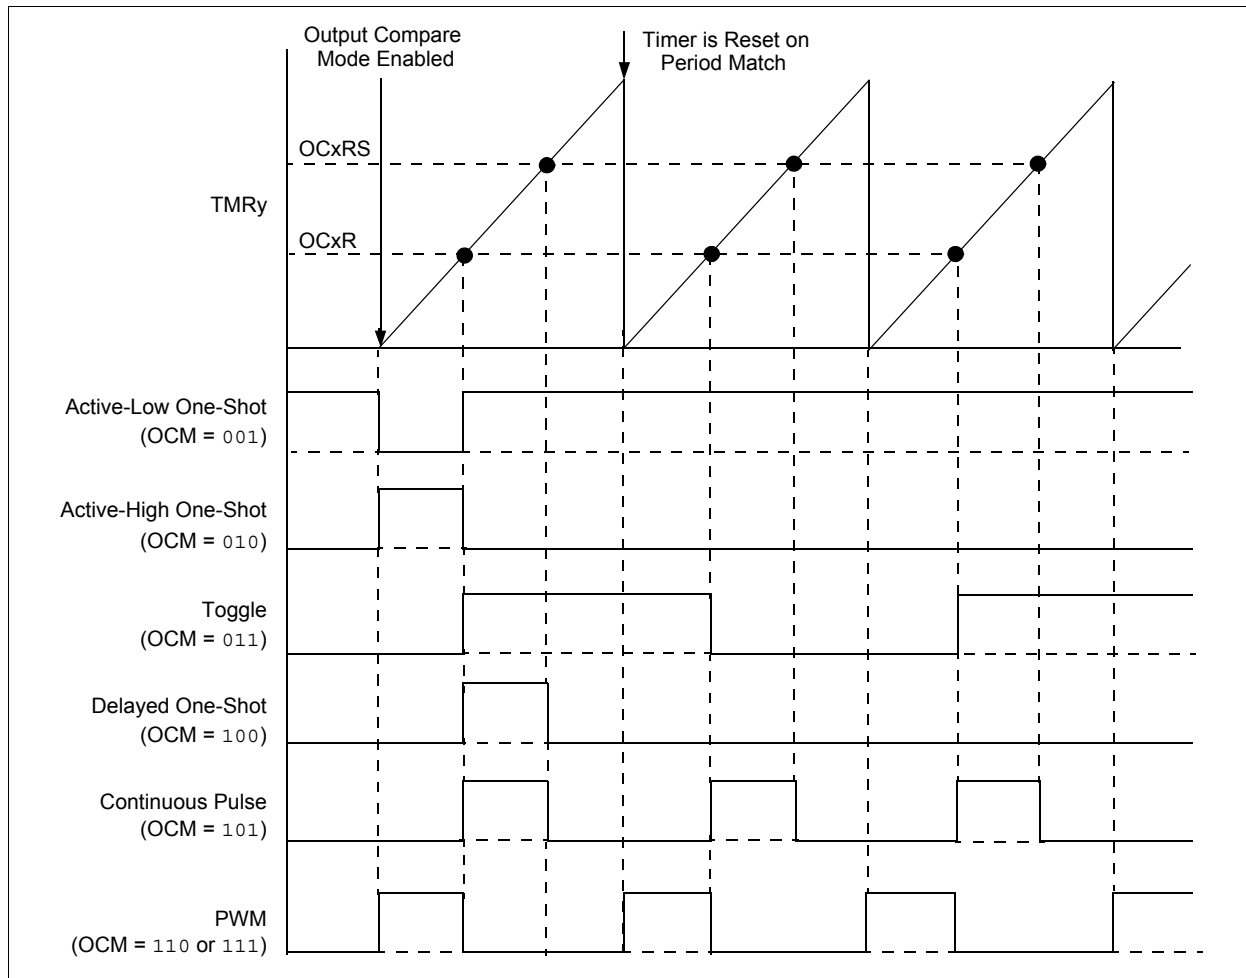

# PIC24HJXXXGPX06/X08/X10

## REGISTER 15-1: OCxCON: OUTPUT COMPARE x CONTROL REGISTER (x = 1, 2)

|        |     |        |     |     |     |     |       |
|--------|-----|--------|-----|-----|-----|-----|-------|
| U-0    | U-0 | R/W-0  | U-0 | U-0 | U-0 | U-0 | U-0   |
| —      | —   | OCSIDL | —   | —   | —   | —   | —     |
| bit 15 |     |        |     |     |     |     | bit 8 |

|       |     |     |         |        |          |       |       |
|-------|-----|-----|---------|--------|----------|-------|-------|
| U-0   | U-0 | U-0 | R-0, HC | R/W-0  | R/W-0    | R/W-0 | R/W-0 |
| —     | —   | —   | OCFLT   | OCTSEL | OCM<2:0> |       |       |
| bit 7 |     |     |         |        |          |       | bit 0 |

|                   |                             |                                    |                    |
|-------------------|-----------------------------|------------------------------------|--------------------|
| <b>Legend:</b>    | HC = Hardware Clearable bit |                                    |                    |
| R = Readable bit  | W = Writable bit            | U = Unimplemented bit, read as '0' |                    |
| -n = Value at POR | '1' = Bit is set            | '0' = Bit is cleared               | x = Bit is unknown |

- bit 15-14     **Unimplemented:** Read as '0'
- bit 13     **OCSIDL:** Stop Output Compare in Idle Mode Control bit  
             1 = Output Compare x halts in CPU Idle mode  
             0 = Output Compare x continues to operate in CPU Idle mode
- bit 12-5     **Unimplemented:** Read as '0'
- bit 4     **OCFLT:** PWM Fault Condition Status bit  
             1 = PWM Fault condition has occurred (cleared in hardware only)  
             0 = No PWM Fault condition has occurred (this bit is only used when OCM<2:0> = 111)
- bit 3     **OCTSEL:** Output Compare Timer Select bit  
             1 = Timer3 is the clock source for Compare x  
             0 = Timer2 is the clock source for Compare x
- bit 2-0     **OCM<2:0>:** Output Compare Mode Select bits  
             111 = PWM mode on OCx, Fault pin enabled  
             110 = PWM mode on OCx, Fault pin disabled  
             101 = Initialize OCx pin low, generate continuous output pulses on OCx pin  
             100 = Initialize OCx pin low, generate single output pulse on OCx pin  
             011 = Compare event toggles OCx pin  
             010 = Initialize OCx pin high, compare event forces OCx pin low  
             001 = Initialize OCx pin low, compare event forces OCx pin high  
             000 = Output compare channel is disabled

# PIC24HJXXXGPX06/X08/X10

---

NOTES:

## 16.0 SERIAL PERIPHERAL INTERFACE (SPI)

**Note:** This data sheet summarizes the features of the PIC24HJXXXGPX06/X08/X10 family of devices. However, it is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the “PIC24H Family Reference Manual”, **Section 18. “Serial Peripheral Interface (SPI)”** (DS70243), which is available from the Microchip website ([www.microchip.com](http://www.microchip.com)).

The Serial Peripheral Interface (SPI) module is a synchronous serial interface useful for communicating with other peripheral or microcontroller devices. These peripheral devices may be serial EEPROMs, shift registers, display drivers, Analog-to-Digital converters, etc. The SPI module is compatible with SPI and SIOP from Motorola®.


**Note:** In this section, the SPI modules are referred to together as SPIx, or separately as SPI1 and SPI2. Special Function Registers will follow a similar notation. For example, SPIxCON refers to the control register for the SPI1 or SPI2 module.

Each SPI module consists of a 16-bit shift register, SPIxSR (where x = 1 or 2), used for shifting data in and out, and a buffer register, SPIxBUF. A control register, SPIxCON, configures the module. Additionally, a status register, SPIxSTAT, indicates various status conditions.

The serial interface consists of 4 pins: SDIx (serial data input), SDOx (serial data output), SCKx (shift clock input or output), and  $\overline{SSx}$  (active-low slave select).

In Master mode operation, SCK is a clock output but in Slave mode, it is a clock input.

**FIGURE 16-1: SPI MODULE BLOCK DIAGRAM**

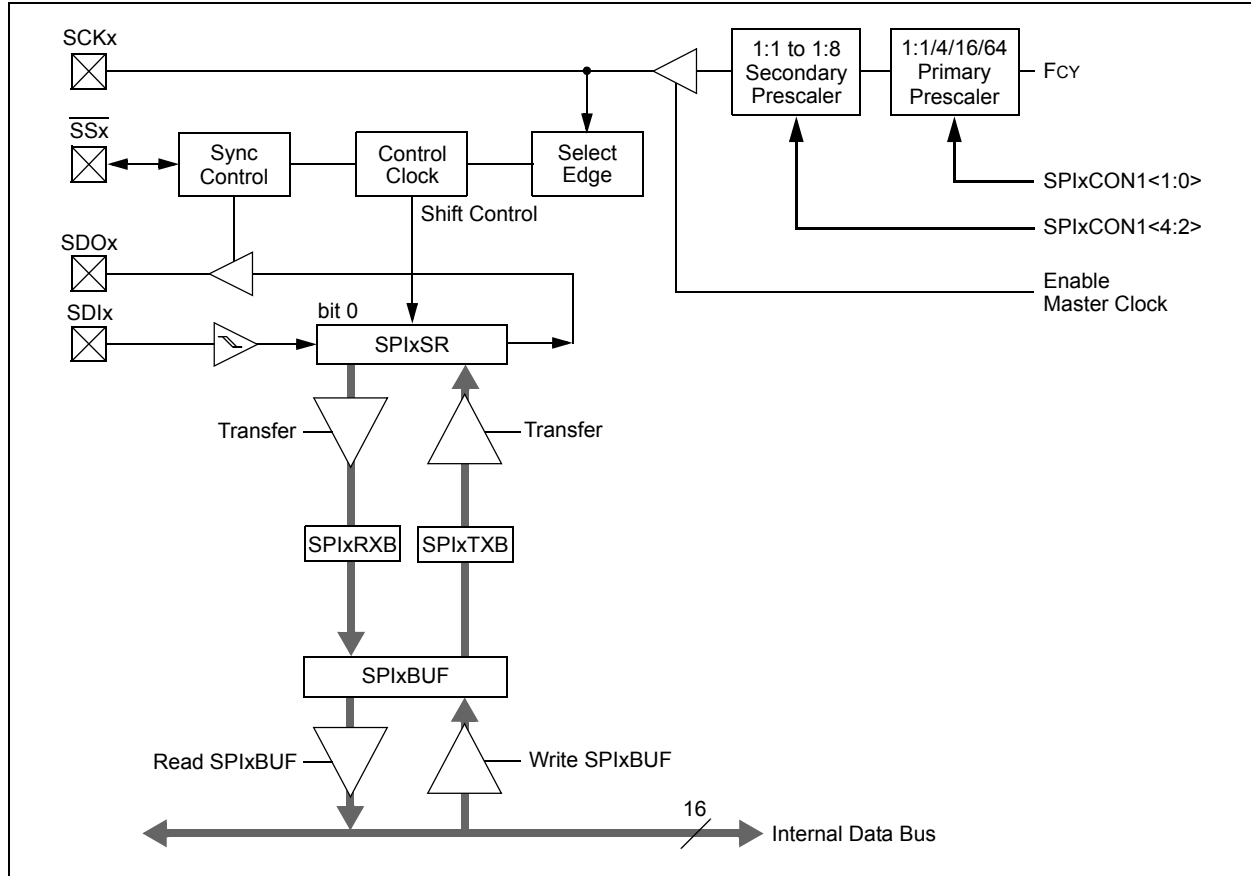

# PIC24HJXXXGPX06/X08/X10

**REGISTER 16-1: SPIxSTAT: SPIx STATUS AND CONTROL REGISTER**

|        |     |         |     |     |     |       |     |
|--------|-----|---------|-----|-----|-----|-------|-----|
| R/W-0  | U-0 | R/W-0   | U-0 | U-0 | U-0 | U-0   | U-0 |
| SPIEN  | —   | SPISIDL | —   | —   | —   | —     | —   |
| bit 15 |     |         |     |     |     | bit 8 |     |

|       |        |     |     |     |     |        |        |
|-------|--------|-----|-----|-----|-----|--------|--------|
| U-0   | R/C-0  | U-0 | U-0 | U-0 | U-0 | R-0    | R-0    |
| —     | SPIROV | —   | —   | —   | —   | SPITBF | SPIRBF |
| bit 7 |        |     |     |     |     | bit 0  |        |

|                   |                   |                                    |                    |
|-------------------|-------------------|------------------------------------|--------------------|
| <b>Legend:</b>    | C = Clearable bit |                                    |                    |
| R = Readable bit  | W = Writable bit  | U = Unimplemented bit, read as '0' |                    |
| -n = Value at POR | '1' = Bit is set  | '0' = Bit is cleared               | x = Bit is unknown |

- bit 15      **SPIEN:** SPIx Enable bit  
1 = Enables module and configures SCKx, SDOx, SDIx and  $\overline{SSx}$  as serial port pins  
0 = Disables module
- bit 14      **Unimplemented:** Read as '0'
- bit 13      **SPISIDL:** Stop in Idle Mode bit  
1 = Discontinue module operation when device enters Idle mode  
0 = Continue module operation in Idle mode
- bit 12-7    **Unimplemented:** Read as '0'
- bit 6      **SPIROV:** Receive Overflow Flag bit  
1 = A new byte/word is completely received and discarded. The user software has not read the previous data in the SPIxBUF register  
0 = No overflow has occurred
- bit 5-2    **Unimplemented:** Read as '0'
- bit 1      **SPITBF:** SPIx Transmit Buffer Full Status bit  
1 = Transmit not yet started, SPIxTXB is full  
0 = Transmit started, SPIxTXB is empty  
Automatically set in hardware when CPU writes SPIxBUF location, loading SPIxTXB.  
Automatically cleared in hardware when SPIx module transfers data from SPIxTXB to SPIxSR.
- bit 0      **SPIRBF:** SPIx Receive Buffer Full Status bit  
1 = Receive complete, SPIxRXB is full  
0 = Receive is not complete, SPIxRXB is empty  
Automatically set in hardware when SPIx transfers data from SPIxSR to SPIxRXB.  
Automatically cleared in hardware when core reads SPIxBUF location, reading SPIxRXB.

# PIC24HJXXXGPX06/X08/X10

**REGISTER 16-2: SPIxCON1: SPIx CONTROL REGISTER 1**

|        |     |     |        |        |        |       |                    |
|--------|-----|-----|--------|--------|--------|-------|--------------------|
| U-0    | U-0 | U-0 | R/W-0  | R/W-0  | R/W-0  | R/W-0 | R/W-0              |
| —      | —   | —   | DISSCK | DISSDO | MODE16 | SMP   | CKE <sup>(1)</sup> |
| bit 15 |     |     |        |        |        |       | bit 8              |

|                     |       |       |                          |       |       |                          |       |
|---------------------|-------|-------|--------------------------|-------|-------|--------------------------|-------|
| R/W-0               | R/W-0 | R/W-0 | R/W-0                    | R/W-0 | R/W-0 | R/W-0                    | R/W-0 |
| SSEN <sup>(3)</sup> | CKP   | MSTEN | SPRE<2:0> <sup>(2)</sup> |       |       | PPRE<1:0> <sup>(2)</sup> |       |
| bit 7               |       |       |                          |       |       |                          | bit 0 |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-13 **Unimplemented:** Read as '0'

bit 12 **DISSCK:** Disable SCKx pin bit (SPI Master modes only)

1 = Internal SPI clock is disabled, pin functions as I/O

0 = Internal SPI clock is enabled

bit 11 **DISSDO:** Disable SDOx pin bit

1 = SDOx pin is not used by module; pin functions as I/O

0 = SDOx pin is controlled by the module

bit 10 **MODE16:** Word/Byte Communication Select bit

1 = Communication is word-wide (16 bits)

0 = Communication is byte-wide (8 bits)

bit 9 **SMP:** SPIx Data Input Sample Phase bit

Master mode:

1 = Input data sampled at end of data output time

0 = Input data sampled at middle of data output time

Slave mode:

SMP must be cleared when SPIx is used in Slave mode.

bit 8 **CKE:** SPIx Clock Edge Select bit<sup>(1)</sup>

1 = Serial output data changes on transition from active clock state to Idle clock state (see bit 6)

0 = Serial output data changes on transition from Idle clock state to active clock state (see bit 6)

bit 7 **SSEN:** Slave Select Enable bit (Slave mode)<sup>(3)</sup>

1 =  $\overline{SSx}$  pin used for Slave mode

0 =  $\overline{SSx}$  pin not used by module. Pin controlled by port function

bit 6 **CKP:** Clock Polarity Select bit

1 = Idle state for clock is a high level; active state is a low level

0 = Idle state for clock is a low level; active state is a high level

bit 5 **MSTEN:** Master Mode Enable bit

1 = Master mode

0 = Slave mode

**Note 1:** The CKE bit is not used in the Framed SPI modes. The user should program this bit to '0' for the Framed SPI modes (FRMEN = 1).

**2:** Do not set both Primary and Secondary prescalers to a value of 1:1.

**3:** This bit must be cleared when FRMEN = 1.

# PIC24HJXXXGPX06/X08/X10

---

## REGISTER 16-2: SPIxCON1: SPIx CONTROL REGISTER 1 (CONTINUED)

bit 4-2      **SPRE<2:0>**: Secondary Prescale bits (Master mode)<sup>(2)</sup>

111 = Secondary prescale 1:1

110 = Secondary prescale 2:1

•

•

•

000 = Secondary prescale 8:1

bit 1-0      **PPRE<1:0>**: Primary Prescale bits (Master mode)<sup>(2)</sup>

11 = Primary prescale 1:1

10 = Primary prescale 4:1

01 = Primary prescale 16:1

00 = Primary prescale 64:1

**Note 1:** The CKE bit is not used in the Framed SPI modes. The user should program this bit to '0' for the Framed SPI modes (FRMEN = 1).

**2:** Do not set both Primary and Secondary prescalers to a value of 1:1.

**3:** This bit must be cleared when FRMEN = 1.

# PIC24HJXXXGPX06/X08/X10

**REGISTER 16-3: SPIxCON2: SPIx CONTROL REGISTER 2**

|        |        |        |       |     |     |     |     |
|--------|--------|--------|-------|-----|-----|-----|-----|
| R/W-0  | R/W-0  | R/W-0  | U-0   | U-0 | U-0 | U-0 | U-0 |
| FRMEN  | SPIFSD | FRMPOL | —     | —   | —   | —   | —   |
| bit 15 |        |        | bit 8 |     |     |     |     |

|       |     |     |       |     |     |        |     |
|-------|-----|-----|-------|-----|-----|--------|-----|
| U-0   | U-0 | U-0 | U-0   | U-0 | U-0 | R/W-0  | U-0 |
| —     | —   | —   | —     | —   | —   | FRMDLY | —   |
| bit 7 |     |     | bit 0 |     |     |        |     |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

- bit 15      **FRMEN:** Framed SPIx Support bit  
                  1 = Framed SPIx support enabled ( $\overline{\text{SSx}}$  pin used as frame sync pulse input/output)  
                  0 = Framed SPIx support disabled
- bit 14      **SPIFSD:** Frame Sync Pulse Direction Control bit  
                  1 = Frame sync pulse input (slave)  
                  0 = Frame sync pulse output (master)
- bit 13      **FRMPOL:** Frame Sync Pulse Polarity bit  
                  1 = Frame sync pulse is active-high  
                  0 = Frame sync pulse is active-low
- bit 12-2    **Unimplemented:** Read as '0'
- bit 1        **FRMDLY:** Frame Sync Pulse Edge Select bit  
                  1 = Frame sync pulse coincides with first bit clock  
                  0 = Frame sync pulse precedes first bit clock
- bit 0        **Unimplemented:** Read as '0'  
                  This bit must not be set to '1' by the user application.

# PIC24HJXXXGPX06/X08/X10

---

NOTES:

## 17.0 INTER-INTEGRATED CIRCUIT™ (I<sup>2</sup>C™)

**Note:** This data sheet summarizes the features of the PIC24HJXXXGPX06/X08/X10 family of devices. However, it is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the “PIC24H Family Reference Manual”, **Section 19. “Inter-Integrated Circuit™ (I<sup>2</sup>C™)”** (DS70235), which is available from the Microchip website ([www.microchip.com](http://www.microchip.com)).

The Inter-Integrated Circuit (I<sup>2</sup>C) module provides complete hardware support for both Slave and Multi-Master modes of the I<sup>2</sup>C serial communication standard, with a 16-bit interface.

The PIC24HJXXXGPX06/X08/X10 devices have up to two I<sup>2</sup>C interface modules, denoted as I2C1 and I2C2. Each I<sup>2</sup>C module has a 2-pin interface: the SCLx pin is clock and the SDAx pin is data.

Each I<sup>2</sup>C module ‘x’ (x = 1 or 2) offers the following key features:

- I<sup>2</sup>C interface supporting both master and slave operation.
- I<sup>2</sup>C Slave mode supports 7 and 10-bit address.
- I<sup>2</sup>C Master mode supports 7 and 10-bit address.
- I<sup>2</sup>C Port allows bidirectional transfers between master and slaves.
- Serial clock synchronization for I<sup>2</sup>C port can be used as a handshake mechanism to suspend and resume serial transfer (SCLREL control).
- I<sup>2</sup>C supports multi-master operation; detects bus collision and will arbitrate accordingly.

### 17.1 Operating Modes

The hardware fully implements all the master and slave functions of the I<sup>2</sup>C Standard and Fast mode specifications, as well as 7 and 10-bit addressing.

The I<sup>2</sup>C module can operate either as a slave or a master on an I<sup>2</sup>C bus.

The following types of I<sup>2</sup>C operation are supported:

- I<sup>2</sup>C slave operation with 7-bit address
- I<sup>2</sup>C slave operation with 10-bit address
- I<sup>2</sup>C master operation with 7 or 10-bit address

For details about the communication sequence in each of these modes, please refer to the “PIC24H Family Reference Manual”.

## 17.2 I<sup>2</sup>C Registers

I2CxCON and I2CxSTAT are control and status registers, respectively. The I2CxCON register is readable and writable. The lower six bits of I2CxSTAT are read-only. The remaining bits of the I2CxSTAT are read/write.


I2CxRSR is the shift register used for shifting data, whereas I2CxRCV is the buffer register to which data bytes are written, or from which data bytes are read. I2CxRCV is the receive buffer. I2CxTRN is the transmit register to which bytes are written during a transmit operation.

The I2CxADD register holds the slave address. A status bit, ADD10, indicates 10-bit Address mode. The I2CxBRG acts as the Baud Rate Generator (BRG) reload value.

In receive operations, I2CxRSR and I2CxRCV together form a double-buffered receiver. When I2CxRSR receives a complete byte, it is transferred to I2CxRCV and an interrupt pulse is generated.

# PIC24HJXXXGPX06/X08/X10

FIGURE 17-1: I<sup>2</sup>C™ BLOCK DIAGRAM (x = 1 OR 2)

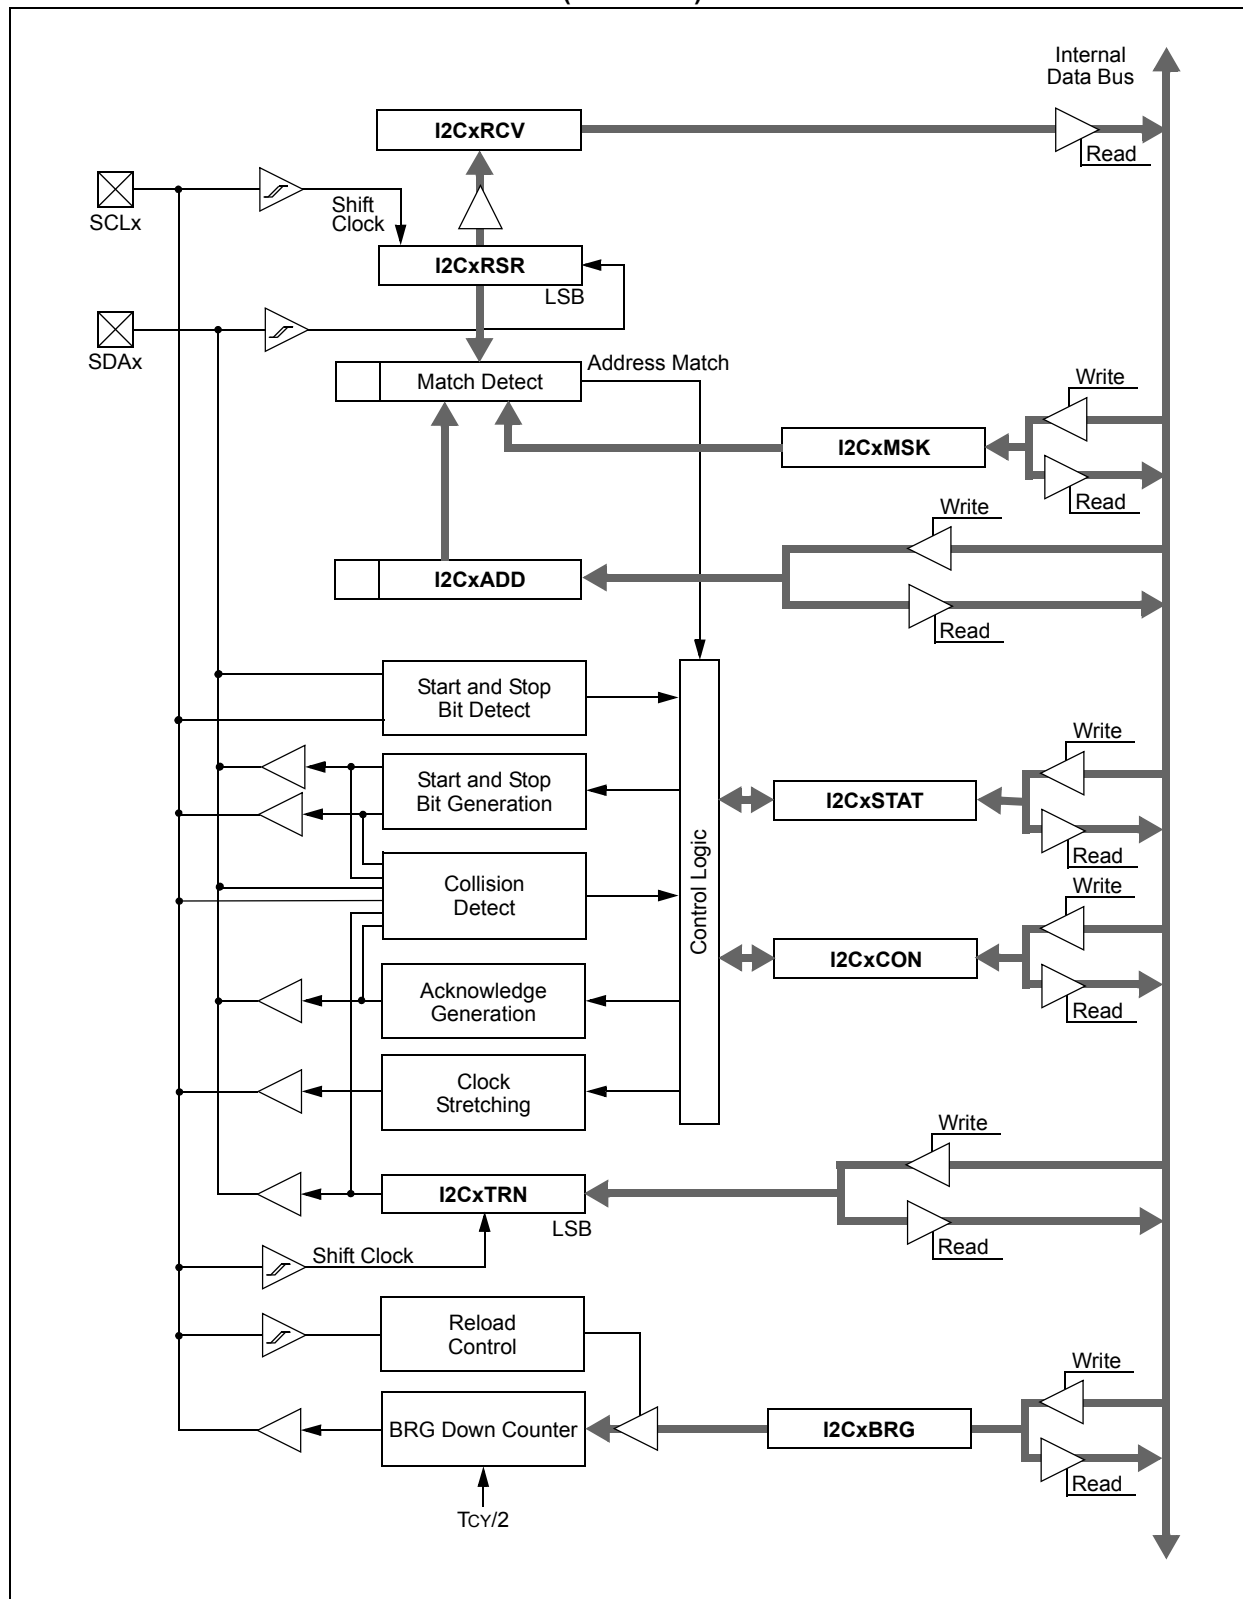

# PIC24HJXXXGPX06/X08/X10

**REGISTER 17-1: I2CxCON: I2Cx CONTROL REGISTER**

|        |     |         |          |        |       |        |       |
|--------|-----|---------|----------|--------|-------|--------|-------|
| R/W-0  | U-0 | R/W-0   | R/W-1 HC | R/W-0  | R/W-0 | R/W-0  | R/W-0 |
| I2CEN  | —   | I2CSIDL | SCLREL   | IPMIEN | A10M  | DISSLW | SMEN  |
| bit 15 |     |         |          |        |       |        | bit 8 |

|       |       |       |          |          |          |          |          |
|-------|-------|-------|----------|----------|----------|----------|----------|
| R/W-0 | R/W-0 | R/W-0 | R/W-0 HC | R/W-0 HC | R/W-0 HC | R/W-0 HC | R/W-0 HC |
| GCEN  | STREN | ACKDT | ACKEN    | RCEN     | PEN      | RSEN     | SEN      |
| bit 7 |       |       |          |          |          |          | bit 0    |

|                   |                                    |                      |                          |
|-------------------|------------------------------------|----------------------|--------------------------|
| <b>Legend:</b>    | U = Unimplemented bit, read as '0' |                      |                          |
| R = Readable bit  | W = Writable bit                   | HS = Set in hardware | HC = Cleared in hardware |
| -n = Value at POR | '1' = Bit is set                   | '0' = Bit is cleared | x = Bit is unknown       |

- bit 15      **I2CEN:** I2Cx Enable bit  
1 = Enables the I2Cx module and configures the SDAx and SCLx pins as serial port pins  
0 = Disables the I2Cx module. All I<sup>2</sup>C pins are controlled by port functions.
- bit 14      **Unimplemented:** Read as '0'
- bit 13      **I2CSIDL:** Stop in Idle Mode bit  
1 = Discontinue module operation when device enters an Idle mode  
0 = Continue module operation in Idle mode
- bit 12      **SCLREL:** SCLx Release Control bit (when operating as I<sup>2</sup>C slave)  
1 = Release SCLx clock  
0 = Hold SCLx clock low (clock stretch)  
If STREN = 1:  
Bit is R/W (i.e., software may write '0' to initiate stretch and write '1' to release clock). Hardware clear at beginning of slave transmission. Hardware clear at end of slave reception.  
If STREN = 0:  
Bit is R/S (i.e., software may only write '1' to release clock). Hardware clear at beginning of slave transmission.
- bit 11      **IPMIEN:** Intelligent Peripheral Management Interface (IPMI) Enable bit  
1 = IPMI mode is enabled; all addresses Acknowledged  
0 = IPMI mode disabled
- bit 10      **A10M:** 10-bit Slave Address bit  
1 = I2CxADD is a 10-bit slave address  
0 = I2CxADD is a 7-bit slave address
- bit 9      **DISSLW:** Disable Slew Rate Control bit  
1 = Slew rate control disabled  
0 = Slew rate control enabled
- bit 8      **SMEN:** SMBus Input Levels bit  
1 = Enable I/O pin thresholds compliant with SMBus specification  
0 = Disable SMBus input thresholds
- bit 7      **GCEN:** General Call Enable bit (when operating as I<sup>2</sup>C slave)  
1 = Enable interrupt when a general call address is received in the I2CxRSR (module is enabled for reception)  
0 = General call address disabled
- bit 6      **STREN:** SCLx Clock Stretch Enable bit (when operating as I<sup>2</sup>C slave)  
Used in conjunction with SCLREL bit.  
1 = Enable software or receive clock stretching  
0 = Disable software or receive clock stretching

# PIC24HJXXXGPX06/X08/X10

---

## REGISTER 17-1: I2CxCON: I2Cx CONTROL REGISTER (CONTINUED)

- bit 5      **ACKDT:** Acknowledge Data bit (when operating as I<sup>2</sup>C master, applicable during master receive)  
Value that will be transmitted when the software initiates an Acknowledge sequence.  
1 = Send NACK during Acknowledge  
0 = Send ACK during Acknowledge
- bit 4      **ACKEN:** Acknowledge Sequence Enable bit  
(when operating as I<sup>2</sup>C master, applicable during master receive)  
1 = Initiate Acknowledge sequence on SDAx and SCLx pins and transmit ACKDT data bit.  
Hardware clear at end of master Acknowledge sequence.  
0 = Acknowledge sequence not in progress
- bit 3      **RCEN:** Receive Enable bit (when operating as I<sup>2</sup>C master)  
1 = Enables Receive mode for I<sup>2</sup>C. Hardware clear at end of eighth bit of master receive data byte.  
0 = Receive sequence not in progress
- bit 2      **PEN:** Stop Condition Enable bit (when operating as I<sup>2</sup>C master)  
1 = Initiate Stop condition on SDAx and SCLx pins. Hardware clear at end of master Stop sequence.  
0 = Stop condition not in progress
- bit 1      **RSEN:** Repeated Start Condition Enable bit (when operating as I<sup>2</sup>C master)  
1 = Initiate Repeated Start condition on SDAx and SCLx pins. Hardware clear at end of  
master Repeated Start sequence.  
0 = Repeated Start condition not in progress
- bit 0      **SEN:** Start Condition Enable bit (when operating as I<sup>2</sup>C master)  
1 = Initiate Start condition on SDAx and SCLx pins. Hardware clear at end of master Start sequence.  
0 = Start condition not in progress

# PIC24HJXXXGPX06/X08/X10

## REGISTER 17-2: I2CxSTAT: I2Cx STATUS REGISTER

|         |         |     |     |     |           |         |         |
|---------|---------|-----|-----|-----|-----------|---------|---------|
| R-0 HSC | R-0 HSC | U-0 | U-0 | U-0 | R/C-0 HSC | R-0 HSC | R-0 HSC |
| ACKSTAT | TRSTAT  | —   | —   | —   | BCL       | GCSTAT  | ADD10   |
| bit 15  |         |     |     |     |           | bit 8   |         |

|          |          |         |           |           |         |         |         |
|----------|----------|---------|-----------|-----------|---------|---------|---------|
| R/C-0 HS | R/C-0 HS | R-0 HSC | R/C-0 HSC | R/C-0 HSC | R-0 HSC | R-0 HSC | R-0 HSC |
| IWCOL    | I2COV    | D_A     | P         | S         | R_W     | RBF     | TBF     |
| bit 7    |          |         |           |           |         | bit 0   |         |

|                   |                                    |                      |
|-------------------|------------------------------------|----------------------|
| <b>Legend:</b>    | U = Unimplemented bit, read as '0' | C = Clear only bit   |
| R = Readable bit  | W = Writable bit                   | HS = Set in hardware |
| -n = Value at POR | '1' = Bit is set                   | '0' = Bit is cleared |
|                   |                                    | x = Bit is unknown   |

- bit 15 **ACKSTAT:** Acknowledge Status bit  
(when operating as I<sup>2</sup>C master, applicable to master transmit operation)  
1 = NACK received from slave  
0 = ACK received from slave  
Hardware set or clear at end of slave Acknowledge.
- bit 14 **TRSTAT:** Transmit Status bit (when operating as I<sup>2</sup>C master, applicable to master transmit operation)  
1 = Master transmit is in progress (8 bits + ACK)  
0 = Master transmit is not in progress  
Hardware set at beginning of master transmission. Hardware clear at end of slave Acknowledge.
- bit 13-11 **Unimplemented:** Read as '0'
- bit 10 **BCL:** Master Bus Collision Detect bit  
1 = A bus collision has been detected during a master operation  
0 = No collision  
Hardware set at detection of bus collision.
- bit 9 **GCSTAT:** General Call Status bit  
1 = General call address was received  
0 = General call address was not received  
Hardware set when address matches general call address. Hardware clear at Stop detection.
- bit 8 **ADD10:** 10-Bit Address Status bit  
1 = 10-bit address was matched  
0 = 10-bit address was not matched  
Hardware set at match of 2nd byte of matched 10-bit address. Hardware clear at Stop detection.
- bit 7 **IWCOL:** Write Collision Detect bit  
1 = An attempt to write the I2CxTRN register failed because the I<sup>2</sup>C module is busy  
0 = No collision  
Hardware set at occurrence of write to I2CxTRN while busy (cleared by software).
- bit 6 **I2COV:** Receive Overflow Flag bit  
1 = A byte was received while the I2CxRCV register is still holding the previous byte  
0 = No overflow  
Hardware set at attempt to transfer I2CxRSR to I2CxRCV (cleared by software).
- bit 5 **D\_A:** Data/Address bit (when operating as I<sup>2</sup>C slave)  
1 = Indicates that the last byte received was data  
0 = Indicates that the last byte received was device address  
Hardware clear at device address match. Hardware set by reception of slave byte.
- bit 4 **P:** Stop bit  
1 = Indicates that a Stop bit has been detected last  
0 = Stop bit was not detected last  
Hardware set or clear when Start, Repeated Start or Stop detected.

# PIC24HJXXXGPX06/X08/X10

---

## REGISTER 17-2: I2CxSTAT: I2Cx STATUS REGISTER (CONTINUED)

- bit 3      **S:** Start bit  
1 = Indicates that a Start (or Repeated Start) bit has been detected last  
0 = Start bit was not detected last  
Hardware set or clear when Start, Repeated Start or Stop detected.
- bit 2      **R\_W:** Read/Write Information bit (when operating as I<sup>2</sup>C slave)  
1 = Read – indicates data transfer is output from slave  
0 = Write – indicates data transfer is input to slave  
Hardware set or clear after reception of I<sup>2</sup>C device address byte.
- bit 1      **RBF:** Receive Buffer Full Status bit  
1 = Receive complete, I2CxRCV is full  
0 = Receive not complete, I2CxRCV is empty  
Hardware set when I2CxRCV is written with received byte. Hardware clear when software reads I2CxRCV.
- bit 0      **TBF:** Transmit Buffer Full Status bit  
1 = Transmit in progress, I2CxTRN is full  
0 = Transmit complete, I2CxTRN is empty  
Hardware set when software writes I2CxTRN. Hardware clear at completion of data transmission.

# PIC24HJXXXGPX06/X08/X10

## REGISTER 17-3: I2CxMSK: I2Cx SLAVE MODE ADDRESS MASK REGISTER

|        |     |     |     |     |     |       |       |
|--------|-----|-----|-----|-----|-----|-------|-------|
| U-0    | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 |
| —      | —   | —   | —   | —   | —   | AMSK9 | AMSK8 |
| bit 15 |     |     |     |     |     | bit 8 |       |

|       |       |       |       |       |       |       |       |
|-------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| AMSK7 | AMSK6 | AMSK5 | AMSK4 | AMSK3 | AMSK2 | AMSK1 | AMSK0 |
| bit 7 |       |       |       |       |       |       | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-10

**Unimplemented:** Read as '0'

bit 9-0

**AMSKx:** Mask for Address Bit x Select bit

1 = Enable masking for bit x of incoming message address; bit match not required in this position

0 = Disable masking for bit x; bit match required in this position

# PIC24HJXXXGPX06/X08/X10

---

NOTES:

## 18.0 UNIVERSAL ASYNCHRONOUS RECEIVER TRANSMITTER (UART)

**Note:** This data sheet summarizes the features of the PIC24HJXXXGPX06/X08/X10 family of devices. However, it is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the “PIC24H Family Reference Manual”, **Section 17. “UART”** (DS70232), which is available from the Microchip website ([www.microchip.com](http://www.microchip.com)).

The Universal Asynchronous Receiver Transmitter (UART) module is one of the serial I/O modules available in the PIC24HJXXXGPX06/X08/X10 device family. The UART is a full-duplex asynchronous system that can communicate with peripheral devices, such as personal computers, LIN, RS-232 and RS-485 interfaces. The module also supports a hardware flow control option with the  $\overline{\text{UxCTS}}$  and  $\overline{\text{UxRTS}}$  pins and also includes an IrDA® encoder and decoder.

The primary features of the UART module are:


- Full-Duplex, 8 or 9-bit Data Transmission through the  $\text{UxTX}$  and  $\text{UxRX}$  pins
- Even, Odd or No Parity Options (for 8-bit data)
- One or Two Stop bits

- Hardware Flow Control Option with  $\overline{\text{UxCTS}}$  and  $\overline{\text{UxRTS}}$  pins
- Fully Integrated Baud Rate Generator with 16-bit Prescaler
- Baud rates ranging from 1 Mbps to 15 bps at 16x mode at 40 MIPS
- Baud rates ranging from 4 Mbps to 61 bps at 4x mode at 40 MIPS
- 4-deep First-In-First-Out (FIFO) Transmit Data Buffer
- 4-Deep FIFO Receive Data Buffer
- Parity, Framing and Buffer Overrun Error Detection
- Support for 9-bit mode with Address Detect (9th bit = 1)
- Transmit and Receive Interrupts
- A Separate Interrupt for all UART Error Conditions
- Loopback mode for Diagnostic Support
- Support for Sync and Break Characters
- Supports Automatic Baud Rate Detection
- IrDA® Encoder and Decoder Logic
- 16x Baud Clock Output for IrDA® Support

A simplified block diagram of the UART is shown in Figure 18-1. The UART module consists of the key important hardware elements:

- Baud Rate Generator
- Asynchronous Transmitter
- Asynchronous Receiver

**FIGURE 18-1: UART SIMPLIFIED BLOCK DIAGRAM**

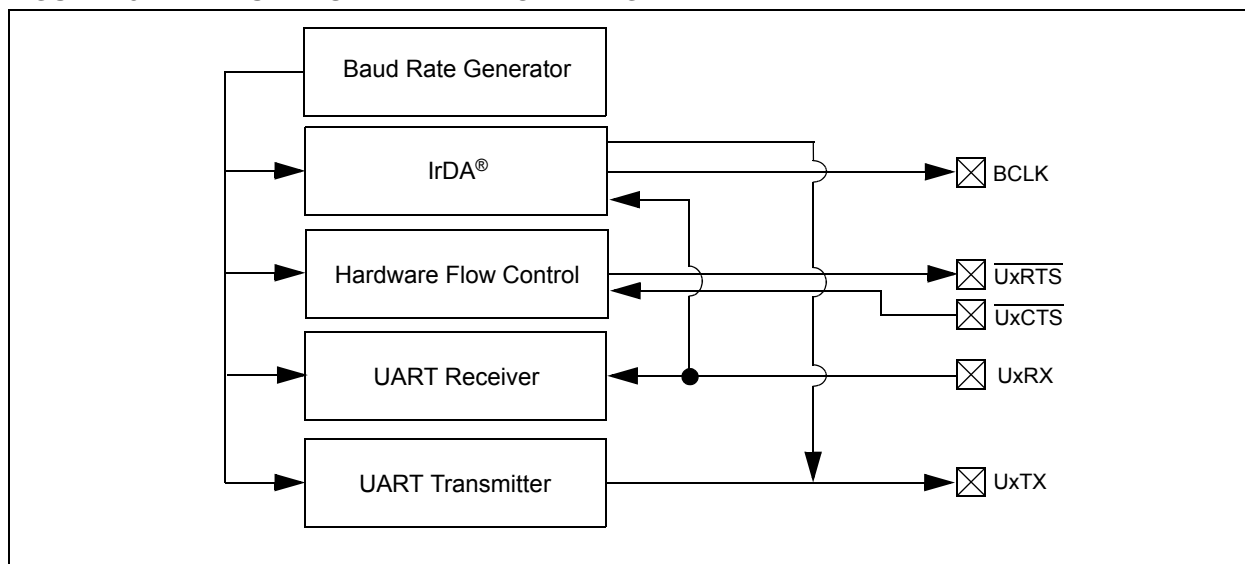

**Note 1:** Both UART1 and UART2 can trigger a DMA data transfer. If U1TX, U1RX, U2TX or U2RX is selected as a DMA IRQ source, a DMA transfer occurs when the U1TXIF, U1RXIF, U2TXIF or U2RXIF bit gets set as a result of a UART1 or UART2 transmission or reception.

**2:** If DMA transfers are required, the UART TX/RX FIFO buffer must be set to a size of 1 byte/word (i.e.,  $\text{UTXISEL}<1:0> = 00$  and  $\text{URXISEL}<1:0> = 00$ ).

# PIC24HJXXXGPX06/X08/X10

## REGISTER 18-1: UxMODE: UARTx MODE REGISTER

|                       |     |       |                     |       |     |          |       |
|-----------------------|-----|-------|---------------------|-------|-----|----------|-------|
| R/W-0                 | U-0 | R/W-0 | R/W-0               | R/W-0 | U-0 | R/W-0    | R/W-0 |
| UARTEN <sup>(1)</sup> | —   | USIDL | IREN <sup>(2)</sup> | RTSMD | —   | UEN<1:0> |       |
| bit 15                |     |       |                     |       |     | bit 8    |       |

|          |  |        |  |          |  |        |  |       |  |            |  |       |  |       |  |
|----------|--|--------|--|----------|--|--------|--|-------|--|------------|--|-------|--|-------|--|
| R/W-0 HC |  | R/W-0  |  | R/W-0 HC |  | R/W-0  |  | R/W-0 |  | R/W-0      |  | R/W-0 |  | R/W-0 |  |
| WAKE     |  | LPBACK |  | ABAUD    |  | URXINV |  | BRGH  |  | PDSEL<1:0> |  |       |  | STSEL |  |
| bit 7    |  |        |  |          |  |        |  |       |  |            |  |       |  | bit 0 |  |

|                   |                       |                                    |                    |
|-------------------|-----------------------|------------------------------------|--------------------|
| <b>Legend:</b>    | HC = Hardware cleared |                                    |                    |
| R = Readable bit  | W = Writable bit      | U = Unimplemented bit, read as '0' |                    |
| -n = Value at POR | '1' = Bit is set      | '0' = Bit is cleared               | x = Bit is unknown |

- bit 15      **UARTEN:** UARTx Enable bit<sup>(1)</sup>  
1 = UARTx is enabled; all UARTx pins are controlled by UARTx as defined by UEN<1:0>  
0 = UARTx is disabled; all UARTx pins are controlled by port latches; UARTx power consumption minimal
- bit 14      **Unimplemented:** Read as '0'
- bit 13      **USIDL:** Stop in Idle Mode bit  
1 = Discontinue module operation when device enters Idle mode  
0 = Continue module operation in Idle mode
- bit 12      **IREN:** IrDA<sup>®</sup> Encoder and Decoder Enable bit<sup>(2)</sup>  
1 = IrDA<sup>®</sup> encoder and decoder enabled  
0 = IrDA<sup>®</sup> encoder and decoder disabled
- bit 11      **RTSMD:** Mode Selection for  $\overline{\text{UxRTS}}$  Pin bit  
1 =  $\overline{\text{UxRTS}}$  pin in Simplex mode  
0 =  $\overline{\text{UxRTS}}$  pin in Flow Control mode
- bit 10      **Unimplemented:** Read as '0'
- bit 9-8      **UEN<1:0>:** UARTx Enable bits  
11 = UxTX, UxRX and BCLK pins are enabled and used;  $\overline{\text{UxCTS}}$  pin controlled by port latches  
10 = UxTX, UxRX,  $\overline{\text{UxCTS}}$  and  $\overline{\text{UxRTS}}$  pins are enabled and used  
01 = UxTX, UxRX and UxRTS pins are enabled and used;  $\overline{\text{UxCTS}}$  pin controlled by port latches  
00 = UxTX and UxRX pins are enabled and used;  $\overline{\text{UxCTS}}$  and  $\overline{\text{UxRTS}}$ /BCLK pins controlled by port latches
- bit 7      **WAKE:** Wake-up on Start bit Detect During Sleep Mode Enable bit  
1 = UARTx will continue to sample the UxRX pin; interrupt generated on falling edge; bit cleared in hardware on following rising edge  
0 = No wake-up enabled
- bit 6      **LPBACK:** UARTx Loopback Mode Select bit  
1 = Enable Loopback mode  
0 = Loopback mode is disabled
- bit 5      **ABAUD:** Auto-Baud Enable bit  
1 = Enable baud rate measurement on the next character – requires reception of a Sync field (0x55) before any data; cleared in hardware upon completion  
0 = Baud rate measurement disabled or completed

**Note 1:** Refer to **Section 17. “UART”** (DS70232) in the “PIC24H Family Reference Manual” for information on enabling the UART module for receive or transmit operation.

**2:** This feature is only available for the 16x BRG mode (BRGH = 0).

## REGISTER 18-1: UxMODE: UARTx MODE REGISTER (CONTINUED)

|         |                                                                                                                                                                                                    |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| bit 4   | <b>URXINV:</b> Receive Polarity Inversion bit<br>1 = UxRX Idle state is '0'<br>0 = UxRX Idle state is '1'                                                                                          |
| bit 3   | <b>BRGH:</b> High Baud Rate Enable bit<br>1 = BRG generates 4 clocks per bit period (4x baud clock, High-Speed mode)<br>0 = BRG generates 16 clocks per bit period (16x baud clock, Standard mode) |
| bit 2-1 | <b>PDSEL&lt;1:0&gt;:</b> Parity and Data Selection bits<br>11 = 9-bit data, no parity<br>10 = 8-bit data, odd parity<br>01 = 8-bit data, even parity<br>00 = 8-bit data, no parity                 |
| bit 0   | <b>STSEL:</b> Stop Bit Selection bit<br>1 = Two Stop bits<br>0 = One Stop bit                                                                                                                      |

**Note 1:** Refer to **Section 17. "UART"** (DS70232) in the *"PIC24H Family Reference Manual"* for information on enabling the UART module for receive or transmit operation.

**2:** This feature is only available for the 16x BRG mode (BRGH = 0).

# PIC24HJXXXGPX06/X08/X10

## REGISTER 18-2: UxSTA: UARTx STATUS AND CONTROL REGISTER

|          |        |          |     |          |                      |       |      |
|----------|--------|----------|-----|----------|----------------------|-------|------|
| R/W-0    | R/W-0  | R/W-0    | U-0 | R/W-0 HC | R/W-0                | R-0   | R-1  |
| UTXISEL1 | UTXINV | UTXISEL0 | —   | UTXBRK   | UTXEN <sup>(1)</sup> | UTXBF | TRMT |
| bit 15   |        |          |     |          |                      | bit 8 |      |

|              |       |       |      |      |      |       |     |
|--------------|-------|-------|------|------|------|-------|-----|
| R/W-0        | R/W-0 | R/W-0 | R-1  | R-0  | R-0  | R/C-0 | R-0 |
| URXISEL<1:0> | ADDEN | RIDLE | PERR | FERR | OERR | URXDA |     |
| bit 7        |       |       |      |      |      | bit 0 |     |

|                   |                       |                                              |
|-------------------|-----------------------|----------------------------------------------|
| <b>Legend:</b>    | HC = Hardware cleared | C = Clear only bit                           |
| R = Readable bit  | W = Writable bit      | U = Unimplemented bit, read as '0'           |
| -n = Value at POR | '1' = Bit is set      | '0' = Bit is cleared      x = Bit is unknown |

- bit 15,13 **UTXISEL<1:0>**: Transmission Interrupt Mode Selection bits
- 11 = Reserved; do not use
  - 10 = Interrupt when a character is transferred to the Transmit Shift Register, and as a result, the transmit buffer becomes empty
  - 01 = Interrupt when the last character is shifted out of the Transmit Shift Register; all transmit operations are completed
  - 00 = Interrupt when a character is transferred to the Transmit Shift Register (this implies there is at least one character open in the transmit buffer)
- bit 14 **UTXINV**: Transmit Polarity Inversion bit
- If IREN = 0:
- 1 = UxTX Idle state is '0'
  - 0 = UxTX Idle state is '1'
- If IREN = 1:
- 1 = IrDA<sup>®</sup> encoded UxTX Idle state is '1'
  - 0 = IrDA<sup>®</sup> encoded UxTX Idle state is '0'
- bit 12 **Unimplemented**: Read as '0'
- bit 11 **UTXBRK**: Transmit Break bit
- 1 = Send Sync Break on next transmission – Start bit, followed by twelve '0' bits, followed by Stop bit; cleared by hardware upon completion
  - 0 = Sync Break transmission disabled or completed
- bit 10 **UTXEN**: Transmit Enable bit<sup>(1)</sup>
- 1 = Transmit enabled, UxTX pin controlled by UARTx
  - 0 = Transmit disabled, any pending transmission is aborted and buffer is reset. UxTX pin controlled by port.
- bit 9 **UTXBF**: Transmit Buffer Full Status bit (read-only)
- 1 = Transmit buffer is full
  - 0 = Transmit buffer is not full, at least one more character can be written
- bit 8 **TRMT**: Transmit Shift Register Empty bit (read-only)
- 1 = Transmit Shift Register is empty and transmit buffer is empty (the last transmission has completed)
  - 0 = Transmit Shift Register is not empty, a transmission is in progress or queued
- bit 7-6 **URXISEL<1:0>**: Receive Interrupt Mode Selection bits
- 11 = Interrupt is set on UxRSR transfer making the receive buffer full (i.e., has 4 data characters)
  - 10 = Interrupt is set on UxRSR transfer making the receive buffer 3/4 full (i.e., has 3 data characters)
  - 0x = Interrupt is set when any character is received and transferred from the UxRSR to the receive buffer. Receive buffer has one or more characters.

**Note 1:** Refer to **Section 17. “UART”** (DS70232) in the “PIC24H Family Reference Manual” for information on enabling the UART module for transmit operation.

## REGISTER 18-2: UxSTA: UARTx STATUS AND CONTROL REGISTER (CONTINUED)

|       |                                                                                                                                                                                                                                                                             |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| bit 5 | <b>ADDEN:</b> Address Character Detect bit (bit 8 of received data = 1)<br>1 = Address Detect mode enabled. If 9-bit mode is not selected, this does not take effect<br>0 = Address Detect mode disabled                                                                    |
| bit 4 | <b>RIDLE:</b> Receiver Idle bit (read-only)<br>1 = Receiver is Idle<br>0 = Receiver is active                                                                                                                                                                               |
| bit 3 | <b>PERR:</b> Parity Error Status bit (read-only)<br>1 = Parity error has been detected for the current character (character at the top of the receive FIFO)<br>0 = Parity error has not been detected                                                                       |
| bit 2 | <b>FERR:</b> Framing Error Status bit (read-only)<br>1 = Framing error has been detected for the current character (character at the top of the receive FIFO)<br>0 = Framing error has not been detected                                                                    |
| bit 1 | <b>OERR:</b> Receive Buffer Overrun Error Status bit (read/clear only)<br>1 = Receive buffer has overflowed<br>0 = Receive buffer has not overflowed. Clearing a previously set OERR bit (1 → 0 transition) will reset the receiver buffer and the UxRSR to the empty state |
| bit 0 | <b>URXDA:</b> Receive Buffer Data Available bit (read-only)<br>1 = Receive buffer has data, at least one more character can be read<br>0 = Receive buffer is empty                                                                                                          |

**Note 1:** Refer to **Section 17. “UART”** (DS70232) in the “*PIC24H Family Reference Manual*” for information on enabling the UART module for transmit operation.

# PIC24HJXXXGPX06/X08/X10

---

NOTES:

## 19.0 ENHANCED CAN (ECAN™) MODULE

**Note:** This data sheet summarizes the features of the PIC24HJXXXGPX06/X08/X10 family of devices. However, it is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the *"PIC24H Family Reference Manual"*, **Section 21. "Enhanced Controller Area Network (ECAN™)"** (DS70226), which is available from the Microchip website ([www.microchip.com](http://www.microchip.com)).

### 19.1 Overview

The Enhanced Controller Area Network (ECAN™) module is a serial interface, useful for communicating with other CAN modules or microcontroller devices. This interface/protocol was designed to allow communications within noisy environments. The PIC24HJXXXGPX06/X08/X10 devices contain up to two ECAN modules.

The CAN module is a communication controller implementing the CAN 2.0 A/B protocol, as defined in the BOSCH specification. The module will support CAN 1.2, CAN 2.0A, CAN 2.0B Passive and CAN 2.0B Active versions of the protocol. The module implementation is a full CAN system. The CAN specification is not covered within this data sheet. The reader may refer to the BOSCH CAN specification for further details.

The module features are as follows:

- Implementation of the CAN protocol, CAN 1.2, CAN 2.0A and CAN 2.0B
- Standard and extended data frames
- 0-8 bytes data length
- Programmable bit rate up to 1 Mbit/sec
- Automatic response to remote transmission requests
- Up to 8 transmit buffers with application specified prioritization and abort capability (each buffer may contain up to 8 bytes of data)
- Up to 32 receive buffers (each buffer may contain up to 8 bytes of data)
- Up to 16 full (standard/extended identifier) acceptance filters
- 3 full acceptance filter masks
- DeviceNet™ addressing support
- Programmable wake-up functionality with integrated low-pass filter
- Programmable Loopback mode supports self-test operation
- Signaling via interrupt capabilities for all CAN receiver and transmitter error states
- Programmable clock source
- Programmable link to input capture module (IC2 for both CAN1 and CAN2) for time-stamping and

network synchronization

- Low-power Sleep and Idle mode

The CAN bus module consists of a protocol engine and message buffering/control. The CAN protocol engine handles all functions for receiving and transmitting messages on the CAN bus. Messages are transmitted by first loading the appropriate data registers. Status and errors can be checked by reading the appropriate registers. Any message detected on the CAN bus is checked for errors and then matched against filters to see if it should be received and stored in one of the receive registers.

### 19.2 Frame Types

The CAN module transmits various types of frames which include data messages, remote transmission requests and as other frames that are automatically generated for control purposes. The following frame types are supported:

- Standard Data Frame:

A standard data frame is generated by a node when the node wishes to transmit data. It includes an 11-bit standard identifier (SID) but not an 18-bit extended identifier (EID).

- Extended Data Frame:

An extended data frame is similar to a standard data frame but includes an extended identifier as well.

- Remote Frame:

It is possible for a destination node to request the data from the source. For this purpose, the destination node sends a remote frame with an identifier that matches the identifier of the required data frame. The appropriate data source node will then send a data frame as a response to this remote request.

- Error Frame:

An error frame is generated by any node that detects a bus error. An error frame consists of two fields: an error flag field and an error delimiter field.

- Overload Frame:


An overload frame can be generated by a node as a result of two conditions. First, the node detects a dominant bit during interframe space which is an illegal condition. Second, due to internal conditions, the node is not yet able to start reception of the next message. A node may generate a maximum of 2 sequential overload frames to delay the start of the next message.

- Interframe Space:

Interframe space separates a proceeding frame (of whatever type) from a following data or remote frame.

# PIC24HJXXXGPX06/X08/X10

FIGURE 19-1: ECAN™ MODULE BLOCK DIAGRAM

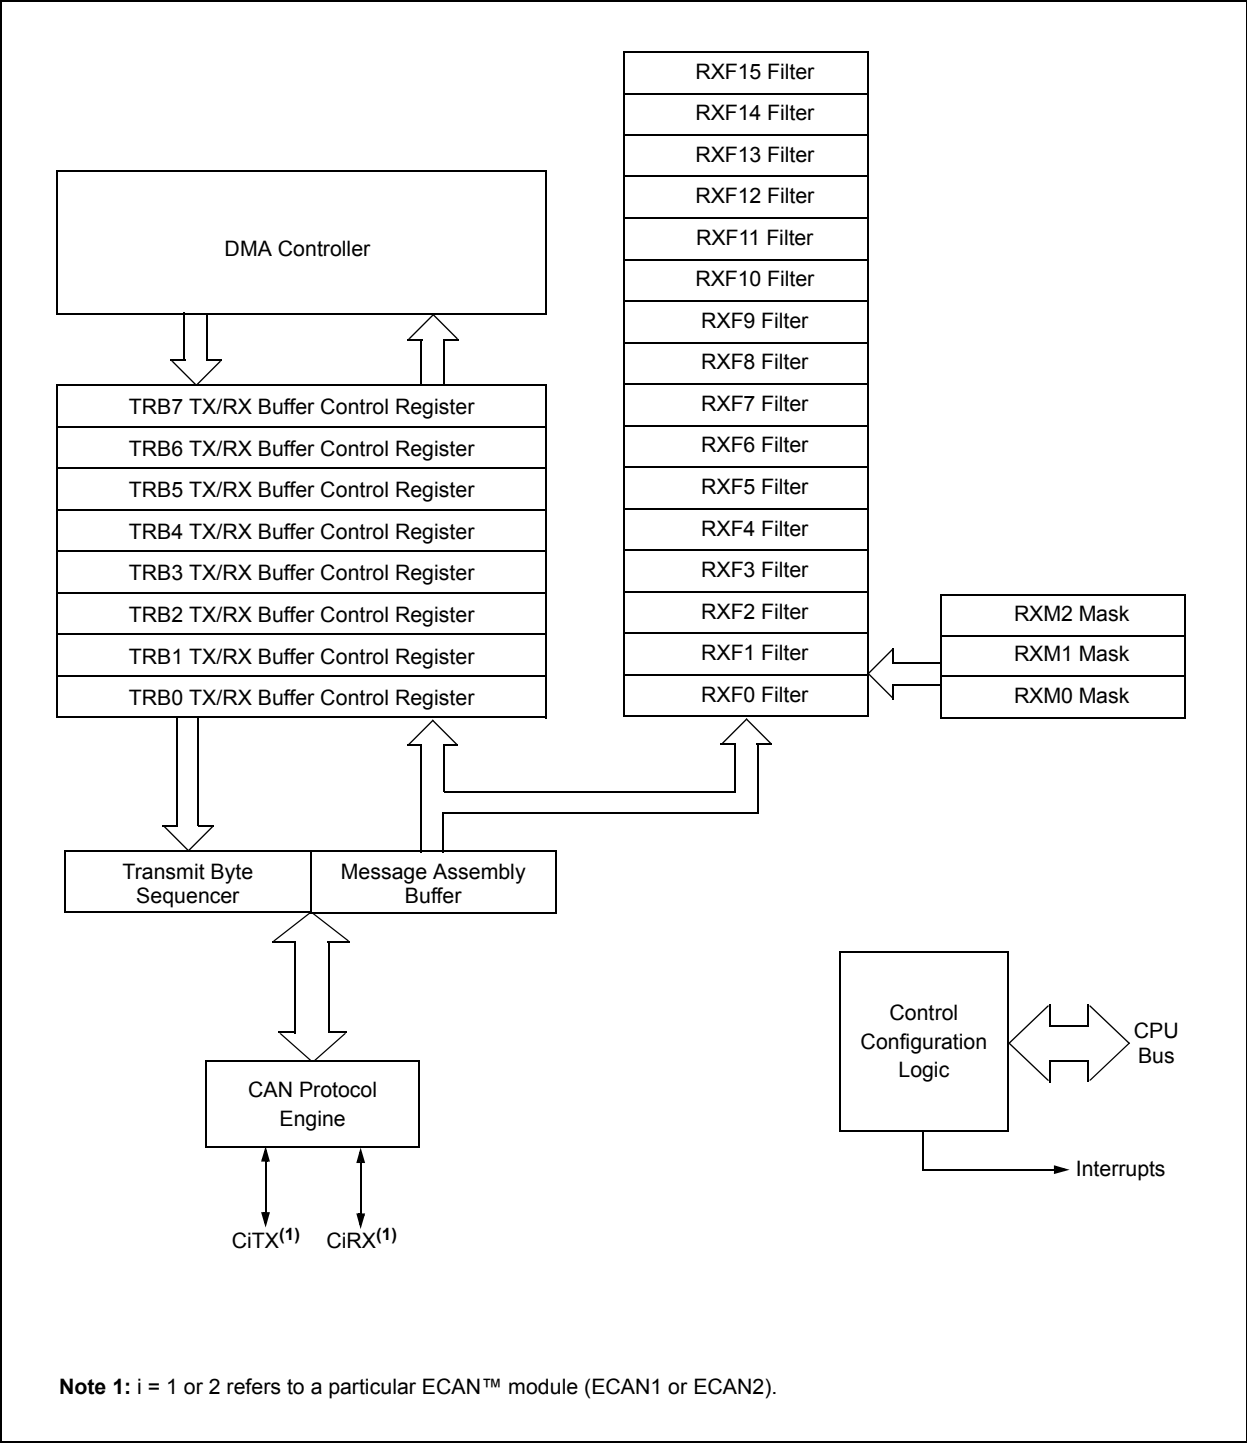

## 19.3 Modes of Operation

The CAN module can operate in one of several operation modes selected by the user. These modes include:

- Initialization Mode
- Disable Mode
- Normal Operation Mode
- Listen Only Mode
- Listen All Messages Mode
- Loopback Mode

Modes are requested by setting the REQOP<2:0> bits (CiCTRL1<10:8>). Entry into a mode is Acknowledged by monitoring the OPMODE<2:0> bits (CiCTRL1<7:5>). The module will not change the mode and the OPMODE bits until a change in mode is acceptable, generally during bus Idle time, which is defined as at least 11 consecutive recessive bits.

### 19.3.1 INITIALIZATION MODE

In the Initialization mode, the module will not transmit or receive. The error counters are cleared and the interrupt flags remain unchanged. The programmer will have access to Configuration registers that are access restricted in other modes. The module will protect the user from accidentally violating the CAN protocol through programming errors. All registers which control the configuration of the module can not be modified while the module is on-line. The CAN module will not be allowed to enter the Configuration mode while a transmission is taking place. The Configuration mode serves as a lock to protect the following registers.

- All Module Control Registers
- Baud Rate and Interrupt Configuration Registers
- Bus Timing Registers
- Identifier Acceptance Filter Registers
- Identifier Acceptance Mask Registers

### 19.3.2 DISABLE MODE

In Disable mode, the module will not transmit or receive. The module has the ability to set the WAKIF bit due to bus activity, however, any pending interrupts will remain and the error counters will retain their value.

If the REQOP<2:0> bits (CiCTRL1<10:8>) = 001, the module will enter the Module Disable mode. If the module is active, the module will wait for 11 recessive bits on the CAN bus, detect that condition as an Idle bus, then accept the module disable command. When the OPMODE<2:0> bits (CiCTRL1<7:5>) = 001, that indicates whether the module successfully went into Module Disable mode. The I/O pins will revert to normal I/O function when the module is in the Module Disable mode.

The module can be programmed to apply a low-pass filter function to the CiRX input line while the module or the CPU is in Sleep mode. The WAKFIL bit (CiCFG2<14>) enables or disables the filter.

**Note:** Typically, if the CAN module is allowed to transmit in a particular mode of operation and a transmission is requested immediately after the CAN module has been placed in that mode of operation, the module waits for 11 consecutive recessive bits on the bus before starting transmission. If the user switches to Disable mode within this 11-bit period, then this transmission is aborted and the corresponding TXABT bit is set and TXREQ bit is cleared.

### 19.3.3 NORMAL OPERATION MODE

Normal Operation mode is selected when REQOP<2:0> = 000. In this mode, the module is activated and the I/O pins will assume the CAN bus functions. The module will transmit and receive CAN bus messages via the CiTX and CiRX pins.

### 19.3.4 LISTEN ONLY MODE

If the Listen Only mode is activated, the module on the CAN bus is passive. The transmitter buffers revert to the port I/O function. The receive pins remain inputs. For the receiver, no error flags or Acknowledge signals are sent. The error counters are deactivated in this state. The Listen Only mode can be used for detecting the baud rate on the CAN bus. To use this, it is necessary that there are at least two further nodes that communicate with each other.

### 19.3.5 LISTEN ALL MESSAGES MODE

The module can be set to ignore all errors and receive any message. The Listen All Messages mode is activated by setting REQOP<2:0> = '111'. In this mode, the data which is in the message assembly buffer, until the time an error occurred, is copied in the receive buffer and can be read via the CPU interface.

### 19.3.6 LOOPBACK MODE

If the Loopback mode is activated, the module will connect the internal transmit signal to the internal receive signal at the module boundary. The transmit and receive pins revert to their port I/O function.

# PIC24HJXXXGPX06/X08/X10

## REGISTER 19-1: CiCTRL1: ECAN™ MODULE CONTROL REGISTER 1

|        |     |       |       |     |            |       |       |
|--------|-----|-------|-------|-----|------------|-------|-------|
| U-0    | U-0 | R/W-0 | R/W-0 | r-0 | R/W-1      | R/W-0 | R/W-0 |
| —      | —   | CSIDL | ABAT  | —   | REQOP<2:0> |       |       |
| bit 15 |     |       |       |     |            | bit 8 |       |

|             |     |     |     |        |     |     |       |
|-------------|-----|-----|-----|--------|-----|-----|-------|
| R-1         | R-0 | R-0 | U-0 | R/W-0  | U-0 | U-0 | R/W-0 |
| OPMODE<2:0> |     |     | —   | CANCAP | —   | —   | WIN   |
| bit 7       |     |     |     |        |     |     | bit 0 |

|                   |                     |                                    |                    |
|-------------------|---------------------|------------------------------------|--------------------|
| <b>Legend:</b>    | r = Bit is Reserved |                                    |                    |
| R = Readable bit  | W = Writable bit    | U = Unimplemented bit, read as '0' |                    |
| -n = Value at POR | '1' = Bit is set    | '0' = Bit is cleared               | x = Bit is unknown |

- bit 15-14 **Unimplemented:** Read as '0'
- bit 13 **CSIDL:** Stop in Idle Mode bit  
1 = Discontinue module operation when device enters Idle mode  
0 = Continue module operation in Idle mode
- bit 12 **ABAT:** Abort All Pending Transmissions bit  
Signal all transmit buffers to abort transmission. Module will clear this bit when all transmissions are aborted.
- bit 11 **Reserved:** Do not use
- bit 10-8 **REQOP<2:0>:** Request Operation Mode bits  
000 = Set Normal Operation mode  
001 = Set Disable mode  
010 = Set Loopback mode  
011 = Set Listen Only Mode  
100 = Set Configuration mode  
101 = Reserved – do not use  
110 = Reserved – do not use  
111 = Set Listen All Messages mode
- bit 7-5 **OPMODE<2:0>:** Operation Mode bits  
000 = Module is in Normal Operation mode  
001 = Module is in Disable mode  
010 = Module is in Loopback mode  
011 = Module is in Listen Only mode  
100 = Module is in Configuration mode  
101 = Reserved  
110 = Reserved  
111 = Module is in Listen All Messages mode
- bit 4 **Unimplemented:** Read as '0'
- bit 3 **CANCAP:** CAN Message Receive Timer Capture Event Enable bit  
1 = Enable input capture based on CAN message receive  
0 = Disable CAN capture
- bit 2-1 **Unimplemented:** Read as '0'
- bit 0 **WIN:** SFR Map Window Select bit  
1 = Use filter window  
0 = Use buffer window

# PIC24HJXXXGPX06/X08/X10

## REGISTER 19-2: CICTRL2: ECAN™ MODULE CONTROL REGISTER 2

|        |     |     |     |     |     |     |       |
|--------|-----|-----|-----|-----|-----|-----|-------|
| U-0    | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0   |
| —      | —   | —   | —   | —   | —   | —   | —     |
| bit 15 |     |     |     |     |     |     | bit 8 |

|       |     |     |            |     |     |     |       |
|-------|-----|-----|------------|-----|-----|-----|-------|
| U-0   | U-0 | U-0 | R-0        | R-0 | R-0 | R-0 | R-0   |
| —     | —   | —   | DNCNT<4:0> |     |     |     |       |
| bit 7 |     |     |            |     |     |     | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-5

**Unimplemented:** Read as '0'

bit 4-0

**DNCNT<4:0>:** DeviceNet™ Filter Bit Number bits

10010-11111 = Invalid selection

10001 = Compare up to data byte 3, bit 6 with EID<17>

•

•

•

00001 = Compare up to data byte 1, bit 7 with EID<0>

00000 = Do not compare data bytes

# PIC24HJXXXGPX06/X08/X10

REGISTER 19-3: CIVEC: ECAN™ MODULE INTERRUPT CODE REGISTER

|        |            |     |             |     |     |     |     |
|--------|------------|-----|-------------|-----|-----|-----|-----|
| U-0    | U-0        | U-0 | R-0         | R-0 | R-0 | R-0 | R-0 |
| —      | —          | —   | FILHIT<4:0> |     |     |     |     |
| bit 15 |            |     | bit 8       |     |     |     |     |
|        |            |     |             |     |     |     |     |
| U-0    | R-1        | R-0 | R-0         | R-0 | R-0 | R-0 | R-0 |
| —      | ICODE<6:0> |     |             |     |     |     |     |
| bit 7  |            |     | bit 0       |     |     |     |     |

|                   |                  |                                    |                    |
|-------------------|------------------|------------------------------------|--------------------|
| <b>Legend:</b>    |                  |                                    |                    |
| R = Readable bit  | W = Writable bit | U = Unimplemented bit, read as '0' |                    |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared               | x = Bit is unknown |

- bit 15-13

**Unimplemented:** Read as '0'
- bit 12-8

**FILHIT<4:0>:** Filter Hit Number bits  
10000-11111 = Reserved  
01111 = Filter 15  
•  
•  
•  
00001 = Filter 1  
00000 = Filter 0
- bit 7

**Unimplemented:** Read as '0'
- bit 6-0

**ICODE<6:0>:** Interrupt Flag Code bits  
1000101-1111111 = Reserved  
1000100 = FIFO almost full interrupt  
1000011 = Receiver overflow interrupt  
1000010 = Wake-up interrupt  
1000001 = Error interrupt  
1000000 = No interrupt  
  
0010000-0111111 = Reserved  
0001111 = RB15 buffer Interrupt  
•  
•  
•  
0001001 = RB9 buffer interrupt  
0001000 = RB8 buffer interrupt  
0000111 = TRB7 buffer interrupt  
0000110 = TRB6 buffer interrupt  
0000101 = TRB5 buffer interrupt  
0000100 = TRB4 buffer interrupt  
0000011 = TRB3 buffer interrupt  
0000010 = TRB2 buffer interrupt  
0000001 = TRB1 buffer interrupt  
0000000 = TRB0 Buffer interrupt

# PIC24HJXXXGPX06/X08/X10

## REGISTER 19-4: CifCTRL: ECAN™ MODULE FIFO CONTROL REGISTER

|            |       |       |     |     |     |     |       |
|------------|-------|-------|-----|-----|-----|-----|-------|
| R/W-0      | R/W-0 | R/W-0 | U-0 | U-0 | U-0 | U-0 | U-0   |
| DMABS<2:0> |       |       | —   | —   | —   | —   | —     |
| bit 15     |       |       |     |     |     |     | bit 8 |

|       |     |     |          |       |       |       |       |
|-------|-----|-----|----------|-------|-------|-------|-------|
| U-0   | U-0 | U-0 | R/W-0    | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| —     | —   | —   | FSA<4:0> |       |       |       |       |
| bit 7 |     |     |          |       |       |       | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-13 **DMABS<2:0>**: DMA Buffer Size bits

111 = Reserved

110 = 32 buffers in DMA RAM

101 = 24 buffers in DMA RAM

100 = 16 buffers in DMA RAM

011 = 12 buffers in DMA RAM

010 = 8 buffers in DMA RAM

001 = 6 buffers in DMA RAM

000 = 4 buffers in DMA RAM

bit 12-5 **Unimplemented**: Read as '0'

bit 4-0 **FSA<4:0>**: FIFO Area Starts with Buffer bits

11111 = RB31 buffer

11110 = RB30 buffer

•

•

•

00001 = TRB1 buffer

00000 = TRB0 buffer

# PIC24HJXXXGPX06/X08/X10

## REGISTER 19-5: CiFIFO: ECAN™ MODULE FIFO STATUS REGISTER

|        |     |          |     |     |     |     |       |
|--------|-----|----------|-----|-----|-----|-----|-------|
| U-0    | U-0 | R-0      | R-0 | R-0 | R-0 | R-0 | R-0   |
| —      | —   | FBP<5:0> |     |     |     |     |       |
| bit 15 |     |          |     |     |     |     | bit 8 |

|       |     |           |     |     |     |     |       |
|-------|-----|-----------|-----|-----|-----|-----|-------|
| U-0   | U-0 | R-0       | R-0 | R-0 | R-0 | R-0 | R-0   |
| —     | —   | FNRB<5:0> |     |     |     |     |       |
| bit 7 |     |           |     |     |     |     | bit 0 |

|                   |                  |                                    |                    |
|-------------------|------------------|------------------------------------|--------------------|
| <b>Legend:</b>    |                  |                                    |                    |
| R = Readable bit  | W = Writable bit | U = Unimplemented bit, read as '0' |                    |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared               | x = Bit is unknown |

|           |                                                            |
|-----------|------------------------------------------------------------|
| bit 15-14 | <b>Unimplemented:</b> Read as '0'                          |
| bit 13-8  | <b>FBP&lt;5:0&gt;:</b> FIFO Write Buffer Pointer bits      |
|           | 011111 = RB31 buffer                                       |
|           | 011110 = RB30 buffer                                       |
|           | •                                                          |
|           | •                                                          |
|           | •                                                          |
|           | 000001 = TRB1 buffer                                       |
|           | 000000 = TRB0 buffer                                       |
| bit 7-6   | <b>Unimplemented:</b> Read as '0'                          |
| bit 5-0   | <b>FNRB&lt;5:0&gt;:</b> FIFO Next Read Buffer Pointer bits |
|           | 011111 = RB31 buffer                                       |
|           | 011110 = RB30 buffer                                       |
|           | •                                                          |
|           | •                                                          |
|           | •                                                          |
|           | 000001 = TRB1 buffer                                       |
|           | 000000 = TRB0 buffer                                       |

# PIC24HJXXXGPX06/X08/X10

## REGISTER 19-6: CiINTF: ECAN™ MODULE INTERRUPT FLAG REGISTER

|        |     |      |      |      |       |       |       |
|--------|-----|------|------|------|-------|-------|-------|
| U-0    | U-0 | R-0  | R-0  | R-0  | R-0   | R-0   | R-0   |
| —      | —   | TXBO | TXBP | RXBP | TXWAR | RXWAR | EWARN |
| bit 15 |     |      |      |      |       |       | bit 8 |

|       |       |       |     |        |        |       |       |
|-------|-------|-------|-----|--------|--------|-------|-------|
| R/C-0 | R/C-0 | R/C-0 | U-0 | R/C-0  | R/C-0  | R/C-0 | R/C-0 |
| IVRIF | WAKIF | ERRIF | —   | FIFOIF | RBOVIF | RBIF  | TBIF  |
| bit 7 |       |       |     |        |        |       | bit 0 |

|                   |                    |                                    |                    |
|-------------------|--------------------|------------------------------------|--------------------|
| <b>Legend:</b>    | C = Clear only bit |                                    |                    |
| R = Readable bit  | W = Writable bit   | U = Unimplemented bit, read as '0' |                    |
| -n = Value at POR | '1' = Bit is set   | '0' = Bit is cleared               | x = Bit is unknown |

|           |                                                                                    |
|-----------|------------------------------------------------------------------------------------|
| bit 15-14 | <b>Unimplemented:</b> Read as '0'                                                  |
| bit 13    | <b>TXBO:</b> Transmitter in Error State Bus Off bit                                |
| bit 12    | <b>TXBP:</b> Transmitter in Error State Bus Passive bit                            |
| bit 11    | <b>RXBP:</b> Receiver in Error State Bus Passive bit                               |
| bit 10    | <b>TXWAR:</b> Transmitter in Error State Warning bit                               |
| bit 9     | <b>RXWAR:</b> Receiver in Error State Warning bit                                  |
| bit 8     | <b>EWARN:</b> Transmitter or Receiver in Error State Warning bit                   |
| bit 7     | <b>IVRIF:</b> Invalid Message Received Interrupt Flag bit                          |
| bit 6     | <b>WAKIF:</b> Bus Wake-up Activity Interrupt Flag bit                              |
| bit 5     | <b>ERRIF:</b> Error Interrupt Flag bit (multiple sources in CiINTF<13:8> register) |
| bit 4     | <b>Unimplemented:</b> Read as '0'                                                  |
| bit 3     | <b>FIFOIF:</b> FIFO Almost Full Interrupt Flag bit                                 |
| bit 2     | <b>RBOVIF:</b> RX Buffer Overflow Interrupt Flag bit                               |
| bit 1     | <b>RBIF:</b> RX Buffer Interrupt Flag bit                                          |
| bit 0     | <b>TBIF:</b> TX Buffer Interrupt Flag bit                                          |

# PIC24HJXXXGPX06/X08/X10

## REGISTER 19-7: CIINTE: ECAN™ MODULE INTERRUPT ENABLE REGISTER

|        |     |     |     |       |     |     |     |
|--------|-----|-----|-----|-------|-----|-----|-----|
| U-0    | U-0 | U-0 | U-0 | U-0   | U-0 | U-0 | U-0 |
| —      | —   | —   | —   | —     | —   | —   | —   |
| bit 15 |     |     |     | bit 8 |     |     |     |

|       |       |       |     |        |        |       |       |
|-------|-------|-------|-----|--------|--------|-------|-------|
| R/W-0 | R/W-0 | R/W-0 | U-0 | R/W-0  | R/W-0  | R/W-0 | R/W-0 |
| IVRIE | WAKIE | ERRIE | —   | FIFOIE | RBOVIE | RBIE  | TBIE  |
| bit 7 |       |       |     | bit 0  |        |       |       |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

|          |                                                             |
|----------|-------------------------------------------------------------|
| bit 15-8 | <b>Unimplemented:</b> Read as '0'                           |
| bit 7    | <b>IVRIE:</b> Invalid Message Received Interrupt Enable bit |
| bit 6    | <b>WAKIE:</b> Bus Wake-up Activity Interrupt Flag bit       |
| bit 5    | <b>ERRIE:</b> Error Interrupt Enable bit                    |
| bit 4    | <b>Unimplemented:</b> Read as '0'                           |
| bit 3    | <b>FIFOIE:</b> FIFO Almost Full Interrupt Enable bit        |
| bit 2    | <b>RBOVIE:</b> RX Buffer Overflow Interrupt Enable bit      |
| bit 1    | <b>RBIE:</b> RX Buffer Interrupt Enable bit                 |
| bit 0    | <b>TBIE:</b> TX Buffer Interrupt Enable bit                 |

# PIC24HJXXXGPX06/X08/X10

## REGISTER 19-8: CIEC: ECAN™ MODULE TRANSMIT/RECEIVE ERROR COUNT REGISTER

|              |     |     |     |     |     |     |     |
|--------------|-----|-----|-----|-----|-----|-----|-----|
| R-0          | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
| TERRCNT<7:0> |     |     |     |     |     |     |     |
| bit 15       |     |     |     |     |     |     |     |
| bit 8        |     |     |     |     |     |     |     |

|              |     |     |     |     |     |     |     |
|--------------|-----|-----|-----|-----|-----|-----|-----|
| R-0          | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
| RERRCNT<7:0> |     |     |     |     |     |     |     |
| bit 7        |     |     |     |     |     |     |     |
| bit 0        |     |     |     |     |     |     |     |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-8      **TERRCNT<7:0>**: Transmit Error Count bits

bit 7-0      **RERRCNT<7:0>**: Receive Error Count bits

# PIC24HJXXXGPX06/X08/X10

## REGISTER 19-9: CiCFG1: ECAN™ MODULE BAUD RATE CONFIGURATION REGISTER 1

|        |     |     |     |     |     |     |       |
|--------|-----|-----|-----|-----|-----|-----|-------|
| U-0    | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0   |
| —      | —   | —   | —   | —   | —   | —   | —     |
| bit 15 |     |     |     |     |     |     | bit 8 |

|          |       |          |       |       |       |       |       |
|----------|-------|----------|-------|-------|-------|-------|-------|
| R/W-0    | R/W-0 | R/W-0    | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| SJW<1:0> |       | BRP<5:0> |       |       |       |       |       |
| bit 7    |       |          |       |       |       |       | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-8

**Unimplemented:** Read as '0'

bit 7-6

**SJW<1:0>:** Synchronization Jump Width bits

11 = Length is 4 x T<sub>Q</sub>

10 = Length is 3 x T<sub>Q</sub>

01 = Length is 2 x T<sub>Q</sub>

00 = Length is 1 x T<sub>Q</sub>

bit 5-0

**BRP<5:0>:** Baud Rate Prescaler bits

11 1111 = T<sub>Q</sub> = 2 x 64 x 1/FCAN

•

•

•

00 0010 = T<sub>Q</sub> = 2 x 3 x 1/FCAN

00 0001 = T<sub>Q</sub> = 2 x 2 x 1/FCAN

00 0000 = T<sub>Q</sub> = 2 x 1 x 1/FCAN

# PIC24HJXXXGPX06/X08/X10

## REGISTER 19-10: C1CFG2: ECAN™ MODULE BAUD RATE CONFIGURATION REGISTER 2

|        |        |     |     |     |             |       |       |
|--------|--------|-----|-----|-----|-------------|-------|-------|
| U-0    | R/W-x  | U-0 | U-0 | U-0 | R/W-x       | R/W-x | R/W-x |
| —      | WAKFIL | —   | —   | —   | SEG2PH<2:0> |       |       |
| bit 15 |        |     |     |     |             |       | bit 8 |

|          |       |             |       |       |            |       |       |
|----------|-------|-------------|-------|-------|------------|-------|-------|
| R/W-x    | R/W-x | R/W-x       | R/W-x | R/W-x | R/W-x      | R/W-x | R/W-x |
| SEG2PHTS | SAM   | SEG1PH<2:0> |       |       | PRSEG<2:0> |       |       |
| bit 7    |       |             |       |       |            |       | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **Unimplemented:** Read as '0'

bit 14 **WAKFIL:** Select CAN bus Line Filter for Wake-up bit

1 = Use CAN bus line filter for wake-up

0 = CAN bus line filter is not used for wake-up

bit 13-11 **Unimplemented:** Read as '0'

bit 10-8 **SEG2PH<2:0>:** Phase Buffer Segment 2 bits

111 = Length is 8 x Tq

000 = Length is 1 x Tq

bit 7 **SEG2PHTS:** Phase Segment 2 Time Select bit

1 = Freely programmable

0 = Maximum of SEG1PH bits or Information Processing Time (IPT), whichever is greater

bit 6 **SAM:** Sample of the CAN bus Line bit

1 = Bus line is sampled three times at the sample point

0 = Bus line is sampled once at the sample point

bit 5-3 **SEG1PH<2:0>:** Phase Buffer Segment 1 bits

111 = Length is 8 x Tq

000 = Length is 1 x Tq

bit 2-0 **PRSEG<2:0>:** Propagation Time Segment bits

111 = Length is 8 x Tq

000 = Length is 1 x Tq

# PIC24HJXXXGPX06/X08/X10

## REGISTER 19-11: CiFEN1: ECAN™ MODULE ACCEPTANCE FILTER ENABLE REGISTER

|         |         |         |         |         |         |        |        |
|---------|---------|---------|---------|---------|---------|--------|--------|
| R/W-1   | R/W-1   | R/W-1   | R/W-1   | R/W-1   | R/W-1   | R/W-1  | R/W-1  |
| FLTEN15 | FLTEN14 | FLTEN13 | FLTEN12 | FLTEN11 | FLTEN10 | FLTEN9 | FLTEN8 |
| bit 15  |         |         |         |         |         | bit 8  |        |

|        |        |        |        |        |        |        |        |
|--------|--------|--------|--------|--------|--------|--------|--------|
| R/W-1  | R/W-1  | R/W-1  | R/W-1  | R/W-1  | R/W-1  | R/W-1  | R/W-1  |
| FLTEN7 | FLTEN6 | FLTEN5 | FLTEN4 | FLTEN3 | FLTEN2 | FLTEN1 | FLTEN0 |
| bit 7  |        |        |        |        |        | bit 0  |        |

### Legend:

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
-n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown

bit 15-0                      **FLTENn:** Enable Filter n to Accept Messages bits  
                                         1 = Enable Filter n  
                                         0 = Disable Filter n

## REGISTER 19-12: CiBUFPNT1: ECAN™ MODULE FILTER 0-3 BUFFER POINTER REGISTER

|           |       |       |       |           |       |       |       |
|-----------|-------|-------|-------|-----------|-------|-------|-------|
| R/W-0     | R/W-0 | R/W-0 | R/W-0 | R/W-0     | R/W-0 | R/W-0 | R/W-0 |
| F3BP<3:0> |       |       |       | F2BP<3:0> |       |       |       |
| bit 15    |       |       |       |           |       | bit 8 |       |

|           |       |       |       |           |       |       |       |
|-----------|-------|-------|-------|-----------|-------|-------|-------|
| R/W-0     | R/W-0 | R/W-0 | R/W-0 | R/W-0     | R/W-0 | R/W-0 | R/W-0 |
| F1BP<3:0> |       |       |       | F0BP<3:0> |       |       |       |
| bit 7     |       |       |       |           |       | bit 0 |       |

### Legend:

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
-n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown

bit 15-12                      **F3BP<3:0>:** RX Buffer Written when Filter 3 Hits bits  
bit 11-8                      **F2BP<3:0>:** RX Buffer Written when Filter 2 Hits bits  
bit 7-4                      **F1BP<3:0>:** RX Buffer Written when Filter 1 Hits bits  
bit 3-0                      **F0BP<3:0>:** RX Buffer Written when Filter 0 Hits bits  
                                         1111 = Filter hits received in RX FIFO buffer  
                                         1110 = Filter hits received in RX Buffer 14  
                                         .  
                                         .  
                                         .  
                                         0001 = Filter hits received in RX Buffer 1  
                                         0000 = Filter hits received in RX Buffer 0

# PIC24HJXXXGPX06/X08/X10

## REGISTER 19-13: CiBUFPNT2: ECAN™ MODULE FILTER 4-7 BUFFER POINTER REGISTER

|           |       |       |       |           |       |       |       |
|-----------|-------|-------|-------|-----------|-------|-------|-------|
| R/W-0     | R/W-0 | R/W-0 | R/W-0 | R/W-0     | R/W-0 | R/W-0 | R/W-0 |
| F7BP<3:0> |       |       |       | F6BP<3:0> |       |       |       |
| bit 15    |       |       |       | bit 8     |       |       |       |

|           |       |       |       |           |       |       |       |
|-----------|-------|-------|-------|-----------|-------|-------|-------|
| R/W-0     | R/W-0 | R/W-0 | R/W-0 | R/W-0     | R/W-0 | R/W-0 | R/W-0 |
| F5BP<3:0> |       |       |       | F4BP<3:0> |       |       |       |
| bit 7     |       |       |       | bit 0     |       |       |       |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-12 **F7BP<3:0>**: RX Buffer Written when Filter 7 Hits bits

bit 11-8 **F6BP<3:0>**: RX Buffer Written when Filter 6 Hits bits

bit 7-4 **F5BP<3:0>**: RX Buffer Written when Filter 5 Hits bits

bit 3-0 **F4BP<3:0>**: RX Buffer Written when Filter 4 Hits bits

## REGISTER 19-14: CiBUFPNT3: ECAN™ MODULE FILTER 8-11 BUFFER POINTER REGISTER

|            |       |       |       |            |       |       |       |
|------------|-------|-------|-------|------------|-------|-------|-------|
| R/W-0      | R/W-0 | R/W-0 | R/W-0 | R/W-0      | R/W-0 | R/W-0 | R/W-0 |
| F11BP<3:0> |       |       |       | F10BP<3:0> |       |       |       |
| bit 15     |       |       |       | bit 8      |       |       |       |

|           |       |       |       |           |       |       |       |
|-----------|-------|-------|-------|-----------|-------|-------|-------|
| R/W-0     | R/W-0 | R/W-0 | R/W-0 | R/W-0     | R/W-0 | R/W-0 | R/W-0 |
| F9BP<3:0> |       |       |       | F8BP<3:0> |       |       |       |
| bit 7     |       |       |       | bit 0     |       |       |       |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-12 **F11BP<3:0>**: RX Buffer Written when Filter 11 Hits bits

bit 11-8 **F10BP<3:0>**: RX Buffer Written when Filter 10 Hits bits

bit 7-4 **F9BP<3:0>**: RX Buffer Written when Filter 9 Hits bits

bit 3-0 **F8BP<3:0>**: RX Buffer Written when Filter 8 Hits bits

# PIC24HJXXXGPX06/X08/X10

## REGISTER 19-15: CiBUFPNT4: ECAN™ MODULE FILTER 12-15 BUFFER POINTER REGISTER

|            |       |       |       |            |       |       |       |
|------------|-------|-------|-------|------------|-------|-------|-------|
| R/W-0      | R/W-0 | R/W-0 | R/W-0 | R/W-0      | R/W-0 | R/W-0 | R/W-0 |
| F15BP<3:0> |       |       |       | F14BP<3:0> |       |       |       |
| bit 15     |       |       |       | bit 8      |       |       |       |

|            |       |       |       |            |       |       |       |
|------------|-------|-------|-------|------------|-------|-------|-------|
| R/W-0      | R/W-0 | R/W-0 | R/W-0 | R/W-0      | R/W-0 | R/W-0 | R/W-0 |
| F13BP<3:0> |       |       |       | F12BP<3:0> |       |       |       |
| bit 7      |       |       |       | bit 0      |       |       |       |

|                   |                  |                                    |                    |
|-------------------|------------------|------------------------------------|--------------------|
| <b>Legend:</b>    |                  |                                    |                    |
| R = Readable bit  | W = Writable bit | U = Unimplemented bit, read as '0' |                    |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared               | x = Bit is unknown |

- bit 15-12      **F15BP<3:0>**: RX Buffer Written when Filter 15 Hits bits
- bit 11-8      **F14BP<3:0>**: RX Buffer Written when Filter 14 Hits bits
- bit 7-4        **F13BP<3:0>**: RX Buffer Written when Filter 13 Hits bits
- bit 3-0        **F12BP<3:0>**: RX Buffer Written when Filter 12 Hits bits

# PIC24HJXXXGPX06/X08/X10

## REGISTER 19-16: CiRxFnSID: ECAN™ MODULE ACCEPTANCE FILTER n STANDARD IDENTIFIER (n = 0, 1, ..., 15)

|        |       |       |       |       |       |       |       |
|--------|-------|-------|-------|-------|-------|-------|-------|
| R/W-x  | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x |
| SID10  | SID9  | SID8  | SID7  | SID6  | SID5  | SID4  | SID3  |
| bit 15 |       |       |       |       |       | bit 8 |       |

|       |       |       |     |       |     |       |       |
|-------|-------|-------|-----|-------|-----|-------|-------|
| R/W-x | R/W-x | R/W-x | U-0 | R/W-x | U-0 | R/W-x | R/W-x |
| SID2  | SID1  | SID0  | —   | EXIDE | —   | EID17 | EID16 |
| bit 7 |       |       |     |       |     | bit 0 |       |

### Legend:

R = Readable bit      W = Writable bit      U = Unimplemented bit, read as '0'  
-n = Value at POR      '1' = Bit is set      '0' = Bit is cleared      x = Bit is unknown

- bit 15-5      **SID<10:0>**: Standard Identifier bits  
1 = Message address bit SIDx must be '1' to match filter  
0 = Message address bit SIDx must be '0' to match filter
- bit 4      **Unimplemented**: Read as '0'
- bit 3      **EXIDE**: Extended Identifier Enable bit  
If MIDE = 1 then:  
1 = Match only messages with extended identifier addresses  
0 = Match only messages with standard identifier addresses  
If MIDE = 0 then:  
Ignore EXIDE bit.
- bit 2      **Unimplemented**: Read as '0'
- bit 1-0      **EID<17:16>**: Extended Identifier bits  
1 = Message address bit EIDx must be '1' to match filter  
0 = Message address bit EIDx must be '0' to match filter

## REGISTER 19-17: CiRxFnEID: ECAN™ MODULE ACCEPTANCE FILTER n EXTENDED IDENTIFIER (n = 0, 1, ..., 15)

|        |       |       |       |       |       |       |       |
|--------|-------|-------|-------|-------|-------|-------|-------|
| R/W-x  | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x |
| EID15  | EID14 | EID13 | EID12 | EID11 | EID10 | EID9  | EID8  |
| bit 15 |       |       |       |       |       | bit 8 |       |

|       |       |       |       |       |       |       |       |
|-------|-------|-------|-------|-------|-------|-------|-------|
| R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x |
| EID7  | EID6  | EID5  | EID4  | EID3  | EID2  | EID1  | EID0  |
| bit 7 |       |       |       |       |       | bit 0 |       |

### Legend:

R = Readable bit      W = Writable bit      U = Unimplemented bit, read as '0'  
-n = Value at POR      '1' = Bit is set      '0' = Bit is cleared      x = Bit is unknown

- bit 15-0      **EID<15:0>**: Extended Identifier bits  
1 = Message address bit EIDx must be '1' to match filter  
0 = Message address bit EIDx must be '0' to match filter

# PIC24HJXXXGPX06/X08/X10

## REGISTER 19-18: CiFMSKSEL1: ECAN™ MODULE FILTER 7-0 MASK SELECTION REGISTER

|            |       |            |       |            |       |            |       |
|------------|-------|------------|-------|------------|-------|------------|-------|
| R/W-0      | R/W-0 | R/W-0      | R/W-0 | R/W-0      | R/W-0 | R/W-0      | R/W-0 |
| F7MSK<1:0> |       | F6MSK<1:0> |       | F5MSK<1:0> |       | F4MSK<1:0> |       |
| bit 15     |       |            |       |            |       |            | bit 8 |

|            |       |            |       |            |       |            |       |
|------------|-------|------------|-------|------------|-------|------------|-------|
| R/W-0      | R/W-0 | R/W-0      | R/W-0 | R/W-0      | R/W-0 | R/W-0      | R/W-0 |
| F3MSK<1:0> |       | F2MSK<1:0> |       | F1MSK<1:0> |       | F0MSK<1:0> |       |
| bit 7      |       |            |       |            |       |            | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-14      **F7MSK<1:0>**: Mask Source for Filter 7 bit

bit 13-12      **F6MSK<1:0>**: Mask Source for Filter 6 bit

bit 11-10      **F5MSK<1:0>**: Mask Source for Filter 5 bit

bit 9-8        **F4MSK<1:0>**: Mask Source for Filter 4 bit

bit 7-6        **F3MSK<1:0>**: Mask Source for Filter 3 bit

bit 5-4        **F2MSK<1:0>**: Mask Source for Filter 2 bit

bit 3-2        **F1MSK<1:0>**: Mask Source for Filter 1 bit

bit 1-0        **F0MSK<1:0>**: Mask Source for Filter 0 bit

11 = Reserved

10 = Acceptance Mask 2 registers contain mask

01 = Acceptance Mask 1 registers contain mask

00 = Acceptance Mask 0 registers contain mask

# PIC24HJXXXGPX06/X08/X10

## REGISTER 19-19: CIfMSKSEL2: ECAN™ FILTER 15-8 MASK SELECTION REGISTER

|             |       |             |       |             |       |             |       |       |  |  |  |  |  |  |  |
|-------------|-------|-------------|-------|-------------|-------|-------------|-------|-------|--|--|--|--|--|--|--|
| R/W-0       | R/W-0 | R/W-0       | R/W-0 | R/W-0       | R/W-0 | R/W-0       | R/W-0 |       |  |  |  |  |  |  |  |
| F15MSK<1:0> |       | F14MSK<1:0> |       | F13MSK<1:0> |       | F12MSK<1:0> |       |       |  |  |  |  |  |  |  |
| bit 15      |       |             |       |             |       |             |       | bit 8 |  |  |  |  |  |  |  |

|             |       |             |       |            |       |            |       |
|-------------|-------|-------------|-------|------------|-------|------------|-------|
| R/W-0       | R/W-0 | R/W-0       | R/W-0 | R/W-0      | R/W-0 | R/W-0      | R/W-0 |
| F11MSK<1:0> |       | F10MSK<1:0> |       | F9MSK<1:0> |       | F8MSK<1:0> |       |
| bit 7       |       |             |       |            |       |            | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-14 **F15MSK<1:0>**: Mask Source for Filter 15 bit

11 = Reserved

10 = Acceptance Mask 2 registers contain mask

01 = Acceptance Mask 1 registers contain mask

00 = Acceptance Mask 0 registers contain mask

bit 13-12 **F14MSK<1:0>**: Mask Source for Filter 14 bit (same values as bit 15-14)

bit 11-10 **F13MSK<1:0>**: Mask Source for Filter 13 bit (same values as bit 15-14)

bit 9-8 **F12MSK<1:0>**: Mask Source for Filter 12 bit (same values as bit 15-14)

bit 7-6 **F11MSK<1:0>**: Mask Source for Filter 11 bit (same values as bit 15-14)

bit 5-4 **F10MSK<1:0>**: Mask Source for Filter 10 bit (same values as bit 15-14)

bit 3-2 **F9MSK<1:0>**: Mask Source for Filter 9 bit (same values as bit 15-14)

bit 1-0 **F8MSK<1:0>**: Mask Source for Filter 8 bit (same values as bit 15-14)

# PIC24HJXXXGPX06/X08/X10

## REGISTER 19-20: CiRXMnSID: ECAN™ MODULE ACCEPTANCE FILTER MASK n STANDARD IDENTIFIER

|        |       |       |       |       |       |       |       |
|--------|-------|-------|-------|-------|-------|-------|-------|
| R/W-x  | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x |
| SID10  | SID9  | SID8  | SID7  | SID6  | SID5  | SID4  | SID3  |
| bit 15 |       |       |       |       |       | bit 8 |       |

|       |       |       |     |       |     |       |       |
|-------|-------|-------|-----|-------|-----|-------|-------|
| R/W-x | R/W-x | R/W-x | U-0 | R/W-x | U-0 | R/W-x | R/W-x |
| SID2  | SID1  | SID0  | —   | MIDE  | —   | EID17 | EID16 |
| bit 7 |       |       |     |       |     | bit 0 |       |

### Legend:

R = Readable bit      W = Writable bit      U = Unimplemented bit, read as '0'  
-n = Value at POR      '1' = Bit is set      '0' = Bit is cleared      x = Bit is unknown

- bit 15-5      **SID<10:0>**: Standard Identifier bits  
1 = Include bit SIDx in filter comparison  
0 = Bit SIDx is don't care in filter comparison
- bit 4      **Unimplemented**: Read as '0'
- bit 3      **MIDE**: Identifier Receive Mode bit  
1 = Match only message types (standard or extended address) that correspond to EXIDE bit in filter  
0 = Match either standard or extended address message if filters match  
(i.e., if (Filter SID) = (Message SID) or if (Filter SID/EID) = (Message SID/EID))
- bit 2      **Unimplemented**: Read as '0'
- bit 1-0      **EID<17:16>**: Extended Identifier bits  
1 = Include bit EIDx in filter comparison  
0 = Bit EIDx is don't care in filter comparison

## REGISTER 19-21: CiRXMnEID: ECAN™ TECHNOLOGY ACCEPTANCE FILTER MASK n EXTENDED IDENTIFIER

|        |       |       |       |       |       |       |       |
|--------|-------|-------|-------|-------|-------|-------|-------|
| R/W-x  | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x |
| EID15  | EID14 | EID13 | EID12 | EID11 | EID10 | EID9  | EID8  |
| bit 15 |       |       |       |       |       | bit 8 |       |

|       |       |       |       |       |       |       |       |
|-------|-------|-------|-------|-------|-------|-------|-------|
| R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x |
| EID7  | EID6  | EID5  | EID4  | EID3  | EID2  | EID1  | EID0  |
| bit 7 |       |       |       |       |       | bit 0 |       |

### Legend:

R = Readable bit      W = Writable bit      U = Unimplemented bit, read as '0'  
-n = Value at POR      '1' = Bit is set      '0' = Bit is cleared      x = Bit is unknown

- bit 15-0      **EID<15:0>**: Extended Identifier bits  
1 = Include bit EIDx in filter comparison  
0 = Bit EIDx is don't care in filter comparison

# PIC24HJXXXGPX06/X08/X10

## REGISTER 19-22: C<sub>IRXFUL1</sub>: ECAN™ MODULE RECEIVE BUFFER FULL REGISTER 1

|         |         |         |         |         |         |        |        |
|---------|---------|---------|---------|---------|---------|--------|--------|
| R/C-0   | R/C-0   | R/C-0   | R/C-0   | R/C-0   | R/C-0   | R/C-0  | R/C-0  |
| RXFUL15 | RXFUL14 | RXFUL13 | RXFUL12 | RXFUL11 | RXFUL10 | RXFUL9 | RXFUL8 |
| bit 15  |         |         |         |         |         |        | bit 8  |

|        |        |        |        |        |        |        |        |
|--------|--------|--------|--------|--------|--------|--------|--------|
| R/C-0  | R/C-0  | R/C-0  | R/C-0  | R/C-0  | R/C-0  | R/C-0  | R/C-0  |
| RXFUL7 | RXFUL6 | RXFUL5 | RXFUL4 | RXFUL3 | RXFUL2 | RXFUL1 | RXFUL0 |
| bit 7  |        |        |        |        |        |        | bit 0  |

|                   |                    |                                              |
|-------------------|--------------------|----------------------------------------------|
| <b>Legend:</b>    | C = Clear only bit |                                              |
| R = Readable bit  | W = Writable bit   | U = Unimplemented bit, read as '0'           |
| -n = Value at POR | '1' = Bit is set   | '0' = Bit is cleared      x = Bit is unknown |

bit 15-0      **RXFUL<15:0>:** Receive Buffer n Full bits  
1 = Buffer is full (set by module)  
0 = Buffer is empty (clear by application software)

## REGISTER 19-23: C<sub>IRXFUL2</sub>: ECAN™ MODULE RECEIVE BUFFER FULL REGISTER 2

|         |         |         |         |         |         |         |         |
|---------|---------|---------|---------|---------|---------|---------|---------|
| R/C-0   | R/C-0   | R/C-0   | R/C-0   | R/C-0   | R/C-0   | R/C-0   | R/C-0   |
| RXFUL31 | RXFUL30 | RXFUL29 | RXFUL28 | RXFUL27 | RXFUL26 | RXFUL25 | RXFUL24 |
| bit 15  |         |         |         |         |         |         | bit 8   |

|         |         |         |         |         |         |         |         |
|---------|---------|---------|---------|---------|---------|---------|---------|
| R/C-0   | R/C-0   | R/C-0   | R/C-0   | R/C-0   | R/C-0   | R/C-0   | R/C-0   |
| RXFUL23 | RXFUL22 | RXFUL21 | RXFUL20 | RXFUL19 | RXFUL18 | RXFUL17 | RXFUL16 |
| bit 7   |         |         |         |         |         |         | bit 0   |

|                   |                    |                                              |
|-------------------|--------------------|----------------------------------------------|
| <b>Legend:</b>    | C = Clear only bit |                                              |
| R = Readable bit  | W = Writable bit   | U = Unimplemented bit, read as '0'           |
| -n = Value at POR | '1' = Bit is set   | '0' = Bit is cleared      x = Bit is unknown |

bit 15-0      **RXFUL<31:16>:** Receive Buffer n Full bits  
1 = Buffer is full (set by module)  
0 = Buffer is empty (clear by application software)

# PIC24HJXXXGPX06/X08/X10

## REGISTER 19-24: C<sub>i</sub>RXOVF1: ECAN™ MODULE RECEIVE BUFFER OVERFLOW REGISTER 1

|         |         |         |         |         |         |        |        |
|---------|---------|---------|---------|---------|---------|--------|--------|
| R/C-0   | R/C-0   | R/C-0   | R/C-0   | R/C-0   | R/C-0   | R/C-0  | R/C-0  |
| RXOVF15 | RXOVF14 | RXOVF13 | RXOVF12 | RXOVF11 | RXOVF10 | RXOVF9 | RXOVF8 |
| bit 15  |         |         |         |         |         | bit 8  |        |

|        |        |        |        |        |        |        |        |
|--------|--------|--------|--------|--------|--------|--------|--------|
| R/C-0  | R/C-0  | R/C-0  | R/C-0  | R/C-0  | R/C-0  | R/C-0  | R/C-0  |
| RXOVF7 | RXOVF6 | RXOVF5 | RXOVF4 | RXOVF3 | RXOVF2 | RXOVF1 | RXOVF0 |
| bit 7  |        |        |        |        |        | bit 0  |        |

|                   |                    |                                    |                    |
|-------------------|--------------------|------------------------------------|--------------------|
| <b>Legend:</b>    | C = Clear only bit |                                    |                    |
| R = Readable bit  | W = Writable bit   | U = Unimplemented bit, read as '0' |                    |
| -n = Value at POR | '1' = Bit is set   | '0' = Bit is cleared               | x = Bit is unknown |

bit 15-0      **RXOVF<15:0>**: Receive Buffer n Overflow bits  
1 = Module pointed a write to a full buffer (set by module)  
0 = Overflow is cleared (clear by application software)

## REGISTER 19-25: C<sub>i</sub>RXOVF2: ECAN™ MODULE RECEIVE BUFFER OVERFLOW REGISTER 2

|         |         |         |         |         |         |         |         |
|---------|---------|---------|---------|---------|---------|---------|---------|
| R/C-0   | R/C-0   | R/C-0   | R/C-0   | R/C-0   | R/C-0   | R/C-0   | R/C-0   |
| RXOVF31 | RXOVF30 | RXOVF29 | RXOVF28 | RXOVF27 | RXOVF26 | RXOVF25 | RXOVF24 |
| bit 15  |         |         |         |         |         | bit 8   |         |

|         |         |         |         |         |         |         |         |
|---------|---------|---------|---------|---------|---------|---------|---------|
| R/C-0   | R/C-0   | R/C-0   | R/C-0   | R/C-0   | R/C-0   | R/C-0   | R/C-0   |
| RXOVF23 | RXOVF22 | RXOVF21 | RXOVF20 | RXOVF19 | RXOVF18 | RXOVF17 | RXOVF16 |
| bit 7   |         |         |         |         |         | bit 0   |         |

|                   |                    |                                    |                    |
|-------------------|--------------------|------------------------------------|--------------------|
| <b>Legend:</b>    | C = Clear only bit |                                    |                    |
| R = Readable bit  | W = Writable bit   | U = Unimplemented bit, read as '0' |                    |
| -n = Value at POR | '1' = Bit is set   | '0' = Bit is cleared               | x = Bit is unknown |

bit 15-0      **RXOVF<31:16>**: Receive Buffer n Overflow bits  
1 = Module pointed a write to a full buffer (set by module)  
0 = Overflow is cleared (clear by application software)

# PIC24HJXXXGPX06/X08/X10

## REGISTER 19-26: CiTRmnCON: ECAN™ MODULE TX/RX BUFFER m CONTROL REGISTER (m = 0,2,4,6; n = 1,3,5,7)

|        |        |         |        |        |        |             |       |
|--------|--------|---------|--------|--------|--------|-------------|-------|
| R/W-0  | R-0    | R-0     | R-0    | R/W-0  | R/W-0  | R/W-0       | R/W-0 |
| TXENn  | TXABTn | TXLARBn | TXERRn | TXREQn | RTRENn | TXnPRI<1:0> |       |
| bit 15 |        |         |        |        |        |             | bit 8 |

|       |                       |                        |                       |        |        |             |       |
|-------|-----------------------|------------------------|-----------------------|--------|--------|-------------|-------|
| R/W-0 | R-0                   | R-0                    | R-0                   | R/W-0  | R/W-0  | R/W-0       | R/W-0 |
| TXENm | TXABTm <sup>(1)</sup> | TXLARBm <sup>(1)</sup> | TXERRm <sup>(1)</sup> | TXREQm | RTRENm | TXmPRI<1:0> |       |
| bit 7 |                       |                        |                       |        |        |             | bit 0 |

### Legend:

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
-n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown

- bit 15-8      **See Definition for Bits 7-0, Controls Buffer n**
- bit 7      **TXENm:** TX/RX Buffer Selection bit  
1 = Buffer TRBn is a transmit buffer  
0 = Buffer TRBn is a receive buffer
- bit 6      **TXABTm:** Message Aborted bit<sup>(1)</sup>  
1 = Message was aborted  
0 = Message completed transmission successfully
- bit 5      **TXLARBm:** Message Lost Arbitration bit<sup>(1)</sup>  
1 = Message lost arbitration while being sent  
0 = Message did not lose arbitration while being sent
- bit 4      **TXERRm:** Error Detected During Transmission bit<sup>(1)</sup>  
1 = A bus error occurred while the message was being sent  
0 = A bus error did not occur while the message was being sent
- bit 3      **TXREQm:** Message Send Request bit  
Setting this bit to '1' requests sending a message. The bit will automatically clear when the message is successfully sent. Clearing the bit to '0' while set will request a message abort.
- bit 2      **RTRENm:** Auto-Remote Transmit Enable bit  
1 = When a remote transmit is received, TXREQ will be set  
0 = When a remote transmit is received, TXREQ will be unaffected
- bit 1-0      **TXmPRI<1:0>:** Message Transmission Priority bits  
11 = Highest message priority  
10 = High intermediate message priority  
01 = Low intermediate message priority  
00 = Lowest message priority

**Note 1:** This bit is cleared when TXREQ is set.

# PIC24HJXXXGPX06/X08/X10

**Note:** The buffers, SID, EID, DLC, Data Field and Receive Status registers are stored in DMA RAM. These are not Special Function Registers.

## REGISTER 19-27: CnTRBnSID: ECAN™ MODULE BUFFER n STANDARD IDENTIFIER (n = 0, 1, ..., 31)

|        |     |     |       |       |       |       |       |
|--------|-----|-----|-------|-------|-------|-------|-------|
| U-0    | U-0 | U-0 | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x |
| —      | —   | —   | SID10 | SID9  | SID8  | SID7  | SID6  |
| bit 15 |     |     |       |       |       |       | bit 8 |

|       |       |       |       |       |       |       |       |
|-------|-------|-------|-------|-------|-------|-------|-------|
| R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x |
| SID5  | SID4  | SID3  | SID2  | SID1  | SID0  | SRR   | IDE   |
| bit 7 |       |       |       |       |       |       | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-13 **Unimplemented:** Read as '0'

bit 12-2 **SID<10:0>:** Standard Identifier bits

bit 1 **SRR:** Substitute Remote Request bit

1 = Message will request remote transmission

0 = Normal message

bit 0 **IDE:** Extended Identifier bit

1 = Message will transmit extended identifier

0 = Message will transmit standard identifier

## REGISTER 19-28: CnTRBnEID: ECAN™ MODULE BUFFER n EXTENDED IDENTIFIER (n = 0, 1, ..., 31)

|        |     |     |     |       |       |       |       |
|--------|-----|-----|-----|-------|-------|-------|-------|
| U-0    | U-0 | U-0 | U-0 | R/W-x | R/W-x | R/W-x | R/W-x |
| —      | —   | —   | —   | EID17 | EID16 | EID15 | EID14 |
| bit 15 |     |     |     |       |       |       | bit 8 |

|       |       |       |       |       |       |       |       |
|-------|-------|-------|-------|-------|-------|-------|-------|
| R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x |
| EID13 | EID12 | EID11 | EID10 | EID9  | EID8  | EID7  | EID6  |
| bit 7 |       |       |       |       |       |       | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-12 **Unimplemented:** Read as '0'

bit 11-0 **EID<17:6>:** Extended Identifier bits

# PIC24HJXXXGPX06/X08/X10

## REGISTER 19-29: CiTRBnDLC: ECAN™ MODULE BUFFER n DATA LENGTH CONTROL (n = 0, 1, ..., 31)

|        |       |       |       |       |       |       |       |
|--------|-------|-------|-------|-------|-------|-------|-------|
| R/W-x  | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x |
| EID5   | EID4  | EID3  | EID2  | EID1  | EID0  | RTR   | RB1   |
| bit 15 |       |       |       |       |       |       | bit 8 |
| U-0    | U-0   | U-0   | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x |
| —      | —     | —     | RB0   | DLC3  | DLC2  | DLC1  | DLC0  |
| bit 7  |       |       |       |       |       |       | bit 0 |

### Legend:

R = Readable bit      W = Writable bit      U = Unimplemented bit, read as '0'  
-n = Value at POR      '1' = Bit is set      '0' = Bit is cleared      x = Bit is unknown

- bit 15-10      **EID<5:0>**: Extended Identifier bits
- bit 9      **RTR**: Remote Transmission Request bit  
1 = Message will request remote transmission  
0 = Normal message
- bit 8      **RB1**: Reserved Bit 1  
User must set this bit to '0' per CAN protocol.
- bit 7-5      **Unimplemented**: Read as '0'
- bit 4      **RB0**: Reserved Bit 0  
User must set this bit to '0' per CAN protocol.
- bit 3-0      **DLC<3:0>**: Data Length Code bits

## REGISTER 19-30: CiTRBnDm: ECAN™ MODULE BUFFER n DATA FIELD BYTE m (n = 0, 1, ..., 31; m = 0, 1, ..., 7)<sup>(1)</sup>

|         |         |         |         |         |         |         |         |
|---------|---------|---------|---------|---------|---------|---------|---------|
| R/W-x   | R/W-x   | R/W-x   | R/W-x   | R/W-x   | R/W-x   | R/W-x   | R/W-x   |
| TRBnDm7 | TRBnDm6 | TRBnDm5 | TRBnDm4 | TRBnDm3 | TRBnDm2 | TRBnDm1 | TRBnDm0 |
| bit 7   |         |         |         |         |         |         | bit 0   |

### Legend:

R = Readable bit      W = Writable bit      U = Unimplemented bit, read as '0'  
-n = Value at POR      '1' = Bit is set      '0' = Bit is cleared      x = Bit is unknown

- bit 7-0      **TRnDm<7:0>**: Data Field Buffer 'n' Byte 'm' bits

**Note 1:** The Most Significant Byte contains byte (m + 1) of the buffer.

# PIC24HJXXXGPX06/X08/X10

## REGISTER 19-31: CiTRBnSTAT: ECAN™ MODULE RECEIVE BUFFER n STATUS (n = 0, 1, ..., 31)

|        |     |     |         |         |         |         |         |
|--------|-----|-----|---------|---------|---------|---------|---------|
| U-0    | U-0 | U-0 | R/W-x   | R/W-x   | R/W-x   | R/W-x   | R/W-x   |
| —      | —   | —   | FILHIT4 | FILHIT3 | FILHIT2 | FILHIT1 | FILHIT0 |
| bit 15 |     |     | bit 8   |         |         |         |         |

|       |     |     |     |     |     |     |     |       |
|-------|-----|-----|-----|-----|-----|-----|-----|-------|
| U-0   | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |       |
| —     | —   | —   | —   | —   | —   | —   | —   |       |
| bit 7 |     |     |     |     |     |     |     | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-13      **Unimplemented:** Read as '0'

bit 12-8      **FILHIT<4:0>:** Filter Hit Code bits (only written by module for receive buffers, unused for transmit buffers)  
Encodes number of filter that resulted in writing this buffer.

bit 7-0      **Unimplemented:** Read as '0'

## 20.0 10-BIT/12-BIT ANALOG-TO-DIGITAL CONVERTER (ADC)

**Note:** This data sheet summarizes the features of the PIC24HJXXXGPX06/X08/X10 family of devices. However, it is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the “PIC24H Family Reference Manual”, **Section 16. “Analog-to-Digital Converter (ADC)”** (DS70225), which is available from the Microchip website ([www.microchip.com](http://www.microchip.com)).

The PIC24HJXXXGPX06/X08/X10 devices have up to 32 Analog-to-Digital input channels. These devices also have up to 2 Analog-to-Digital converter modules (ADCx, where ‘x’ = 1 or 2), each with its own set of Special Function Registers.

The AD12B bit (ADxCON1<10>) allows each of the ADC modules to be configured by the user as either a 10-bit, 4-sample/hold ADC (default configuration) or a 12-bit, 1-sample/hold ADC.

**Note:** The ADC module needs to be disabled before modifying the AD12B bit.

### 20.1 Key Features

The 10-bit ADC configuration has the following key features:

- Successive Approximation (SAR) conversion
- Conversion speeds of up to 1.1 Msps
- Up to 32 analog input pins
- External voltage reference input pins
- Simultaneous sampling of up to four analog input pins
- Automatic Channel Scan mode
- Selectable conversion trigger source
- Selectable Buffer Fill modes
- Two result alignment options (signed/unsigned)
- Operation during CPU Sleep and Idle modes

The 12-bit ADC configuration supports all the above features, except:

- In the 12-bit configuration, conversion speeds of up to 500 ksps are supported
- There is only 1 sample/hold amplifier in the 12-bit configuration, so simultaneous sampling of multiple channels is not supported.

Depending on the particular device pinout, the Analog-to-Digital Converter can have up to 32 analog input pins, designated AN0 through AN31. In addition, there are two analog input pins for external voltage reference connections. These voltage reference inputs may be shared with other analog input pins. The actual number

of analog input pins and external voltage reference input configuration will depend on the specific device. Refer to the device data sheet for further details.

A block diagram of the Analog-to-Digital Converter is shown in Figure 20-1.

### 20.2 Analog-to-Digital Initialization

The following configuration steps should be performed.

1. Configure the ADC module:
  - a) Select port pins as analog inputs (ADxPCFGH<15:0> or ADxPCFGL<15:0>)
  - b) Select voltage reference source to match expected range on analog inputs (ADxCON2<15:13>)
  - c) Select the analog conversion clock to match desired data rate with processor clock (ADxCON3<7:0>)
  - d) Determine how many S/H channels will be used (ADxCON2<9:8> and ADxPCFGH<15:0> or ADxPCFGL<15:0>)
  - e) Select the appropriate sample/conversion sequence (ADxCON1<7:5> and ADxCON3<12:8>)
  - f) Select how conversion results are presented in the buffer (ADxCON1<9:8>)
  - g) Turn on the ADC module (ADxCON1<15>)
2. Configure ADC interrupt (if required):
  - a) Clear the ADxIF bit
  - b) Select ADC interrupt priority

### 20.3 ADC and DMA

If more than one conversion result needs to be buffered before triggering an interrupt, DMA data transfers can be used. Both ADC1 and ADC2 can trigger a DMA data transfer. If ADC1 or ADC2 is selected as the DMA IRQ source, a DMA transfer occurs when the AD1IF or AD2IF bit gets set as a result of an ADC1 or ADC2 sample conversion sequence.

The SMPI<3:0> bits (ADxCON2<5:2>) are used to select how often the DMA RAM buffer pointer is incremented.


The ADDMABM bit (ADxCON1<12>) determines how the conversion results are filled in the DMA RAM buffer area being used for ADC. If this bit is set, DMA buffers are written in the order of conversion. The module will provide an address to the DMA channel that is the same as the address used for the non-DMA stand-alone buffer. If the ADDMABM bit is cleared, then DMA buffers are written in Scatter/Gather mode. The module will provide a scatter/gather address to the DMA channel, based on the index of the analog input and the size of the DMA buffer.

\_\_\_\_\_

\_\_\_\_\_



**FIGURE 20-2: ANALOG-TO-DIGITAL CONVERSION CLOCK PERIOD BLOCK DIAGRAM**

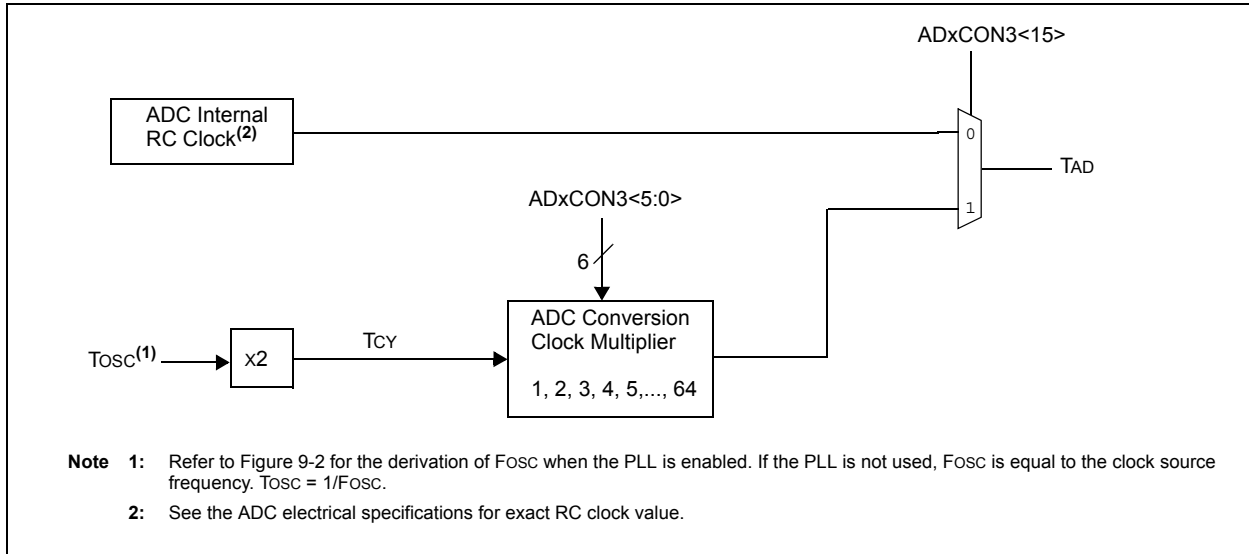

# PIC24HJXXXGPX06/X08/X10

## REGISTER 20-1: ADxCON1: ADCx CONTROL REGISTER 1 (where x = 1 or 2)

|        |     |        |         |     |       |           |       |
|--------|-----|--------|---------|-----|-------|-----------|-------|
| R/W-0  | U-0 | R/W-0  | R/W-0   | U-0 | R/W-0 | R/W-0     | R/W-0 |
| ADON   | —   | ADSIDL | ADDMABM | —   | AD12B | FORM<1:0> |       |
| bit 15 |     |        |         |     |       | bit 8     |       |

|           |       |       |     |        |       |                |                 |
|-----------|-------|-------|-----|--------|-------|----------------|-----------------|
| R/W-0     | R/W-0 | R/W-0 | U-0 | R/W-0  | R/W-0 | R/W-0<br>HC,HS | R/C-0<br>HC, HS |
| SSRC<2:0> |       |       | —   | SIMSAM | ASAM  | SAMP           | DONE            |
| bit 7     |       |       |     |        |       |                | bit 0           |

|                   |                          |                                    |
|-------------------|--------------------------|------------------------------------|
| <b>Legend:</b>    | HC = Cleared by hardware | HS = Set by hardware               |
| R = Readable bit  | W = Writable bit         | U = Unimplemented bit, read as '0' |
| -n = Value at POR | '1' = Bit is set         | '0' = Bit is cleared               |
|                   |                          | x = Bit is unknown                 |

- bit 15      **ADON:** ADC Operating Mode bit  
              1 = ADC module is operating  
              0 = ADC module is off
- bit 14      **Unimplemented:** Read as '0'
- bit 13      **ADSIDL:** Stop in Idle Mode bit  
              1 = Discontinue module operation when device enters Idle mode  
              0 = Continue module operation in Idle mode
- bit 12      **ADDMABM:** DMA Buffer Build Mode bit  
              1 = DMA buffers are written in the order of conversion. The module will provide an address to the DMA channel that is the same as the address used for the non-DMA stand-alone buffer  
              0 = DMA buffers are written in Scatter/Gather mode. The module will provide a scatter/gather address to the DMA channel, based on the index of the analog input and the size of the DMA buffer
- bit 11      **Unimplemented:** Read as '0'
- bit 10      **AD12B:** 10-Bit or 12-Bit Operation Mode bit  
              1 = 12-bit, 1-channel ADC operation  
              0 = 10-bit, 4-channel ADC operation
- bit 9-8      **FORM<1:0>:** Data Output Format bits  
              For 10-bit operation:  
              11 = Reserved  
              10 = Reserved  
              01 = Signed integer (DOUT = ssss sssd dddd dddd, where s = .NOT.d<9>)  
              00 = Integer (DOUT = 0000 00dd dddd dddd)  
              For 12-bit operation:  
              11 = Reserved  
              10 = Reserved  
              01 = Signed Integer (DOUT = ssss sddd dddd dddd, where s = .NOT.d<11>)  
              00 = Integer (DOUT = 0000 dddd dddd dddd)
- bit 7-5      **SSRC<2:0>:** Sample Clock Source Select bits  
              111 = Internal counter ends sampling and starts conversion (auto-convert)  
              110 = Reserved  
              101 = Reserved  
              100 = Reserved  
              011 = Reserved  
              010 = GP timer (Timer3 for ADC1, Timer5 for ADC2) compare ends sampling and starts conversion  
              001 = Active transition on INT0 pin ends sampling and starts conversion  
              000 = Clearing sample bit ends sampling and starts conversion
- bit 4      **Unimplemented:** Read as '0'

# PIC24HJXXXGPX06/X08/X10

## REGISTER 20-1: ADxCON1: ADCx CONTROL REGISTER 1 (where x = 1 or 2) (CONTINUED)

- bit 3      **SIMSAM:** Simultaneous Sample Select bit (only applicable when CHPS<1:0> = 01 or 1x)  
            **When AD12B = 1, SIMSAM is: U-0, Unimplemented, Read as '0'**  
            1 = Samples CH0, CH1, CH2, CH3 simultaneously (when CHPS<1:0> = 1x); or  
                Samples CH0 and CH1 simultaneously (when CHPS<1:0> = 01)  
            0 = Samples multiple channels individually in sequence
- bit 2      **ASAM:** ADC Sample Auto-Start bit  
            1 = Sampling begins immediately after last conversion. SAMP bit is auto-set  
            0 = Sampling begins when SAMP bit is set
- bit 1      **SAMP:** ADC Sample Enable bit  
            1 = ADC sample/hold amplifiers are sampling  
            0 = ADC sample/hold amplifiers are holding  
            If ASAM = 0, software may write '1' to begin sampling. Automatically set by hardware if ASAM = 1.  
            If SSRC = 000, software may write '0' to end sampling and start conversion. If SSRC ≠ 000,  
            automatically cleared by hardware to end sampling and start conversion.
- bit 0      **DONE:** ADC Conversion Status bit  
            1 = ADC conversion cycle is completed.  
            0 = ADC conversion not started or in progress  
            Automatically set by hardware when analog-to-digital conversion is complete. Software may write '0'  
            to clear DONE status (software not allowed to write '1'). Clearing this bit will NOT affect any operation  
            in progress. Automatically cleared by hardware at start of a new conversion.

# PIC24HJXXXGPX06/X08/X10

## REGISTER 20-2: ADxCON2: ADCx CONTROL REGISTER 2 (where x = 1 or 2)

|           |       |       |       |     |       |           |       |
|-----------|-------|-------|-------|-----|-------|-----------|-------|
| R/W-0     | R/W-0 | R/W-0 | U-0   | U-0 | R/W-0 | R/W-0     | R/W-0 |
| VCFG<2:0> |       |       | —     | —   | CSCNA | CHPS<1:0> |       |
| bit 15    |       |       | bit 8 |     |       |           |       |

|       |     |           |       |       |       |       |       |
|-------|-----|-----------|-------|-------|-------|-------|-------|
| R-0   | U-0 | R/W-0     | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| BUFS  | —   | SMPI<3:0> |       |       |       | BUFM  | ALTS  |
| bit 7 |     |           |       |       |       |       | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-13 **VCFG<2:0>**: Converter Voltage Reference Configuration bits

|     | VREF+          | VREF-          |
|-----|----------------|----------------|
| 000 | AVDD           | AVSS           |
| 001 | External VREF+ | AVSS           |
| 010 | AVDD           | External VREF- |
| 011 | External VREF+ | External VREF- |
| 1xx | AVDD           | AVSS           |

bit 12-11 **Unimplemented**: Read as '0'

bit 10 **CSCNA**: Scan Input Selections for CH0+ during Sample A bit

1 = Scan inputs

0 = Do not scan inputs

bit 9-8 **CHPS<1:0>**: Selects Channels Utilized bits

**When AD12B = 1, CHPS<1:0> is: U-0, Unimplemented, Read as '0'**

1x = Converts CH0, CH1, CH2 and CH3

01 = Converts CH0 and CH1

00 = Converts CH0

bit 7 **BUFS**: Buffer Fill Status bit (only valid when BUFM = 1)

1 = ADC is currently filling second half of buffer, user should access data in first half

0 = ADC is currently filling first half of buffer, user should access data in second half

bit 6 **Unimplemented**: Read as '0'

bit 5-2 **SMPI<3:0>**: Selects Increment Rate for DMA Addresses bits or number of sample/conversion operations per interrupt

1111 = Increments the DMA address or generates interrupt after completion of every 16th sample/conversion operation

1110 = Increments the DMA address or generates interrupt after completion of every 15th sample/conversion operation

•

•

•

0001 = Increments the DMA address or generates interrupt after completion of every 2nd sample/conversion operation

0000 = Increments the DMA address or generates interrupt after completion of every sample/conversion operation

bit 1 **BUFM**: Buffer Fill Mode Select bit

1 = Starts filling first half of buffer on first interrupt and second half of buffer on next interrupt

0 = Always starts filling buffer from the beginning

bit 0 **ALTS**: Alternate Input Sample Mode Select bit

1 = Uses channel input selects for Sample A on first sample and Sample B on next sample

0 = Always uses channel input selects for Sample A

# PIC24HJXXXGPX06/X08/X10

## REGISTER 20-3: ADxCON3: ADCx CONTROL REGISTER 3

|        |     |     |                          |       |       |       |       |
|--------|-----|-----|--------------------------|-------|-------|-------|-------|
| R/W-0  | U-0 | U-0 | R/W-0                    | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| ADRC   | —   | —   | SAMC<4:0> <sup>(1)</sup> |       |       |       |       |
| bit 15 |     |     |                          |       |       |       | bit 8 |

|                          |       |       |       |       |       |       |       |
|--------------------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0                    | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| ADCS<7:0> <sup>(2)</sup> |       |       |       |       |       |       |       |
| bit 7                    |       |       |       |       |       |       | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **ADRC:** ADC Conversion Clock Source bit

1 = ADC internal RC clock

0 = Clock derived from system clock

bit 14-13 **Unimplemented:** Read as '0'

bit 12-8 **SAMC<4:0>:** Auto Sample Time bits<sup>(1)</sup>

11111 = 31 TAD

•

•

•

00001 = 1 TAD

00000 = 0 TAD

bit 7-0 **ADCS<7:0>:** Analog-to-Digital Conversion Clock Select bits<sup>(2)</sup>

11111111 = Reserved

•

•

•

01000000 = Reserved

00111111 = T<sub>CY</sub> · (ADCS<7:0> + 1) = 64 · T<sub>CY</sub> = TAD

•

•

•

00000010 = T<sub>CY</sub> · (ADCS<7:0> + 1) = 3 · T<sub>CY</sub> = TAD

00000001 = T<sub>CY</sub> · (ADCS<7:0> + 1) = 2 · T<sub>CY</sub> = TAD

00000000 = T<sub>CY</sub> · (ADCS<7:0> + 1) = 1 · T<sub>CY</sub> = TAD

**Note 1:** This bit only used if ADxCON1<SSRC> = 1.

**2:** This bit is not used if ADxCON3<ADRC> = 1.

# PIC24HJXXXGPX06/X08/X10

## REGISTER 20-4: ADxCON4: ADCx CONTROL REGISTER 4

|        |     |     |     |     |     |     |       |
|--------|-----|-----|-----|-----|-----|-----|-------|
| U-0    | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0   |
| —      | —   | —   | —   | —   | —   | —   | —     |
| bit 15 |     |     |     |     |     |     | bit 8 |

|       |     |     |     |     |            |       |       |
|-------|-----|-----|-----|-----|------------|-------|-------|
| U-0   | U-0 | U-0 | U-0 | U-0 | R/W-0      | R/W-0 | R/W-0 |
| —     | —   | —   | —   | —   | DMABL<2:0> |       |       |
| bit 7 |     |     |     |     |            |       | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-3

**Unimplemented:** Read as '0'

bit 2-0

**DMABL<2:0>:** Selects Number of DMA Buffer Locations per Analog Input bits

111 = Allocates 128 words of buffer to each analog input

110 = Allocates 64 words of buffer to each analog input

101 = Allocates 32 words of buffer to each analog input

100 = Allocates 16 words of buffer to each analog input

011 = Allocates 8 words of buffer to each analog input

010 = Allocates 4 words of buffer to each analog input

001 = Allocates 2 words of buffer to each analog input

000 = Allocates 1 word of buffer to each analog input

# PIC24HJXXXGPX06/X08/X10

## REGISTER 20-5: ADxCHS123: ADCx INPUT CHANNEL 1, 2, 3 SELECT REGISTER

|        |  |     |  |     |  |     |  |     |  |              |  |       |  |         |  |
|--------|--|-----|--|-----|--|-----|--|-----|--|--------------|--|-------|--|---------|--|
| U-0    |  | U-0 |  | U-0 |  | U-0 |  | U-0 |  | R/W-0        |  | R/W-0 |  | R/W-0   |  |
| —      |  | —   |  | —   |  | —   |  | —   |  | CH123NB<1:0> |  |       |  | CH123SB |  |
| bit 15 |  |     |  |     |  |     |  |     |  |              |  | bit 8 |  |         |  |

|       |     |     |     |     |              |       |         |
|-------|-----|-----|-----|-----|--------------|-------|---------|
| U-0   | U-0 | U-0 | U-0 | U-0 | R/W-0        | R/W-0 | R/W-0   |
| —     | —   | —   | —   | —   | CH123NA<1:0> |       | CH123SA |
| bit 7 |     |     |     |     |              |       | bit 0   |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-11 **Unimplemented:** Read as '0'

bit 10-9 **CH123NB<1:0>**: Channel 1, 2, 3 Negative Input Select for Sample B bits

**When AD12B = 1, CHxNB is: U-0, Unimplemented, Read as '0'**

11 = CH1 negative input is AN9, CH2 negative input is AN10, CH3 negative input is AN11

10 = CH1 negative input is AN6, CH2 negative input is AN7, CH3 negative input is AN8

0x = CH1, CH2, CH3 negative input is VREF-

bit 8 **CH123SB**: Channel 1, 2, 3 Positive Input Select for Sample B bit

**When AD12B = 1, CHxSB is: U-0, Unimplemented, Read as '0'**

1 = CH1 positive input is AN3, CH2 positive input is AN4, CH3 positive input is AN5

0 = CH1 positive input is AN0, CH2 positive input is AN1, CH3 positive input is AN2

bit 7-3 **Unimplemented:** Read as '0'

bit 2-1 **CH123NA<1:0>**: Channel 1, 2, 3 Negative Input Select for Sample A bits

**When AD12B = 1, CHxNA is: U-0, Unimplemented, Read as '0'**

11 = CH1 negative input is AN9, CH2 negative input is AN10, CH3 negative input is AN11

10 = CH1 negative input is AN6, CH2 negative input is AN7, CH3 negative input is AN8

0x = CH1, CH2, CH3 negative input is VREF-

bit 0 **CH123SA**: Channel 1, 2, 3 Positive Input Select for Sample A bit

**When AD12B = 1, CHxSA is: U-0, Unimplemented, Read as '0'**

1 = CH1 positive input is AN3, CH2 positive input is AN4, CH3 positive input is AN5

0 = CH1 positive input is AN0, CH2 positive input is AN1, CH3 positive input is AN2

# PIC24HJXXXGPX06/X08/X10

## REGISTER 20-6: ADxCHS0: ADCx INPUT CHANNEL 0 SELECT REGISTER

|        |     |     |            |       |       |       |       |
|--------|-----|-----|------------|-------|-------|-------|-------|
| R/W-0  | U-0 | U-0 | R/W-0      | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| CH0NB  | —   | —   | CH0SB<4:0> |       |       |       |       |
| bit 15 |     |     |            |       |       |       | bit 8 |

|       |     |     |            |       |       |       |       |
|-------|-----|-----|------------|-------|-------|-------|-------|
| R/W-0 | U-0 | U-0 | R/W-0      | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| CH0NA | —   | —   | CH0SA<4:0> |       |       |       |       |
| bit 7 |     |     |            |       |       |       | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

- bit 15      **CH0NB:** Channel 0 Negative Input Select for Sample B bit  
Same definition as bit 7.
- bit 14-13    **Unimplemented:** Read as '0'
- bit 12-8    **CH0SB<4:0>:** Channel 0 Positive Input Select for Sample B bits  
Same definition as bit<4:0>.
- bit 7        **CH0NA:** Channel 0 Negative Input Select for Sample A bit  
1 = Channel 0 negative input is AN1  
0 = Channel 0 negative input is VREF-
- bit 6-5      **Unimplemented:** Read as '0'
- bit 4-0      **CH0SA<4:0>:** Channel 0 Positive Input Select for Sample A bits  
11111 = Channel 0 positive input is AN31  
11110 = Channel 0 positive input is AN30  
•  
•  
•  
00010 = Channel 0 positive input is AN2  
00001 = Channel 0 positive input is AN1  
00000 = Channel 0 positive input is AN0

**Note:** ADC2 can only select AN0 through AN15 as positive inputs.

# PIC24HJXXXGPX06/X08/X10

## REGISTER 20-7: ADxCSSH: ADCx INPUT SCAN SELECT REGISTER HIGH<sup>(1,2)</sup>

|        |       |       |       |       |       |       |       |
|--------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0  | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| CSS31  | CSS30 | CSS29 | CSS28 | CSS27 | CSS26 | CSS25 | CSS24 |
| bit 15 |       |       |       |       |       |       | bit 8 |

|       |       |       |       |       |       |       |       |
|-------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| CSS23 | CSS22 | CSS21 | CSS20 | CSS19 | CSS18 | CSS17 | CSS16 |
| bit 7 |       |       |       |       |       |       | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-0 **CSS<31:16>**: ADC Input Scan Selection bits

1 = Select ANx for input scan

0 = Skip ANx for input scan

**Note 1:** On devices without 32 analog inputs, all ADxCSSH bits may be selected by user. However, inputs selected for scan without a corresponding input on device will convert VREFL.

**2:** CSSx = ANx, where x = 16 through 31.

## REGISTER 20-8: ADxCSSL: ADCx INPUT SCAN SELECT REGISTER LOW<sup>(1,2)</sup>

|        |       |       |       |       |       |       |       |
|--------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0  | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| CSS15  | CSS14 | CSS13 | CSS12 | CSS11 | CSS10 | CSS9  | CSS8  |
| bit 15 |       |       |       |       |       |       | bit 8 |

|       |       |       |       |       |       |       |       |
|-------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| CSS7  | CSS6  | CSS5  | CSS4  | CSS3  | CSS2  | CSS1  | CSS0  |
| bit 7 |       |       |       |       |       |       | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-0 **CSS<15:0>**: ADC Input Scan Selection bits

1 = Select ANx for input scan

0 = Skip ANx for input scan

**Note 1:** On devices without 16 analog inputs, all ADxCSSL bits may be selected by user. However, inputs selected for scan without a corresponding input on device will convert VREFL.

**2:** CSSx = ANx, where x = 0 through 15.

# PIC24HJXXXGPX06/X08/X10

## REGISTER 20-9: AD1PCFGH: ADC1 PORT CONFIGURATION REGISTER HIGH<sup>(1,2,3)</sup>

|        |        |        |        |        |        |        |        |
|--------|--------|--------|--------|--------|--------|--------|--------|
| R/W-0  | R/W-0  | R/W-0  | R/W-0  | R/W-0  | R/W-0  | R/W-0  | R/W-0  |
| PCFG31 | PCFG30 | PCFG29 | PCFG28 | PCFG27 | PCFG26 | PCFG25 | PCFG24 |
| bit 15 |        |        |        |        |        | bit 8  |        |

|        |        |        |        |        |        |        |        |
|--------|--------|--------|--------|--------|--------|--------|--------|
| R/W-0  | R/W-0  | R/W-0  | R/W-0  | R/W-0  | R/W-0  | R/W-0  | R/W-0  |
| PCFG23 | PCFG22 | PCFG21 | PCFG20 | PCFG19 | PCFG18 | PCFG17 | PCFG16 |
| bit 7  |        |        |        |        |        | bit 0  |        |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-0 **PCFG<31:16>**: ADC Port Configuration Control bits

1 = Port pin in Digital mode, port read input enabled, ADC input multiplexor connected to AVss

0 = Port pin in Analog mode, port read input disabled, ADC samples pin voltage

**Note 1:** On devices without 32 analog inputs, all PCFG bits are R/W by user. However, PCFG bits are ignored on ports without a corresponding input on device.

**2:** ADC2 only supports analog inputs AN0-AN15; therefore, no ADC2 high port Configuration register exists.

**3:** PCFGx = ANx, where x = 16 through 31.

## REGISTER 20-10: ADxPCFGL: ADCx PORT CONFIGURATION REGISTER LOW<sup>(1,2,3)</sup>

|        |        |        |        |        |        |       |       |
|--------|--------|--------|--------|--------|--------|-------|-------|
| R/W-0  | R/W-0  | R/W-0  | R/W-0  | R/W-0  | R/W-0  | R/W-0 | R/W-0 |
| PCFG15 | PCFG14 | PCFG13 | PCFG12 | PCFG11 | PCFG10 | PCFG9 | PCFG8 |
| bit 15 |        |        |        |        |        | bit 8 |       |

|       |       |       |       |       |       |       |       |
|-------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| PCFG7 | PCFG6 | PCFG5 | PCFG4 | PCFG3 | PCFG2 | PCFG1 | PCFG0 |
| bit 7 |       |       |       |       |       | bit 0 |       |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-0 **PCFG<15:0>**: ADC Port Configuration Control bits

1 = Port pin in Digital mode, port read input enabled, ADC input multiplexor connected to AVss

0 = Port pin in Analog mode, port read input disabled, ADC samples pin voltage

**Note 1:** On devices without 16 analog inputs, all PCFG bits are R/W by user. However, PCFG bits are ignored on ports without a corresponding input on device.

**2:** On devices with 2 analog-to-digital modules, both AD1PCFGL and AD2PCFGL will affect the configuration of port pins multiplexed with AN0-AN15.

**3:** PCFGx = ANx, where x = 0 through 15.

# PIC24HJXXXGPX06/X08/X10

## 21.0 SPECIAL FEATURES

**Note:** This data sheet summarizes the features of the PIC24HJXXXGPX06/X08/X10 families of devices. However, it is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **Section 23. “CodeGuard™ Security”** (DS70239), **Section 24. “Programming and Diagnostics”** (DS70246), and **Section 25. “Device Configuration”** (DS70231) in the *“PIC24H Family Reference Manual”*, which is available from the Microchip web site ([www.microchip.com](http://www.microchip.com)).

PIC24HJXXXGPX06/X08/X10 devices include several features intended to maximize application flexibility and reliability, and minimize cost through elimination of external components. These are:

- Flexible Configuration
- Watchdog Timer (WDT)
- Code Protection and CodeGuard™ Security
- JTAG Boundary Scan Interface
- In-Circuit Serial Programming™ (ICSP™) programming capability
- In-Circuit Emulation

## 21.1 Configuration Bits

The Configuration bits can be programmed (read as ‘0’), or left unprogrammed (read as ‘1’), to select various device configurations. These bits are mapped starting at program memory location 0xF80000.

The device Configuration register map is shown in Table 21-1.

The individual Configuration bit descriptions for the FBS, FSS, FGS, FOSCSEL, FOSC, FWDT and FPOR Configuration registers are shown in Table 21-2.

Note that address 0xF80000 is beyond the user program memory space. In fact, it belongs to the configuration memory space (0x800000-0xFFFFF), which can only be accessed using table reads and table writes.

The upper byte of all device Configuration registers should always be ‘1111 1111’. This makes them appear to be NOP instructions in the remote event that their locations are ever executed by accident. Since Configuration bits are not implemented in the corresponding locations, writing ‘1’s to these locations has no effect on device operation.

To prevent inadvertent configuration changes during code execution, all programmable Configuration bits are write-once. After a bit is initially programmed during a power cycle, it cannot be written to again. Changing a device configuration requires that power to the device be cycled.

**TABLE 21-1: DEVICE CONFIGURATION REGISTER MAP**

| Address  | Name    | Bit 7                   | Bit 6                   | Bit 5  | Bit 4  | Bit 3        | Bit 2      | Bit 1       | Bit 0 |
|----------|---------|-------------------------|-------------------------|--------|--------|--------------|------------|-------------|-------|
| 0xF80000 | FBS     | RBS<1:0>                |                         | —      | —      | BSS<2:0>     |            |             | BWRP  |
| 0xF80002 | FSS     | RSS<1:0>                |                         | —      | —      | SSS<2:0>     |            |             | SWRP  |
| 0xF80004 | FGS     | —                       | —                       | —      | —      | —            | GSS<1:0>   |             | GWRP  |
| 0xF80006 | FOSCSEL | IESO                    | Reserved <sup>(2)</sup> | —      | —      | —            | FNOSC<2:0> |             |       |
| 0xF80008 | FOSC    | FCKSM<1:0>              |                         | —      | —      | —            | OSCIOFNC   | POSCMD<1:0> |       |
| 0xF8000A | FWDT    | FWDTEN                  | WINDIS                  | —      | WDTPRE | WDTPOST<3:0> |            |             |       |
| 0xF8000C | FPOR    | —                       | —                       | —      | —      | —            | FPWRT<2:0> |             |       |
| 0xF8000E | FICD    | Reserved <sup>(1)</sup> |                         | JTAGEN | —      | —            | —          | ICS<1:0>    |       |
| 0xF80010 | FUID0   | User Unit ID Byte 0     |                         |        |        |              |            |             |       |
| 0xF80012 | FUID1   | User Unit ID Byte 1     |                         |        |        |              |            |             |       |
| 0xF80014 | FUID2   | User Unit ID Byte 2     |                         |        |        |              |            |             |       |
| 0xF80016 | FUID3   | User Unit ID Byte 3     |                         |        |        |              |            |             |       |

**Note 1:** When read, these bits will appear as ‘1’. When you write to these bits, set these bits to ‘1’.

**2:** When read, this bit returns the current programmed value.

# PIC24HJXXXGPX06/X08/X10

**TABLE 21-2: PIC24HJXXXGPX06/X08/X10 CONFIGURATION BITS DESCRIPTION**

| Bit Field | Register | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-----------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| BWRP      | FBS      | Boot Segment Program Flash Write Protection<br>1 = Boot segment may be written<br>0 = Boot segment is write-protected                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| BSS<2:0>  | FBS      | Boot Segment Program Flash Code Protection Size<br>X11 = No Boot program Flash segment<br><br>Boot space is 1K IW less VS<br>110 = Standard security; boot program Flash segment starts at End of VS, ends at 0x0007FE<br>010 = High security; boot program Flash segment starts at End of VS, ends at 0x0007FE<br><br>Boot space is 4K IW less VS<br>101 = Standard security; boot program Flash segment starts at End of VS, ends at 0x001FFE<br>001 = High security; boot program Flash segment starts at End of VS, ends at 0x001FFE<br><br>Boot space is 8K IW less VS<br>100 = Standard security; boot program Flash segment starts at End of VS, ends at 0x003FFE<br>000 = High security; boot program Flash segment starts at End of VS, ends at 0x003FFE |
| RBS<1:0>  | FBS      | Boot Segment RAM Code Protection<br>11 = No Boot RAM defined<br>10 = Boot RAM is 128 Bytes<br>01 = Boot RAM is 256 Bytes<br>00 = Boot RAM is 1024 Bytes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| SWRP      | FSS      | Secure Segment Program Flash Write Protection<br>1 = Secure segment may be written<br>0 = Secure segment is write-protected                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

# PIC24HJXXXGPX06/X08/X10

**TABLE 21-2: PIC24HJXXXGPX06/X08/X10 CONFIGURATION BITS DESCRIPTION (CONTINUED)**

| Bit Field | Register | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-----------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SSS<2:0>  | FSS      | <p>Secure Segment Program Flash Code Protection Size<br/><b>(FOR 128K and 256K DEVICES)</b><br/> X11 = No Secure program Flash segment</p> <p>Secure space is 8K IW less BS<br/> 110 = Standard security; secure program Flash segment starts at End of BS, ends at 0x003FFE<br/> 010 = High security; secure program Flash segment starts at End of BS, ends at 0x003FFE</p> <p>Secure space is 16K IW less BS<br/> 101 = Standard security; secure program Flash segment starts at End of BS, ends at 0x007FFE<br/> 001 = High security; secure program Flash segment starts at End of BS, ends at 0x007FFE</p> <p>Secure space is 32K IW less BS<br/> 100 = Standard security; secure program Flash segment starts at End of BS, ends at 0x00FFFE<br/> 000 = High security; secure program Flash segment starts at End of BS, ends at 0x00FFFE</p> <p><b>(FOR 64K DEVICES)</b><br/> X11 = No Secure program Flash segment</p> <p>Secure space is 4K IW less BS<br/> 110 = Standard security; secure program Flash segment starts at End of BS, ends at 0x001FFE<br/> 010 = High security; secure program Flash segment starts at End of BS, ends at 0x001FFE</p> <p>Secure space is 8K IW less BS<br/> 101 = Standard security; secure program Flash segment starts at End of BS, ends at 0x003FFE<br/> 001 = High security; secure program Flash segment starts at End of BS, ends at 0x003FFE</p> <p>Secure space is 16K IW less BS<br/> 100 = Standard security; secure program Flash segment starts at End of BS, ends at 0x007FFE<br/> 000 = High security; secure program Flash segment starts at End of BS, ends at 0x007FFE</p> |
| RSS<1:0>  | FSS      | <p>Secure Segment RAM Code Protection<br/> 11 = No Secure RAM defined<br/> 10 = Secure RAM is 256 Bytes less BS RAM<br/> 01 = Secure RAM is 2048 Bytes less BS RAM<br/> 00 = Secure RAM is 4096 Bytes less BS RAM</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| GSS<1:0>  | FGS      | <p>General Segment Code-Protect bit<br/> 11 = User program memory is not code-protected<br/> 10 = Standard Security; general program Flash segment starts at End of SS, ends at EOM<br/> 0x = High Security; general program Flash segment starts at End of ESS, ends at EOM</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| GWRP      | FGS      | <p>General Segment Write-Protect bit<br/> 1 = User program memory is not write-protected<br/> 0 = User program memory is write-protected</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

# PIC24HJXXXGPX06/X08/X10

**TABLE 21-2: PIC24HJXXXGPX06/X08/X10 CONFIGURATION BITS DESCRIPTION (CONTINUED)**

| Bit Field   | Register | Description                                                                                                                                                                                                                                                                                                                                              |
|-------------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IESO        | FOSCSEL  | Internal External Start-up Option bit<br>1 = Start-up device with FRC, then automatically switch to the user-selected oscillator source when ready<br>0 = Start-up device with user-selected oscillator source                                                                                                                                           |
| FNOSC<2:0>  | FOSCSEL  | Initial Oscillator Source Selection bits<br>111 = Internal Fast RC (FRC) oscillator with postscaler<br>110 = Reserved<br>101 = LPRC oscillator<br>100 = Secondary (LP) oscillator<br>011 = Primary (XT, HS, EC) oscillator with PLL<br>010 = Primary (XT, HS, EC) oscillator<br>001 = Internal Fast RC (FRC) oscillator with PLL<br>000 = FRC oscillator |
| FCKSM<1:0>  | FOSC     | Clock Switching Mode bits<br>1x = Clock switching is disabled, Fail-Safe Clock Monitor is disabled<br>01 = Clock switching is enabled, Fail-Safe Clock Monitor is disabled<br>00 = Clock switching is enabled, Fail-Safe Clock Monitor is enabled                                                                                                        |
| OSCIOFNC    | FOSC     | OSC2 Pin Function bit (except in XT and HS modes)<br>1 = OSC2 is clock output<br>0 = OSC2 is general purpose digital I/O pin                                                                                                                                                                                                                             |
| POSCMD<1:0> | FOSC     | Primary Oscillator Mode Select bits<br>11 = Primary oscillator disabled<br>10 = HS Crystal Oscillator mode<br>01 = XT Crystal Oscillator mode<br>00 = EC (External Clock) mode                                                                                                                                                                           |
| FWDTEN      | FWDT     | Watchdog Timer Enable bit<br>1 = Watchdog Timer always enabled (LPRC oscillator cannot be disabled. Clearing the SWDTEN bit in the RCON register will have no effect.)<br>0 = Watchdog Timer enabled/disabled by user software (LPRC can be disabled by clearing the SWDTEN bit in the RCON register)                                                    |
| WINDIS      | FWDT     | Watchdog Timer Window Enable bit<br>1 = Watchdog Timer in Non-Window mode<br>0 = Watchdog Timer in Window mode                                                                                                                                                                                                                                           |
| WDTPRE      | FWDT     | Watchdog Timer Prescaler bit<br>1 = 1:128<br>0 = 1:32                                                                                                                                                                                                                                                                                                    |
| WDTPOST     | FWDT     | Watchdog Timer Postscaler bits<br>1111 = 1:32,768<br>1110 = 1:16,384<br>.<br>.<br>.<br>0001 = 1:2<br>0000 = 1:1                                                                                                                                                                                                                                          |

# PIC24HJXXXGPX06/X08/X10

**TABLE 21-2: PIC24HJXXXGPX06/X08/X10 CONFIGURATION BITS DESCRIPTION (CONTINUED)**

| Bit Field  | Register | Description                                                                                                                                                                                                             |
|------------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FPWRT<2:0> | FPOR     | Power-on Reset Timer Value Select bits<br>111 = PWRT = 128 ms<br>110 = PWRT = 64 ms<br>101 = PWRT = 32 ms<br>100 = PWRT = 16 ms<br>011 = PWRT = 8 ms<br>010 = PWRT = 4 ms<br>001 = PWRT = 2 ms<br>000 = PWRT = Disabled |
| JTAGEN     | FICD     | JTAG Enable bits<br>1 = JTAG enabled<br>0 = JTAG disabled                                                                                                                                                               |
| ICS<1:0>   | FICD     | ICD Communication Channel Select bits<br>11 = Communicate on PGEC1 and PGED1<br>10 = Communicate on PGEC2 and PGED2<br>01 = Communicate on PGEC3 and PGED3<br>00 = Reserved                                             |

# PIC24HJXXXGPX06/X08/X10

## 21.2 On-Chip Voltage Regulator


All of the PIC24HJXXXGPX06/X08/X10 devices power their core digital logic at a nominal 2.5V. This may create an issue for designs that are required to operate at a higher typical voltage, such as 3.3V. To simplify system design, all devices in the PIC24HJXXXGPX06/X08/X10 family incorporate an on-chip regulator that allows the device to run its core logic from VDD.

The regulator provides power to the core from the other VDD pins. The regulator requires that a low-ESR (less than 5 ohms) capacitor (such as tantalum or ceramic) be connected to the VCAP/VDDCORE pin (Figure 21-1). This helps to maintain the stability of the regulator. The recommended value for the filter capacitor is provided in Table 24-13 of **Section 24.1 “DC Characteristics”**.

**Note:** It is important for the low-ESR capacitor to be placed as close as possible to the VCAP/VDDCORE pin.

On a POR, it takes approximately 20  $\mu$ s for the on-chip voltage regulator to generate an output voltage. During this time, designated as TSTARTUP, code execution is disabled. TSTARTUP is applied every time the device resumes operation after any power-down.

**FIGURE 21-1: ON-CHIP VOLTAGE REGULATOR<sup>(1)</sup> CONNECTIONS**

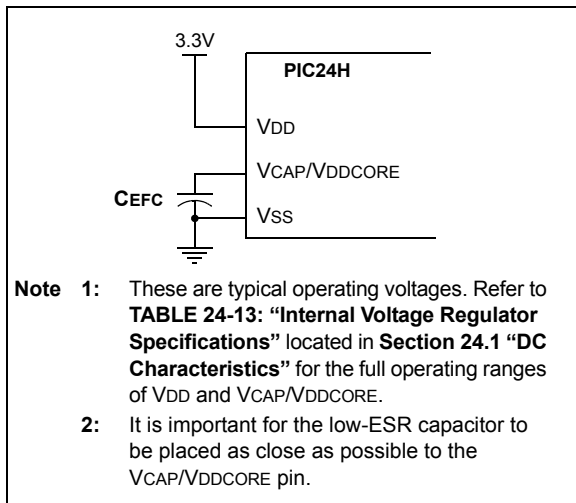

## 21.3 BOR: Brown-out Reset

The BOR (Brown-out Reset) module is based on an internal voltage reference circuit that monitors the regulated voltage VCAP/VDDCORE. The main purpose of the BOR module is to generate a device Reset when a brown-out condition occurs. Brown-out conditions are generally caused by glitches on the AC mains (i.e., missing portions of the AC cycle waveform due to bad power transmission lines or voltage sags due to excessive current draw when a large inductive load is turned on).

A BOR will generate a Reset pulse which will reset the device. The BOR will select the clock source, based on the device Configuration bit values (FNOSC<2:0> and POSCMD<1:0>). Furthermore, if an oscillator mode is selected, the BOR will activate the Oscillator Start-up Timer (OST). The system clock is held until OST expires. If the PLL is used, then the clock will be held until the LOCK bit (OSCCON<5>) is '1'.

Concurrently, the PWRT time-out (TPWRT) will be applied before the internal Reset is released. If TPWRT = 0 and a crystal oscillator is being used, then a nominal delay of TFSCM = 100 is applied. The total delay in this case is TFSCM.

The BOR Status bit (RCON<1>) will be set to indicate that a BOR has occurred. The BOR circuit continues to operate while in Sleep or Idle modes and will reset the device should VDD fall below the BOR threshold voltage.

## 21.4 Watchdog Timer (WDT)

For PIC24HJXXXGPX06/X08/X10 devices, the WDT is driven by the LPRC oscillator. When the WDT is enabled, the clock source is also enabled.

The nominal WDT clock source from LPRC is 32 kHz. This feeds a prescaler that can be configured for either 5-bit (divide-by-32) or 7-bit (divide-by-128) operation. The prescaler is set by the WDTPRE Configuration bit. With a 32 kHz input, the prescaler yields a nominal WDT time-out period (TWDT) of 1 ms in 5-bit mode, or 4 ms in 7-bit mode.

A variable postscaler divides down the WDT prescaler output and allows for a wide range of time-out periods. The postscaler is controlled by the WDTPOST<3:0> Configuration bits (FWDT<3:0>) which allow the selection of a total of 16 settings, from 1:1 to 1:32,768. Using the prescaler and postscaler, time-out periods ranging from 1 ms to 131 seconds can be achieved.

The WDT, prescaler and postscaler are reset:

- On any device Reset
- On the completion of a clock switch, whether invoked by software (i.e., setting the OSWEN bit after changing the NOSC bits) or by hardware (i.e., Fail-Safe Clock Monitor)
- When a PWRSAV instruction is executed (i.e., Sleep or Idle mode is entered)
- When the device exits Sleep or Idle mode to resume normal operation
- By a CLRWDT instruction during normal execution

If the WDT is enabled, it will continue to run during Sleep or Idle modes. When the WDT time-out occurs, the device will wake the device and code execution will continue from where the PWRSAV instruction was executed. The corresponding SLEEP or IDLE bits (RCON<3,2>) will need to be cleared in software after the device wakes up.

The WDT flag bit, WDTO (RCON<4>), is not automatically cleared following a WDT time-out. To detect subsequent WDT events, the flag must be cleared in software.


**Note:** The CLRWDT and PWRSAV instructions clear the prescaler and postscaler counts when executed.

The WDT is enabled or disabled by the FWDTEN Configuration bit in the FWDT Configuration register. When the FWDTEN Configuration bit is set, the WDT is always enabled.

The WDT can be optionally controlled in software when the FWDTEN Configuration bit has been programmed to '0'. The WDT is enabled in software by setting the SWDTEN control bit (RCON<5>). The SWDTEN control bit is cleared on any device Reset. The software WDT option allows the user to enable the WDT for critical code segments and disable the WDT during non-critical segments for maximum power savings.

**Note:** If the WINDIS bit (FWDT<6>) is cleared, the CLRWDT instruction should be executed by the application software only during the last 1/4 of the WDT period. This CLRWDT window can be determined by using a timer. If a CLRWDT instruction is executed before this window, a WDT Reset occurs.

**FIGURE 21-2: WDT BLOCK DIAGRAM**

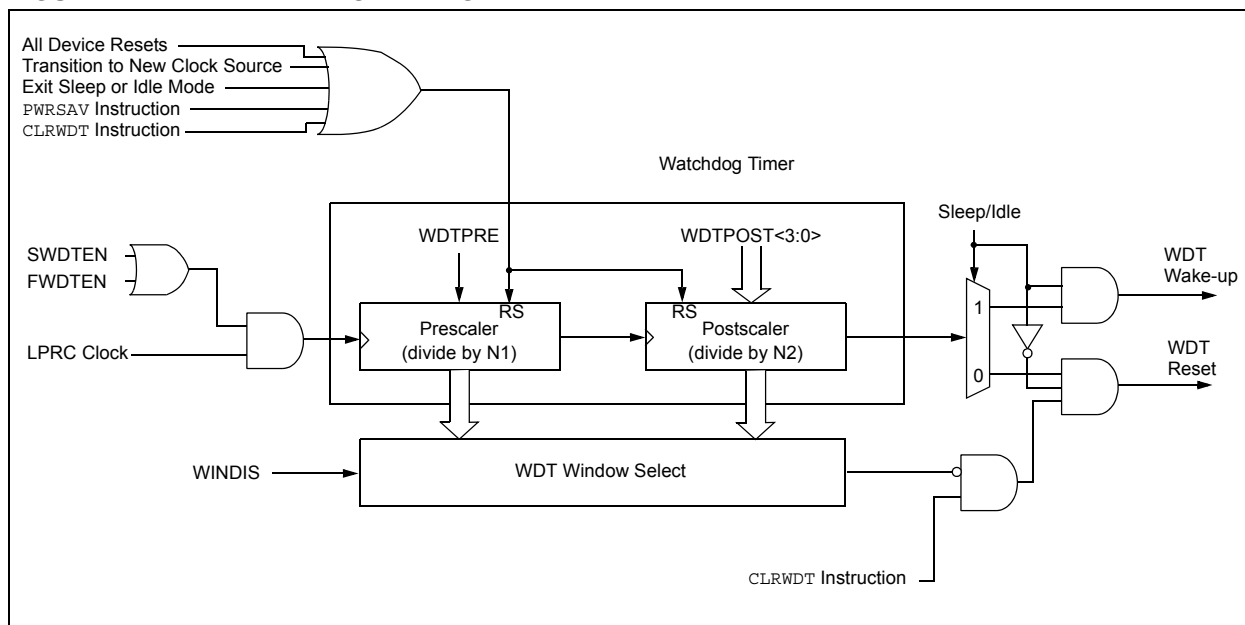

# PIC24HJXXXGPX06/X08/X10

## 21.5 JTAG Interface

PIC24HJXXXGPX06/X08/X10 devices implement a JTAG interface, which supports boundary scan device testing, as well as in-circuit programming. Detailed information on the interface will be provided in future revisions of the document.

**Note:** For further information, refer to the *PIC24H Family Reference Manual*, **Section 24. “Programming and Diagnostics”** (DS70246), which is available from the Microchip website ([www.microchip.com](http://www.microchip.com)).

## 21.6 Code Protection and CodeGuard™ Security

The PIC24H product families offer advanced implementation of CodeGuard™ Security. CodeGuard Security enables multiple parties to securely share resources (memory, interrupts and peripherals) on a single chip. This feature helps protect individual Intellectual Property in collaborative system designs.

When coupled with software encryption libraries, CodeGuard Security can be used to securely update Flash even when multiple IP are resident on the single chip. The code protection features vary depending on the actual PIC24H implemented. The following sections provide an overview these features.

The code protection features are controlled by the Configuration registers: FBS, FSS and FGS.

**Note:** For further information, refer to the *PIC24H Family Reference Manual*, **Section 23. “CodeGuard™ Security”** (DS70239), which is available from the Microchip website ([www.microchip.com](http://www.microchip.com)).

## 21.7 In-Circuit Serial Programming Programming Capability

PIC24HJXXXGPX06/X08/X10 family digital signal controllers can be serially programmed while in the end application circuit. This is simply done with two lines for clock and data and three other lines for power, ground and the programming sequence. This allows customers to manufacture boards with unprogrammed devices and then program the digital signal controller just before shipping the product. This also allows the most recent firmware or a custom firmware, to be programmed. Please refer to the *dsPIC33F/PIC24H Flash Programming Specification* (DS70152) document for details about ICSP programming capability.

Any one out of three pairs of programming clock/data pins may be used:

- PGEC1 and PGED1
- PGEC2 and PGED2
- PGEC3 and PGED3

## 21.8 In-Circuit Debugger

When MPLAB® ICD 2 is selected as a debugger, the in-circuit debugging functionality is enabled. This function allows simple debugging functions when used with MPLAB IDE. Debugging functionality is controlled through the PGECx (Emulation/Debug Clock) and PGEDx (Emulation/Debug Data) pin functions.

Any one out of three pairs of debugging clock/data pins may be used:

- PGEC1 and PGED1
- PGEC2 and PGED2
- PGEC3 and PGED3

To use the in-circuit debugger function of the device, the design must implement ICSP programming capability connections to MCLR, VDD, VSS and the PGEDx/PGECx pin pair. In addition, when the feature is enabled, some of the resources are not available for general use. These resources include the first 80 bytes of data RAM and two I/O pins.

## 22.0 INSTRUCTION SET SUMMARY

**Note:** This data sheet summarizes the features of the PIC24HJXXXGPX06/X08/X10 families of devices. However, it is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the related section in the *"PIC24H Family Reference Manual"*, which is available from the Microchip website ([www.microchip.com](http://www.microchip.com)).

The PIC24H instruction set is identical to that of the PIC24F, and is a subset of the dsPIC30F/33F instruction set.

Most instructions are a single program memory word (24 bits). Only three instructions require two program memory locations.

Each single-word instruction is a 24-bit word, divided into an 8-bit opcode, which specifies the instruction type and one or more operands, which further specify the operation of the instruction.

The instruction set is highly orthogonal and is grouped into five basic categories:

- Word or byte-oriented operations
- Bit-oriented operations
- Literal operations
- DSP operations
- Control operations

Table 22-1 shows the general symbols used in describing the instructions.

The PIC24H instruction set summary in Table 22-2 lists all the instructions, along with the status flags affected by each instruction.

Most word or byte-oriented W register instructions (including barrel shift instructions) have three operands:

- The first source operand which is typically a register 'Wb' without any address modifier
- The second source operand which is typically a register 'Ws' with or without an address modifier
- The destination of the result which is typically a register 'Wd' with or without an address modifier

However, word or byte-oriented file register instructions have two operands:

- The file register specified by the value 'f'
- The destination, which could either be the file register 'f' or the W0 register, which is denoted as 'WREG'

Most bit-oriented instructions (including simple rotate/shift instructions) have two operands:

- The W register (with or without an address modifier) or file register (specified by the value of 'Ws' or 'f')
- The bit in the W register or file register (specified by a literal value or indirectly by the contents of register 'Wb')

The literal instructions that involve data movement may use some of the following operands:

- A literal value to be loaded into a W register or file register (specified by the value of 'k')
- The W register or file register where the literal value is to be loaded (specified by 'Wb' or 'f')

However, literal instructions that involve arithmetic or logical operations use some of the following operands:

- The first source operand which is a register 'Wb' without any address modifier
- The second source operand which is a literal value
- The destination of the result (only if not the same as the first source operand) which is typically a register 'Wd' with or without an address modifier

The control instructions may use some of the following operands:

- A program memory address
- The mode of the table read and table write instructions

# PIC24HJXXXGPX06/X08/X10

All instructions are a single word, except for certain double word instructions, which were made double word instructions so that all the required information is available in these 48 bits. In the second word, the 8 MSBs are '0's. If this second word is executed as an instruction (by itself), it will execute as a NOP.

Most single-word instructions are executed in a single instruction cycle, unless a conditional test is true, or the program counter is changed as a result of the instruction. In these cases, the execution takes two instruction cycles with the additional instruction cycle(s) executed as a NOP. Notable exceptions are the BRA (unconditional/computed branch), indirect CALL/GOTO, all table

reads and writes and RETURN/RETFIE instructions, which are single-word instructions but take two or three cycles. Certain instructions that involve skipping over the subsequent instruction require either two or three cycles if the skip is performed, depending on whether the instruction being skipped is a single-word or double word instruction. Moreover, double word moves require two cycles. The double word instructions execute in two instruction cycles.

**Note:** For more details on the instruction set, refer to the “dsPIC30F/33F Programmer’s Reference Manual” (DS70157).

**TABLE 22-1: SYMBOLS USED IN OPCODE DESCRIPTIONS**

| Field           | Description                                                                                                                           |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------|
| #text           | Means literal defined by “text”                                                                                                       |
| (text)          | Means “content of text”                                                                                                               |
| [text]          | Means “the location addressed by text”                                                                                                |
| { }             | Optional field or operation                                                                                                           |
| <n:m>           | Register bit field                                                                                                                    |
| .b              | Byte mode selection                                                                                                                   |
| .d              | Double Word mode selection                                                                                                            |
| .S              | Shadow register select                                                                                                                |
| .w              | Word mode selection (default)                                                                                                         |
| bit4            | 4-bit bit selection field (used in word addressed instructions) $\in \{0...15\}$                                                      |
| C, DC, N, OV, Z | MCU Status bits: Carry, Digit Carry, Negative, Overflow, Sticky Zero                                                                  |
| Expr            | Absolute address, label or expression (resolved by the linker)                                                                        |
| f               | File register address $\in \{0x0000...0x1FFF\}$                                                                                       |
| lit1            | 1-bit unsigned literal $\in \{0,1\}$                                                                                                  |
| lit4            | 4-bit unsigned literal $\in \{0...15\}$                                                                                               |
| lit5            | 5-bit unsigned literal $\in \{0...31\}$                                                                                               |
| lit8            | 8-bit unsigned literal $\in \{0...255\}$                                                                                              |
| lit10           | 10-bit unsigned literal $\in \{0...255\}$ for Byte mode, $\{0:1023\}$ for Word mode                                                   |
| lit14           | 14-bit unsigned literal $\in \{0...16384\}$                                                                                           |
| lit16           | 16-bit unsigned literal $\in \{0...65535\}$                                                                                           |
| lit23           | 23-bit unsigned literal $\in \{0...8388608\}$ ; LSB must be '0'                                                                       |
| None            | Field does not require an entry, may be blank                                                                                         |
| PC              | Program Counter                                                                                                                       |
| Slit10          | 10-bit signed literal $\in \{-512...511\}$                                                                                            |
| Slit16          | 16-bit signed literal $\in \{-32768...32767\}$                                                                                        |
| Slit6           | 6-bit signed literal $\in \{-16...16\}$                                                                                               |
| Wb              | Base W register $\in \{W0..W15\}$                                                                                                     |
| Wd              | Destination W register $\in \{Wd, [Wd], [Wd++] , [Wd--], [++Wd], [--Wd] \}$                                                           |
| Wdo             | Destination W register $\in \{Wnd, [Wnd], [Wnd++] , [Wnd--], [++Wnd], [--Wnd], [Wnd+Wb] \}$                                           |
| Wm,Wn           | Dividend, Divisor working register pair (direct addressing)                                                                           |
| Wm*Wm           | Multiplicand and Multiplier working register pair for Square instructions $\in \{W4 * W4, W5 * W5, W6 * W6, W7 * W7\}$                |
| Wm*Wn           | Multiplicand and Multiplier working register pair for DSP instructions $\in \{W4 * W5, W4 * W6, W4 * W7, W5 * W6, W5 * W7, W6 * W7\}$ |
| Wn              | One of 16 working registers $\in \{W0..W15\}$                                                                                         |

**TABLE 22-1: SYMBOLS USED IN OPCODE DESCRIPTIONS (CONTINUED)**

| Field | Description                                                                            |
|-------|----------------------------------------------------------------------------------------|
| Wnd   | One of 16 destination working registers $\in \{W0...W15\}$                             |
| Wns   | One of 16 source working registers $\in \{W0...W15\}$                                  |
| WREG  | W0 (working register used in file register instructions)                               |
| Ws    | Source W register $\in \{Ws, [Ws], [Ws++] , [Ws--], [++Ws], [--Ws] \}$                 |
| Wso   | Source W register $\in \{Wns, [Wns], [Wns++] , [Wns--], [++Wns], [--Wns], [Wns+Wb] \}$ |

# PIC24HJXXXGPX06/X08/X10

**TABLE 22-2: INSTRUCTION SET OVERVIEW**

| Base Instr # | Assembly Mnemonic | Assembly Syntax    | Description                                                | # of Words | # of Cycles   | Status Flags Affected |
|--------------|-------------------|--------------------|------------------------------------------------------------|------------|---------------|-----------------------|
| 1            | ADD               | ADD f              | $f = f + WREG$                                             | 1          | 1             | C,DC,N,OV,Z           |
|              |                   | ADD f, WREG        | $WREG = f + WREG$                                          | 1          | 1             | C,DC,N,OV,Z           |
|              |                   | ADD #lit10, Wn     | $Wd = lit10 + Wd$                                          | 1          | 1             | C,DC,N,OV,Z           |
|              |                   | ADD Wb, Ws, Wd     | $Wd = Wb + Ws$                                             | 1          | 1             | C,DC,N,OV,Z           |
|              |                   | ADD Wb, #lit5, Wd  | $Wd = Wb + lit5$                                           | 1          | 1             | C,DC,N,OV,Z           |
| 2            | ADDC              | ADDC f             | $f = f + WREG + (C)$                                       | 1          | 1             | C,DC,N,OV,Z           |
|              |                   | ADDC f, WREG       | $WREG = f + WREG + (C)$                                    | 1          | 1             | C,DC,N,OV,Z           |
|              |                   | ADDC #lit10, Wn    | $Wd = lit10 + Wd + (C)$                                    | 1          | 1             | C,DC,N,OV,Z           |
|              |                   | ADDC Wb, Ws, Wd    | $Wd = Wb + Ws + (C)$                                       | 1          | 1             | C,DC,N,OV,Z           |
|              |                   | ADDC Wb, #lit5, Wd | $Wd = Wb + lit5 + (C)$                                     | 1          | 1             | C,DC,N,OV,Z           |
| 3            | AND               | AND f              | $f = f .AND. WREG$                                         | 1          | 1             | N,Z                   |
|              |                   | AND f, WREG        | $WREG = f .AND. WREG$                                      | 1          | 1             | N,Z                   |
|              |                   | AND #lit10, Wn     | $Wd = lit10 .AND. Wd$                                      | 1          | 1             | N,Z                   |
|              |                   | AND Wb, Ws, Wd     | $Wd = Wb .AND. Ws$                                         | 1          | 1             | N,Z                   |
|              |                   | AND Wb, #lit5, Wd  | $Wd = Wb .AND. lit5$                                       | 1          | 1             | N,Z                   |
| 4            | ASR               | ASR f              | $f = \text{Arithmetic Right Shift } f$                     | 1          | 1             | C,N,OV,Z              |
|              |                   | ASR f, WREG        | $WREG = \text{Arithmetic Right Shift } f$                  | 1          | 1             | C,N,OV,Z              |
|              |                   | ASR Ws, Wd         | $Wd = \text{Arithmetic Right Shift } Ws$                   | 1          | 1             | C,N,OV,Z              |
|              |                   | ASR Wb, Wns, Wnd   | $Wnd = \text{Arithmetic Right Shift } Wb \text{ by } Wns$  | 1          | 1             | N,Z                   |
|              |                   | ASR Wb, #lit5, Wnd | $Wnd = \text{Arithmetic Right Shift } Wb \text{ by } lit5$ | 1          | 1             | N,Z                   |
| 5            | BCLR              | BCLR f, #bit4      | Bit Clear f                                                | 1          | 1             | None                  |
|              |                   | BCLR Ws, #bit4     | Bit Clear Ws                                               | 1          | 1             | None                  |
| 6            | BRA               | BRA C, Expr        | Branch if Carry                                            | 1          | 1 (2)         | None                  |
|              |                   | BRA GE, Expr       | Branch if greater than or equal                            | 1          | 1 (2)         | None                  |
|              |                   | BRA GEU, Expr      | Branch if unsigned greater than or equal                   | 1          | 1 (2)         | None                  |
|              |                   | BRA GT, Expr       | Branch if greater than                                     | 1          | 1 (2)         | None                  |
|              |                   | BRA GTU, Expr      | Branch if unsigned greater than                            | 1          | 1 (2)         | None                  |
|              |                   | BRA LE, Expr       | Branch if less than or equal                               | 1          | 1 (2)         | None                  |
|              |                   | BRA LEU, Expr      | Branch if unsigned less than or equal                      | 1          | 1 (2)         | None                  |
|              |                   | BRA LT, Expr       | Branch if less than                                        | 1          | 1 (2)         | None                  |
|              |                   | BRA LTU, Expr      | Branch if unsigned less than                               | 1          | 1 (2)         | None                  |
|              |                   | BRA N, Expr        | Branch if Negative                                         | 1          | 1 (2)         | None                  |
|              |                   | BRA NC, Expr       | Branch if Not Carry                                        | 1          | 1 (2)         | None                  |
|              |                   | BRA NN, Expr       | Branch if Not Negative                                     | 1          | 1 (2)         | None                  |
|              |                   | BRA NZ, Expr       | Branch if Not Zero                                         | 1          | 1 (2)         | None                  |
|              |                   | BRA Expr           | Branch Unconditionally                                     | 1          | 2             | None                  |
|              |                   | BRA Z, Expr        | Branch if Zero                                             | 1          | 1 (2)         | None                  |
|              |                   | BRA Wn             | Computed Branch                                            | 1          | 2             | None                  |
| 7            | BSET              | BSET f, #bit4      | Bit Set f                                                  | 1          | 1             | None                  |
|              |                   | BSET Ws, #bit4     | Bit Set Ws                                                 | 1          | 1             | None                  |
| 8            | BSW               | BSW.C Ws, Wb       | Write C bit to Ws<Wb>                                      | 1          | 1             | None                  |
|              |                   | BSW.Z Ws, Wb       | Write Z bit to Ws<Wb>                                      | 1          | 1             | None                  |
| 9            | BTG               | BTG f, #bit4       | Bit Toggle f                                               | 1          | 1             | None                  |
|              |                   | BTG Ws, #bit4      | Bit Toggle Ws                                              | 1          | 1             | None                  |
| 10           | BTSC              | BTSC f, #bit4      | Bit Test f, Skip if Clear                                  | 1          | 1<br>(2 or 3) | None                  |
|              |                   | BTSC Ws, #bit4     | Bit Test Ws, Skip if Clear                                 | 1          | 1<br>(2 or 3) | None                  |
| 11           | BTSS              | BTSS f, #bit4      | Bit Test f, Skip if Set                                    | 1          | 1<br>(2 or 3) | None                  |
|              |                   | BTSS Ws, #bit4     | Bit Test Ws, Skip if Set                                   | 1          | 1<br>(2 or 3) | None                  |

# PIC24HJXXXGPX06/X08/X10

**TABLE 22-2: INSTRUCTION SET OVERVIEW (CONTINUED)**

| Base Instr # | Assembly Mnemonic | Assembly Syntax      | Description                                            | # of Words | # of Cycles   | Status Flags Affected |
|--------------|-------------------|----------------------|--------------------------------------------------------|------------|---------------|-----------------------|
| 12           | BTST              | BTST $f, \#bit4$     | Bit Test $f$                                           | 1          | 1             | Z                     |
|              |                   | BTST.C $Ws, \#bit4$  | Bit Test $Ws$ to C                                     | 1          | 1             | C                     |
|              |                   | BTST.Z $Ws, \#bit4$  | Bit Test $Ws$ to Z                                     | 1          | 1             | Z                     |
|              |                   | BTST.C $Ws, Wb$      | Bit Test $Ws<Wb>$ to C                                 | 1          | 1             | C                     |
|              |                   | BTST.Z $Ws, Wb$      | Bit Test $Ws<Wb>$ to Z                                 | 1          | 1             | Z                     |
| 13           | BTSTS             | BTSTS $f, \#bit4$    | Bit Test then Set $f$                                  | 1          | 1             | Z                     |
|              |                   | BTSTS.C $Ws, \#bit4$ | Bit Test $Ws$ to C, then Set                           | 1          | 1             | C                     |
|              |                   | BTSTS.Z $Ws, \#bit4$ | Bit Test $Ws$ to Z, then Set                           | 1          | 1             | Z                     |
| 14           | CALL              | CALL $lit23$         | Call subroutine                                        | 2          | 2             | None                  |
|              |                   | CALL $Wn$            | Call indirect subroutine                               | 1          | 2             | None                  |
| 15           | CLR               | CLR $f$              | $f = 0x0000$                                           | 1          | 1             | None                  |
|              |                   | CLR WREG             | WREG = 0x0000                                          | 1          | 1             | None                  |
|              |                   | CLR $Ws$             | $Ws = 0x0000$                                          | 1          | 1             | None                  |
| 16           | CLRWDT            | CLRWDT               | Clear Watchdog Timer                                   | 1          | 1             | WDTO, Sleep           |
| 17           | COM               | COM $f$              | $f = \bar{f}$                                          | 1          | 1             | N, Z                  |
|              |                   | COM $f, WREG$        | WREG = $\bar{f}$                                       | 1          | 1             | N, Z                  |
|              |                   | COM $Ws, Wd$         | $Wd = \overline{Ws}$                                   | 1          | 1             | N, Z                  |
| 18           | CP                | CP $f$               | Compare $f$ with WREG                                  | 1          | 1             | C, DC, N, OV, Z       |
|              |                   | CP $Wb, \#lit5$      | Compare $Wb$ with $lit5$                               | 1          | 1             | C, DC, N, OV, Z       |
|              |                   | CP $Wb, Ws$          | Compare $Wb$ with $Ws$ ( $Wb - Ws$ )                   | 1          | 1             | C, DC, N, OV, Z       |
| 19           | CP0               | CP0 $f$              | Compare $f$ with 0x0000                                | 1          | 1             | C, DC, N, OV, Z       |
|              |                   | CP0 $Ws$             | Compare $Ws$ with 0x0000                               | 1          | 1             | C, DC, N, OV, Z       |
| 20           | CPB               | CPB $f$              | Compare $f$ with WREG, with Borrow                     | 1          | 1             | C, DC, N, OV, Z       |
|              |                   | CPB $Wb, \#lit5$     | Compare $Wb$ with $lit5$ , with Borrow                 | 1          | 1             | C, DC, N, OV, Z       |
|              |                   | CPB $Wb, Ws$         | Compare $Wb$ with $Ws$ , with Borrow ( $Wb - Ws - C$ ) | 1          | 1             | C, DC, N, OV, Z       |
| 21           | CPSEQ             | CPSEQ $Wb, Wn$       | Compare $Wb$ with $Wn$ , skip if =                     | 1          | 1<br>(2 or 3) | None                  |
| 22           | CPSGT             | CPSGT $Wb, Wn$       | Compare $Wb$ with $Wn$ , skip if >                     | 1          | 1<br>(2 or 3) | None                  |
| 23           | CPSLT             | CPSLT $Wb, Wn$       | Compare $Wb$ with $Wn$ , skip if <                     | 1          | 1<br>(2 or 3) | None                  |
| 24           | CPSNE             | CPSNE $Wb, Wn$       | Compare $Wb$ with $Wn$ , skip if $\neq$                | 1          | 1<br>(2 or 3) | None                  |
| 25           | DAW               | DAW $Wn$             | $Wn =$ decimal adjust $Wn$                             | 1          | 1             | C                     |
| 26           | DEC               | DEC $f$              | $f = f - 1$                                            | 1          | 1             | C, DC, N, OV, Z       |
|              |                   | DEC $f, WREG$        | WREG = $f - 1$                                         | 1          | 1             | C, DC, N, OV, Z       |
|              |                   | DEC $Ws, Wd$         | $Wd = Ws - 1$                                          | 1          | 1             | C, DC, N, OV, Z       |
| 27           | DEC2              | DEC2 $f$             | $f = f - 2$                                            | 1          | 1             | C, DC, N, OV, Z       |
|              |                   | DEC2 $f, WREG$       | WREG = $f - 2$                                         | 1          | 1             | C, DC, N, OV, Z       |
|              |                   | DEC2 $Ws, Wd$        | $Wd = Ws - 2$                                          | 1          | 1             | C, DC, N, OV, Z       |
| 28           | DISI              | DISI $\#lit14$       | Disable Interrupts for $k$ instruction cycles          | 1          | 1             | None                  |
| 29           | DIV               | DIV.S $Wm, Wn$       | Signed 16/16-bit Integer Divide                        | 1          | 18            | N, Z, C, OV           |
|              |                   | DIV.SD $Wm, Wn$      | Signed 32/16-bit Integer Divide                        | 1          | 18            | N, Z, C, OV           |
|              |                   | DIV.U $Wm, Wn$       | Unsigned 16/16-bit Integer Divide                      | 1          | 18            | N, Z, C, OV           |
|              |                   | DIV.UD $Wm, Wn$      | Unsigned 32/16-bit Integer Divide                      | 1          | 18            | N, Z, C, OV           |
| 30           | EXCH              | EXCH $Wns, Wnd$      | Swap $Wns$ with $Wnd$                                  | 1          | 1             | None                  |
| 31           | FBCL              | FBCL $Ws, Wnd$       | Find Bit Change from Left (MSb) Side                   | 1          | 1             | C                     |
| 32           | FF1L              | FF1L $Ws, Wnd$       | Find First One from Left (MSb) Side                    | 1          | 1             | C                     |
| 33           | FF1R              | FF1R $Ws, Wnd$       | Find First One from Right (LSb) Side                   | 1          | 1             | C                     |
| 34           | GOTO              | GOTO Expr            | Go to address                                          | 2          | 2             | None                  |
|              |                   | GOTO $Wn$            | Go to indirect                                         | 1          | 2             | None                  |

# PIC24HJXXXGPX06/X08/X10

**TABLE 22-2: INSTRUCTION SET OVERVIEW (CONTINUED)**

| Base Instr # | Assembly Mnemonic | Assembly Syntax                           | Description                                                      | # of Words | # of Cycles | Status Flags Affected |
|--------------|-------------------|-------------------------------------------|------------------------------------------------------------------|------------|-------------|-----------------------|
| 35           | INC               | INC <i>f</i>                              | $f = f + 1$                                                      | 1          | 1           | C,DC,N,OV,Z           |
|              |                   | INC <i>f</i> , WREG                       | WREG = $f + 1$                                                   | 1          | 1           | C,DC,N,OV,Z           |
|              |                   | INC <i>Ws</i> , <i>Wd</i>                 | $Wd = Ws + 1$                                                    | 1          | 1           | C,DC,N,OV,Z           |
| 36           | INC2              | INC2 <i>f</i>                             | $f = f + 2$                                                      | 1          | 1           | C,DC,N,OV,Z           |
|              |                   | INC2 <i>f</i> , WREG                      | WREG = $f + 2$                                                   | 1          | 1           | C,DC,N,OV,Z           |
|              |                   | INC2 <i>Ws</i> , <i>Wd</i>                | $Wd = Ws + 2$                                                    | 1          | 1           | C,DC,N,OV,Z           |
| 37           | IOR               | IOR <i>f</i>                              | $f = f .IOR. WREG$                                               | 1          | 1           | N,Z                   |
|              |                   | IOR <i>f</i> , WREG                       | WREG = $f .IOR. WREG$                                            | 1          | 1           | N,Z                   |
|              |                   | IOR #lit10, <i>Wn</i>                     | $Wd = lit10 .IOR. Wd$                                            | 1          | 1           | N,Z                   |
|              |                   | IOR <i>Wb</i> , <i>Ws</i> , <i>Wd</i>     | $Wd = Wb .IOR. Ws$                                               | 1          | 1           | N,Z                   |
|              |                   | IOR <i>Wb</i> , #lit5, <i>Wd</i>          | $Wd = Wb .IOR. lit5$                                             | 1          | 1           | N,Z                   |
| 38           | LNK               | LNK #lit14                                | Link Frame Pointer                                               | 1          | 1           | None                  |
| 39           | LSR               | LSR <i>f</i>                              | $f = \text{Logical Right Shift } f$                              | 1          | 1           | C,N,OV,Z              |
|              |                   | LSR <i>f</i> , WREG                       | WREG = Logical Right Shift $f$                                   | 1          | 1           | C,N,OV,Z              |
|              |                   | LSR <i>Ws</i> , <i>Wd</i>                 | $Wd = \text{Logical Right Shift } Ws$                            | 1          | 1           | C,N,OV,Z              |
|              |                   | LSR <i>Wb</i> , <i>Wns</i> , <i>Wnd</i>   | $Wnd = \text{Logical Right Shift } Wb \text{ by } Wns$           | 1          | 1           | N,Z                   |
|              |                   | LSR <i>Wb</i> , #lit5, <i>Wnd</i>         | $Wnd = \text{Logical Right Shift } Wb \text{ by } lit5$          | 1          | 1           | N,Z                   |
| 40           | MOV               | MOV <i>f</i> , <i>Wn</i>                  | Move $f$ to $Wn$                                                 | 1          | 1           | None                  |
|              |                   | MOV <i>f</i>                              | Move $f$ to $f$                                                  | 1          | 1           | N,Z                   |
|              |                   | MOV <i>f</i> , WREG                       | Move $f$ to WREG                                                 | 1          | 1           | N,Z                   |
|              |                   | MOV #lit16, <i>Wn</i>                     | Move 16-bit literal to $Wn$                                      | 1          | 1           | None                  |
|              |                   | MOV.b #lit8, <i>Wn</i>                    | Move 8-bit literal to $Wn$                                       | 1          | 1           | None                  |
|              |                   | MOV <i>Wn</i> , <i>f</i>                  | Move $Wn$ to $f$                                                 | 1          | 1           | None                  |
|              |                   | MOV <i>Wso</i> , <i>Wdo</i>               | Move $Ws$ to $Wd$                                                | 1          | 1           | None                  |
|              |                   | MOV WREG, <i>f</i>                        | Move WREG to $f$                                                 | 1          | 1           | N,Z                   |
|              |                   | MOV.D <i>Wns</i> , <i>Wd</i>              | Move Double from $W(ns):W(ns + 1)$ to $Wd$                       | 1          | 2           | None                  |
|              |                   | MOV.D <i>Ws</i> , <i>Wnd</i>              | Move Double from $Ws$ to $W(nd + 1):W(nd)$                       | 1          | 2           | None                  |
| 41           | MUL               | MUL.SS <i>Wb</i> , <i>Ws</i> , <i>Wnd</i> | $\{Wnd + 1, Wnd\} = \text{signed}(Wb) * \text{signed}(Ws)$       | 1          | 1           | None                  |
|              |                   | MUL.SU <i>Wb</i> , <i>Ws</i> , <i>Wnd</i> | $\{Wnd + 1, Wnd\} = \text{signed}(Wb) * \text{unsigned}(Ws)$     | 1          | 1           | None                  |
|              |                   | MUL.US <i>Wb</i> , <i>Ws</i> , <i>Wnd</i> | $\{Wnd + 1, Wnd\} = \text{unsigned}(Wb) * \text{signed}(Ws)$     | 1          | 1           | None                  |
|              |                   | MUL.UU <i>Wb</i> , <i>Ws</i> , <i>Wnd</i> | $\{Wnd + 1, Wnd\} = \text{unsigned}(Wb) * \text{unsigned}(Ws)$   | 1          | 1           | None                  |
|              |                   | MUL.SU <i>Wb</i> , #lit5, <i>Wnd</i>      | $\{Wnd + 1, Wnd\} = \text{signed}(Wb) * \text{unsigned}(lit5)$   | 1          | 1           | None                  |
|              |                   | MUL.UU <i>Wb</i> , #lit5, <i>Wnd</i>      | $\{Wnd + 1, Wnd\} = \text{unsigned}(Wb) * \text{unsigned}(lit5)$ | 1          | 1           | None                  |
|              |                   | MUL <i>f</i>                              | $W3:W2 = f * WREG$                                               | 1          | 1           | None                  |
| 42           | NEG               | NEG <i>f</i>                              | $f = \bar{f} + 1$                                                | 1          | 1           | C,DC,N,OV,Z           |
|              |                   | NEG <i>f</i> , WREG                       | WREG = $\bar{f} + 1$                                             | 1          | 1           | C,DC,N,OV,Z           |
|              |                   | NEG <i>Ws</i> , <i>Wd</i>                 | $Wd = \overline{Ws} + 1$                                         | 1          | 1           | C,DC,N,OV,Z           |
| 43           | NOP               | NOP                                       | No Operation                                                     | 1          | 1           | None                  |
|              |                   | NOPR                                      | No Operation                                                     | 1          | 1           | None                  |
| 44           | POP               | POP <i>f</i>                              | Pop $f$ from Top-of-Stack (TOS)                                  | 1          | 1           | None                  |
|              |                   | POP <i>Wdo</i>                            | Pop from Top-of-Stack (TOS) to $Wdo$                             | 1          | 1           | None                  |
|              |                   | POP.D <i>Wnd</i>                          | Pop from Top-of-Stack (TOS) to $W(nd):W(nd + 1)$                 | 1          | 2           | None                  |
|              |                   | POP.S                                     | Pop Shadow Registers                                             | 1          | 1           | All                   |
| 45           | PUSH              | PUSH <i>f</i>                             | Push $f$ to Top-of-Stack (TOS)                                   | 1          | 1           | None                  |
|              |                   | PUSH <i>Wso</i>                           | Push $Wso$ to Top-of-Stack (TOS)                                 | 1          | 1           | None                  |
|              |                   | PUSH.D <i>Wns</i>                         | Push $W(ns):W(ns + 1)$ to Top-of-Stack (TOS)                     | 1          | 2           | None                  |
|              |                   | PUSH.S                                    | Push Shadow Registers                                            | 1          | 1           | None                  |
| 46           | PWRSV             | PWRSV #lit1                               | Go into Sleep or Idle mode                                       | 1          | 1           | WDTO,Sleep            |

# PIC24HJXXXGPX06/X08/X10

**TABLE 22-2: INSTRUCTION SET OVERVIEW (CONTINUED)**

| Base Instr # | Assembly Mnemonic | Assembly Syntax     | Description                             | # of Words | # of Cycles | Status Flags Affected |
|--------------|-------------------|---------------------|-----------------------------------------|------------|-------------|-----------------------|
| 47           | RCALL             | RCALL Expr          | Relative Call                           | 1          | 2           | None                  |
|              |                   | RCALL Wn            | Computed Call                           | 1          | 2           | None                  |
| 48           | REPEAT            | REPEAT #lit14       | Repeat Next Instruction lit14 + 1 times | 1          | 1           | None                  |
|              |                   | REPEAT Wn           | Repeat Next Instruction (Wn) + 1 times  | 1          | 1           | None                  |
| 49           | RESET             | RESET               | Software device Reset                   | 1          | 1           | None                  |
| 50           | RETFIE            | RETFIE              | Return from interrupt                   | 1          | 3 (2)       | None                  |
| 51           | RETLW             | RETLW #lit10, Wn    | Return with literal in Wn               | 1          | 3 (2)       | None                  |
| 52           | RETURN            | RETURN              | Return from Subroutine                  | 1          | 3 (2)       | None                  |
| 53           | RLC               | RLC f               | f = Rotate Left through Carry f         | 1          | 1           | C,N,Z                 |
|              |                   | RLC f, WREG         | WREG = Rotate Left through Carry f      | 1          | 1           | C,N,Z                 |
|              |                   | RLC Ws, Wd          | Wd = Rotate Left through Carry Ws       | 1          | 1           | C,N,Z                 |
| 54           | RLNC              | RLNC f              | f = Rotate Left (No Carry) f            | 1          | 1           | N,Z                   |
|              |                   | RLNC f, WREG        | WREG = Rotate Left (No Carry) f         | 1          | 1           | N,Z                   |
|              |                   | RLNC Ws, Wd         | Wd = Rotate Left (No Carry) Ws          | 1          | 1           | N,Z                   |
| 55           | RRC               | RRC f               | f = Rotate Right through Carry f        | 1          | 1           | C,N,Z                 |
|              |                   | RRC f, WREG         | WREG = Rotate Right through Carry f     | 1          | 1           | C,N,Z                 |
|              |                   | RRC Ws, Wd          | Wd = Rotate Right through Carry Ws      | 1          | 1           | C,N,Z                 |
| 56           | RRNC              | RRNC f              | f = Rotate Right (No Carry) f           | 1          | 1           | N,Z                   |
|              |                   | RRNC f, WREG        | WREG = Rotate Right (No Carry) f        | 1          | 1           | N,Z                   |
|              |                   | RRNC Ws, Wd         | Wd = Rotate Right (No Carry) Ws         | 1          | 1           | N,Z                   |
| 57           | SE                | SE Ws, Wnd          | Wnd = sign-extended Ws                  | 1          | 1           | C,N,Z                 |
| 58           | SETM              | SETM f              | f = 0xFFFF                              | 1          | 1           | None                  |
|              |                   | SETM WREG           | WREG = 0xFFFF                           | 1          | 1           | None                  |
|              |                   | SETM Ws             | Ws = 0xFFFF                             | 1          | 1           | None                  |
| 59           | SL                | SL f                | f = Left Shift f                        | 1          | 1           | C,N,OV,Z              |
|              |                   | SL f, WREG          | WREG = Left Shift f                     | 1          | 1           | C,N,OV,Z              |
|              |                   | SL Ws, Wd           | Wd = Left Shift Ws                      | 1          | 1           | C,N,OV,Z              |
|              |                   | SL Wb, Wns, Wnd     | Wnd = Left Shift Wb by Wns              | 1          | 1           | N,Z                   |
|              |                   | SL Wb, #lit5, Wnd   | Wnd = Left Shift Wb by lit5             | 1          | 1           | N,Z                   |
| 60           | SUB               | SUB f               | f = f – WREG                            | 1          | 1           | C,DC,N,OV,Z           |
|              |                   | SUB f, WREG         | WREG = f – WREG                         | 1          | 1           | C,DC,N,OV,Z           |
|              |                   | SUB #lit10, Wn      | Wn = Wn – lit10                         | 1          | 1           | C,DC,N,OV,Z           |
|              |                   | SUB Wb, Ws, Wd      | Wd = Wb – Ws                            | 1          | 1           | C,DC,N,OV,Z           |
|              |                   | SUB Wb, #lit5, Wd   | Wd = Wb – lit5                          | 1          | 1           | C,DC,N,OV,Z           |
| 61           | SUBB              | SUBB f              | f = f – WREG – ( $\overline{C}$ )       | 1          | 1           | C,DC,N,OV,Z           |
|              |                   | SUBB f, WREG        | WREG = f – WREG – ( $\overline{C}$ )    | 1          | 1           | C,DC,N,OV,Z           |
|              |                   | SUBB #lit10, Wn     | Wn = Wn – lit10 – ( $\overline{C}$ )    | 1          | 1           | C,DC,N,OV,Z           |
|              |                   | SUBB Wb, Ws, Wd     | Wd = Wb – Ws – ( $\overline{C}$ )       | 1          | 1           | C,DC,N,OV,Z           |
|              |                   | SUBB Wb, #lit5, Wd  | Wd = Wb – lit5 – ( $\overline{C}$ )     | 1          | 1           | C,DC,N,OV,Z           |
| 62           | SUBR              | SUBR f              | f = WREG – f                            | 1          | 1           | C,DC,N,OV,Z           |
|              |                   | SUBR f, WREG        | WREG = WREG – f                         | 1          | 1           | C,DC,N,OV,Z           |
|              |                   | SUBR Wb, Ws, Wd     | Wd = Ws – Wb                            | 1          | 1           | C,DC,N,OV,Z           |
|              |                   | SUBR Wb, #lit5, Wd  | Wd = lit5 – Wb                          | 1          | 1           | C,DC,N,OV,Z           |
| 63           | SUBBR             | SUBBR f             | f = WREG – f – ( $\overline{C}$ )       | 1          | 1           | C,DC,N,OV,Z           |
|              |                   | SUBBR f, WREG       | WREG = WREG – f – ( $\overline{C}$ )    | 1          | 1           | C,DC,N,OV,Z           |
|              |                   | SUBBR Wb, Ws, Wd    | Wd = Ws – Wb – ( $\overline{C}$ )       | 1          | 1           | C,DC,N,OV,Z           |
|              |                   | SUBBR Wb, #lit5, Wd | Wd = lit5 – Wb – ( $\overline{C}$ )     | 1          | 1           | C,DC,N,OV,Z           |
| 64           | SWAP              | SWAP.b Wn           | Wn = nibble swap Wn                     | 1          | 1           | None                  |
|              |                   | SWAP Wn             | Wn = byte swap Wn                       | 1          | 1           | None                  |
| 65           | TBLRDH            | TBLRDH Ws, Wd       | Read Prog<23:16> to Wd<7:0>             | 1          | 2           | None                  |

# PIC24HJXXXGPX06/X08/X10

TABLE 22-2: INSTRUCTION SET OVERVIEW (CONTINUED)

| Base Instr # | Assembly Mnemonic | Assembly Syntax          | Description                              | # of Words | # of Cycles | Status Flags Affected |
|--------------|-------------------|--------------------------|------------------------------------------|------------|-------------|-----------------------|
| 66           | TBLRDL            | TBLRDL <i>Ws, Wd</i>     | Read Prog<15:0> to <i>Wd</i>             | 1          | 2           | None                  |
| 67           | TBLWTH            | TBLWTH <i>Ws, Wd</i>     | Write <i>Ws</i> <7:0> to Prog<23:16>     | 1          | 2           | None                  |
| 68           | TBLWTL            | TBLWTL <i>Ws, Wd</i>     | Write <i>Ws</i> to Prog<15:0>            | 1          | 2           | None                  |
| 69           | ULNK              | ULNK                     | Unlink Frame Pointer                     | 1          | 1           | None                  |
| 70           | XOR               | XOR <i>f</i>             | <i>f</i> = <i>f</i> .XOR. WREG           | 1          | 1           | N,Z                   |
|              |                   | XOR <i>f, WREG</i>       | WREG = <i>f</i> .XOR. WREG               | 1          | 1           | N,Z                   |
|              |                   | XOR # <i>lit10, Wn</i>   | <i>Wd</i> = <i>lit10</i> .XOR. <i>Wd</i> | 1          | 1           | N,Z                   |
|              |                   | XOR <i>Wb, Ws, Wd</i>    | <i>Wd</i> = <i>Wb</i> .XOR. <i>Ws</i>    | 1          | 1           | N,Z                   |
|              |                   | XOR <i>Wb, #lit5, Wd</i> | <i>Wd</i> = <i>Wb</i> .XOR. <i>lit5</i>  | 1          | 1           | N,Z                   |
| 71           | ZE                | ZE <i>Ws, Wnd</i>        | <i>Wnd</i> = Zero-extend <i>Ws</i>       | 1          | 1           | C,Z,N                 |

## 23.0 DEVELOPMENT SUPPORT

The PIC® microcontrollers are supported with a full range of hardware and software development tools:

- Integrated Development Environment
  - MPLAB® IDE Software
- Assemblers/Compilers/Linkers
  - MPASM™ Assembler
  - MPLAB C18 and MPLAB C30 C Compilers
  - MPLINK™ Object Linker/  
MPLIB™ Object Librarian
  - MPLAB ASM30 Assembler/Linker/Library
- Simulators
  - MPLAB SIM Software Simulator
- Emulators
  - MPLAB ICE 2000 In-Circuit Emulator
  - MPLAB REAL ICE™ In-Circuit Emulator
- In-Circuit Debugger
  - MPLAB ICD 2
- Device Programmers
  - PICSTART® Plus Development Programmer
  - MPLAB PM3 Device Programmer
  - PICKit™ 2 Development Programmer
- Low-Cost Demonstration and Development Boards and Evaluation Kits

## 23.1 MPLAB Integrated Development Environment Software

The MPLAB IDE software brings an ease of software development previously unseen in the 8/16-bit microcontroller market. The MPLAB IDE is a Windows® operating system-based application that contains:

- A single graphical interface to all debugging tools
  - Simulator
  - Programmer (sold separately)
  - Emulator (sold separately)
  - In-Circuit Debugger (sold separately)
- A full-featured editor with color-coded context
- A multiple project manager
- Customizable data windows with direct edit of contents
- High-level source code debugging
- Visual device initializer for easy register initialization
- Mouse over variable inspection
- Drag and drop variables from source to watch windows
- Extensive on-line help
- Integration of select third party tools, such as HI-TECH Software C Compilers and IAR C Compilers

The MPLAB IDE allows you to:

- Edit your source files (either assembly or C)
- One touch assemble (or compile) and download to PIC MCU emulator and simulator tools (automatically updates all project information)
- Debug using:
  - Source files (assembly or C)
  - Mixed assembly and C
  - Machine code

MPLAB IDE supports multiple debugging tools in a single development paradigm, from the cost-effective simulators, through low-cost in-circuit debuggers, to full-featured emulators. This eliminates the learning curve when upgrading to tools with increased flexibility and power.

# PIC24HJXXXGPX06/X08/X10

---

## 23.2 MPASM Assembler

The MPASM Assembler is a full-featured, universal macro assembler for all PIC MCUs.

The MPASM Assembler generates relocatable object files for the MPLINK Object Linker, Intel® standard HEX files, MAP files to detail memory usage and symbol reference, absolute LST files that contain source lines and generated machine code and COFF files for debugging.

The MPASM Assembler features include:

- Integration into MPLAB IDE projects
- User-defined macros to streamline assembly code
- Conditional assembly for multi-purpose source files
- Directives that allow complete control over the assembly process

## 23.3 MPLAB C18 and MPLAB C30 C Compilers

The MPLAB C18 and MPLAB C30 Code Development Systems are complete ANSI C compilers for Microchip's PIC18 and PIC24 families of microcontrollers and the dsPIC30 and dsPIC33 family of digital signal controllers. These compilers provide powerful integration capabilities, superior code optimization and ease of use not found with other compilers.

For easy source level debugging, the compilers provide symbol information that is optimized to the MPLAB IDE debugger.

## 23.4 MPLINK Object Linker/ MPLIB Object Librarian

The MPLINK Object Linker combines relocatable objects created by the MPASM Assembler and the MPLAB C18 C Compiler. It can link relocatable objects from precompiled libraries, using directives from a linker script.

The MPLIB Object Librarian manages the creation and modification of library files of precompiled code. When a routine from a library is called from a source file, only the modules that contain that routine will be linked in with the application. This allows large libraries to be used efficiently in many different applications.

The object linker/library features include:

- Efficient linking of single libraries instead of many smaller files
- Enhanced code maintainability by grouping related modules together
- Flexible creation of libraries with easy module listing, replacement, deletion and extraction

## 23.5 MPLAB ASM30 Assembler, Linker and Librarian

MPLAB ASM30 Assembler produces relocatable machine code from symbolic assembly language for dsPIC30F devices. MPLAB C30 C Compiler uses the assembler to produce its object file. The assembler generates relocatable object files that can then be archived or linked with other relocatable object files and archives to create an executable file. Notable features of the assembler include:

- Support for the entire dsPIC30F instruction set
- Support for fixed-point and floating-point data
- Command line interface
- Rich directive set
- Flexible macro language
- MPLAB IDE compatibility

## 23.6 MPLAB SIM Software Simulator

The MPLAB SIM Software Simulator allows code development in a PC-hosted environment by simulating the PIC MCUs and dsPIC® DSCs on an instruction level. On any given instruction, the data areas can be examined or modified and stimuli can be applied from a comprehensive stimulus controller. Registers can be logged to files for further run-time analysis. The trace buffer and logic analyzer display extend the power of the simulator to record and track program execution, actions on I/O, most peripherals and internal registers.

The MPLAB SIM Software Simulator fully supports symbolic debugging using the MPLAB C18 and MPLAB C30 C Compilers, and the MPASM and MPLAB ASM30 Assemblers. The software simulator offers the flexibility to develop and debug code outside of the hardware laboratory environment, making it an excellent, economical software development tool.

## 23.7 MPLAB ICE 2000 High-Performance In-Circuit Emulator

The MPLAB ICE 2000 In-Circuit Emulator is intended to provide the product development engineer with a complete microcontroller design tool set for PIC microcontrollers. Software control of the MPLAB ICE 2000 In-Circuit Emulator is advanced by the MPLAB Integrated Development Environment, which allows editing, building, downloading and source debugging from a single environment.

The MPLAB ICE 2000 is a full-featured emulator system with enhanced trace, trigger and data monitoring features. Interchangeable processor modules allow the system to be easily reconfigured for emulation of different processors. The architecture of the MPLAB ICE 2000 In-Circuit Emulator allows expansion to support new PIC microcontrollers.

The MPLAB ICE 2000 In-Circuit Emulator system has been designed as a real-time emulation system with advanced features that are typically found on more expensive development tools. The PC platform and Microsoft® Windows® 32-bit operating system were chosen to best make these features available in a simple, unified application.

## 23.8 MPLAB REAL ICE In-Circuit Emulator System

MPLAB REAL ICE In-Circuit Emulator System is Microchip's next generation high-speed emulator for Microchip Flash DSC and MCU devices. It debugs and programs PIC® Flash MCUs and dsPIC® Flash DSCs with the easy-to-use, powerful graphical user interface of the MPLAB Integrated Development Environment (IDE), included with each kit.

The MPLAB REAL ICE probe is connected to the design engineer's PC using a high-speed USB 2.0 interface and is connected to the target with either a connector compatible with the popular MPLAB ICD 2 system (RJ11) or with the new high-speed, noise tolerant, Low-Voltage Differential Signal (LVDS) interconnection (CAT5).

MPLAB REAL ICE is field upgradeable through future firmware downloads in MPLAB IDE. In upcoming releases of MPLAB IDE, new devices will be supported, and new features will be added, such as software breakpoints and assembly code trace. MPLAB REAL ICE offers significant advantages over competitive emulators including low-cost, full-speed emulation, real-time variable watches, trace analysis, complex breakpoints, a ruggedized probe interface and long (up to three meters) interconnection cables.

## 23.9 MPLAB ICD 2 In-Circuit Debugger

Microchip's In-Circuit Debugger, MPLAB ICD 2, is a powerful, low-cost, run-time development tool, connecting to the host PC via an RS-232 or high-speed USB interface. This tool is based on the Flash PIC MCUs and can be used to develop for these and other PIC MCUs and dsPIC DSCs. The MPLAB ICD 2 utilizes the in-circuit debugging capability built into the Flash devices. This feature, along with Microchip's In-Circuit Serial Programming™ (ICSP™) protocol, offers cost-effective, in-circuit Flash debugging from the graphical user interface of the MPLAB Integrated Development Environment. This enables a designer to develop and debug source code by setting breakpoints, single stepping and watching variables, and CPU status and peripheral registers. Running at full speed enables testing hardware and applications in real time. MPLAB ICD 2 also serves as a development programmer for selected PIC devices.

## 23.10 MPLAB PM3 Device Programmer

The MPLAB PM3 Device Programmer is a universal, CE compliant device programmer with programmable voltage verification at VDDMIN and VDDMAX for maximum reliability. It features a large LCD display (128 x 64) for menus and error messages and a modular, detachable socket assembly to support various package types. The ICSP cable assembly is included as a standard item. In Stand-Alone mode, the MPLAB PM3 Device Programmer can read, verify and program PIC devices without a PC connection. It can also set code protection in this mode. The MPLAB PM3 connects to the host PC via an RS-232 or USB cable. The MPLAB PM3 has high-speed communications and optimized algorithms for quick programming of large memory devices and incorporates an SD/MMC card for file storage and secure data applications.

## 23.11 PICSTART Plus Development Programmer

The PICSTART Plus Development Programmer is an easy-to-use, low-cost, prototype programmer. It connects to the PC via a COM (RS-232) port. MPLAB Integrated Development Environment software makes using the programmer simple and efficient. The PICSTART Plus Development Programmer supports most PIC devices in DIP packages up to 40 pins. Larger pin count devices, such as the PIC16C92X and PIC17C76X, may be supported with an adapter socket. The PICSTART Plus Development Programmer is CE compliant.

## 23.12 PICkit 2 Development Programmer

The PICkit 2 Development Programmer is a low-cost programmer and selected Flash device debugger with an easy-to-use interface for programming many of Microchip's baseline, mid-range and PIC18F families of Flash memory microcontrollers. The PICkit 2 Starter Kit includes a prototyping development board, twelve sequential lessons, software and HI-TECH's PICC™ Lite C compiler, and is designed to help get up to speed quickly using PIC microcontrollers. The kit provides everything needed to program, evaluate and develop applications using Microchip's powerful, mid-range Flash memory family of microcontrollers.

## 23.13 Demonstration, Development and Evaluation Boards

A wide variety of demonstration, development and evaluation boards for various PIC MCUs and dsPIC DSCs allows quick application development on fully functional systems. Most boards include prototyping areas for adding custom circuitry and provide application firmware and source code for examination and modification.

The boards support a variety of features, including LEDs, temperature sensors, switches, speakers, RS-232 interfaces, LCD displays, potentiometers and additional EEPROM memory.

The demonstration and development boards can be used in teaching environments, for prototyping custom circuits and for learning about various microcontroller applications.

In addition to the PICDEM™ and dsPICDEM™ demonstration/development board series of circuits, Microchip has a line of evaluation kits and demonstration software for analog filter design, KEELOQ® security ICs, CAN, IrDA®, PowerSmart battery management, SEEVAL® evaluation system, Sigma-Delta ADC, flow rate sensing, plus many more.

Check the Microchip web page ([www.microchip.com](http://www.microchip.com)) for the complete list of demonstration, development and evaluation kits.

## 24.0 ELECTRICAL CHARACTERISTICS

This section provides an overview of PIC24HJXXXGPX06/X08/X10 electrical characteristics. Additional information is provided in future revisions of this document as it becomes available.

Absolute maximum ratings for the PIC24HJXXXGPX06/X08/X10 family are listed below. Exposure to these maximum rating conditions for extended periods can affect device reliability. Functional operation of the device at these or any other conditions above the parameters indicated in the operation listings of this specification is not implied.

### Absolute Maximum Ratings<sup>(1)</sup>

|                                                                                    |                       |
|------------------------------------------------------------------------------------|-----------------------|
| Ambient temperature under bias .....                                               | -40°C to +85°C        |
| Storage temperature .....                                                          | -65°C to +150°C       |
| Voltage on VDD with respect to VSS .....                                           | -0.3V to +4.0V        |
| Voltage on any combined analog and digital pin and MCLR, with respect to VSS ..... | -0.3V to (VDD + 0.3V) |
| Voltage on any digital-only pin with respect to VSS .....                          | -0.3V to +5.6V        |
| Voltage on VCAP/VDDCORE with respect to VSS .....                                  | 2.25V to 2.75V        |
| Maximum current out of VSS pin .....                                               | 300 mA                |
| Maximum current into VDD pin <sup>(2)</sup> .....                                  | 250 mA                |
| Maximum output current sunk by any I/O pin <sup>(3)</sup> .....                    | 4 mA                  |
| Maximum output current sourced by any I/O pin <sup>(3)</sup> .....                 | 4 mA                  |
| Maximum current sunk by all ports .....                                            | 200 mA                |
| Maximum current sourced by all ports <sup>(2)</sup> .....                          | 200 mA                |

**Note 1:** Stresses above those listed under “Absolute Maximum Ratings” can cause permanent damage to the device. This is a stress rating only, and functional operation of the device at those or any other conditions above those indicated in the operation listings of this specification is not implied. Exposure to maximum rating conditions for extended periods can affect device reliability.

**2:** Maximum allowable current is a function of device maximum power dissipation (see Table 24-2).

**3:** Exceptions are CLKOUT, which is able to sink/source 25 mA, and the VREF+, VREF-, SCLx, SDAX, PGECx and PGEDx pins, which are able to sink/source 12 mA.

# PIC24HJXXXGPX06/X08/X10

## 24.1 DC Characteristics

TABLE 24-1: OPERATING MIPS VS. VOLTAGE

| Characteristic | VDD Range<br>(in Volts) | Temp Range<br>(in °C) | Max MIPS                |
|----------------|-------------------------|-----------------------|-------------------------|
|                |                         |                       | PIC24HJXXXGPX06/X08/X10 |
|                | 3.0-3.6V                | -40°C to +85°C        | 40                      |

TABLE 24-2: THERMAL OPERATING CONDITIONS

| Rating                                                                                                                                                                                                                           | Symbol | Min                       | Typ | Max  | Unit |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|---------------------------|-----|------|------|
| Industrial Temperature Devices                                                                                                                                                                                                   |        |                           |     |      |      |
| Operating Junction Temperature Range                                                                                                                                                                                             | TJ     | -40                       | —   | +125 | °C   |
| Operating Ambient Temperature Range                                                                                                                                                                                              | TA     | -40                       | —   | +85  | °C   |
| Power Dissipation:<br>Internal chip power dissipation:<br>$P_{INT} = V_{DD} \times (I_{DD} - \Sigma I_{OH})$<br>I/O Pin Power Dissipation:<br>$I/O = \Sigma (\{V_{DD} - V_{OH}\} \times I_{OH}) + \Sigma (V_{OL} \times I_{OL})$ | PD     | PINT + PI/O               |     |      | W    |
| Maximum Allowed Power Dissipation                                                                                                                                                                                                | PDMAX  | $(T_J - T_A)/\theta_{JA}$ |     |      | W    |

TABLE 24-3: THERMAL PACKAGING CHARACTERISTICS

| Characteristic                                        | Symbol        | Typ | Max | Unit | Notes |
|-------------------------------------------------------|---------------|-----|-----|------|-------|
| Package Thermal Resistance, 100-pin TQFP (14x14x1 mm) | $\theta_{JA}$ | 40  | —   | °C/W | 1     |
| Package Thermal Resistance, 100-pin TQFP (12x12x1 mm) | $\theta_{JA}$ | 40  | —   | °C/W | 1     |
| Package Thermal Resistance, 64-pin TQFP (10x10x1 mm)  | $\theta_{JA}$ | 40  | —   | °C/W | 1     |

**Note 1:** Junction to ambient thermal resistance, Theta-JA ( $\theta_{JA}$ ) numbers are achieved by package simulations.

# PIC24HJXXXGPX06/X08/X10

**TABLE 24-4: DC TEMPERATURE AND VOLTAGE SPECIFICATIONS**

| DC CHARACTERISTICS       |                       |                                                                                       | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |                    |      |       |                                                         |
|--------------------------|-----------------------|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------|-------|---------------------------------------------------------|
| Param No.                | Symbol                | Characteristic                                                                        | Min                                                                                                                                                                      | Typ <sup>(1)</sup> | Max  | Units | Conditions                                              |
| <b>Operating Voltage</b> |                       |                                                                                       |                                                                                                                                                                          |                    |      |       |                                                         |
| DC10                     | <b>Supply Voltage</b> |                                                                                       |                                                                                                                                                                          |                    |      |       |                                                         |
|                          | VDD                   |                                                                                       | 3.0                                                                                                                                                                      | —                  | 3.6  | V     | —                                                       |
| DC12                     | VDR                   | <b>RAM Data Retention Voltage<sup>(2)</sup></b>                                       | 1.8                                                                                                                                                                      | —                  | —    | V     | —                                                       |
| DC16                     | VPOR                  | <b>VDD Start Voltage<sup>(4)</sup></b><br>to ensure internal<br>Power-on Reset signal | —                                                                                                                                                                        | —                  | VSS  | V     | —                                                       |
| DC17                     | SVDD                  | <b>VDD Rise Rate</b><br>to ensure internal<br>Power-on Reset signal                   | 0.03                                                                                                                                                                     | —                  | —    | V/ms  | 0-3.0V in 0.1s                                          |
| DC18                     | VCORE                 | <b>VDD Core<sup>(3)</sup></b><br>Internal regulator voltage                           | 2.25                                                                                                                                                                     | —                  | 2.75 | V     | Voltage is dependent on<br>load, temperature and<br>VDD |

- Note 1:** Data in “Typ” column is at 3.3V, 25°C unless otherwise stated.  
**2:** This is the limit to which VDD can be lowered without losing RAM data.  
**3:** These parameters are characterized but not tested in manufacturing.  
**4:** VDD voltage must remain at VSS for a minimum of 200 µs to ensure POR.

# PIC24HJXXXGPX06/X08/X10

**TABLE 24-5: DC CHARACTERISTICS: OPERATING CURRENT (IDD)**

| DC CHARACTERISTICS                     |                        |     | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature   -40°C ≤ TA ≤ +85°C for Industrial |            |      |         |
|----------------------------------------|------------------------|-----|---------------------------------------------------------------------------------------------------------------------------------------|------------|------|---------|
| Parameter No.                          | Typical <sup>(1)</sup> | Max | Units                                                                                                                                 | Conditions |      |         |
| Operating Current (IDD) <sup>(2)</sup> |                        |     |                                                                                                                                       |            |      |         |
| DC20d                                  | 27                     | 30  | mA                                                                                                                                    | -40°C      | 3.3V | 10 MIPS |
| DC20a                                  | 27                     | 30  | mA                                                                                                                                    | +25°C      |      |         |
| DC20b                                  | 27                     | 30  | mA                                                                                                                                    | +85°C      |      |         |
| DC21d                                  | 36                     | 40  | mA                                                                                                                                    | -40°C      | 3.3V | 16 MIPS |
| DC21a                                  | 37                     | 40  | mA                                                                                                                                    | +25°C      |      |         |
| DC21b                                  | 38                     | 45  | mA                                                                                                                                    | +85°C      |      |         |
| DC22d                                  | 43                     | 50  | mA                                                                                                                                    | -40°C      | 3.3V | 20 MIPS |
| DC22a                                  | 46                     | 50  | mA                                                                                                                                    | +25°C      |      |         |
| DC22b                                  | 46                     | 55  | mA                                                                                                                                    | +85°C      |      |         |
| DC23d                                  | 65                     | 70  | mA                                                                                                                                    | -40°C      | 3.3V | 30 MIPS |
| DC23a                                  | 65                     | 70  | mA                                                                                                                                    | +25°C      |      |         |
| DC23b                                  | 65                     | 70  | mA                                                                                                                                    | +85°C      |      |         |
| DC24d                                  | 84                     | 90  | mA                                                                                                                                    | -40°C      | 3.3V | 40 MIPS |
| DC24a                                  | 84                     | 90  | mA                                                                                                                                    | +25°C      |      |         |
| DC24b                                  | 84                     | 90  | mA                                                                                                                                    | +85°C      |      |         |

**Note 1:** Data in "Typical" column is at 3.3V, 25°C unless otherwise stated.

- 2:** The supply current is mainly a function of the operating voltage and frequency. Other factors, such as I/O pin loading and switching rate, oscillator type, internal code execution pattern and temperature, also have an impact on the current consumption. The test conditions for all IDD measurements are as follows: OSC1 driven with external square wave from rail to rail. All I/O pins are configured as inputs and pulled to Vss. MCLR = VDD, WDT and FSCM are disabled. CPU, SRAM, program memory and data memory are operational. No peripheral modules are operating; however, every peripheral is being clocked (PMD bits are all zeroed).

# PIC24HJXXXGPX06/X08/X10

**TABLE 24-6: DC CHARACTERISTICS: IDLE CURRENT (IDLE)**

| DC CHARACTERISTICS                                                 |                        |     | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature    -40°C ≤ TA ≤ +85°C for Industrial |            |      |         |
|--------------------------------------------------------------------|------------------------|-----|----------------------------------------------------------------------------------------------------------------------------------------|------------|------|---------|
| Parameter No.                                                      | Typical <sup>(1)</sup> | Max | Units                                                                                                                                  | Conditions |      |         |
| Idle Current (IDLE): Core OFF Clock ON Base Current <sup>(2)</sup> |                        |     |                                                                                                                                        |            |      |         |
| DC40d                                                              | 3                      | 25  | mA                                                                                                                                     | -40°C      | 3.3V | 10 MIPS |
| DC40a                                                              | 3                      | 25  | mA                                                                                                                                     | +25°C      |      |         |
| DC40b                                                              | 3                      | 25  | mA                                                                                                                                     | +85°C      |      |         |
| DC41d                                                              | 4                      | 25  | mA                                                                                                                                     | -40°C      | 3.3V | 16 MIPS |
| DC41a                                                              | 5                      | 25  | mA                                                                                                                                     | +25°C      |      |         |
| DC41b                                                              | 6                      | 25  | mA                                                                                                                                     | +85°C      |      |         |
| DC42d                                                              | 8                      | 25  | mA                                                                                                                                     | -40°C      | 3.3V | 20 MIPS |
| DC42a                                                              | 9                      | 25  | mA                                                                                                                                     | +25°C      |      |         |
| DC42b                                                              | 10                     | 25  | mA                                                                                                                                     | +85°C      |      |         |
| DC43a                                                              | 15                     | 25  | mA                                                                                                                                     | +25°C      | 3.3V | 30 MIPS |
| DC43d                                                              | 15                     | 25  | mA                                                                                                                                     | -40°C      |      |         |
| DC43b                                                              | 15                     | 25  | mA                                                                                                                                     | +85°C      |      |         |
| DC44d                                                              | 16                     | 25  | mA                                                                                                                                     | -40°C      | 3.3V | 40 MIPS |
| DC44a                                                              | 16                     | 25  | mA                                                                                                                                     | +25°C      |      |         |
| DC44b                                                              | 16                     | 25  | mA                                                                                                                                     | +85°C      |      |         |

**Note 1:** Data in "Typical" column is at 3.3V, 25°C unless otherwise stated.

**2:** Base IDLE current is measured with core off, clock on and all modules turned off. Peripheral Module Disable SFR registers are zeroed. All I/O pins are configured as inputs and pulled to Vss.

# PIC24HJXXXGPX06/X08/X10

**TABLE 24-7: DC CHARACTERISTICS: POWER-DOWN CURRENT (IPD)**

| DC CHARACTERISTICS                      |                        |     | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature    -40°C ≤ TA ≤ +85°C for Industrial |            |      |                                             |
|-----------------------------------------|------------------------|-----|----------------------------------------------------------------------------------------------------------------------------------------|------------|------|---------------------------------------------|
| Parameter No.                           | Typical <sup>(1)</sup> | Max | Units                                                                                                                                  | Conditions |      |                                             |
| Power-Down Current (IPD) <sup>(2)</sup> |                        |     |                                                                                                                                        |            |      |                                             |
| DC60d                                   | 55                     | 500 | μA                                                                                                                                     | -40°C      | 3.3V | Base Power-Down Current <sup>(3,4)</sup>    |
| DC60a                                   | 211                    | 500 | μA                                                                                                                                     | +25°C      |      |                                             |
| DC60b                                   | 244                    | 500 | μA                                                                                                                                     | +85°C      |      |                                             |
| DC61d                                   | 8                      | 13  | μA                                                                                                                                     | -40°C      | 3.3V | Watchdog Timer Current: ΔIWD <sup>(3)</sup> |
| DC61a                                   | 10                     | 15  | μA                                                                                                                                     | +25°C      |      |                                             |
| DC61b                                   | 12                     | 20  | μA                                                                                                                                     | +85°C      |      |                                             |

- Note 1:** Data in the Typical column is at 3.3V, 25°C unless otherwise stated.
- Note 2:** Base IPD is measured with all peripherals and clocks shut down. All I/Os are configured as inputs and pulled to Vss. WDT, etc., are all switched off and VREGS (RCON<8>) = 1.
- Note 3:** The  $\Delta$  current is the additional current consumed when the module is enabled. This current should be added to the base IPD current.
- Note 4:** These currents are measured on the device containing the most memory in this family.

**TABLE 24-8: DC CHARACTERISTICS: DOZE CURRENT (IDOZE)**

| DC CHARACTERISTICS |                        |     | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |       |                                    |
|--------------------|------------------------|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------------------------------------|
| Parameter No.      | Typical <sup>(1)</sup> | Max | Doze Ratio                                                                                                                                                               | Units | Conditions                         |
| DC73a              | 11                     | 35  | 1:2                                                                                                                                                                      | mA    | $-40^{\circ}\text{C}$ 3.3V 40 MIPS |
| DC73f              | 11                     | 30  | 1:64                                                                                                                                                                     | mA    |                                    |
| DC73g              | 11                     | 30  | 1:128                                                                                                                                                                    | mA    |                                    |
| DC70a              | 42                     | 50  | 1:2                                                                                                                                                                      | mA    | $+25^{\circ}\text{C}$ 3.3V 40 MIPS |
| DC70f              | 26                     | 30  | 1:64                                                                                                                                                                     | mA    |                                    |
| DC70g              | 25                     | 30  | 1:128                                                                                                                                                                    | mA    |                                    |
| DC71a              | 41                     | 50  | 1:2                                                                                                                                                                      | mA    | $+85^{\circ}\text{C}$ 3.3V 40 MIPS |
| DC71f              | 25                     | 30  | 1:64                                                                                                                                                                     | mA    |                                    |
| DC71g              | 24                     | 30  | 1:128                                                                                                                                                                    | mA    |                                    |

- Note 1:** Data in the Typical column is at 3.3V, 25°C unless otherwise stated.

# PIC24HJXXXGPX06/X08/X10

**TABLE 24-9: DC CHARACTERISTICS: I/O PIN INPUT SPECIFICATIONS**

| DC CHARACTERISTICS |                 |                                                                      | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |                    |                     |       |                                                                                 |
|--------------------|-----------------|----------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|---------------------|-------|---------------------------------------------------------------------------------|
| Param No.          | Symbol          | Characteristic                                                       | Min                                                                                                                                                                      | Typ <sup>(1)</sup> | Max                 | Units | Conditions                                                                      |
| DI10               | V <sub>IL</sub> | <b>Input Low Voltage</b><br>I/O pins                                 | V <sub>SS</sub>                                                                                                                                                          | —                  | 0.2 V <sub>DD</sub> | V     | SMbus disabled<br>SMbus enabled                                                 |
| DI15               |                 | MCLR                                                                 | V <sub>SS</sub>                                                                                                                                                          | —                  | 0.2 V <sub>DD</sub> | V     |                                                                                 |
| DI16               |                 | I/O Pins with OSC1 or SOSC1                                          | V <sub>SS</sub>                                                                                                                                                          | —                  | 0.2 V <sub>DD</sub> | V     |                                                                                 |
| DI18               |                 | I/O Pins with I <sup>2</sup> C                                       | V <sub>SS</sub>                                                                                                                                                          | —                  | 0.3 V <sub>DD</sub> | V     |                                                                                 |
| DI19               |                 | I/O Pins with I <sup>2</sup> C                                       | V <sub>SS</sub>                                                                                                                                                          | —                  | 0.2 V <sub>DD</sub> | V     |                                                                                 |
| DI20               | V <sub>IH</sub> | <b>Input High Voltage</b><br>I/O Pins Not 5V Tolerant <sup>(4)</sup> | 0.8 V <sub>DD</sub>                                                                                                                                                      | —                  | V <sub>DD</sub>     | V     | V <sub>DD</sub> = 3.3V<br>V <sub>DD</sub> = 3.3V                                |
|                    |                 | I/O Pins 5V Tolerant <sup>(4)</sup>                                  | 0.8 V <sub>DD</sub>                                                                                                                                                      | —                  | 5.5                 | V     |                                                                                 |
|                    |                 | I/O Pins Not 5V Tolerant <sup>(4)</sup>                              | 2                                                                                                                                                                        | —                  | V <sub>DD</sub>     | V     |                                                                                 |
|                    |                 | I/O Pins 5V Tolerant <sup>(4)</sup>                                  | 2                                                                                                                                                                        | —                  | 5.5                 | V     |                                                                                 |
| DI26               |                 | I/O Pins with OSC1 or SOSC1                                          | 0.7 V <sub>DD</sub>                                                                                                                                                      | —                  | V <sub>DD</sub>     | V     |                                                                                 |
| DI28               |                 | I/O Pins with I <sup>2</sup> C                                       | 0.7 V <sub>DD</sub>                                                                                                                                                      | —                  | 5.5                 | V     |                                                                                 |
| DI29               |                 | I/O Pins with I <sup>2</sup> C                                       | 0.8 V <sub>DD</sub>                                                                                                                                                      | —                  | 5.5                 | V     |                                                                                 |
| DI30               | ICNPU           | <b>CNx Pull-up Current</b>                                           | 50                                                                                                                                                                       | 250                | 400                 | μA    | V <sub>DD</sub> = 3.3V, V <sub>PIN</sub> = V <sub>SS</sub>                      |
| DI50               | I <sub>IL</sub> | <b>Input Leakage Current<sup>(2,3)</sup></b><br>I/O Pins             | —                                                                                                                                                                        | —                  | ±2                  | μA    | V <sub>SS</sub> ≤ V <sub>PIN</sub> ≤ V <sub>DD</sub> ,<br>Pin at high-impedance |
| DI51               |                 | I/O Pins Not 5V Tolerant <sup>(4)</sup>                              | —                                                                                                                                                                        | —                  | ±2                  | μA    | V <sub>SS</sub> ≤ V <sub>PIN</sub> ≤ V <sub>DD</sub> ,<br>Pin at high-impedance |
| DI51a              |                 | I/O Pins Not 5V Tolerant <sup>(4)</sup>                              | —                                                                                                                                                                        | —                  | ±2                  | μA    | Shared with external reference pins                                             |
| DI51b              |                 | I/O Pins Not 5V Tolerant <sup>(4)</sup>                              | —                                                                                                                                                                        | —                  | ±3.5                | μA    | V <sub>SS</sub> ≤ V <sub>PIN</sub> ≤ V <sub>DD</sub> , Pin at high-impedance    |
| DI51c              |                 | I/O Pins Not 5V Tolerant <sup>(4)</sup>                              | —                                                                                                                                                                        | —                  | ±8                  | μA    | Analog pins shared with external reference pins                                 |
| DI55               |                 | MCLR                                                                 | —                                                                                                                                                                        | —                  | ±2                  | μA    | V <sub>SS</sub> ≤ V <sub>PIN</sub> ≤ V <sub>DD</sub>                            |
| DI56               |                 | OSC1                                                                 | —                                                                                                                                                                        | —                  | ±2                  | μA    | V <sub>SS</sub> ≤ V <sub>PIN</sub> ≤ V <sub>DD</sub> ,<br>XT and HS modes       |

**Note 1:** Data in “Typ” column is at 3.3V, 25°C unless otherwise stated.

**2:** The leakage current on the MCLR pin is strongly dependent on the applied voltage level. The specified levels represent normal operating conditions. Higher leakage current may be measured at different input voltages.

**3:** Negative current is defined as current sourced by the pin.

**4:** See “Pin Diagrams” for a list of 5V tolerant pins.

# PIC24HJXXXGPX06/X08/X10

**TABLE 24-10: DC CHARACTERISTICS: I/O PIN OUTPUT SPECIFICATIONS**

| DC CHARACTERISTICS |        |                            | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |     |     |       |                                                    |
|--------------------|--------|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----|-------|----------------------------------------------------|
| Param No.          | Symbol | Characteristic             | Min                                                                                                                                                                      | Typ | Max | Units | Conditions                                         |
| DO10<br>DO16       | VOL    | <b>Output Low Voltage</b>  |                                                                                                                                                                          |     |     |       |                                                    |
|                    |        | I/O ports                  | —                                                                                                                                                                        | —   | 0.4 | V     | $I_{OL} = 2\text{ mA}$ , $V_{DD} = 3.3\text{V}$    |
|                    |        | OSC2/CLKO                  | —                                                                                                                                                                        | —   | 0.4 | V     | $I_{OL} = 2\text{ mA}$ , $V_{DD} = 3.3\text{V}$    |
| DO20<br>DO26       | VOH    | <b>Output High Voltage</b> |                                                                                                                                                                          |     |     |       |                                                    |
|                    |        | I/O ports                  | 2.40                                                                                                                                                                     | —   | —   | V     | $I_{OH} = -2.3\text{ mA}$ , $V_{DD} = 3.3\text{V}$ |
|                    |        | OSC2/CLKO                  | 2.41                                                                                                                                                                     | —   | —   | V     | $I_{OH} = -1.3\text{ mA}$ , $V_{DD} = 3.3\text{V}$ |

**TABLE 24-11: ELECTRICAL CHARACTERISTICS: BOR**

| DC CHARACTERISTICS |        |                                                                                                     | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |     |                    |       |            |
|--------------------|--------|-----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|--------------------|-------|------------|
| Param No.          | Symbol | Characteristic                                                                                      | Min <sup>(1)</sup>                                                                                                                                                       | Typ | Max <sup>(1)</sup> | Units | Conditions |
| BO10               | VBOR   | BOR Event on $V_{DD}$ transition high-to-low<br>BOR event is tied to $V_{DD}$ core voltage decrease | 2.40                                                                                                                                                                     | —   | 2.55               | V     | —          |

**Note 1:** Parameters are for design guidance only and are not tested in manufacturing.

# PIC24HJXXXGPX06/X08/X10

**TABLE 24-12: DC CHARACTERISTICS: PROGRAM MEMORY**

| DC CHARACTERISTICS |        |                                   | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |                    |      |       |                                               |
|--------------------|--------|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------|-------|-----------------------------------------------|
| Param No.          | Symbol | Characteristic                    | Min                                                                                                                                                                      | Typ <sup>(1)</sup> | Max  | Units | Conditions                                    |
|                    |        | <b>Program Flash Memory</b>       |                                                                                                                                                                          |                    |      |       |                                               |
| D130a              | EP     | Cell Endurance                    | 100                                                                                                                                                                      | 1000               | —    | E/W   | See <b>Note 2</b>                             |
| D131               | VPR    | VDD for Read                      | V <sub>MIN</sub>                                                                                                                                                         | —                  | 3.6  | V     | V <sub>MIN</sub> = Minimum operating voltage  |
| D132B              | VPEW   | VDD for Self-Timed Write          | V <sub>MIN</sub>                                                                                                                                                         | —                  | 3.6  | V     | V <sub>MIN</sub> = Minimum operating voltage  |
| D134               | TRETD  | Characteristic Retention          | 20                                                                                                                                                                       | —                  | —    | Year  | Provided no other specifications are violated |
| D135               | IDDP   | Supply Current during Programming | —                                                                                                                                                                        | 10                 | —    | mA    |                                               |
| D136a              | TRW    | Row Write Time                    | 1.32                                                                                                                                                                     | —                  | 1.74 | ms    | TRW = 11064 FRC cycles, See <b>Note 2</b>     |
| D136b              | TRW    | Row Write Time                    | 1.28                                                                                                                                                                     | —                  | 1.79 | ms    | TRW = 11064 FRC cycles, See <b>Note 2</b>     |
| D137a              | TPE    | Page Erase Time                   | 20.1                                                                                                                                                                     | —                  | 26.5 | ms    | TPE = 168517 FRC cycles, See <b>Note 2</b>    |
| D138a              | TWW    | Word Write Cycle Time             | 42.3                                                                                                                                                                     | —                  | 55.9 | μs    | TWW = 355 FRC cycles, See <b>Note 2</b>       |

**Note 1:** Data in “Typ” column is at 3.3V, 25°C unless otherwise stated.

- 2:** Other conditions: FRC = 7.37 MHz, TUN<5:0> = b'011111 (for Min), TUN<5:0> = b'100000 (for Max). This parameter depends on the FRC accuracy (see Table 24-19) and the value of the FRC Oscillator Tuning register (see Register 9-4). For complete details on calculating the Minimum and Maximum time see **Section 5.3 “Programming Operations”**.

**TABLE 24-13: INTERNAL VOLTAGE REGULATOR SPECIFICATIONS**

| Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |        |                                 |     |     |     |       |                                                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|---------------------------------|-----|-----|-----|-------|----------------------------------------------------|
| Param No.                                                                                                                                                                | Symbol | Characteristics                 | Min | Typ | Max | Units | Comments                                           |
|                                                                                                                                                                          | CEFC   | External Filter Capacitor Value | 4.7 | 10  | —   | μF    | Capacitor must be low series resistance (< 5 Ohms) |

# PIC24HJXXXGPX06/X08/X10

## 24.2 AC Characteristics and Timing Parameters

This section defines PIC24HJXXXGPX06/X08/X10 AC characteristics and timing parameters.

TABLE 24-14: TEMPERATURE AND VOLTAGE SPECIFICATIONS – AC

|                    |                                                                                                                                                                                                                                                                                     |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AC CHARACTERISTICS | <b>Standard Operating Conditions: 3.0V to 3.6V (unless otherwise stated)</b><br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial<br>Operating voltage $V_{DD}$ range as described in <b>Section 24.0 “Electrical Characteristics”</b> . |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

FIGURE 24-1: LOAD CONDITIONS FOR DEVICE TIMING SPECIFICATIONS


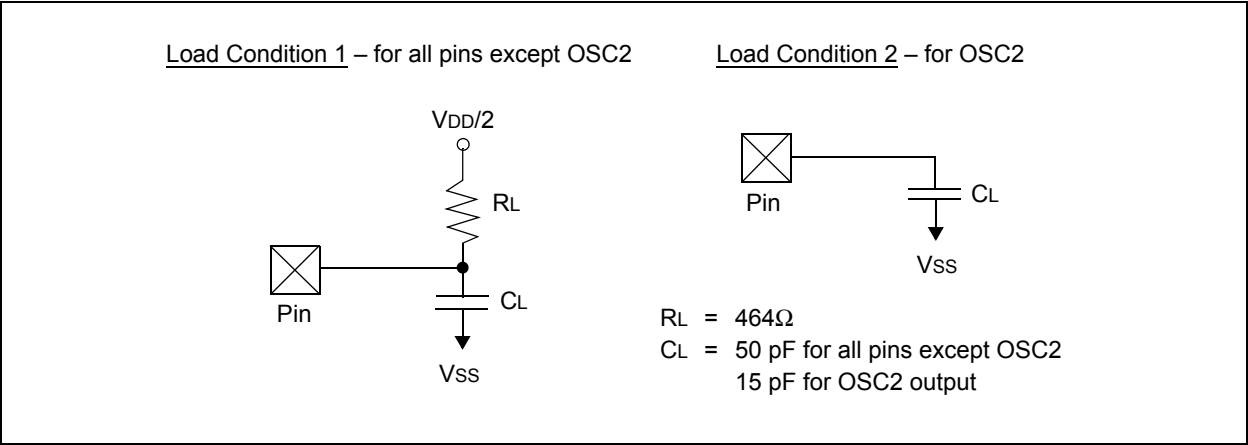


TABLE 24-15: CAPACITIVE LOADING REQUIREMENTS ON OUTPUT PINS

| Param No. | Symbol | Characteristic        | Min | Typ | Max | Units | Conditions                                                   |
|-----------|--------|-----------------------|-----|-----|-----|-------|--------------------------------------------------------------|
| DO50      | Cosco  | OSC2/SOSCO pin        | —   | —   | 15  | pF    | In XT and HS modes when external clock is used to drive OSC1 |
| DO56      | Cio    | All I/O pins and OSC2 | —   | —   | 50  | pF    | EC mode                                                      |
| DO58      | CB     | SCLx, SDAx            | —   | —   | 400 | pF    | In I <sup>2</sup> C™ mode                                    |

# PIC24HJXXXGPX06/X08/X10

**FIGURE 24-2: EXTERNAL CLOCK TIMING**

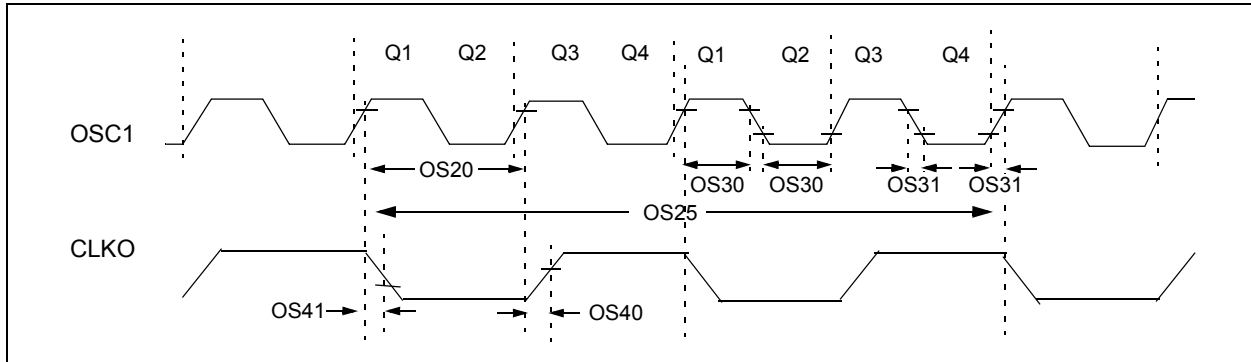

**TABLE 24-16: EXTERNAL CLOCK TIMING REQUIREMENTS**

| AC CHARACTERISTICS |               |                                                                                    | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |                    |                        |                   |                                                       |
|--------------------|---------------|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------------------|-------------------|-------------------------------------------------------|
| Param No.          | Sym bol       | Characteristic                                                                     | Min                                                                                                                                                                      | Typ <sup>(1)</sup> | Max                    | Units             | Conditions                                            |
| OS10               | FIN           | External CLKI Frequency<br>(External clocks allowed only<br>in EC and ECPLL modes) | DC                                                                                                                                                                       | —                  | 40                     | MHz               | EC                                                    |
|                    |               | Oscillator Crystal Frequency                                                       | 3.5<br>10                                                                                                                                                                | —<br>—<br>—        | 10<br>40<br>33         | MHz<br>MHz<br>kHz | XT<br>HS<br>SOSC                                      |
| OS20               | TOSC          | $T_{OSC} = 1/F_{OSC}$                                                              | 12.5                                                                                                                                                                     | —                  | DC                     | ns                | —                                                     |
| OS25               | Tcy           | Instruction Cycle Time <sup>(2)</sup>                                              | 25                                                                                                                                                                       | —                  | DC                     | ns                | —                                                     |
| OS30               | TosL,<br>TosH | External Clock in (OSC1)<br>High or Low Time                                       | $0.375 \times T_{OSC}$                                                                                                                                                   | —                  | $0.625 \times T_{OSC}$ | ns                | EC                                                    |
| OS31               | TosR,<br>TosF | External Clock in (OSC1)<br>Rise or Fall Time                                      | —                                                                                                                                                                        | —                  | 20                     | ns                | EC                                                    |
| OS40               | TckR          | CLKO Rise Time <sup>(3)</sup>                                                      | —                                                                                                                                                                        | 5.2                | —                      | ns                | —                                                     |
| OS41               | TckF          | CLKO Fall Time <sup>(3)</sup>                                                      | —                                                                                                                                                                        | 5.2                | —                      | ns                | —                                                     |
| OS42               | GM            | External Oscillator<br>Transconductance <sup>(4)</sup>                             | 14                                                                                                                                                                       | 16                 | 18                     | mA/V              | $V_{DD} = 3.3\text{V}$<br>$T_A = +25^{\circ}\text{C}$ |

**Note 1:** Data in “Typ” column is at 3.3V, 25°C unless otherwise stated.

**2:** Instruction cycle period (Tcy) equals two times the input oscillator time-base period. All specified values are based on characterization data for that particular oscillator type under standard operating conditions with the device executing code. Exceeding these specified limits may result in an unstable oscillator operation and/or higher than expected current consumption. All devices are tested to operate at “min.” values with an external clock applied to the OSC1/CLKI pin. When an external clock input is used, the “max.” cycle time limit is “DC” (no clock) for all devices.

**3:** Measurements are taken in EC mode. The CLKO signal is measured on the OSC2 pin.

**4:** Data for this parameter is Preliminary. This parameter is characterized, but not tested in manufacturing.

# PIC24HJXXXGPX06/X08/X10

**TABLE 24-17: PLL CLOCK TIMING SPECIFICATIONS (V<sub>DD</sub> = 3.0V TO 3.6V)**

| AC CHARACTERISTICS |        | Standard Operating Conditions: 3.0V to 3.6V (unless otherwise stated)<br>Operating temperature -40°C ≤ T <sub>A</sub> ≤ +85°C for Industrial |     |                    |     |       |                             |
|--------------------|--------|----------------------------------------------------------------------------------------------------------------------------------------------|-----|--------------------|-----|-------|-----------------------------|
| Param No.          | Symbol | Characteristic                                                                                                                               | Min | Typ <sup>(1)</sup> | Max | Units | Conditions                  |
| OS50               | FPLLI  | PLL Voltage Controlled Oscillator (VCO) Input Frequency Range                                                                                | 0.8 | —                  | 8   | MHz   | ECPLL, HSPLL, XTPLL modes   |
| OS51               | FSYS   | On-Chip VCO System Frequency                                                                                                                 | 100 | —                  | 200 | MHz   |                             |
| OS52               | TLOCK  | PLL Start-up Time (Lock Time)                                                                                                                | 0.9 | 1.5                | 3.1 | mS    |                             |
| OS53               | DCLK   | CLKO Stability (Jitter)                                                                                                                      | -3  | 0.5                | 3   | %     | Measured over 100 ms period |

**Note 1:** Data in “Typ” column is at 3.3V, 25°C unless otherwise stated. Parameters are for design guidance only and are not tested.

**TABLE 24-18: AC CHARACTERISTICS: INTERNAL RC ACCURACY**

| AC CHARACTERISTICS |                                                     | Standard Operating Conditions: 3.0V to 3.6V (unless otherwise stated)<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial |     |     |       |                    |                |
|--------------------|-----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|-----|-----|-------|--------------------|----------------|
| Param No.          | Characteristic                                      | Min                                                                                                                              | Typ | Max | Units | Conditions         |                |
|                    | Internal FRC Accuracy @ 7.3728 MHz <sup>(1,2)</sup> |                                                                                                                                  |     |     |       |                    |                |
| F20                | FRC                                                 | -2                                                                                                                               | —   | +2  | %     | -40°C ≤ TA ≤ +85°C | VDD = 3.0-3.6V |

**Note 1:** Frequency calibrated at 25°C and 3.3V. TUN bits can be used to compensate for temperature drift.

**2:** FRC is set to initial frequency of 7.37 MHz (±2%) at 25°C.


**TABLE 24-19: INTERNAL RC ACCURACY**

| AC CHARACTERISTICS |                                  | Standard Operating Conditions: 3.0V to 3.6V (unless otherwise stated)<br>Operating temperature    -40°C ≤ TA ≤ +85°C for Industrial |     |     |       |                    |                |
|--------------------|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|-----|-----|-------|--------------------|----------------|
| Param No.          | Characteristic                   | Min                                                                                                                                 | Typ | Max | Units | Conditions         |                |
|                    | LPRC @ 32.768 kHz <sup>(1)</sup> |                                                                                                                                     |     |     |       |                    |                |
| F21                | LPRC                             | -20                                                                                                                                 | ±6  | +20 | %     | -40°C ≤ TA ≤ +85°C | VDD = 3.0-3.6V |

**Note 1:** Change of LPRC frequency as V<sub>DD</sub> changes.

# PIC24HJXXXGPX06/X08/X10

**FIGURE 24-3: CLKO AND I/O TIMING CHARACTERISTICS**

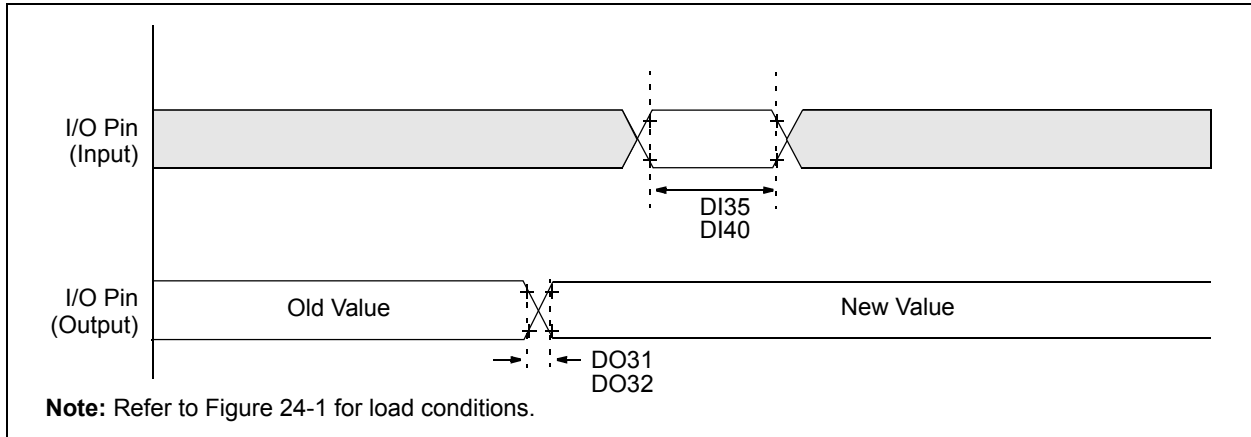


**TABLE 24-20: I/O TIMING REQUIREMENTS**

| AC CHARACTERISTICS |        |                                    | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |                    |     |       |            |
|--------------------|--------|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-----|-------|------------|
| Param No.          | Symbol | Characteristic                     | Min                                                                                                                                                                      | Typ <sup>(1)</sup> | Max | Units | Conditions |
| DO31               | TioR   | Port Output Rise Time              | —                                                                                                                                                                        | 10                 | 25  | ns    | —          |
| DO32               | TioF   | Port Output Fall Time              | —                                                                                                                                                                        | 10                 | 25  | ns    | —          |
| DI35               | TINP   | INTx Pin High or Low Time (output) | 20                                                                                                                                                                       | —                  | —   | ns    | —          |
| DI40               | TRBP   | CNx High or Low Time (input)       | 2                                                                                                                                                                        | —                  | —   | Tcy   | —          |

**Note 1:** Data in “Typ” column is at 3.3V, 25°C unless otherwise stated.

# PIC24HJXXXGPX06/X08/X10

**FIGURE 24-4: RESET, WATCHDOG TIMER, OSCILLATOR START-UP TIMER AND POWER-UP TIMER TIMING CHARACTERISTICS**

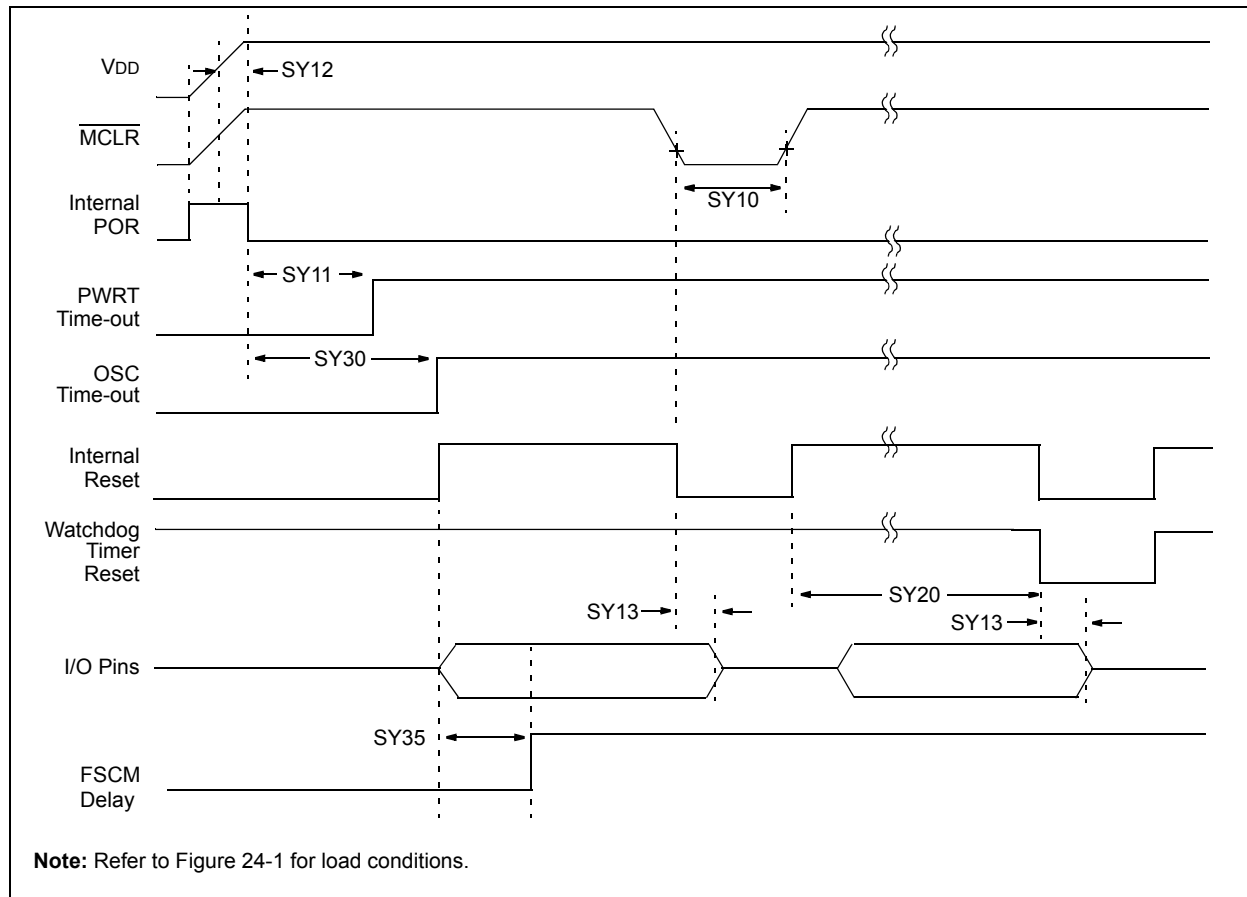

# PIC24HJXXXGPX06/X08/X10

**TABLE 24-21: RESET, WATCHDOG TIMER, OSCILLATOR START-UP TIMER, POWER-UP TIMER TIMING REQUIREMENTS**


| AC CHARACTERISTICS |        |                                                          | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial |                                      |     |       |                                                                                         |
|--------------------|--------|----------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|-----|-------|-----------------------------------------------------------------------------------------|
| Param No.          | Symbol | Characteristic <sup>(1)</sup>                            | Min                                                                                                                                 | Typ <sup>(2)</sup>                   | Max | Units | Conditions                                                                              |
| SY10               | TMCL   | MCLR Pulse-Width (low)                                   | 2                                                                                                                                   | —                                    | —   | μs    | -40°C to +85°C                                                                          |
| SY11               | TPWRT  | Power-up Timer Period                                    | —                                                                                                                                   | 2<br>4<br>8<br>16<br>32<br>64<br>128 | —   | ms    | -40°C to +85°C<br>User programmable                                                     |
| SY12               | TPOR   | Power-on Reset Delay                                     | 3                                                                                                                                   | 10                                   | 30  | μs    | -40°C to +85°C                                                                          |
| SY13               | TIOZ   | I/O High-Impedance from MCLR Low or Watchdog Timer Reset | 0.68                                                                                                                                | 0.72                                 | 1.2 | μs    | —                                                                                       |
| SY20               | TWDT1  | Watchdog Timer Time-out Period                           | —                                                                                                                                   | —                                    | —   | —     | See <b>Section 21.4 “Watchdog Timer (WDT)”</b> and LPRC specification F21 (Table 24-19) |
| SY30               | TOST   | Oscillator Start-up Timer Period                         | —                                                                                                                                   | 1024 TOSC                            | —   | —     | TOSC = OSC1 period                                                                      |
| SY35               | TFSCM  | Fail-Safe Clock Monitor Delay                            | —                                                                                                                                   | 500                                  | 900 | μs    | -40°C to +85°C                                                                          |

**Note 1:** These parameters are characterized but not tested in manufacturing.

**Note 2:** Data in “Typ” column is at 3.3V, 25°C unless otherwise stated.

# PIC24HJXXXGPX06/X08/X10

**FIGURE 24-5: TIMER1, 2, 3, 4, 5, 6, 7, 8 AND 9 EXTERNAL CLOCK TIMING CHARACTERISTICS**

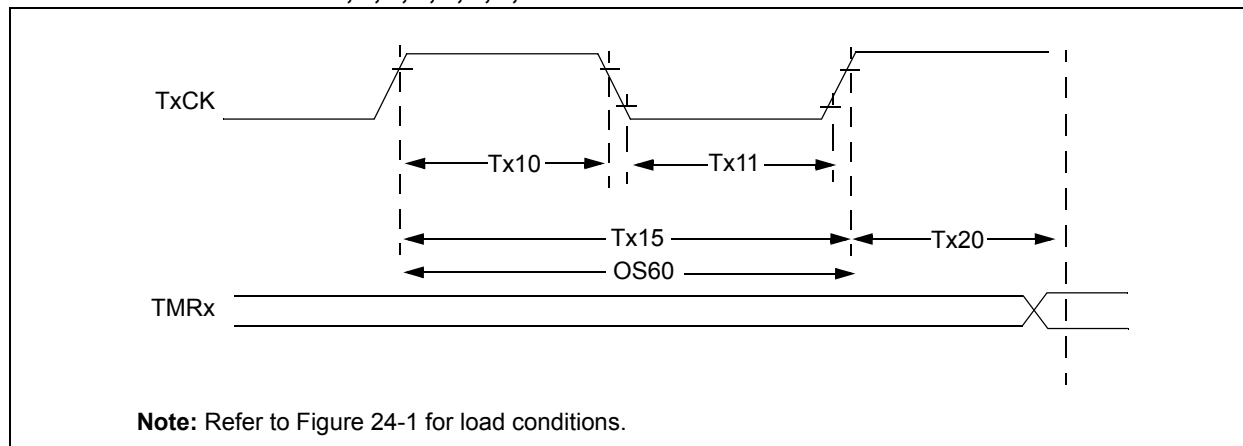

**TABLE 24-22: TIMER1 EXTERNAL CLOCK TIMING REQUIREMENTS<sup>(1)</sup>**

| AC CHARACTERISTICS |                       |                                                                                                |                             | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |     |              |       |                                       |
|--------------------|-----------------------|------------------------------------------------------------------------------------------------|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|--------------|-------|---------------------------------------|
| Param No.          | Symbol                | Characteristic                                                                                 |                             | Min                                                                                                                                                                      | Typ | Max          | Units | Conditions                            |
| TA10               | T <sub>TxH</sub>      | TxCK High Time                                                                                 | Synchronous, no prescaler   | $0.5 T_{CY} + 20$                                                                                                                                                        | —   | —            | ns    | Must also meet parameter TA15         |
|                    |                       |                                                                                                | Synchronous, with prescaler | 10                                                                                                                                                                       | —   | —            | ns    |                                       |
|                    |                       |                                                                                                | Asynchronous                | 10                                                                                                                                                                       | —   | —            | ns    |                                       |
| TA11               | T <sub>TxL</sub>      | TxCK Low Time                                                                                  | Synchronous, no prescaler   | $0.5 T_{CY} + 20$                                                                                                                                                        | —   | —            | ns    | Must also meet parameter TA15         |
|                    |                       |                                                                                                | Synchronous, with prescaler | 10                                                                                                                                                                       | —   | —            | ns    |                                       |
|                    |                       |                                                                                                | Asynchronous                | 10                                                                                                                                                                       | —   | —            | ns    |                                       |
| TA15               | T <sub>TxP</sub>      | TxCK Input Period                                                                              | Synchronous, no prescaler   | $T_{CY} + 40$                                                                                                                                                            | —   | —            | ns    | —                                     |
|                    |                       |                                                                                                | Synchronous, with prescaler | Greater of:<br>20 ns or<br>$(T_{CY} + 40)/N$                                                                                                                             | —   | —            | —     | N = prescale value<br>(1, 8, 64, 256) |
|                    |                       |                                                                                                | Asynchronous                | 20                                                                                                                                                                       | —   | —            | ns    | —                                     |
| OS60               | F <sub>t1</sub>       | SOSCI/T1CK Oscillator Input frequency Range (oscillator enabled by setting bit TCS (T1CON<1>)) |                             | DC                                                                                                                                                                       | —   | 50           | kHz   | —                                     |
| TA20               | T <sub>CKEXTMRL</sub> | Delay from External TxCK Clock Edge to Timer Increment                                         |                             | $0.5 T_{CY}$                                                                                                                                                             |     | $1.5 T_{CY}$ | —     | —                                     |

**Note 1:** Timer1 is a Type A.

# PIC24HJXXXGPX06/X08/X10

**TABLE 24-23: TIMER2, 4, 6 AND 8 EXTERNAL CLOCK TIMING REQUIREMENTS**


| AC CHARACTERISTICS |            |                                                        |                             | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature    -40°C ≤ TA ≤ +85°C for Industrial |     |         |       |                                       |
|--------------------|------------|--------------------------------------------------------|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------|-----|---------|-------|---------------------------------------|
| Param No.          | Symbol     | Characteristic                                         |                             | Min                                                                                                                                    | Typ | Max     | Units | Conditions                            |
| TB10               | TtxH       | TxCK High Time                                         | Synchronous, no prescaler   | 0.5 Tcy + 20                                                                                                                           | —   | —       | ns    | Must also meet parameter TB15         |
|                    |            |                                                        | Synchronous, with prescaler | 10                                                                                                                                     | —   | —       | ns    |                                       |
| TB11               | TtxL       | TxCK Low Time                                          | Synchronous, no prescaler   | 0.5 Tcy + 20                                                                                                                           | —   | —       | ns    | Must also meet parameter TB15         |
|                    |            |                                                        | Synchronous, with prescaler | 10                                                                                                                                     | —   | —       | ns    |                                       |
| TB15               | TtxP       | TxCK Input Period                                      | Synchronous, no prescaler   | Tcy + 40                                                                                                                               | —   | —       | ns    | N = prescale value<br>(1, 8, 64, 256) |
|                    |            |                                                        | Synchronous, with prescaler | Greater of:<br>20 ns or<br>(Tcy + 40)/N                                                                                                |     |         |       |                                       |
| TB20               | TCKEXT-MRL | Delay from External TxCK Clock Edge to Timer Increment |                             | 0.5 Tcy                                                                                                                                | —   | 1.5 Tcy | —     | —                                     |

**TABLE 24-24: TIMER3, 5, 7 AND 9 EXTERNAL CLOCK TIMING REQUIREMENTS**

| AC CHARACTERISTICS |           |                                                        |                             | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature    -40°C ≤ TA ≤ +85°C for Industrial |     |         |       |                                    |
|--------------------|-----------|--------------------------------------------------------|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------|-----|---------|-------|------------------------------------|
| Param No.          | Symbol    | Characteristic                                         |                             | Min                                                                                                                                    | Typ | Max     | Units | Conditions                         |
| TC10               | TtxH      | TxCK High Time                                         | Synchronous                 | 0.5 TCY + 20                                                                                                                           | —   | —       | ns    | Must also meet parameter TC15      |
| TC11               | TtxL      | TxCK Low Time                                          | Synchronous                 | 0.5 TCY + 20                                                                                                                           | —   | —       | ns    | Must also meet parameter TC15      |
| TC15               | TtxP      | TxCK Input Period                                      | Synchronous, no prescaler   | TCY + 40                                                                                                                               | —   | —       | ns    | N = prescale value (1, 8, 64, 256) |
|                    |           |                                                        | Synchronous, with prescaler | Greater of: 20 ns or (TCY + 40)/N                                                                                                      |     |         |       |                                    |
| TC20               | TCKEXTMRL | Delay from External TxCK Clock Edge to Timer Increment |                             | 0.5 TCY                                                                                                                                | —   | 1.5 TCY | —     | —                                  |

# PIC24HJXXXGPX06/X08/X10

**FIGURE 24-6: INPUT CAPTURE (CAPx) TIMING CHARACTERISTICS**

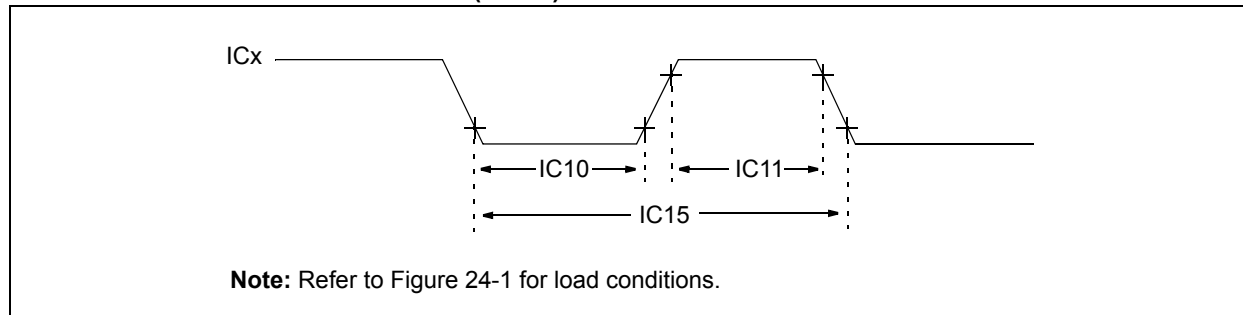


**TABLE 24-25: INPUT CAPTURE TIMING REQUIREMENTS**

| AC CHARACTERISTICS |        |                               | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature    -40°C ≤ TA ≤ +85°C for Industrial |              |     |       |                               |
|--------------------|--------|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|--------------|-----|-------|-------------------------------|
| Param No.          | Symbol | Characteristic <sup>(1)</sup> |                                                                                                                                        | Min          | Max | Units | Conditions                    |
| IC10               | TccL   | ICx Input Low Time            | No Prescaler                                                                                                                           | 0.5 Tcy + 20 | —   | ns    | —                             |
|                    |        |                               | With Prescaler                                                                                                                         | 10           | —   | ns    |                               |
| IC11               | TccH   | ICx Input High Time           | No Prescaler                                                                                                                           | 0.5 Tcy + 20 | —   | ns    | —                             |
|                    |        |                               | With Prescaler                                                                                                                         | 10           | —   | ns    |                               |
| IC15               | TccP   | ICx Input Period              |                                                                                                                                        | (Tcy + 40)/N | —   | ns    | N = prescale value (1, 4, 16) |

**Note 1:** These parameters are characterized but not tested in manufacturing.

**FIGURE 24-7: OUTPUT COMPARE MODULE (OCx) TIMING CHARACTERISTICS**

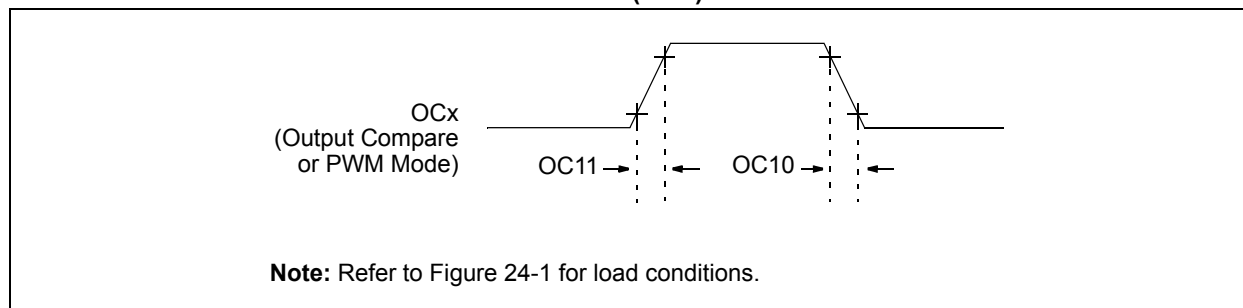


**TABLE 24-26: OUTPUT COMPARE MODULE TIMING REQUIREMENTS**

| AC CHARACTERISTICS |        | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |     |     |     |       |
|--------------------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----|-----|-------|
| Param No.          | Symbol | Characteristic <sup>(1)</sup>                                                                                                                                            | Min | Typ | Max | Units |
| OC10               | TccF   | OCx Output Fall Time                                                                                                                                                     | —   | —   | —   | ns    |
| OC11               | TccR   | OCx Output Rise Time                                                                                                                                                     | —   | —   | —   | ns    |

**Note 1:** These parameters are characterized but not tested in manufacturing.

# PIC24HJXXXGPX06/X08/X10

**FIGURE 24-8: OC/PWM MODULE TIMING CHARACTERISTICS**

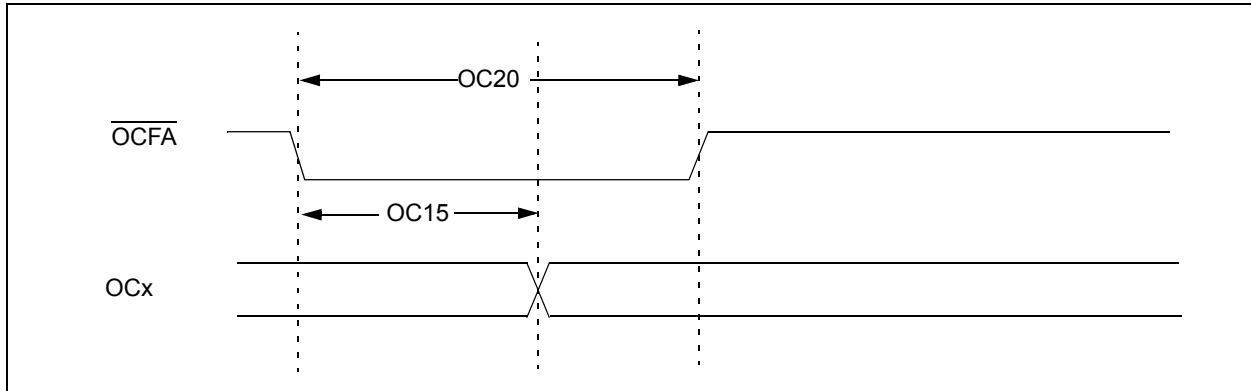


**TABLE 24-27: SIMPLE OC/PWM MODE TIMING REQUIREMENTS**

| AC CHARACTERISTICS |                  |                               | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |     |     |       |            |
|--------------------|------------------|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----|-------|------------|
| Param No.          | Symbol           | Characteristic <sup>(1)</sup> | Min                                                                                                                                                                      | Typ | Max | Units | Conditions |
| OC15               | T <sub>FD</sub>  | Fault Input to PWM I/O Change | —                                                                                                                                                                        | —   | 50  | ns    | —          |
| OC20               | T <sub>FLT</sub> | Fault Input Pulse-Width       | 50                                                                                                                                                                       | —   | —   | ns    | —          |

**Note 1:** These parameters are characterized but not tested in manufacturing.

# PIC24HJXXXGPX06/X08/X10

**FIGURE 24-9: SPIx MODULE MASTER MODE (CKE = 0) TIMING CHARACTERISTICS**

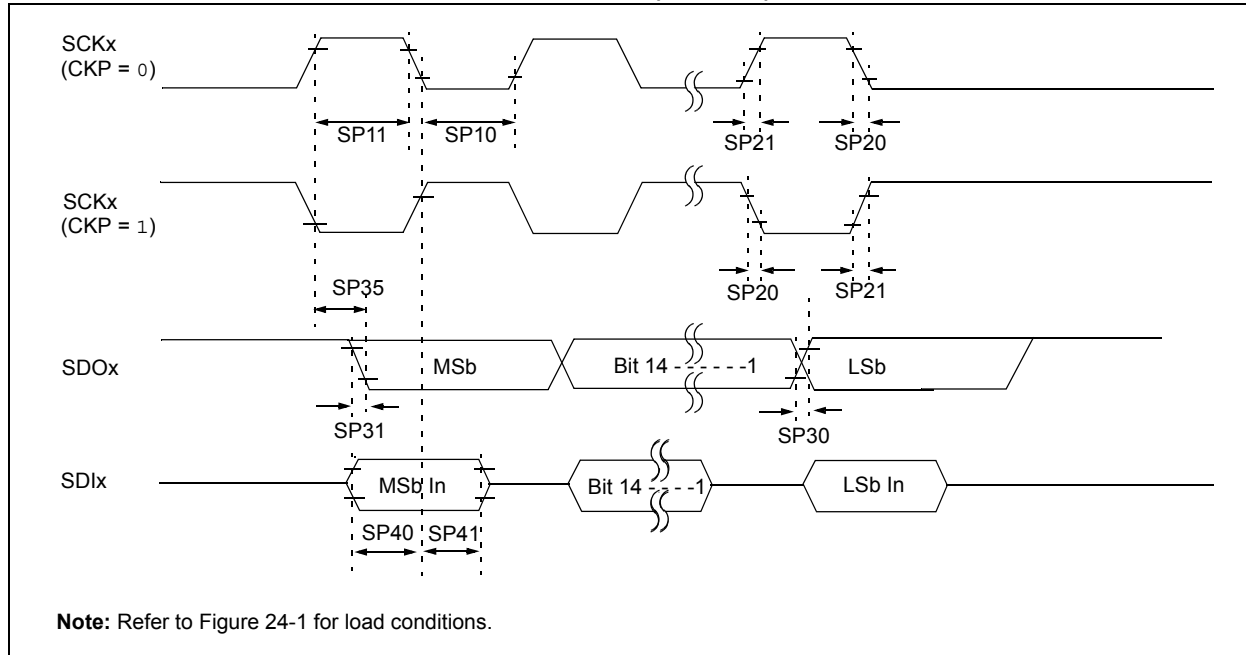


**TABLE 24-28: SPIx MASTER MODE (CKE = 0) TIMING REQUIREMENTS**

| AC CHARACTERISTICS |                       |                                            | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |                    |     |       |                                      |
|--------------------|-----------------------|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-----|-------|--------------------------------------|
| Param No.          | Symbol                | Characteristic <sup>(1)</sup>              | Min                                                                                                                                                                      | Typ <sup>(2)</sup> | Max | Units | Conditions                           |
| SP10               | TscL                  | SCKx Output Low Time                       | Tcy/2                                                                                                                                                                    | —                  | —   | ns    | See <b>Note 3</b>                    |
| SP11               | TscH                  | SCKx Output High Time                      | Tcy/2                                                                                                                                                                    | —                  | —   | ns    | See <b>Note 3</b>                    |
| SP20               | TscF                  | SCKx Output Fall Time                      | —                                                                                                                                                                        | —                  | —   | ns    | See parameter D032 and <b>Note 4</b> |
| SP21               | TscR                  | SCKx Output Rise Time                      | —                                                                                                                                                                        | —                  | —   | ns    | See parameter D031 and <b>Note 4</b> |
| SP30               | TdoF                  | SDOx Data Output Fall Time                 | —                                                                                                                                                                        | —                  | —   | ns    | See parameter D032 and <b>Note 4</b> |
| SP31               | TdoR                  | SDOx Data Output Rise Time                 | —                                                                                                                                                                        | —                  | —   | ns    | See parameter D031 and <b>Note 4</b> |
| SP35               | Tsch2doV,<br>TscL2doV | SDOx Data Output Valid after SCKx Edge     | —                                                                                                                                                                        | 6                  | 20  | ns    | —                                    |
| SP40               | TdiV2scH,<br>TdiV2scL | Setup Time of SDIx Data Input to SCKx Edge | 23                                                                                                                                                                       | —                  | —   | ns    | —                                    |
| SP41               | Tsch2diL,<br>TscL2diL | Hold Time of SDIx Data Input to SCKx Edge  | 30                                                                                                                                                                       | —                  | —   | ns    | —                                    |

- Note 1:** These parameters are characterized but not tested in manufacturing.
- Note 2:** Data in “Typ” column is at 3.3V, 25°C unless otherwise stated.
- Note 3:** The minimum clock period for SCKx is 100 ns. Therefore, the clock generated in Master mode must not violate this specification.
- Note 4:** Assumes 50 pF load on all SPIx pins.

# PIC24HJXXXGPX06/X08/X10

**FIGURE 24-10: SPIx MODULE MASTER MODE (CKE = 1) TIMING CHARACTERISTICS**

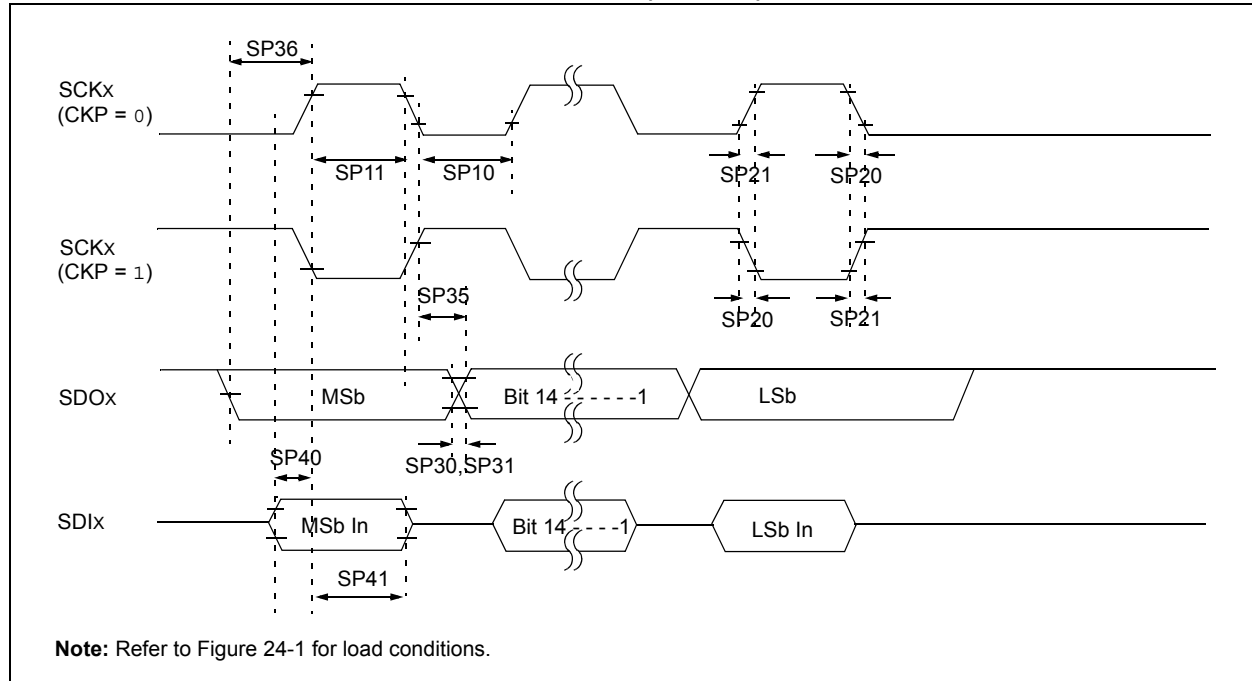

**TABLE 24-29: SPIx MODULE MASTER MODE (CKE = 1) TIMING REQUIREMENTS**

| AC CHARACTERISTICS |                       |                                            | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |                    |     |       |                    |
|--------------------|-----------------------|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-----|-------|--------------------|
| Param No.          | Symbol                | Characteristic <sup>(1)</sup>              | Min                                                                                                                                                                      | Typ <sup>(2)</sup> | Max | Units | Conditions         |
| SP10               | TscL                  | SCKx Output Low Time <sup>(3)</sup>        | $T_{CY}/2$                                                                                                                                                               | —                  | —   | ns    | —                  |
| SP11               | TscH                  | SCKx Output High Time <sup>(3)</sup>       | $T_{CY}/2$                                                                                                                                                               | —                  | —   | ns    | —                  |
| SP20               | TscF                  | SCKx Output Fall Time <sup>(4)</sup>       | —                                                                                                                                                                        | —                  | —   | ns    | See parameter D032 |
| SP21               | TscR                  | SCKx Output Rise Time <sup>(4)</sup>       | —                                                                                                                                                                        | —                  | —   | ns    | See parameter D031 |
| SP30               | TdoF                  | SDOx Data Output Fall Time <sup>(4)</sup>  | —                                                                                                                                                                        | —                  | —   | ns    | See parameter D032 |
| SP31               | TdoR                  | SDOx Data Output Rise Time <sup>(4)</sup>  | —                                                                                                                                                                        | —                  | —   | ns    | See parameter D031 |
| SP35               | Tsch2doV,<br>TscL2doV | SDOx Data Output Valid after SCKx Edge     | —                                                                                                                                                                        | 6                  | 20  | ns    | —                  |
| SP36               | TdoV2sc,<br>TdoV2scL  | SDOx Data Output Setup to First SCKx Edge  | 30                                                                                                                                                                       | —                  | —   | ns    | —                  |
| SP40               | TdiV2scH,<br>TdiV2scL | Setup Time of SDIx Data Input to SCKx Edge | 23                                                                                                                                                                       | —                  | —   | ns    | —                  |
| SP41               | Tsch2diL,<br>TscL2diL | Hold Time of SDIx Data Input to SCKx Edge  | 30                                                                                                                                                                       | —                  | —   | ns    | —                  |

**Note 1:** These parameters are characterized but not tested in manufacturing.


**2:** Data in “Typ” column is at 3.3V, 25°C unless otherwise stated.

**3:** The minimum clock period for SCKx is 100 ns. The clock generated in Master mode must not violate this specification.

**4:** Assumes 50 pF load on all SPIx pins.

# PIC24HJXXXGPX06/X08/X10

**FIGURE 24-11: SPIx MODULE SLAVE MODE (CKE = 0) TIMING CHARACTERISTICS**

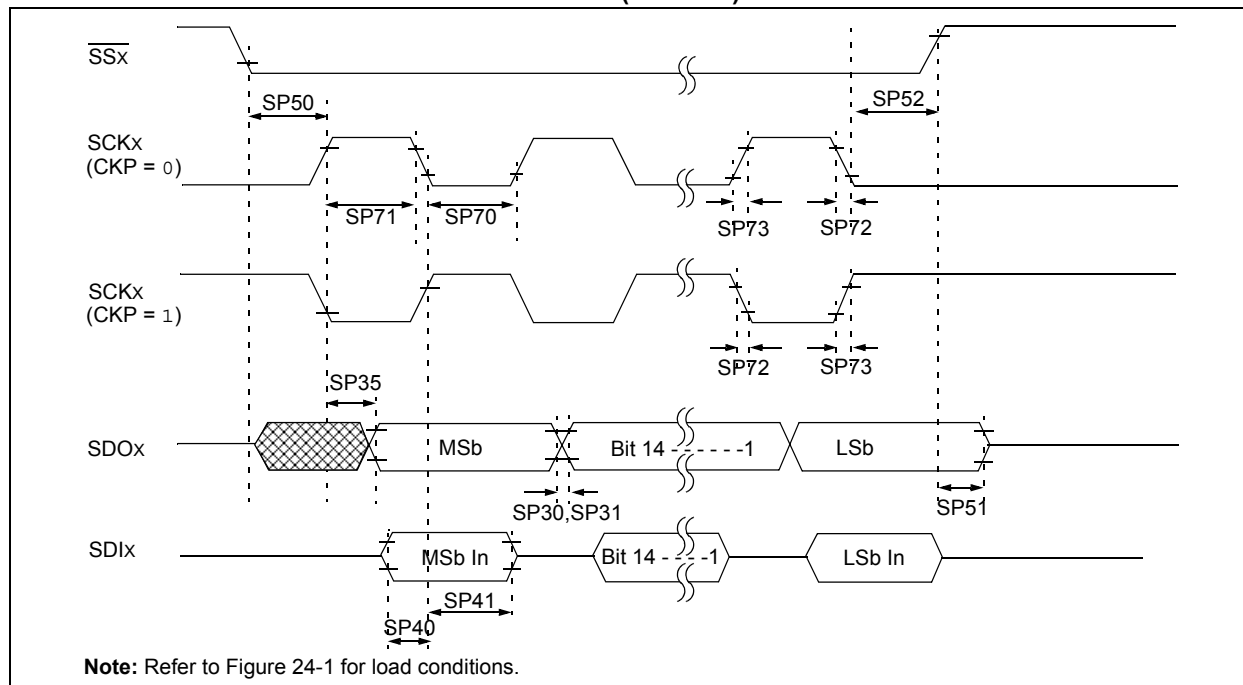

**TABLE 24-30: SPIx MODULE SLAVE MODE (CKE = 0) TIMING REQUIREMENTS**


| AC CHARACTERISTICS |                       |                                                    | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial |                    |     |       |                    |
|--------------------|-----------------------|----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|--------------------|-----|-------|--------------------|
| Param No.          | Symbol                | Characteristic <sup>(1)</sup>                      | Min                                                                                                                                 | Typ <sup>(2)</sup> | Max | Units | Conditions         |
| SP70               | TscL                  | SCKx Input Low Time                                | 30                                                                                                                                  | —                  | —   | ns    | —                  |
| SP71               | Tsch                  | SCKx Input High Time                               | 30                                                                                                                                  | —                  | —   | ns    | —                  |
| SP72               | TscF                  | SCKx Input Fall Time <sup>(3)</sup>                | —                                                                                                                                   | 10                 | 25  | ns    | —                  |
| SP73               | TscR                  | SCKx Input Rise Time <sup>(3)</sup>                | —                                                                                                                                   | 10                 | 25  | ns    | —                  |
| SP30               | TdoF                  | SDOx Data Output Fall Time <sup>(3)</sup>          | —                                                                                                                                   | —                  | —   | ns    | See parameter D032 |
| SP31               | TdoR                  | SDOx Data Output Rise Time <sup>(3)</sup>          | —                                                                                                                                   | —                  | —   | ns    | See parameter D031 |
| SP35               | Tsch2doV,<br>TscL2doV | SDOx Data Output Valid after SCKx Edge             | —                                                                                                                                   | —                  | 30  | ns    | —                  |
| SP40               | TdiV2scH,<br>TdiV2scL | Setup Time of SDIx Data Input to SCKx Edge         | 20                                                                                                                                  | —                  | —   | ns    | —                  |
| SP41               | Tsch2diL,<br>TscL2diL | Hold Time of SDIx Data Input to SCKx Edge          | 20                                                                                                                                  | —                  | —   | ns    | —                  |
| SP50               | TssL2scH,<br>TssL2scL | SSx ↓ to SCKx ↑ or SCKx Input                      | 120                                                                                                                                 | —                  | —   | ns    | —                  |
| SP51               | TssH2doZ              | SSx ↑ to SDOx Output High-Impedance <sup>(3)</sup> | 10                                                                                                                                  | —                  | 50  | ns    | —                  |
| SP52               | Tsch2ssH<br>TscL2ssH  | SSx after SCKx Edge                                | 1.5 Tcy + 40                                                                                                                        | —                  | —   | ns    | —                  |

**Note 1:** These parameters are characterized but not tested in manufacturing.

**Note 2:** Data in "Typ" column is at 3.3V, 25°C unless otherwise stated.

**Note 3:** Assumes 50 pF load on all SPIx pins.

**FIGURE 24-12: SPIx MODULE SLAVE MODE (CKE = 1) TIMING CHARACTERISTICS**

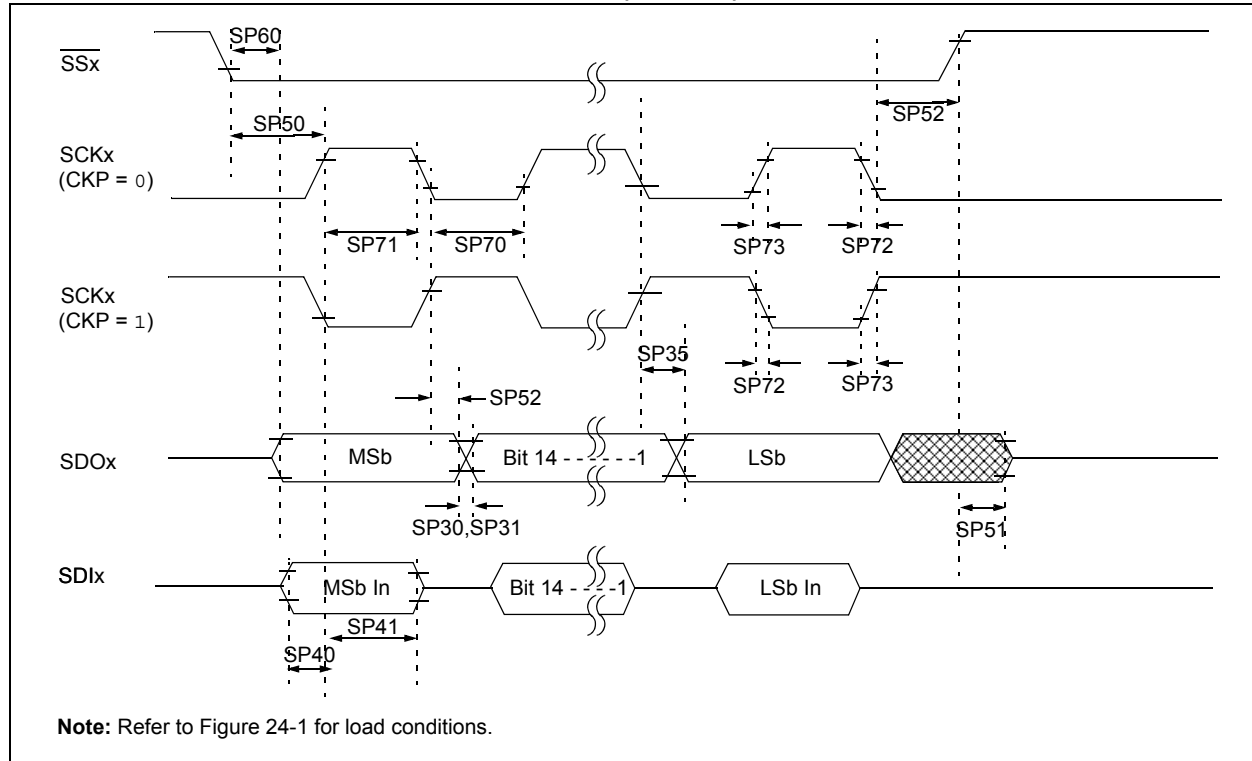


# PIC24HJXXXGPX06/X08/X10

**TABLE 24-31: SPIx MODULE SLAVE MODE (CKE = 1) TIMING REQUIREMENTS**


| AC CHARACTERISTICS |                       |                                                                        | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |                    |     |       |                    |
|--------------------|-----------------------|------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-----|-------|--------------------|
| Param No.          | Symbol                | Characteristic <sup>(1)</sup>                                          | Min                                                                                                                                                                      | Typ <sup>(2)</sup> | Max | Units | Conditions         |
| SP70               | TscL                  | SCKx Input Low Time                                                    | 30                                                                                                                                                                       | —                  | —   | ns    | —                  |
| SP71               | TscH                  | SCKx Input High Time                                                   | 30                                                                                                                                                                       | —                  | —   | ns    | —                  |
| SP72               | TscF                  | SCKx Input Fall Time <sup>(3)</sup>                                    | —                                                                                                                                                                        | 10                 | 25  | ns    | —                  |
| SP73               | TscR                  | SCKx Input Rise Time <sup>(3)</sup>                                    | —                                                                                                                                                                        | 10                 | 25  | ns    | —                  |
| SP30               | TdoF                  | SDOx Data Output Fall Time <sup>(3)</sup>                              | —                                                                                                                                                                        | —                  | —   | ns    | See parameter D032 |
| SP31               | TdoR                  | SDOx Data Output Rise Time <sup>(3)</sup>                              | —                                                                                                                                                                        | —                  | —   | ns    | See parameter D031 |
| SP35               | TscH2doV,<br>TscL2doV | SDOx Data Output Valid after SCKx Edge                                 | —                                                                                                                                                                        | —                  | 30  | ns    | —                  |
| SP40               | TdiV2scH,<br>TdiV2scL | Setup Time of SDIx Data Input to SCKx Edge                             | 20                                                                                                                                                                       | —                  | —   | ns    | —                  |
| SP41               | TscH2diL,<br>TscL2diL | Hold Time of SDIx Data Input to SCKx Edge                              | 20                                                                                                                                                                       | —                  | —   | ns    | —                  |
| SP50               | TssL2scH,<br>TssL2scL | $\overline{\text{SSx}}$ ↓ to SCKx ↓ or SCKx ↑ Input                    | 120                                                                                                                                                                      | —                  | —   | ns    | —                  |
| SP51               | TssH2doZ              | $\overline{\text{SSx}}$ ↑ to SDOx Output High-Impedance <sup>(4)</sup> | 10                                                                                                                                                                       | —                  | 50  | ns    | —                  |
| SP52               | TscH2ssH<br>TscL2ssH  | $\overline{\text{SSx}}$ ↑ after SCKx Edge                              | 1.5 Tcy + 40                                                                                                                                                             | —                  | —   | ns    | —                  |
| SP60               | TssL2doV              | SDOx Data Output Valid after $\overline{\text{SSx}}$ Edge              | —                                                                                                                                                                        | —                  | 50  | ns    | —                  |

- Note 1:** These parameters are characterized but not tested in manufacturing.  
**Note 2:** Data in “Typ” column is at 3.3V, 25°C unless otherwise stated.  
**Note 3:** The minimum clock period for SCKx is 100 ns. The clock generated in Master mode must not violate this specification.  
**Note 4:** Assumes 50 pF load on all SPIx pins.

**FIGURE 24-13: I2Cx BUS START/STOP BITS TIMING CHARACTERISTICS (MASTER MODE)**

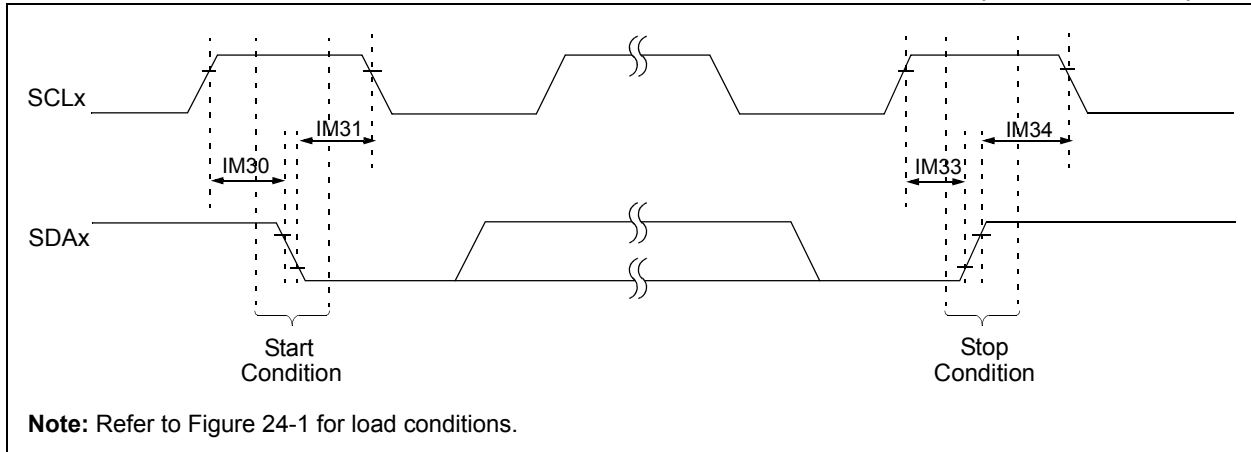

**FIGURE 24-14: I2Cx BUS DATA TIMING CHARACTERISTICS (MASTER MODE)**

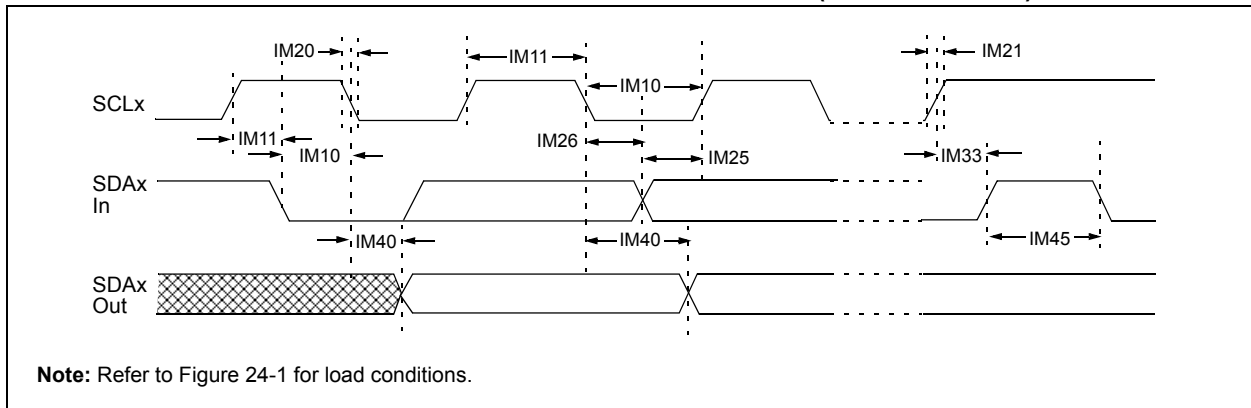

# PIC24HJXXXGPX06/X08/X10


**TABLE 24-32: I2Cx BUS DATA TIMING REQUIREMENTS (MASTER MODE)**

| AC CHARACTERISTICS |         |                            |                           | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |      |               |                                                               |
|--------------------|---------|----------------------------|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------------|---------------------------------------------------------------|
| Param No.          | Symbol  | Characteristic             |                           | Min <sup>(1)</sup>                                                                                                                                                       | Max  | Units         | Conditions                                                    |
| IM10               | TLO:SCL | Clock Low Time             | 100 kHz mode              | $T_{CY}/2 (BRG + 1)$                                                                                                                                                     | —    | $\mu\text{s}$ | —                                                             |
|                    |         |                            | 400 kHz mode              | $T_{CY}/2 (BRG + 1)$                                                                                                                                                     | —    | $\mu\text{s}$ | —                                                             |
|                    |         |                            | 1 MHz mode <sup>(2)</sup> | $T_{CY}/2 (BRG + 1)$                                                                                                                                                     | —    | $\mu\text{s}$ | —                                                             |
| IM11               | THI:SCL | Clock High Time            | 100 kHz mode              | $T_{CY}/2 (BRG + 1)$                                                                                                                                                     | —    | $\mu\text{s}$ | —                                                             |
|                    |         |                            | 400 kHz mode              | $T_{CY}/2 (BRG + 1)$                                                                                                                                                     | —    | $\mu\text{s}$ | —                                                             |
|                    |         |                            | 1 MHz mode <sup>(2)</sup> | $T_{CY}/2 (BRG + 1)$                                                                                                                                                     | —    | $\mu\text{s}$ | —                                                             |
| IM20               | TF:SCL  | SDAx and SCLx Fall Time    | 100 kHz mode              | —                                                                                                                                                                        | 300  | ns            | Cb is specified to be from 10 to 400 pF                       |
|                    |         |                            | 400 kHz mode              | $20 + 0.1 C_B$                                                                                                                                                           | 300  | ns            |                                                               |
|                    |         |                            | 1 MHz mode <sup>(2)</sup> | —                                                                                                                                                                        | 100  | ns            |                                                               |
| IM21               | TR:SCL  | SDAx and SCLx Rise Time    | 100 kHz mode              | —                                                                                                                                                                        | 1000 | ns            | Cb is specified to be from 10 to 400 pF                       |
|                    |         |                            | 400 kHz mode              | $20 + 0.1 C_B$                                                                                                                                                           | 300  | ns            |                                                               |
|                    |         |                            | 1 MHz mode <sup>(2)</sup> | —                                                                                                                                                                        | 300  | ns            |                                                               |
| IM25               | TSU:DAT | Data Input Setup Time      | 100 kHz mode              | 250                                                                                                                                                                      | —    | ns            | —                                                             |
|                    |         |                            | 400 kHz mode              | 100                                                                                                                                                                      | —    | ns            |                                                               |
|                    |         |                            | 1 MHz mode <sup>(2)</sup> | 40                                                                                                                                                                       | —    | ns            |                                                               |
| IM26               | THD:DAT | Data Input Hold Time       | 100 kHz mode              | 0                                                                                                                                                                        | —    | $\mu\text{s}$ | —                                                             |
|                    |         |                            | 400 kHz mode              | 0                                                                                                                                                                        | 0.9  | $\mu\text{s}$ |                                                               |
|                    |         |                            | 1 MHz mode <sup>(2)</sup> | 0.2                                                                                                                                                                      | —    | $\mu\text{s}$ |                                                               |
| IM30               | TSU:STA | Start Condition Setup Time | 100 kHz mode              | $T_{CY}/2 (BRG + 1)$                                                                                                                                                     | —    | $\mu\text{s}$ | Only relevant for Repeated Start condition                    |
|                    |         |                            | 400 kHz mode              | $T_{CY}/2 (BRG + 1)$                                                                                                                                                     | —    | $\mu\text{s}$ |                                                               |
|                    |         |                            | 1 MHz mode <sup>(2)</sup> | $T_{CY}/2 (BRG + 1)$                                                                                                                                                     | —    | $\mu\text{s}$ |                                                               |
| IM31               | THD:STA | Start Condition Hold Time  | 100 kHz mode              | $T_{CY}/2 (BRG + 1)$                                                                                                                                                     | —    | $\mu\text{s}$ | After this period the first clock pulse is generated          |
|                    |         |                            | 400 kHz mode              | $T_{CY}/2 (BRG + 1)$                                                                                                                                                     | —    | $\mu\text{s}$ |                                                               |
|                    |         |                            | 1 MHz mode <sup>(2)</sup> | $T_{CY}/2 (BRG + 1)$                                                                                                                                                     | —    | $\mu\text{s}$ |                                                               |
| IM33               | TSU:STO | Stop Condition Setup Time  | 100 kHz mode              | $T_{CY}/2 (BRG + 1)$                                                                                                                                                     | —    | $\mu\text{s}$ | —                                                             |
|                    |         |                            | 400 kHz mode              | $T_{CY}/2 (BRG + 1)$                                                                                                                                                     | —    | $\mu\text{s}$ |                                                               |
|                    |         |                            | 1 MHz mode <sup>(2)</sup> | $T_{CY}/2 (BRG + 1)$                                                                                                                                                     | —    | $\mu\text{s}$ |                                                               |
| IM34               | THD:STO | Stop Condition Hold Time   | 100 kHz mode              | $T_{CY}/2 (BRG + 1)$                                                                                                                                                     | —    | ns            | —                                                             |
|                    |         |                            | 400 kHz mode              | $T_{CY}/2 (BRG + 1)$                                                                                                                                                     | —    | ns            |                                                               |
|                    |         |                            | 1 MHz mode <sup>(2)</sup> | $T_{CY}/2 (BRG + 1)$                                                                                                                                                     | —    | ns            |                                                               |
| IM40               | TAA:SCL | Output Valid From Clock    | 100 kHz mode              | —                                                                                                                                                                        | 3500 | ns            | —                                                             |
|                    |         |                            | 400 kHz mode              | —                                                                                                                                                                        | 1000 | ns            | —                                                             |
|                    |         |                            | 1 MHz mode <sup>(2)</sup> | —                                                                                                                                                                        | 400  | ns            | —                                                             |
| IM45               | TBF:SDA | Bus Free Time              | 100 kHz mode              | 4.7                                                                                                                                                                      | —    | $\mu\text{s}$ | Time the bus must be free before a new transmission can start |
|                    |         |                            | 400 kHz mode              | 1.3                                                                                                                                                                      | —    | $\mu\text{s}$ |                                                               |
|                    |         |                            | 1 MHz mode <sup>(2)</sup> | 0.5                                                                                                                                                                      | —    | $\mu\text{s}$ |                                                               |
| IM50               | Cb      | Bus Capacitive Loading     |                           | —                                                                                                                                                                        | 400  | pF            | —                                                             |


**Note 1:** BRG is the value of the I<sup>2</sup>C Baud Rate Generator. Refer to **Section 19. “Inter-Integrated Circuit™ (I<sup>2</sup>C™)”** (DS70235) in the “PIC24H Family Reference Manual”. Please see the Microchip website ([www.microchip.com](http://www.microchip.com)) for the latest PIC24H Family Reference Manual chapters.

**2:** Maximum pin capacitance = 10 pF for all I2Cx pins (for 1 MHz mode only).

**FIGURE 24-15: I2Cx BUS START/STOP BITS TIMING CHARACTERISTICS (SLAVE MODE)**

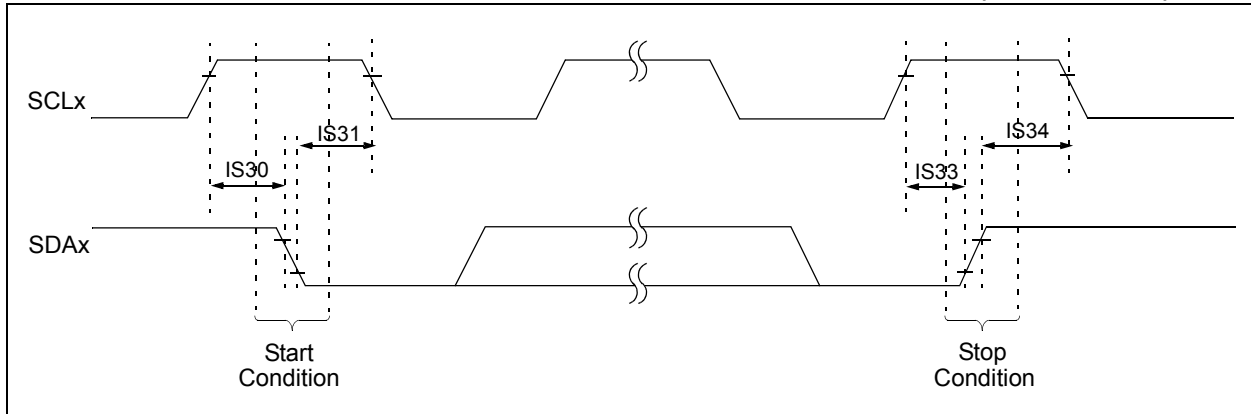

**FIGURE 24-16: I2Cx BUS DATA TIMING CHARACTERISTICS (SLAVE MODE)**

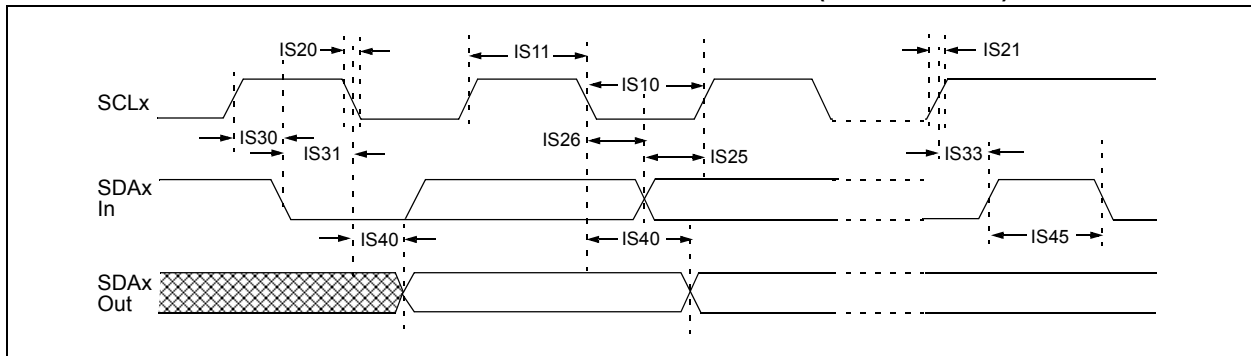

# PIC24HJXXXGPX06/X08/X10


**TABLE 24-33: I2Cx BUS DATA TIMING REQUIREMENTS (SLAVE MODE)**

| AC CHARACTERISTICS |         |                            |                           | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |      |               |                                                               |
|--------------------|---------|----------------------------|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------------|---------------------------------------------------------------|
| Param              | Symbol  | Characteristic             |                           | Min                                                                                                                                                                      | Max  | Units         | Conditions                                                    |
| IS10               | TLO:SCL | Clock Low Time             | 100 kHz mode              | 4.7                                                                                                                                                                      | —    | $\mu\text{s}$ | Device must operate at a minimum of 1.5 MHz                   |
|                    |         |                            | 400 kHz mode              | 1.3                                                                                                                                                                      | —    | $\mu\text{s}$ | Device must operate at a minimum of 10 MHz                    |
|                    |         |                            | 1 MHz mode <sup>(1)</sup> | 0.5                                                                                                                                                                      | —    | $\mu\text{s}$ | —                                                             |
| IS11               | THI:SCL | Clock High Time            | 100 kHz mode              | 4.0                                                                                                                                                                      | —    | $\mu\text{s}$ | Device must operate at a minimum of 1.5 MHz                   |
|                    |         |                            | 400 kHz mode              | 0.6                                                                                                                                                                      | —    | $\mu\text{s}$ | Device must operate at a minimum of 10 MHz                    |
|                    |         |                            | 1 MHz mode <sup>(1)</sup> | 0.5                                                                                                                                                                      | —    | $\mu\text{s}$ | —                                                             |
| IS20               | TF:SCL  | SDAx and SCLx Fall Time    | 100 kHz mode              | —                                                                                                                                                                        | 300  | ns            | CB is specified to be from 10 to 400 pF                       |
|                    |         |                            | 400 kHz mode              | $20 + 0.1 C_B$                                                                                                                                                           | 300  | ns            |                                                               |
|                    |         |                            | 1 MHz mode <sup>(1)</sup> | —                                                                                                                                                                        | 100  | ns            |                                                               |
| IS21               | TR:SCL  | SDAx and SCLx Rise Time    | 100 kHz mode              | —                                                                                                                                                                        | 1000 | ns            | CB is specified to be from 10 to 400 pF                       |
|                    |         |                            | 400 kHz mode              | $20 + 0.1 C_B$                                                                                                                                                           | 300  | ns            |                                                               |
|                    |         |                            | 1 MHz mode <sup>(1)</sup> | —                                                                                                                                                                        | 300  | ns            |                                                               |
| IS25               | TSU:DAT | Data Input Setup Time      | 100 kHz mode              | 250                                                                                                                                                                      | —    | ns            | —                                                             |
|                    |         |                            | 400 kHz mode              | 100                                                                                                                                                                      | —    | ns            |                                                               |
|                    |         |                            | 1 MHz mode <sup>(1)</sup> | 100                                                                                                                                                                      | —    | ns            |                                                               |
| IS26               | THD:DAT | Data Input Hold Time       | 100 kHz mode              | 0                                                                                                                                                                        | —    | $\mu\text{s}$ | —                                                             |
|                    |         |                            | 400 kHz mode              | 0                                                                                                                                                                        | 0.9  | $\mu\text{s}$ |                                                               |
|                    |         |                            | 1 MHz mode <sup>(1)</sup> | 0                                                                                                                                                                        | 0.3  | $\mu\text{s}$ |                                                               |
| IS30               | TSU:STA | Start Condition Setup Time | 100 kHz mode              | 4.7                                                                                                                                                                      | —    | $\mu\text{s}$ | Only relevant for Repeated Start condition                    |
|                    |         |                            | 400 kHz mode              | 0.6                                                                                                                                                                      | —    | $\mu\text{s}$ |                                                               |
|                    |         |                            | 1 MHz mode <sup>(1)</sup> | 0.25                                                                                                                                                                     | —    | $\mu\text{s}$ |                                                               |
| IS31               | THD:STA | Start Condition Hold Time  | 100 kHz mode              | 4.0                                                                                                                                                                      | —    | $\mu\text{s}$ | After this period, the first clock pulse is generated         |
|                    |         |                            | 400 kHz mode              | 0.6                                                                                                                                                                      | —    | $\mu\text{s}$ |                                                               |
|                    |         |                            | 1 MHz mode <sup>(1)</sup> | 0.25                                                                                                                                                                     | —    | $\mu\text{s}$ |                                                               |
| IS33               | TSU:STO | Stop Condition Setup Time  | 100 kHz mode              | 4.7                                                                                                                                                                      | —    | $\mu\text{s}$ | —                                                             |
|                    |         |                            | 400 kHz mode              | 0.6                                                                                                                                                                      | —    | $\mu\text{s}$ |                                                               |
|                    |         |                            | 1 MHz mode <sup>(1)</sup> | 0.6                                                                                                                                                                      | —    | $\mu\text{s}$ |                                                               |
| IS34               | THD:STO | Stop Condition Hold Time   | 100 kHz mode              | 4000                                                                                                                                                                     | —    | ns            | —                                                             |
|                    |         |                            | 400 kHz mode              | 600                                                                                                                                                                      | —    | ns            |                                                               |
|                    |         |                            | 1 MHz mode <sup>(1)</sup> | 250                                                                                                                                                                      | —    | ns            |                                                               |
| IS40               | TAA:SCL | Output Valid From Clock    | 100 kHz mode              | 0                                                                                                                                                                        | 3500 | ns            | —                                                             |
|                    |         |                            | 400 kHz mode              | 0                                                                                                                                                                        | 1000 | ns            |                                                               |
|                    |         |                            | 1 MHz mode <sup>(1)</sup> | 0                                                                                                                                                                        | 350  | ns            |                                                               |
| IS45               | TBF:SDA | Bus Free Time              | 100 kHz mode              | 4.7                                                                                                                                                                      | —    | $\mu\text{s}$ | Time the bus must be free before a new transmission can start |
|                    |         |                            | 400 kHz mode              | 1.3                                                                                                                                                                      | —    | $\mu\text{s}$ |                                                               |
|                    |         |                            | 1 MHz mode <sup>(1)</sup> | 0.5                                                                                                                                                                      | —    | $\mu\text{s}$ |                                                               |
| IS50               | CB      | Bus Capacitive Loading     |                           | —                                                                                                                                                                        | 400  | pF            | —                                                             |

**Note 1:** Maximum pin capacitance = 10 pF for all I2Cx pins (for 1 MHz mode only).

# PIC24HJXXXGPX06/X08/X10

**FIGURE 24-17: ECAN™ MODULE I/O TIMING CHARACTERISTICS**

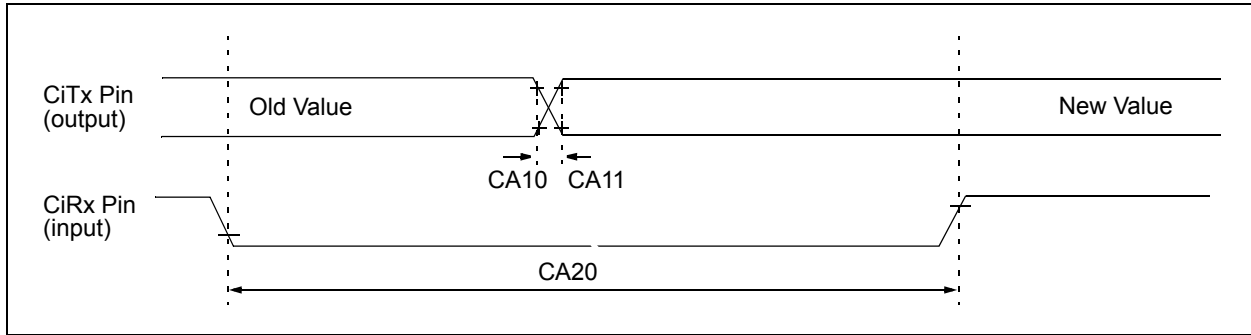

**TABLE 24-34: ECAN™ MODULE I/O TIMING REQUIREMENTS**

| AC CHARACTERISTICS |        |                                           | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |                    |     |       |                    |
|--------------------|--------|-------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-----|-------|--------------------|
| Param No.          | Symbol | Characteristic <sup>(1)</sup>             | Min                                                                                                                                                                      | Typ <sup>(2)</sup> | Max | Units | Conditions         |
| CA10               | TioF   | Port Output Fall Time                     | —                                                                                                                                                                        | —                  | —   | ns    | See parameter D032 |
| CA11               | TioR   | Port Output Rise Time                     | —                                                                                                                                                                        | —                  | —   | ns    | See parameter D031 |
| CA20               | Tcwf   | Pulse-Width to Trigger CAN Wake-up Filter | 120                                                                                                                                                                      | —                  | —   | ns    | —                  |

**Note 1:** These parameters are characterized but not tested in manufacturing.

**2:** Data in "Typ" column is at 3.3V, 25°C unless otherwise stated. Parameters are for design guidance only and are not tested.

# PIC24HJXXXGPX06/X08/X10

**TABLE 24-35: ADC MODULE SPECIFICATIONS**

| AC CHARACTERISTICS |        |                                                | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_{\text{A}} \leq +85^{\circ}\text{C}$ for Industrial |            |                                  |                                |                                                                                         |
|--------------------|--------|------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------------------------------|--------------------------------|-----------------------------------------------------------------------------------------|
| Param No.          | Symbol | Characteristic                                 | Min.                                                                                                                                                                              | Typ        | Max.                             | Units                          | Conditions                                                                              |
| Device Supply      |        |                                                |                                                                                                                                                                                   |            |                                  |                                |                                                                                         |
| AD01               | AVDD   | Module VDD Supply                              | Greater of<br>VDD – 0.3<br>or 3.0                                                                                                                                                 | —          | Lesser of<br>VDD + 0.3<br>or 3.6 | V                              | —                                                                                       |
| AD02               | AVSS   | Module Vss Supply                              | Vss – 0.3                                                                                                                                                                         | —          | Vss + 0.3                        | V                              | —                                                                                       |
| Reference Inputs   |        |                                                |                                                                                                                                                                                   |            |                                  |                                |                                                                                         |
| AD05               | VREFH  | Reference Voltage High                         | AVSS + 2.7                                                                                                                                                                        | —          | AVDD                             | V                              | See <b>Note 1</b>                                                                       |
| AD05a              |        |                                                | 3.0                                                                                                                                                                               | —          | 3.6                              | V                              | VREFH = AVDD<br>VREFL = AVSS = 0                                                        |
| AD06               | VREFL  | Reference Voltage Low                          | AVSS                                                                                                                                                                              | —          | AVDD – 2.7                       | V                              | See <b>Note 1</b>                                                                       |
| AD06a              |        |                                                | 0                                                                                                                                                                                 | —          | 0                                | V                              | VREFH = AVDD<br>VREFL = AVSS = 0                                                        |
| AD07               | VREF   | Absolute Reference Voltage                     | 2.7                                                                                                                                                                               | —          | 3.6                              | V                              | VREF = VREFH - VREFL                                                                    |
| AD08               | IREF   | Current Drain                                  | —<br>—                                                                                                                                                                            | 250<br>—   | 550<br>10                        | $\mu\text{A}$<br>$\mu\text{A}$ | ADC operating, see <b>Note 1</b><br>ADC off, see <b>Note 1</b>                          |
| AD08a              | IAD    | Operating Current                              | —<br>—                                                                                                                                                                            | 7.0<br>2.7 | 9.0<br>3.2                       | mA<br>mA                       | 10-bit ADC mode, See <b>Note 2</b><br>12-bit ADC mode, See <b>Note 2</b>                |
| Analog Input       |        |                                                |                                                                                                                                                                                   |            |                                  |                                |                                                                                         |
| AD12               | VINH   | Input Voltage Range VINH                       | VINL                                                                                                                                                                              | —          | VREFH                            | V                              | This voltage reflects Sample and Hold Channels 0, 1, 2, and 3 (CH0-CH3), positive input |
| AD13               | VINL   | Input Voltage Range VINL                       | VREFL                                                                                                                                                                             | —          | AVSS + 1V                        | V                              | This voltage reflects Sample and Hold Channels 0, 1, 2, and 3 (CH0-CH3), negative input |
| AD17               | RIN    | Recommended Impedance of Analog Voltage Source | —<br>—                                                                                                                                                                            | —<br>—     | 200<br>200                       | $\Omega$<br>$\Omega$           | 10-bit ADC<br>12-bit ADC                                                                |

**Note 1:** These parameters are not characterized or tested in manufacturing.

**2:** These parameters are characterized; but not tested in manufacturing

# PIC24HJXXXGPX06/X08/X10

**TABLE 24-36: ADC MODULE SPECIFICATIONS (12-BIT MODE)**


| AC CHARACTERISTICS                                                         |        |                                | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |      |      |       |                                                                                                              |
|----------------------------------------------------------------------------|--------|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|-------|--------------------------------------------------------------------------------------------------------------|
| Param No.                                                                  | Symbol | Characteristic                 | Min.                                                                                                                                                                     | Typ  | Max. | Units | Conditions                                                                                                   |
| <b>ADC Accuracy (12-bit Mode) – Measurements with external VREF+/VREF-</b> |        |                                |                                                                                                                                                                          |      |      |       |                                                                                                              |
| AD20a                                                                      | Nr     | Resolution                     | 12 data bits                                                                                                                                                             |      |      | bits  |                                                                                                              |
| AD21a                                                                      | INL    | Integral Nonlinearity          | -2                                                                                                                                                                       | —    | +2   | LSb   | V <sub>INL</sub> = AV <sub>SS</sub> = V <sub>REFL</sub> = 0V,<br>AV <sub>DD</sub> = V <sub>REFH</sub> = 3.6V |
| AD22a                                                                      | DNL    | Differential Nonlinearity      | >-1                                                                                                                                                                      | —    | <1   | LSb   | V <sub>INL</sub> = AV <sub>SS</sub> = V <sub>REFL</sub> = 0V,<br>AV <sub>DD</sub> = V <sub>REFH</sub> = 3.6V |
| AD23a                                                                      | GERR   | Gain Error                     | 1.25                                                                                                                                                                     | 1.5  | 3    | LSb   | V <sub>INL</sub> = AV <sub>SS</sub> = V <sub>REFL</sub> = 0V,<br>AV <sub>DD</sub> = V <sub>REFH</sub> = 3.6V |
| AD24a                                                                      | EOFF   | Offset Error                   | 1.25                                                                                                                                                                     | 1.52 | 2    | LSb   | V <sub>INL</sub> = AV <sub>SS</sub> = V <sub>REFL</sub> = 0V,<br>AV <sub>DD</sub> = V <sub>REFH</sub> = 3.6V |
| AD25a                                                                      | —      | Monotonicity                   | —                                                                                                                                                                        | —    | —    | —     | Guaranteed                                                                                                   |
| <b>ADC Accuracy (12-bit Mode) – Measurements with internal VREF+/VREF-</b> |        |                                |                                                                                                                                                                          |      |      |       |                                                                                                              |
| AD20a                                                                      | Nr     | Resolution                     | 12 data bits                                                                                                                                                             |      |      | bits  |                                                                                                              |
| AD21a                                                                      | INL    | Integral Nonlinearity          | -2                                                                                                                                                                       | —    | +2   | LSb   | V <sub>INL</sub> = AV <sub>SS</sub> = 0V, AV <sub>DD</sub> = 3.6V                                            |
| AD22a                                                                      | DNL    | Differential Nonlinearity      | >-1                                                                                                                                                                      | —    | <1   | LSb   | V <sub>INL</sub> = AV <sub>SS</sub> = 0V, AV <sub>DD</sub> = 3.6V                                            |
| AD23a                                                                      | GERR   | Gain Error                     | 2                                                                                                                                                                        | 3    | 7    | LSb   | V <sub>INL</sub> = AV <sub>SS</sub> = 0V, AV <sub>DD</sub> = 3.6V                                            |
| AD24a                                                                      | EOFF   | Offset Error                   | 2                                                                                                                                                                        | 3    | 5    | LSb   | V <sub>INL</sub> = AV <sub>SS</sub> = 0V, AV <sub>DD</sub> = 3.6V                                            |
| AD25a                                                                      | —      | Monotonicity                   | —                                                                                                                                                                        | —    | —    | —     | Guaranteed                                                                                                   |
| <b>Dynamic Performance (12-bit Mode)</b>                                   |        |                                |                                                                                                                                                                          |      |      |       |                                                                                                              |
| AD30a                                                                      | THD    | Total Harmonic Distortion      | -77                                                                                                                                                                      | -69  | -61  | dB    | —                                                                                                            |
| AD31a                                                                      | SINAD  | Signal to Noise and Distortion | 59                                                                                                                                                                       | 63   | 64   | dB    | —                                                                                                            |
| AD32a                                                                      | SFDR   | Spurious Free Dynamic Range    | 63                                                                                                                                                                       | 72   | 74   | dB    | —                                                                                                            |
| AD33a                                                                      | FNYQ   | Input Signal Bandwidth         | —                                                                                                                                                                        | —    | 250  | kHz   | —                                                                                                            |
| AD34a                                                                      | ENOB   | Effective Number of Bits       | 10.95                                                                                                                                                                    | 11.1 | —    | bits  | —                                                                                                            |

# PIC24HJXXXGPX06/X08/X10

TABLE 24-37: ADC MODULE SPECIFICATIONS (10-BIT MODE)

| AC CHARACTERISTICS                                                         |        |                                | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |     |      |       |                                                                                                              |
|----------------------------------------------------------------------------|--------|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|------|-------|--------------------------------------------------------------------------------------------------------------|
| Param No.                                                                  | Symbol | Characteristic                 | Min.                                                                                                                                                                     | Typ | Max. | Units | Conditions                                                                                                   |
| <b>ADC Accuracy (10-bit Mode) – Measurements with external VREF+/VREF-</b> |        |                                |                                                                                                                                                                          |     |      |       |                                                                                                              |
| AD20b                                                                      | Nr     | Resolution                     | 10 data bits                                                                                                                                                             |     |      | bits  |                                                                                                              |
| AD21b                                                                      | INL    | Integral Nonlinearity          | -1.5                                                                                                                                                                     | —   | +1.5 | LSb   | V <sub>INL</sub> = AV <sub>SS</sub> = V <sub>REFL</sub> = 0V,<br>AV <sub>DD</sub> = V <sub>REFH</sub> = 3.6V |
| AD22b                                                                      | DNL    | Differential Nonlinearity      | >-1                                                                                                                                                                      | —   | <1   | LSb   | V <sub>INL</sub> = AV <sub>SS</sub> = V <sub>REFL</sub> = 0V,<br>AV <sub>DD</sub> = V <sub>REFH</sub> = 3.6V |
| AD23b                                                                      | GERR   | Gain Error                     | 1                                                                                                                                                                        | 3   | 6    | LSb   | V <sub>INL</sub> = AV <sub>SS</sub> = V <sub>REFL</sub> = 0V,<br>AV <sub>DD</sub> = V <sub>REFH</sub> = 3.6V |
| AD24b                                                                      | EOFF   | Offset Error                   | 1                                                                                                                                                                        | 2   | 5    | LSb   | V <sub>INL</sub> = AV <sub>SS</sub> = V <sub>REFL</sub> = 0V,<br>AV <sub>DD</sub> = V <sub>REFH</sub> = 3.6V |
| AD25b                                                                      | —      | Monotonicity                   | —                                                                                                                                                                        | —   | —    | —     | Guaranteed                                                                                                   |
| <b>ADC Accuracy (10-bit Mode) – Measurements with internal VREF+/VREF-</b> |        |                                |                                                                                                                                                                          |     |      |       |                                                                                                              |
| AD20b                                                                      | Nr     | Resolution                     | 10 data bits                                                                                                                                                             |     |      | bits  |                                                                                                              |
| AD21b                                                                      | INL    | Integral Nonlinearity          | -1                                                                                                                                                                       | —   | +1   | LSb   | V <sub>INL</sub> = AV <sub>SS</sub> = 0V, AV <sub>DD</sub> = 3.6V                                            |
| AD22b                                                                      | DNL    | Differential Nonlinearity      | >-1                                                                                                                                                                      | —   | <1   | LSb   | V <sub>INL</sub> = AV <sub>SS</sub> = 0V, AV <sub>DD</sub> = 3.6V                                            |
| AD23b                                                                      | GERR   | Gain Error                     | 1                                                                                                                                                                        | 5   | 6    | LSb   | V <sub>INL</sub> = AV <sub>SS</sub> = 0V, AV <sub>DD</sub> = 3.6V                                            |
| AD24b                                                                      | EOFF   | Offset Error                   | 1                                                                                                                                                                        | 2   | 3    | LSb   | V <sub>INL</sub> = AV <sub>SS</sub> = 0V, AV <sub>DD</sub> = 3.6V                                            |
| AD25b                                                                      | —      | Monotonicity                   | —                                                                                                                                                                        | —   | —    | —     | Guaranteed                                                                                                   |
| <b>Dynamic Performance (10-bit Mode)</b>                                   |        |                                |                                                                                                                                                                          |     |      |       |                                                                                                              |
| AD30b                                                                      | THD    | Total Harmonic Distortion      | —                                                                                                                                                                        | -64 | -67  | dB    | —                                                                                                            |
| AD31b                                                                      | SINAD  | Signal to Noise and Distortion | —                                                                                                                                                                        | 57  | 58   | dB    | —                                                                                                            |
| AD32b                                                                      | SFDR   | Spurious Free Dynamic Range    | —                                                                                                                                                                        | 60  | 62   | dB    | —                                                                                                            |
| AD33b                                                                      | FNYQ   | Input Signal Bandwidth         | —                                                                                                                                                                        | —   | 550  | kHz   | —                                                                                                            |
| AD34b                                                                      | ENOB   | Effective Number of Bits       | 9.1                                                                                                                                                                      | 9.7 | 9.8  | bits  | —                                                                                                            |

**FIGURE 24-18: ADC CONVERSION (12-BIT MODE) TIMING CHARACTERISTICS**  
(ASAM = 0, SSRC<2:0> = 000)

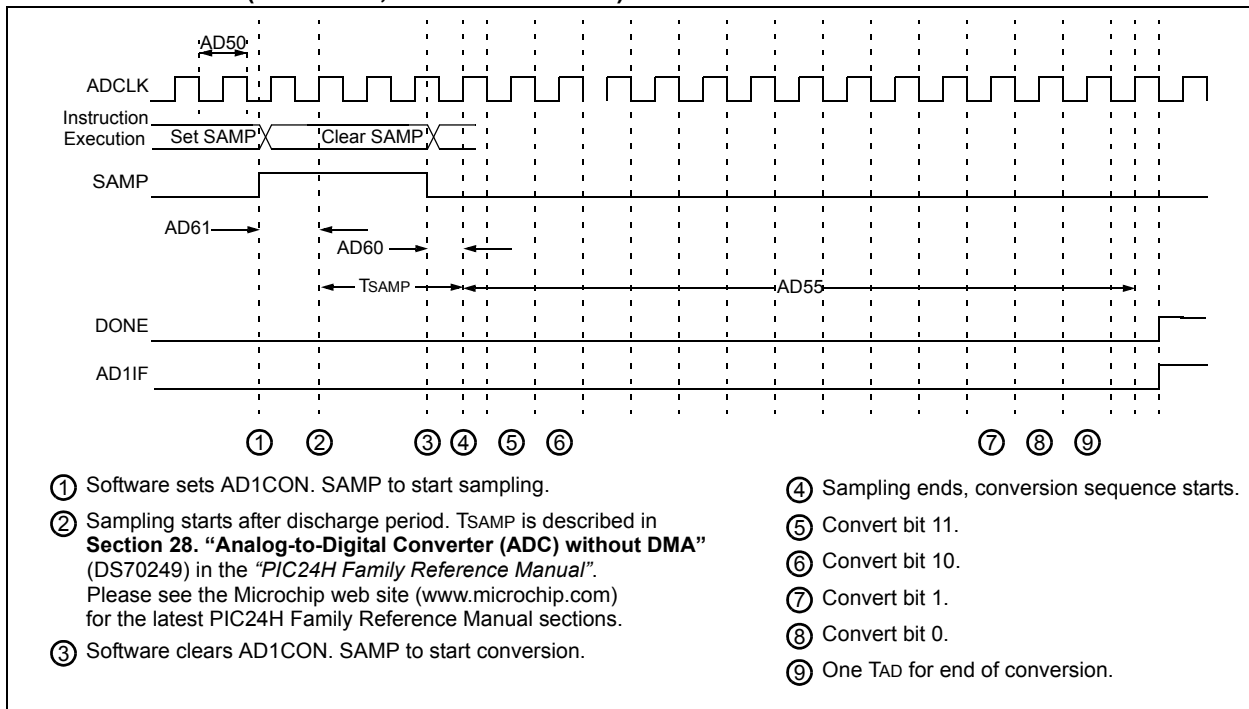


# PIC24HJXXXGPX06/X08/X10

**TABLE 24-38: ADC CONVERSION (12-BIT MODE) TIMING REQUIREMENTS**


| AC CHARACTERISTICS                    |        |                                                                        | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |                    |         |       |                                   |
|---------------------------------------|--------|------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|---------|-------|-----------------------------------|
| Param No.                             | Symbol | Characteristic                                                         | Min.                                                                                                                                                                     | Typ <sup>(2)</sup> | Max.    | Units | Conditions                        |
| <b>Clock Parameters<sup>(1)</sup></b> |        |                                                                        |                                                                                                                                                                          |                    |         |       |                                   |
| AD50                                  | TAD    | ADC Clock Period                                                       | 117.6                                                                                                                                                                    | —                  | —       | ns    | —                                 |
| AD51                                  | tRC    | ADC Internal RC Oscillator Period                                      | —                                                                                                                                                                        | 250                | —       | ns    | —                                 |
| <b>Conversion Rate</b>                |        |                                                                        |                                                                                                                                                                          |                    |         |       |                                   |
| AD55                                  | tCONV  | Conversion Time                                                        | —                                                                                                                                                                        | 14 TAD             | —       | ns    | —                                 |
| AD56                                  | FCNV   | Throughput Rate                                                        | —                                                                                                                                                                        | —                  | 500     | ksps  | —                                 |
| AD57                                  | TSAMP  | Sample Time                                                            | 3 TAD                                                                                                                                                                    | —                  | —       | —     | —                                 |
| <b>Timing Parameters</b>              |        |                                                                        |                                                                                                                                                                          |                    |         |       |                                   |
| AD60                                  | tPCS   | Conversion Start from Sample Trigger <sup>(2)</sup>                    | 2.0 TAD                                                                                                                                                                  | —                  | 3.0 TAD | —     | Auto convert trigger not selected |
| AD61                                  | tPSS   | Sample Start from Setting Sample (SAMP) bit <sup>(2)</sup>             | 2.0 TAD                                                                                                                                                                  | —                  | 3.0 TAD | —     | —                                 |
| AD62                                  | tCSS   | Conversion Completion to Sample Start (ASAM = 1) <sup>(2)</sup>        | —                                                                                                                                                                        | 0.5 TAD            | —       | —     | —                                 |
| AD63                                  | tDPU   | Time to Stabilize Analog Stage from ADC Off to ADC On <sup>(2,3)</sup> | —                                                                                                                                                                        | —                  | 20      | μs    | —                                 |

- Note 1:** Because the sample caps eventually loses charge, clock rates below 10 kHz may affect linearity performance, especially at elevated temperatures.
- 2:** These parameters are characterized but not tested in manufacturing.
- 3:** tDPU is the time required for the ADC module to stabilize when it is turned on (AD1CON1<ADON> = 1). During this time, the ADC result is indeterminate.

**FIGURE 24-19: ADC CONVERSION (10-BIT MODE) TIMING CHARACTERISTICS (CHPS<1:0> = 01, SIMSAM = 0, ASAM = 0, SSRC<2:0> = 000)**

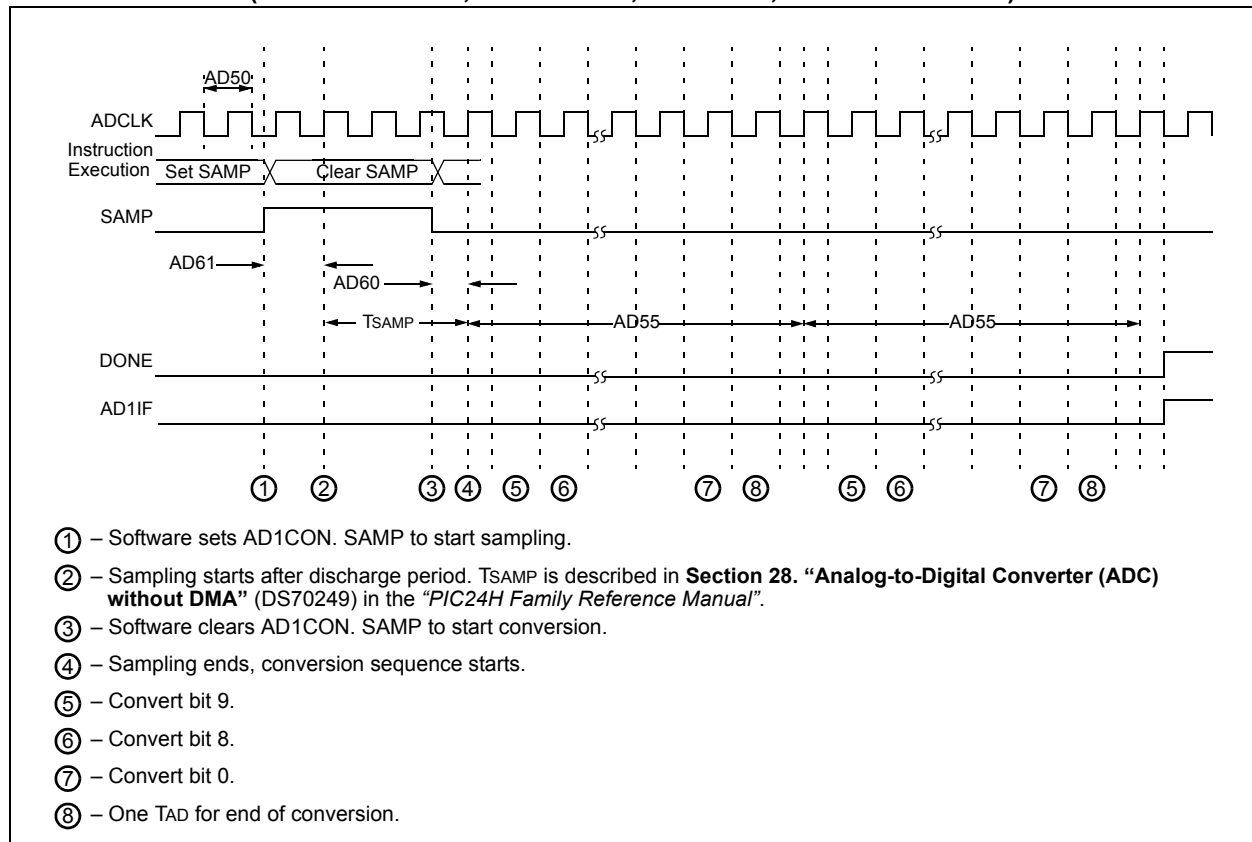

**FIGURE 24-20: ADC CONVERSION (10-BIT MODE) TIMING CHARACTERISTICS (CHPS<1:0> = 01, SIMSAM = 0, ASAM = 1, SSRC<2:0> = 111, SAMC<4:0> = 00001)**

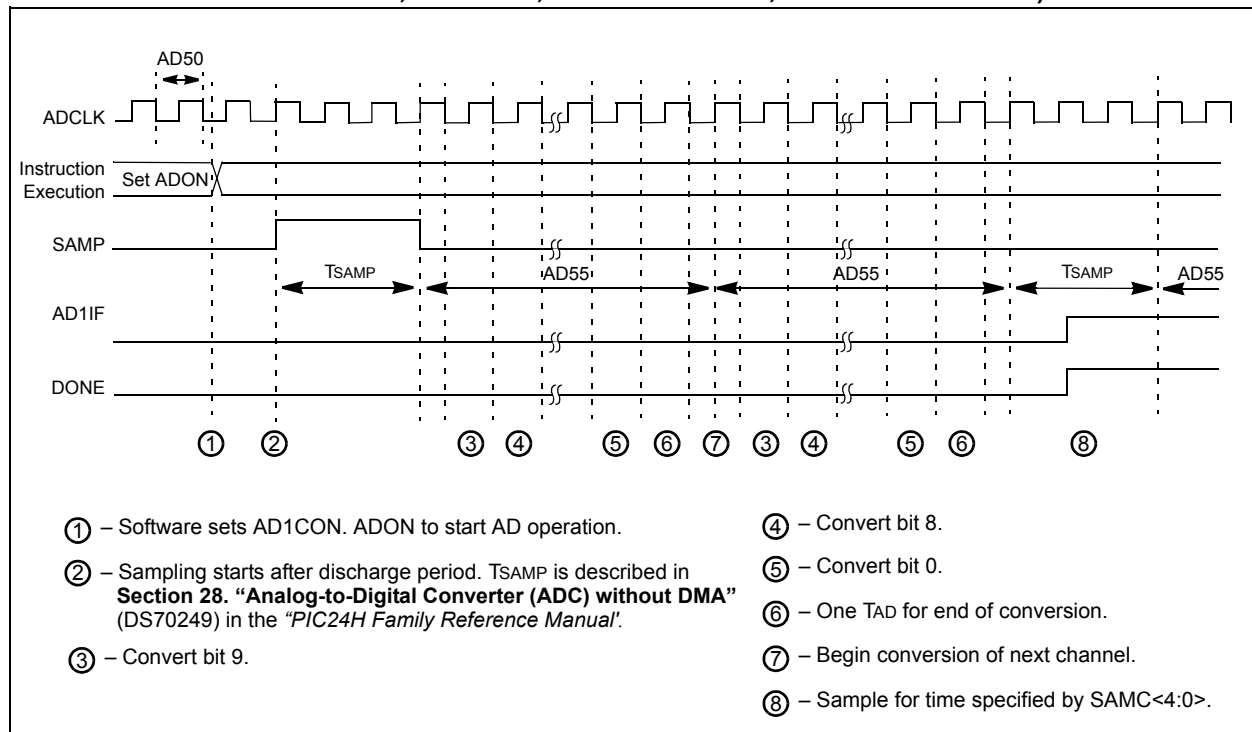

# PIC24HJXXXGPX06/X08/X10

**TABLE 24-39: ADC CONVERSION (10-BIT MODE) TIMING REQUIREMENTS**

| AC CHARACTERISTICS       |        |                                                                        | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |                    |         |       |                                   |
|--------------------------|--------|------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|---------|-------|-----------------------------------|
| Param No.                | Symbol | Characteristic                                                         | Min.                                                                                                                                                                     | Typ <sup>(1)</sup> | Max.    | Units | Conditions                        |
| <b>Clock Parameters</b>  |        |                                                                        |                                                                                                                                                                          |                    |         |       |                                   |
| AD50                     | TAD    | ADC Clock Period                                                       | 76                                                                                                                                                                       | —                  | —       | ns    | —                                 |
| AD51                     | trc    | ADC Internal RC Oscillator Period                                      | —                                                                                                                                                                        | 250                | —       | ns    | —                                 |
| <b>Conversion Rate</b>   |        |                                                                        |                                                                                                                                                                          |                    |         |       |                                   |
| AD55                     | tCONV  | Conversion Time                                                        | —                                                                                                                                                                        | 12 TAD             | —       | —     | —                                 |
| AD56                     | FCNV   | Throughput Rate                                                        | —                                                                                                                                                                        | —                  | 1.1     | Msp/s | —                                 |
| AD57                     | TSAMP  | Sample Time                                                            | 2 TAD                                                                                                                                                                    | —                  | —       | —     | —                                 |
| <b>Timing Parameters</b> |        |                                                                        |                                                                                                                                                                          |                    |         |       |                                   |
| AD60                     | tPCS   | Conversion Start from Sample Trigger <sup>(2)</sup>                    | 2.0 TAD                                                                                                                                                                  | —                  | 3.0 TAD | —     | Auto-Convert Trigger not selected |
| AD61                     | tpSS   | Sample Start from Setting Sample (SAMP) bit <sup>(2)</sup>             | 2.0 TAD                                                                                                                                                                  | —                  | 3.0 TAD | —     | —                                 |
| AD62                     | tCSS   | Conversion Completion to Sample Start (ASAM = 1) <sup>(2)</sup>        | —                                                                                                                                                                        | 0.5 TAD            | —       | —     | —                                 |
| AD63                     | tDPU   | Time to Stabilize Analog Stage from ADC Off to ADC On <sup>(2,3)</sup> | —                                                                                                                                                                        | —                  | 20      | μs    | —                                 |

**Note 1:** These parameters are characterized but not tested in manufacturing.


**2:** Because the sample caps eventually loses charge, clock rates below 10 kHz may affect linearity performance, especially at elevated temperatures.

**3:** tDPU is the time required for the ADC module to stabilize when it is turned on (AD1CON1<ADON> = 1). During this time, the ADC result is indeterminate.


## 25.0 PACKAGING INFORMATION

### 25.1 Package Marking Information


64-Lead TQFP (10x10x1 mm)




Example




100-Lead TQFP (12x12x1 mm)




Example



100-Lead TQFP (14x14x1mm)



100-Lead TQFP (14x14x1mm)



**Legend:** XX...X Customer-specific information  
Y Year code (last digit of calendar year)  
YY Year code (last 2 digits of calendar year)  
WW Week code (week of January 1 is week '01')  
NNN Alphanumeric traceability code  
(e3) Pb-free JEDEC designator for Matte Tin (Sn)  
\* This package is Pb-free. The Pb-free JEDEC designator (e3) can be found on the outer packaging for this package.


**Note:** In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information.

# PIC24HJXXXGPX06/X08/X10

## 25.2 Package Details

### 64-Lead Plastic Thin Quad Flatpack (PT) – 10x10x1 mm Body, 2.00 mm Footprint [TQFP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

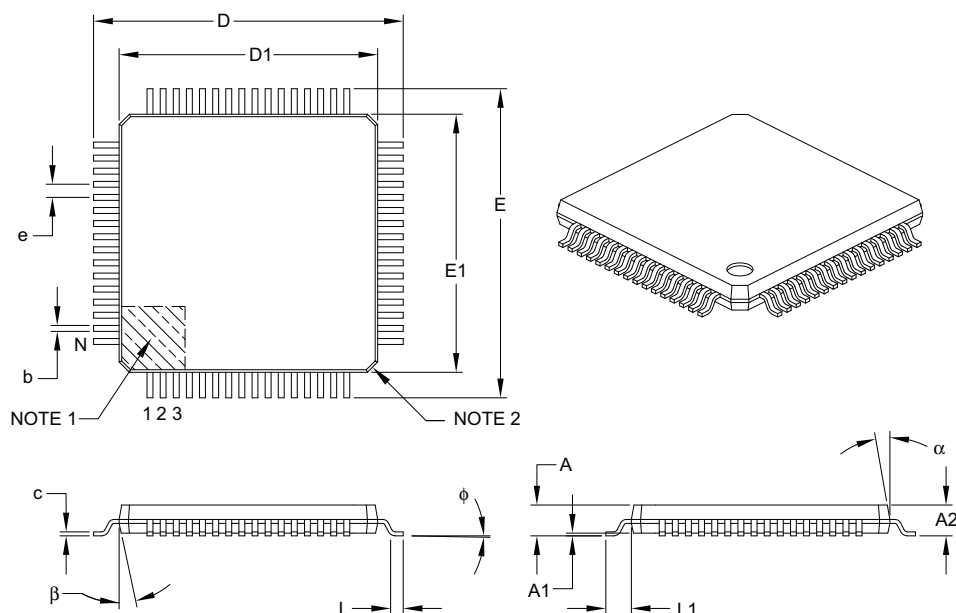

|                          |    | Units | MILLIMETERS |      |      |
|--------------------------|----|-------|-------------|------|------|
| Dimension Limits         |    |       | MIN         | NOM  | MAX  |
| Number of Leads          | N  |       | 64          |      |      |
| Lead Pitch               | e  |       | 0.50 BSC    |      |      |
| Overall Height           | A  |       | –           | –    | 1.20 |
| Molded Package Thickness | A2 |       | 0.95        | 1.00 | 1.05 |
| Standoff                 | A1 |       | 0.05        | –    | 0.15 |
| Foot Length              | L  |       | 0.45        | 0.60 | 0.75 |
| Footprint                | L1 |       | 1.00 REF    |      |      |
| Foot Angle               | φ  |       | 0°          | 3.5° | 7°   |
| Overall Width            | E  |       | 12.00 BSC   |      |      |
| Overall Length           | D  |       | 12.00 BSC   |      |      |
| Molded Package Width     | E1 |       | 10.00 BSC   |      |      |
| Molded Package Length    | D1 |       | 10.00 BSC   |      |      |
| Lead Thickness           | c  |       | 0.09        | –    | 0.20 |
| Lead Width               | b  |       | 0.17        | 0.22 | 0.27 |
| Mold Draft Angle Top     | α  |       | 11°         | 12°  | 13°  |
| Mold Draft Angle Bottom  | β  |       | 11°         | 12°  | 13°  |

#### Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Chamfers at corners are optional; size may vary.
- Dimensions D1 and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.25 mm per side.
- Dimensioning and tolerancing per ASME Y14.5M.

BSC: Basic Dimension. Theoretically exact value shown without tolerances.


REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-085B

# PIC24HJXXXGPX06/X08/X10

## 64-Lead Plastic Thin Quad Flatpack (PT) – 10x10x1 mm Body, 2.00 mm [TQFP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packageing>

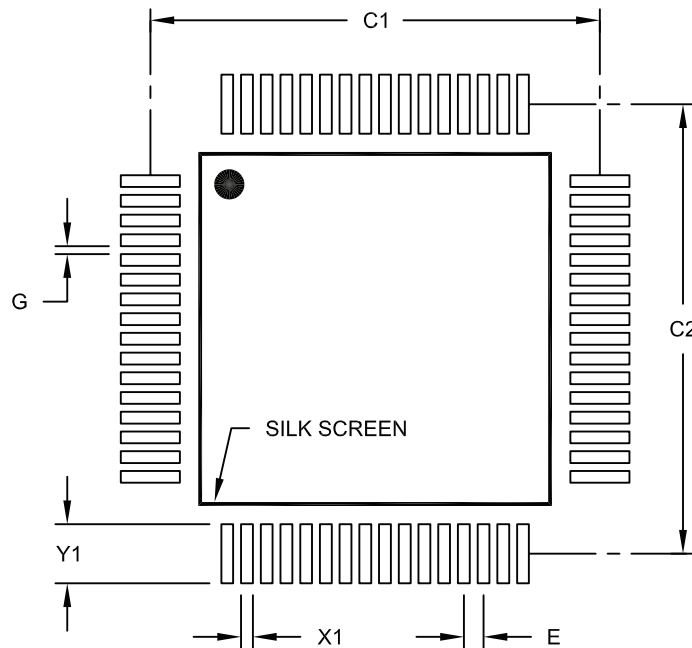

RECOMMENDED LAND PATTERN

| Units                    |    | MILLIMETERS |       |      |
|--------------------------|----|-------------|-------|------|
| Dimension Limits         |    | MIN         | NOM   | MAX  |
| Contact Pitch            | E  | 0.50 BSC    |       |      |
| Contact Pad Spacing      | C1 |             | 11.40 |      |
| Contact Pad Spacing      | C2 |             | 11.40 |      |
| Contact Pad Width (X64)  | X1 |             |       | 0.30 |
| Contact Pad Length (X64) | Y1 |             |       | 1.50 |
| Distance Between Pads    | G  | 0.20        |       |      |

**Notes:**

1. Dimensioning and tolerancing per ASME Y14.5M


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2085A

# PIC24HJXXXGPX06/X08/X10

## 100-Lead Plastic Thin Quad Flatpack (PT) – 12x12x1 mm Body, 2.00 mm Footprint [TQFP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

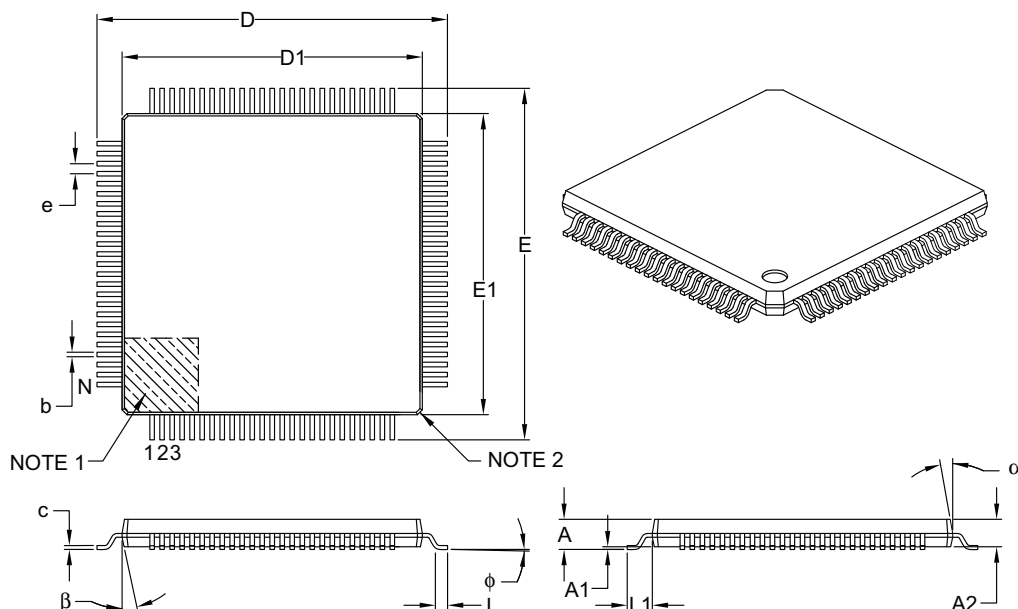

| Units                    |          | MILLIMETERS |      |      |
|--------------------------|----------|-------------|------|------|
| Dimension Limits         |          | MIN         | NOM  | MAX  |
| Number of Leads          | N        | 100         |      |      |
| Lead Pitch               | e        | 0.40 BSC    |      |      |
| Overall Height           | A        | –           | –    | 1.20 |
| Molded Package Thickness | A2       | 0.95        | 1.00 | 1.05 |
| Standoff                 | A1       | 0.05        | –    | 0.15 |
| Foot Length              | L        | 0.45        | 0.60 | 0.75 |
| Footprint                | L1       | 1.00 REF    |      |      |
| Foot Angle               | $\phi$   | 0°          | 3.5° | 7°   |
| Overall Width            | E        | 14.00 BSC   |      |      |
| Overall Length           | D        | 14.00 BSC   |      |      |
| Molded Package Width     | E1       | 12.00 BSC   |      |      |
| Molded Package Length    | D1       | 12.00 BSC   |      |      |
| Lead Thickness           | c        | 0.09        | –    | 0.20 |
| Lead Width               | b        | 0.13        | 0.18 | 0.23 |
| Mold Draft Angle Top     | $\alpha$ | 11°         | 12°  | 13°  |
| Mold Draft Angle Bottom  | $\beta$  | 11°         | 12°  | 13°  |

### Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Chamfers at corners are optional; size may vary.
- Dimensions D1 and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.25 mm per side.
- Dimensioning and tolerancing per ASME Y14.5M.

BSC: Basic Dimension. Theoretically exact value shown without tolerances.


REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-100B

# PIC24HJXXXGPX06/X08/X10

## 100-Lead Plastic Thin Quad Flatpack (PT) – 12x12x1 mm Body, 2.00 mm [TQFP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

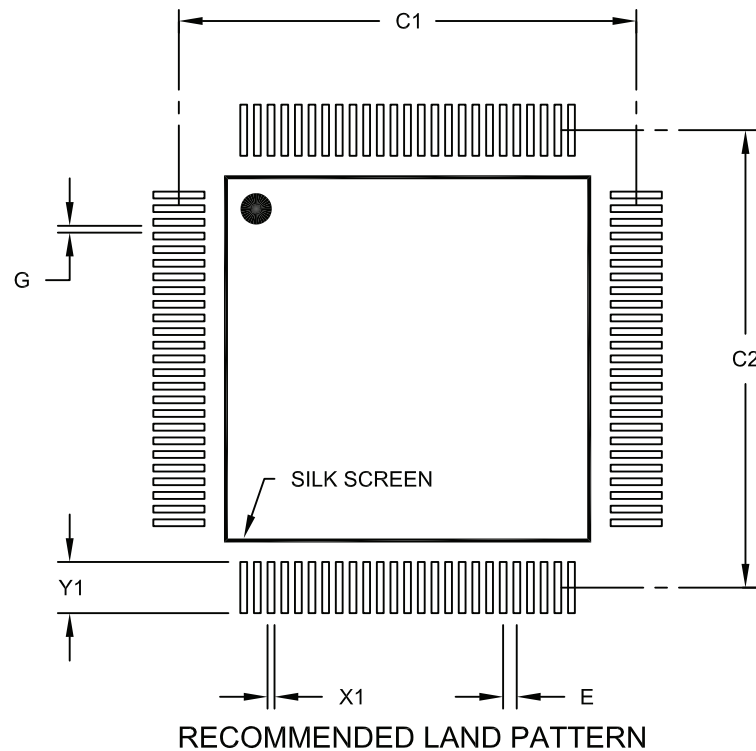

| Units                     |    | MILLIMETERS |       |      |
|---------------------------|----|-------------|-------|------|
| Dimension Limits          |    | MIN         | NOM   | MAX  |
| Contact Pitch             | E  | 0.40 BSC    |       |      |
| Contact Pad Spacing       | C1 |             | 13.40 |      |
| Contact Pad Spacing       | C2 |             | 13.40 |      |
| Contact Pad Width (X100)  | X1 |             |       | 0.20 |
| Contact Pad Length (X100) | Y1 |             |       | 1.50 |
| Distance Between Pads     | G  | 0.20        |       |      |

### Notes:

1. Dimensioning and tolerancing per ASME Y14.5M


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2100A

# PIC24HJXXXGPX06/X08/X10

## 100-Lead Plastic Thin Quad Flatpack (PF) – 14x14x1 mm Body, 2.00 mm Footprint [TQFP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

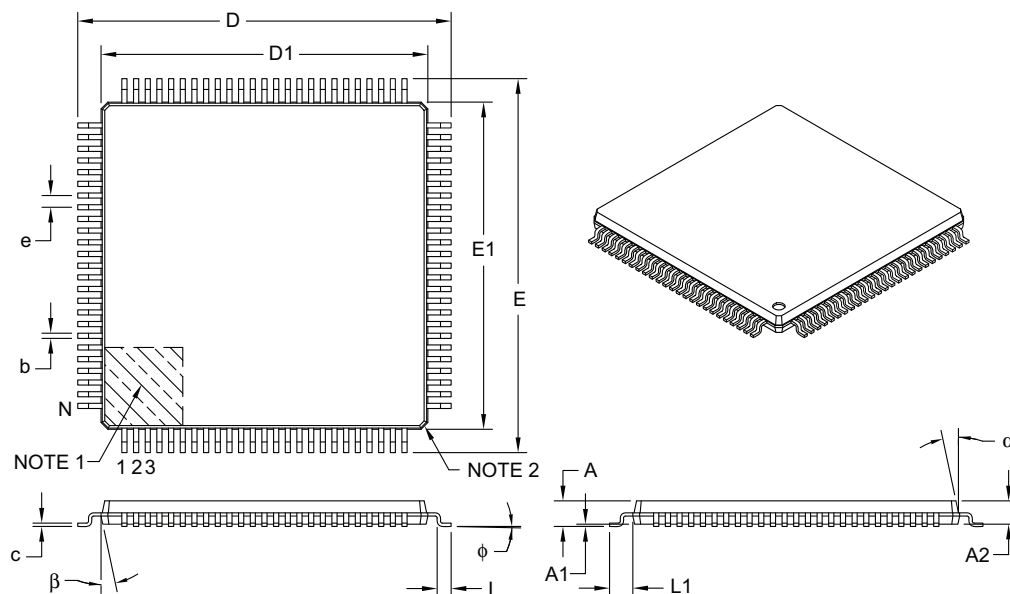

| Dimension Limits         | Units | MILLIMETERS |      |      |
|--------------------------|-------|-------------|------|------|
|                          |       | MIN         | NOM  | MAX  |
| Number of Leads          | N     | 100         |      |      |
| Lead Pitch               | e     | 0.50 BSC    |      |      |
| Overall Height           | A     | –           | –    | 1.20 |
| Molded Package Thickness | A2    | 0.95        | 1.00 | 1.05 |
| Standoff                 | A1    | 0.05        | –    | 0.15 |
| Foot Length              | L     | 0.45        | 0.60 | 0.75 |
| Footprint                | L1    | 1.00 REF    |      |      |
| Foot Angle               | φ     | 0°          | 3.5° | 7°   |
| Overall Width            | E     | 16.00 BSC   |      |      |
| Overall Length           | D     | 16.00 BSC   |      |      |
| Molded Package Width     | E1    | 14.00 BSC   |      |      |
| Molded Package Length    | D1    | 14.00 BSC   |      |      |
| Lead Thickness           | c     | 0.09        | –    | 0.20 |
| Lead Width               | b     | 0.17        | 0.22 | 0.27 |
| Mold Draft Angle Top     | α     | 11°         | 12°  | 13°  |
| Mold Draft Angle Bottom  | β     | 11°         | 12°  | 13°  |

### Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Chamfers at corners are optional; size may vary.
- Dimensions D1 and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.25 mm per side.
- Dimensioning and tolerancing per ASME Y14.5M.

BSC: Basic Dimension. Theoretically exact value shown without tolerances.


REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-110B

# PIC24HJXXXGPX06/X08/X10

## 100-Lead Plastic Thin Quad Flatpack (PF) – 14x14x1 mm Body, 2.00 mm [TQFP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

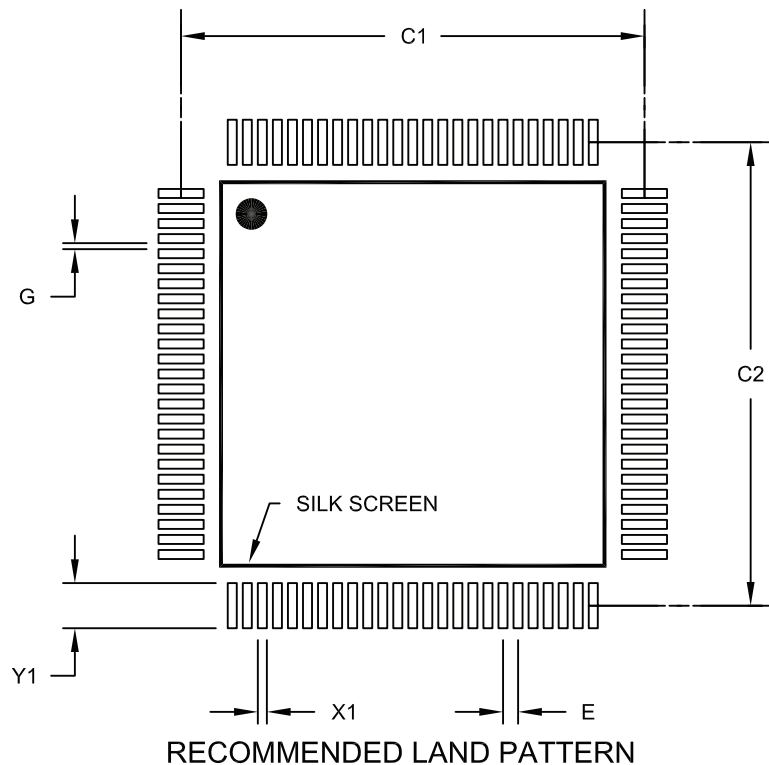

| Units                     |    | MILLIMETERS |       |      |
|---------------------------|----|-------------|-------|------|
| Dimension Limits          |    | MIN         | NOM   | MAX  |
| Contact Pitch             | E  | 0.50 BSC    |       |      |
| Contact Pad Spacing       | C1 |             | 15.40 |      |
| Contact Pad Spacing       | C2 |             | 15.40 |      |
| Contact Pad Width (X100)  | X1 |             |       | 0.30 |
| Contact Pad Length (X100) | Y1 |             |       | 1.50 |
| Distance Between Pads     | G  | 0.20        |       |      |

### Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2110A

# PIC24HJXXXGPX06/X08/X10

---

NOTES:

## APPENDIX A: REVISION HISTORY

### Revision A (February 2006)

- Initial release of this document

### Revision B (March 2006)

- Updated the Configuration Bits Description table (Table 20-1)
- Updated registers and register maps
- Updated **Section 15.0 “Serial Peripheral Interface (SPI)”**
- Updated **Section 23.0 “Electrical Characteristics”**
- Updated pinout diagrams
- Additional minor corrections throughout document text

### Revision C (May 2006)

- Updated **Section 23.0 “Electrical Characteristics”**
- Updated the Configuration Bits Description table (Table 20-1)
- Additional minor corrections throughout document text

### Revision D (July 2006)

- Added FBS and FSS Device Configuration registers (see Table 20-1) and corresponding bit field descriptions (see Table 20-2). These added registers replaced the former RESERVED1 and RESERVED2 registers.
- Added INTTREG Interrupt Control and Status register. (See **Section 6.3 “Interrupt Control and Status Registers”**. See also Register 6-33.)
- Added Core Registers BSRAM and SSRAM (see **Section 3.2.7 “Data Ram Protection Feature”**)
- Clarified Fail-Safe Clock Monitor operation (see **Section 8.3 “Fail-Safe Clock Monitor (FSCM)”**)
- Updated COSC<2:0> and NOSC<2:0> bit configurations in OSCCON register (see Register 8-1)
- Updated CLKDIV register bit configurations (see Register 8-2)
- Added Word Write Cycle Time parameter (T<sub>WW</sub>) to Program Flash Memory (see Table 23-12)
- Noted exceptions to Absolute Maximum Ratings on I/O pin output current (see **Section 23.0 “Electrical Characteristics”**)
- Added ADC2 Event Trigger for Timer4/5 (**Section 12.0 “Timer2/3, Timer4/5, Timer6/7 and Timer8/9”**)
- Corrected mislabeled I2COV bit in I2CxSTAT register (see Register 16-2)
- Removed AD26a, AD27a, AD28a, AD26b, AD27b and AD28b from Table 23-34 (ADC Module)
- Revised Table 23-36 (AD63)

### Revision F (June 2007)

- Changed document name from PIC24H Family Data Sheet to PIC24HJXXXGPX06/X08/X10 Data Sheet, which resulted in revision change from E to F prior to publication.
- Updated **Section 23.0 “Electrical Characteristics”**
- Additional minor corrections throughout document text

# PIC24HJXXXGPX06/X08/X10

## Revision G (March 2008)

This revision includes minor typographical and formatting changes throughout the data sheet text.

The major changes are referenced by their respective section in the following table.

**TABLE A-1: MAJOR SECTION UPDATES**

| Section Name                                                             | Update Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Section 3.0 “Memory Organization”</b>                                 | <p>Updated Change Notification Register Map table title to reflect application with PIC24HJXXXGPX10 devices (Table 3-2).</p> <p>Added Change Notification Register Map tables (Table 3-3 and Table 3-4) for PIC24HJXXXGPX08 and PIC24HJXXXGPX06 devices, respectively.</p> <p>Updated the bit range for AD1CON3 (ADCS&lt;7:0&gt;) in the ADC1 Register Map and added Note 1 (Table 3-15).</p> <p>Updated the bit range for AD2CON3 (ADCS&lt;7:0&gt;) in the ADC2 Register Map (Table 3-16).</p> <p>Updated the title in the ECAN1 Register Map When C1CTRL1.WIN = 0 or 1 to reflect applicable devices (Table 3-18).</p> <p>Updated the title in the ECAN1 Register Map When C1CTRL1.WIN = 0 to reflect applicable devices (Table 3-19).</p> <p>Updated the title in the ECAN1 Register Map When C1CTRL1.WIN = 1 to reflect applicable devices (Table 3-20).</p> <p>Updated the Reset value for C2FEN1 (FFFF) in the ECAN2 Register Map When C2CTRL1.WIN = 0 or 1 (Table 3-21) and updated the title to reflect applicable device.</p> <p>Updated the title for the ECAN2 Register Map When C2CTRL1.WIN = 0 to reflect applicable device (Table 3-22).</p> <p>Updated the title for the ECAN2 Register Map When C2CTRL1.WIN = 1 to reflect applicable device (Table 3-23).</p> <p>Updated Reset value for TRISA (F6FF) in the PORTA Register Map (Table 3-24).</p> |
| <b>Section 5.0 “Reset”</b>                                               | Added POR and BOR references in Reset Flag Bit Operation (Table 5-1).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Section 7.0 “Direct Memory Access (DMA)”</b>                          | Updated the table cross-reference for Note 2 in the DMAxREQ register (Register 7-2).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Section 8.0 “Oscillator Configuration”</b>                            | Updated the third clock source item (External Clock) in <b>Section 8.1.1 “System Clock Sources”</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Section 15.0 “Serial Peripheral Interface (SPI)”</b>                  | Removed redundant information, which is now available in the related section in the “PIC24H Family Reference Manual”, while retaining the SPI Module Block Diagram (Figure 15-1).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Section 16.0 “Inter-Integrated Circuit™ (I<sup>2</sup>C™)”</b>        | Removed sections 16.3 through 16.13, while retaining the I <sup>2</sup> C Block Diagram (Figure 16-1) (redundant information, which is now available in the related section in the “PIC24H Family Reference Manual”).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Section 17.0 “Universal Asynchronous Receiver Transmitter (UART)”</b> | Removed sections 17.1 through 17.7 (redundant information, which is now available in the related section in the “PIC24H Family Reference Manual”).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

# PIC24HJXXXGPX06/X08/X10

TABLE A-1: MAJOR SECTION UPDATES (CONTINUED)

| Section Name                                                          | Update Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Section 18.0 “Enhanced CAN (ECAN™) Module”</b>                     | <p>Removed sections 18.4 through 18.7 (redundant information, which is now available in the related section in the “PIC24H Family Reference Manual”).</p> <p>Changed default bit value from ‘0’ to ‘1’ for bits 6 through 15 (FLTEN6-FLTEN15) in the CiFEN1 register (Register 18-11).</p>                                                                                                                                                                                                                                                                           |
| <b>Section 19.0 “10-Bit/12-Bit Analog-to-Digital Converter (ADC)”</b> | <p>Removed Equation 19-1 (ADC Conversion Clock Period) and Figure 19-3 (ADC Transfer Function (10-Bit Example)).</p> <p>Updated AN14 and AN15 ADC values in the ADC2 Module Block Diagram (Figure 19-2).</p> <p>Added Note 2 to ADC Conversion Clock Period Block Diagram (Figure 19-3).</p> <p>Updated ADC Conversion Clock Select bits in the ADxCON3 register from ADCS&lt;5:0&gt; to ADCS&lt;7:0&gt;. Any references to these bits have also been updated throughout this data sheet (Register 19-3).</p> <p>Added Note to ADxCHS0 register (Register 19-6).</p> |
| <b>Section 20.0 “Special Features”</b>                                | <p>Added a Note after the second paragraph in <b>Section 20.2 “On-Chip Voltage Regulator”</b>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Section 23.0 “Electrical Characteristics”</b>                      | <p>Added Note 3 to ADC Conversion (12-bit Mode) Timing Requirements (Table 23-38 and Table 23-39).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

# PIC24HJXXXGPX06/X08/X10

## Revision H (March 2009)

This revision includes minor typographical and formatting changes throughout the data sheet text.

Global changes include:

- Changed all instances of OSCI to OSC1 and OSC0 to OSC2
- Changed all instances of VDDCORE and VDDCORE/VCAP to VCAP/VDDCORE

The other changes are referenced by their respective section in the following table.

**TABLE A-2: MAJOR SECTION UPDATES**

| Section Name                                                                     | Update Description                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>“High-Performance, 16-Bit Microcontrollers”</b>                               | Updated all pin diagrams to denote the pin voltage tolerance (see <b>“Pin Diagrams”</b> ).<br><br>Added Note 2 to the 28-Pin QFN-S and 44-Pin QFN pin diagrams, which references pin connections to Vss.                                                                                                                                                                                      |
| <b>Section 1.0 “Device Overview”</b>                                             | Updated AVDD in the PINOUT I/O Descriptions (see Table 1-1).                                                                                                                                                                                                                                                                                                                                  |
| <b>Section 2.0 “Guidelines for Getting Started with 16-Bit Microcontrollers”</b> | Added new section to the data sheet that provides guidelines on getting started with 16-bit Microcontrollers.                                                                                                                                                                                                                                                                                 |
| <b>Section 4.0 “Memory Organization”</b>                                         | Add Accumulator A and B SFRs (ACCAL, ACCAH, ACCAU, ACCBL, ACCBH and ACCBU) and updated the Reset value for CORCON in the CPU Core Register Map (see Table 4-1).<br><br>Updated Reset values for IPC3, IPC4, IPC11 and IPC13-IPC15 in the Interrupt Controller Register Map (see Table 4-5).<br><br>Updated the Reset value for CLKDIV in the System Control Register Map (see Table 4-31).    |
| <b>Section 5.0 “Flash Program Memory”</b>                                        | Updated <b>Section 5.3 “Programming Operations”</b> with programming time formula.                                                                                                                                                                                                                                                                                                            |
| <b>Section 9.0 “Oscillator Configuration”</b>                                    | Added Note 2 to the Oscillator System Diagram (see Figure 9-1).<br><br>Updated default bit values for DOZE<2:0> and FRCDIV<2:0> in the Clock Divisor (CLKDIV) Register (see Register 9-2).<br><br>Added a paragraph regarding FRC accuracy at the end of <b>Section 9.1.1 “System Clock sources”</b> .<br><br>Added Note 1 to the FRC Oscillator Tuning (OSCTUN) Register (see Register 9-4). |
| <b>Section 10.0 “Power-Saving Features”</b>                                      | Added the following registers: <ul style="list-style-type: none"><li>• PMD1: Peripheral Module Disable Control Register 1 (Register 10-1)</li><li>• PMD2: Peripheral Module Disable Control Register 2 (Register 10-2)</li><li>• PMD3: Peripheral Module Disable Control Register 3 (Register 10-3)</li></ul>                                                                                 |
| <b>Section 11.0 “I/O Ports”</b>                                                  | Added reference to pin diagrams for I/O pin availability and functionality (see <b>Section 11.2 “Open-Drain Configuration”</b> ).                                                                                                                                                                                                                                                             |
| <b>Section 16.0 “Serial Peripheral Interface (SPI)”</b>                          | Added Note 2 to the SPIxCON1 register (see Register 16-2).                                                                                                                                                                                                                                                                                                                                    |
| <b>Section 18.0 “Universal Asynchronous Receiver Transmitter (UART)”</b>         | Updated the UTXINV bit settings in the UxSTA register (see Register 18-2).                                                                                                                                                                                                                                                                                                                    |

**TABLE A-2: MAJOR SECTION UPDATES (CONTINUED)**

| Section Name                                                          | Update Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Section 19.0 “Enhanced CAN (ECAN™) Module”</b>                     | Changed bit 11 in the ECAN Control Register 1 (CiCTRL1) to Reserved (see Register 19-1).<br><br>Added the ECAN Filter 15-8 Mask Selection (CiFMSKSEL2) register (see Register 19-19).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Section 20.0 “10-Bit/12-Bit Analog-to-Digital Converter (ADC)”</b> | Replaced the ADC Module Block Diagram (see Figure 20-1) and removed Figure 21-2.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Section 21.0 “Special Features”</b>                                | Added Note 2 to the Device Configuration Register Map (see Table 21-1)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Section 24.0 “Electrical Characteristics”</b>                      | Updated Typical values for Thermal Packaging Characteristics (see Table 24-3).<br><br>Updated Min and Max values for parameter DC12 (RAM Data Retention Voltage) and added Note 4 (see Table 24-4).<br><br>Updated Power-Down Current Max values for parameters DC60b and DC60c (see Table 24-7).<br><br>Updated Characteristics for I/O Pin Input Specifications (see Table 24-9).<br><br>Updated Program Memory values for parameters 136, 137 and 138 (renamed to 136a, 137a and 138a), added parameters 136b, 137b and 138b, and added Note 2 (see Table 24-12).<br><br>Added parameter OS42 (GM) to the External Clock Timing Requirements (see Table 24-16).<br><br>Updated Watchdog Timer Time-out Period parameter SY20 (see Table 24-21). |

# PIC24HJXXXGPX06/X08/X10

---

NOTES:

# PIC24HJXXXGPX06/X08/X10

## INDEX

### A

|                                               |     |
|-----------------------------------------------|-----|
| AC Characteristics .....                      | 242 |
| Internal RC Accuracy .....                    | 244 |
| Load Conditions .....                         | 242 |
| ADC Module .....                              |     |
| ADC1 Register Map .....                       | 38  |
| ADC2 Register Map .....                       | 38  |
| Alternate Interrupt Vector Table (AIVT) ..... | 67  |
| Analog-to-Digital Converter .....             | 201 |
| DMA .....                                     | 201 |
| Initialization .....                          | 201 |
| Key Features .....                            | 201 |
| Arithmetic Logic Unit (ALU) .....             | 24  |
| Assembler .....                               |     |
| MPASM Assembler .....                         | 230 |
| Automatic Clock Stretch .....                 | 162 |

### B

|                                                 |     |
|-------------------------------------------------|-----|
| Block Diagrams .....                            |     |
| 16-bit Timer1 Module .....                      | 141 |
| ADC1 Module .....                               | 202 |
| Connections for On-Chip Voltage Regulator ..... | 218 |
| ECAN Module .....                               | 176 |
| Input Capture .....                             | 149 |
| Output Compare .....                            | 151 |
| PIC24H .....                                    | 12  |
| PIC24H CPU Core .....                           | 20  |
| PIC24H Oscillator System Diagram .....          | 121 |
| PIC24H PLL .....                                | 123 |
| Reset System .....                              | 63  |
| Shared Port Structure .....                     | 139 |
| SPI .....                                       | 155 |
| Timer2 (16-bit) .....                           | 145 |
| Timer2/3 (32-bit) .....                         | 144 |
| UART .....                                      | 169 |
| Watchdog Timer (WDT) .....                      | 219 |

### C

|                                            |          |
|--------------------------------------------|----------|
| C Compilers .....                          |          |
| MPLAB C18 .....                            | 230      |
| MPLAB C30 .....                            | 230      |
| Clock Switching .....                      | 129      |
| Enabling .....                             | 129      |
| Sequence .....                             | 129      |
| Code Examples .....                        |          |
| Erasing a Program Memory Page .....        | 60       |
| Initiating a Programming Sequence .....    | 61       |
| Loading Write Buffers .....                | 61       |
| Port Write/Read .....                      | 140      |
| PWRSAV Instruction Syntax .....            | 131      |
| Code Protection .....                      | 213, 220 |
| Configuration Bits .....                   | 213      |
| Description (Table) .....                  | 214      |
| Configuration Register Map .....           | 213      |
| Configuring Analog Port Pins .....         | 140      |
| CPU .....                                  |          |
| Control Register .....                     | 21       |
| CPU Clocking System .....                  | 122      |
| PLL Configuration .....                    | 122      |
| Selection .....                            | 122      |
| Sources .....                              | 122      |
| Customer Change Notification Service ..... | 287      |
| Customer Support .....                     | 287      |

### D

|                                                                        |     |
|------------------------------------------------------------------------|-----|
| Data Address Space .....                                               | 27  |
| Alignment .....                                                        | 27  |
| Memory Map for PIC24HJXXXGPX06/X08/X10 Devices<br>with 16 KB RAM ..... | 29  |
| Memory Map for PIC24HJXXXGPX06/X08/X10 Devices<br>with 8 KB RAM .....  | 28  |
| Near Data Space .....                                                  | 27  |
| Software Stack .....                                                   | 50  |
| Width .....                                                            | 27  |
| DC Characteristics .....                                               | 234 |
| I/O Pin Input Specifications .....                                     | 239 |
| I/O Pin Output Specifications .....                                    | 240 |
| Idle Current (I <sub>DOZE</sub> ) .....                                | 238 |
| Idle Current (I <sub>IDLE</sub> ) .....                                | 237 |
| Operating Current (I <sub>DD</sub> ) .....                             | 236 |
| Power-Down Current (I <sub>PD</sub> ) .....                            | 238 |
| Program Memory .....                                                   | 241 |
| Temperature and Voltage Specifications .....                           | 235 |
| Development Support .....                                              | 229 |
| DMA Module .....                                                       |     |
| DMA Register Map .....                                                 | 39  |
| DMAC Registers .....                                                   | 112 |
| DMAxCNT .....                                                          | 112 |
| DMAxCON .....                                                          | 112 |
| DMAxPAD .....                                                          | 112 |
| DMAxREQ .....                                                          | 112 |
| DMAxSTA .....                                                          | 112 |
| DMAxSTB .....                                                          | 112 |

### E

|                                                        |     |
|--------------------------------------------------------|-----|
| ECAN Module .....                                      |     |
| CiFMSKSEL2 register .....                              | 193 |
| ECAN1 Register Map (C1CTRL1.WIN = 0 or 1) .....        | 41  |
| ECAN1 Register Map (C1CTRL1.WIN = 0) .....             | 41  |
| ECAN1 Register Map (C1CTRL1.WIN = 1) .....             | 42  |
| ECAN2 Register Map (C2CTRL1.WIN = 0 or 1) .....        | 44  |
| ECAN2 Register Map (C2CTRL1.WIN = 0) .....             | 44  |
| ECAN2 Register Map (C2CTRL1.WIN = 1) .....             | 45  |
| Frame Types .....                                      | 175 |
| Modes of Operation .....                               | 177 |
| Overview .....                                         | 175 |
| ECAN Registers .....                                   |     |
| Filter 15-8 Mask Selection Register (CiFMSKSEL2) ..... | 193 |
| Electrical Characteristics .....                       | 233 |
| AC .....                                               | 242 |
| Enhanced CAN Module .....                              | 175 |
| Equations .....                                        |     |
| Device Operating Frequency .....                       | 122 |
| FOSC Calculation .....                                 | 122 |
| XT with PLL Mode Example .....                         | 123 |
| Errata .....                                           | 10  |

### F

|                                               |     |
|-----------------------------------------------|-----|
| Flash Program Memory .....                    | 57  |
| Control Registers .....                       | 58  |
| Operations .....                              | 58  |
| Programming Algorithm .....                   | 60  |
| RTSP Operation .....                          | 58  |
| Table Instructions .....                      | 57  |
| Flexible Configuration .....                  | 213 |
| FSCM .....                                    |     |
| Delay for Crystal and PLL Clock Sources ..... | 66  |
| Device Resets .....                           | 66  |

# PIC24HJXXXGPX06/X08/X10

|                                                                      |          |  |
|----------------------------------------------------------------------|----------|--|
| <b>I</b>                                                             |          |  |
| I/O Ports .....                                                      | 139      |  |
| Parallel I/O (PIO).....                                              | 139      |  |
| Write/Read Timing .....                                              | 140      |  |
| <b>I<sup>2</sup>C</b>                                                |          |  |
| Operating Modes .....                                                | 161      |  |
| Registers .....                                                      | 161      |  |
| <b>I<sup>2</sup>C Module</b>                                         |          |  |
| I2C1 Register Map .....                                              | 36       |  |
| I2C2 Register Map .....                                              | 36       |  |
| In-Circuit Debugger .....                                            | 220      |  |
| In-Circuit Emulation .....                                           | 213      |  |
| In-Circuit Serial Programming (ICSP) .....                           | 213, 220 |  |
| Input Capture                                                        |          |  |
| Registers .....                                                      | 150      |  |
| Input Change Notification Module .....                               | 140      |  |
| Instruction Addressing Modes .....                                   | 50       |  |
| File Register Instructions .....                                     | 50       |  |
| Fundamental Modes Supported .....                                    | 51       |  |
| MCU Instructions .....                                               | 50       |  |
| Move and Accumulator Instructions .....                              | 51       |  |
| Other Instructions .....                                             | 51       |  |
| Instruction Set                                                      |          |  |
| Overview .....                                                       | 224      |  |
| Summary .....                                                        | 221      |  |
| Instruction-Based Power-Saving Modes .....                           | 131      |  |
| Idle .....                                                           | 132      |  |
| Sleep .....                                                          | 131      |  |
| Internal RC Oscillator                                               |          |  |
| Use with WDT .....                                                   | 219      |  |
| Internet Address .....                                               | 287      |  |
| Interrupt Control and Status Registers .....                         | 71       |  |
| IECx .....                                                           | 71       |  |
| IFSx .....                                                           | 71       |  |
| INTCON1 .....                                                        | 71       |  |
| INTCON2 .....                                                        | 71       |  |
| INTTREG .....                                                        | 71       |  |
| IPCx .....                                                           | 71       |  |
| Interrupt Setup Procedures .....                                     | 110      |  |
| Initialization .....                                                 | 110      |  |
| Interrupt Disable .....                                              | 110      |  |
| Interrupt Service Routine .....                                      | 110      |  |
| Trap Service Routine .....                                           | 110      |  |
| Interrupt Vector Table (IVT) .....                                   | 67       |  |
| Interrupts Coincident with Power Save Instructions .....             | 132      |  |
| <b>J</b>                                                             |          |  |
| JTAG Boundary Scan Interface .....                                   | 213      |  |
| <b>M</b>                                                             |          |  |
| Memory Organization .....                                            | 25       |  |
| Microchip Internet Web Site .....                                    | 287      |  |
| Modes of Operation                                                   |          |  |
| Disable .....                                                        | 177      |  |
| Initialization .....                                                 | 177      |  |
| Listen All Messages .....                                            | 177      |  |
| Listen Only .....                                                    | 177      |  |
| Loopback .....                                                       | 177      |  |
| Normal Operation .....                                               | 177      |  |
| MPLAB ASM30 Assembler, Linker, Librarian .....                       | 230      |  |
| MPLAB ICD 2 In-Circuit Debugger .....                                | 231      |  |
| MPLAB ICE 2000 High-Performance Universal In-Circuit Emulator .....  | 231      |  |
| MPLAB Integrated Development Environment Software .....              | 229      |  |
| MPLAB PM3 Device Programmer .....                                    | 231      |  |
| MPLAB REAL ICE In-Circuit Emulator System .....                      | 231      |  |
| MPLINK Object Linker/MPLIB Object Librarian .....                    | 230      |  |
| Multi-Bit Data Shifter .....                                         | 24       |  |
| <b>N</b>                                                             |          |  |
| NVM Module                                                           |          |  |
| Register Map .....                                                   | 49       |  |
| <b>O</b>                                                             |          |  |
| Open-Drain Configuration .....                                       | 140      |  |
| Output Compare .....                                                 | 151      |  |
| <b>P</b>                                                             |          |  |
| Packaging .....                                                      | 269      |  |
| Details .....                                                        | 270      |  |
| Marking .....                                                        | 269      |  |
| Peripheral Module Disable (PMD) .....                                | 132      |  |
| PICSTART Plus Development Programmer .....                           | 232      |  |
| Pinout I/O Descriptions (table) .....                                | 13       |  |
| PMD Module                                                           |          |  |
| Register Map .....                                                   | 49       |  |
| POR and Long Oscillator Start-up Times .....                         | 66       |  |
| PORTA                                                                |          |  |
| Register Map .....                                                   | 47       |  |
| PORTB                                                                |          |  |
| Register Map .....                                                   | 47       |  |
| PORTC                                                                |          |  |
| Register Map .....                                                   | 47       |  |
| PORTD                                                                |          |  |
| Register Map .....                                                   | 47       |  |
| PORTE                                                                |          |  |
| Register Map .....                                                   | 48       |  |
| PORTF                                                                |          |  |
| Register Map .....                                                   | 48       |  |
| PORTG                                                                |          |  |
| Register Map .....                                                   | 48       |  |
| Power-Saving Features .....                                          | 131      |  |
| Clock Frequency and Switching .....                                  | 131      |  |
| Program Address Space .....                                          | 25       |  |
| Construction .....                                                   | 52       |  |
| Data Access from Program Memory Using Program Space Visibility ..... | 55       |  |
| Data Access from Program Memory Using Table Instructions .....       | 54       |  |
| Data Access from, Address Generation .....                           | 53       |  |
| Memory Map .....                                                     | 25       |  |
| Table Read Instructions                                              |          |  |
| TBLRDH .....                                                         | 54       |  |
| TBLRDL .....                                                         | 54       |  |
| Visibility Operation .....                                           | 55       |  |
| Program Memory                                                       |          |  |
| Interrupt Vector .....                                               | 26       |  |
| Organization .....                                                   | 26       |  |
| Reset Vector .....                                                   | 26       |  |
| <b>R</b>                                                             |          |  |
| Reader Response .....                                                | 288      |  |
| Registers                                                            |          |  |
| ADxCHS0 (ADCx Input Channel 0 Select) .....                          | 210      |  |
| ADxCHS123 (ADCx Input Channel 1, 2, 3 Select) ...                    | 209      |  |
| ADxCON1 (ADCx Control 1) .....                                       | 204      |  |
| ADxCON2 (ADCx Control 2) .....                                       | 206      |  |
| ADxCON3 (ADCx Control 3) .....                                       | 207      |  |
| ADxCON4 (ADCx Control 4) .....                                       | 208      |  |
| ADxCSSH (ADCx Input Scan Select High) .....                          | 211      |  |
| ADxCSSL (ADCx Input Scan Select Low) .....                           | 211      |  |
| ADxPCFGH (ADCx Port Configuration High) .....                        | 212      |  |

# PIC24HJXXXGPX06/X08/X10

|                                                                    |          |                                                        |          |
|--------------------------------------------------------------------|----------|--------------------------------------------------------|----------|
| ADxPCFGL (ADCx Port Configuration Low).....                        | 212      | IPC11 (Interrupt Priority Control 11).....             | 102      |
| CiBUFNT1 (ECAN Filter 0-3 Buffer Pointer).....                     | 188      | IPC12 (Interrupt Priority Control 12).....             | 103      |
| CiBUFNT2 (ECAN Filter 4-7 Buffer Pointer).....                     | 189      | IPC13 (Interrupt Priority Control 13).....             | 104      |
| CiBUFNT3 (ECAN Filter 8-11 Buffer Pointer).....                    | 189      | IPC14 (Interrupt Priority Control 14).....             | 105      |
| CiBUFNT4 (ECAN Filter 12-15 Buffer Pointer).....                   | 190      | IPC15 (Interrupt Priority Control 15).....             | 106      |
| CiCFG1 (ECAN Baud Rate Configuration 1).....                       | 186      | IPC16 (Interrupt Priority Control 16).....             | 107, 109 |
| CiCFG2 (ECAN Baud Rate Configuration 2).....                       | 187      | IPC17 (Interrupt Priority Control 17).....             | 108      |
| CiCTRL1 (ECAN Control 1).....                                      | 178      | IPC2 (Interrupt Priority Control 2).....               | 93       |
| CiCTRL2 (ECAN Control 2).....                                      | 179      | IPC3 (Interrupt Priority Control 3).....               | 94       |
| CiEC (ECAN Transmit/Receive Error Count).....                      | 185      | IPC4 (Interrupt Priority Control 4).....               | 95       |
| CiFCTRL (ECAN FIFO Control).....                                   | 181      | IPC5 (Interrupt Priority Control 5).....               | 96       |
| CiFEN1 (ECAN Acceptance Filter Enable).....                        | 188      | IPC6 (Interrupt Priority Control 6).....               | 97       |
| CiFIFO (ECAN FIFO Status).....                                     | 182      | IPC7 (Interrupt Priority Control 7).....               | 98       |
| CiFMSKSEL1 (ECAN Filter 7-0 Mask Selection).....                   | 192, 193 | IPC8 (Interrupt Priority Control 8).....               | 99       |
| CiINTE (ECAN Interrupt Enable).....                                | 184      | IPC9 (Interrupt Priority Control 9).....               | 100      |
| CiINTF (ECAN Interrupt Flag).....                                  | 183      | NVMCON (Flash Memory Control).....                     | 59       |
| CiRXFnEID (ECAN Acceptance Filter n Extended Identifier).....      | 191      | OCxCON (Output Compare x Control).....                 | 153      |
| CiRXFnSID (ECAN Acceptance Filter n Standard Identifier).....      | 191      | OSCCON (Oscillator Control).....                       | 124      |
| CiRXFUL1 (ECAN Receive Buffer Full 1).....                         | 195      | OSCTUN (FRC Oscillator Tuning).....                    | 128      |
| CiRXFUL2 (ECAN Receive Buffer Full 2).....                         | 195      | PLLFBF (PLL Feedback Divisor).....                     | 127      |
| CiRXMnEID (ECAN Acceptance Filter Mask n Extended Identifier)..... | 194      | PMD1 (Peripheral Module Disable Control Register 1) .. | 133      |
| CiRXMnSID (ECAN Acceptance Filter Mask n Standard Identifier)..... | 194      | PMD2 (Peripheral Module Disable Control Register 2) .. | 135      |
| CiRXOVF1 (ECAN Receive Buffer Overflow 1).....                     | 196      | PMD3 (Peripheral Module Disable Control Register 3) .. | 137      |
| CiRXOVF2 (ECAN Receive Buffer Overflow 2).....                     | 196      | RCON (Reset Control).....                              | 64       |
| CiTRBnDLC (ECAN Buffer n Data Length Control) ..                   | 199      | SPIxCON1 (SPIx Control 1).....                         | 157      |
| CiTRBnEID (ECAN Buffer n Extended Identifier) .....                | 198      | SPIxCON2 (SPIx Control 2).....                         | 159      |
| CiTRBnSID (ECAN Buffer n Standard Identifier).....                 | 198      | SPIxSTAT (SPIx Status and Control).....                | 156      |
| CiTRBnSTAT (ECAN Receive Buffer n Status).....                     | 200      | SR (CPU Status).....                                   | 22, 72   |
| CiTRmnCON (ECAN TX/RX Buffer m Control).....                       | 197      | T1CON (Timer1 Control).....                            | 142      |
| CiVEC (ECAN Interrupt Code).....                                   | 180      | TxCON (T2CON, T4CON, T6CON or T8CON Control) ..        | 146      |
| CLKDIV (Clock Divisor).....                                        | 126      | TyCON (T3CON, T5CON, T7CON or T9CON Control) ..        | 147      |
| CORCON (Core Control).....                                         | 23, 72   | UxMODE (UARTx Mode).....                               | 170      |
| DMACS0 (DMA Controller Status 0).....                              | 117      | UxSTA (UARTx Status and Control).....                  | 172      |
| DMACS1 (DMA Controller Status 1).....                              | 119      | Reset                                                  |          |
| DMAxCNT (DMA Channel x Transfer Count).....                        | 116      | Clock Source Selection.....                            | 65       |
| DMAxCON (DMA Channel x Control).....                               | 113      | Special Function Register Reset States.....            | 66       |
| DMAxPAD (DMA Channel x Peripheral Address).....                    | 116      | Times.....                                             | 65       |
| DMAxREQ (DMA Channel x IRQ Select).....                            | 114      | Reset Sequence.....                                    | 67       |
| DMAxSTA (DMA Channel x RAM Start Address A) ..                     | 115      | Resets.....                                            | 63       |
| DMAxSTB (DMA Channel x RAM Start Address B) ..                     | 115      | <b>S</b>                                               |          |
| DSADR (Most Recent DMA RAM Address).....                           | 120      | Serial Peripheral Interface (SPI).....                 | 155      |
| I2CxCON (I2Cx Control).....                                        | 163      | Software Simulator (MPLAB SIM).....                    | 230      |
| I2CxMSK (I2Cx Slave Mode Address Mask).....                        | 167      | Software Stack Pointer, Frame Pointer                  |          |
| I2CxSTAT (I2Cx Status).....                                        | 165      | CALL Stack Frame.....                                  | 50       |
| ICxCON (Input Capture x Control).....                              | 150      | Special Features.....                                  | 213      |
| IEC0 (Interrupt Enable Control 0).....                             | 83       | SPI Module                                             |          |
| IEC1 (Interrupt Enable Control 1).....                             | 85       | SPI1 Register Map.....                                 | 37       |
| IEC2 (Interrupt Enable Control 2).....                             | 87       | SPI2 Register Map.....                                 | 37       |
| IEC3 (Interrupt Enable Control 3).....                             | 89       | Symbols Used in Opcode Descriptions.....               | 222      |
| IEC4 (Interrupt Enable Control 4).....                             | 90       | System Control                                         |          |
| IFS0 (Interrupt Flag Status 0).....                                | 75       | Register Map.....                                      | 49       |
| IFS1 (Interrupt Flag Status 1).....                                | 77       | <b>T</b>                                               |          |
| IFS2 (Interrupt Flag Status 2).....                                | 79       | Temperature and Voltage Specifications                 |          |
| IFS3 (Interrupt Flag Status 3).....                                | 81       | AC.....                                                | 242      |
| IFS4 (Interrupt Flag Status 4).....                                | 82       | Timer1.....                                            | 141      |
| INTCON1 (Interrupt Control 1).....                                 | 73       | Timer2/3, Timer4/5, Timer6/7 and Timer8/9.....         | 143      |
| INTCON2 (Interrupt Control 2).....                                 | 74       | Timing Characteristics                                 |          |
| IPC0 (Interrupt Priority Control 0).....                           | 91       | CLKO and I/O.....                                      | 245      |
| IPC1 (Interrupt Priority Control 1).....                           | 92       | Timing Diagrams                                        |          |
| IPC10 (Interrupt Priority Control 10).....                         | 101      |                                                        |          |

# PIC24HJXXXGPX06/X08/X10

|                                                                                                      |     |                                                                                                          |          |
|------------------------------------------------------------------------------------------------------|-----|----------------------------------------------------------------------------------------------------------|----------|
| 10-bit Analog-to-Digital Conversion (CHPS = 01, SIMSAM = 0, ASAM = 1, SSRC = 111, SAMC = 00001)..... | 267 | I2Cx Bus Data Requirements (Master Mode).....                                                            | 258      |
| 10-bit Analog-to-Digital Conversion (CHPS = 01, SIMSAM = 0, ASAM = 0, SSRC = 000).....               | 267 | I2Cx Bus Data Requirements (Slave Mode).....                                                             | 260      |
| 12-bit Analog-to-Digital Conversion (ASAM = 0, SSRC = 000).....                                      | 265 | Output Compare Requirements.....                                                                         | 250      |
| ECAN I/O.....                                                                                        | 261 | PLL Clock.....                                                                                           | 244      |
| External Clock.....                                                                                  | 243 | Reset, Watchdog Timer, Oscillator Start-up Timer, Power-up Timer and Brown-out Reset Requirements... 247 |          |
| I2Cx Bus Data (Master Mode).....                                                                     | 257 | Simple OC/PWM Mode Requirements.....                                                                     | 251      |
| I2Cx Bus Data (Slave Mode).....                                                                      | 259 | SPIx Master Mode (CKE = 0) Requirements.....                                                             | 252      |
| I2Cx Bus Start/Stop Bits (Master Mode).....                                                          | 257 | SPIx Master Mode (CKE = 1) Requirements.....                                                             | 253      |
| I2Cx Bus Start/Stop Bits (Slave Mode).....                                                           | 259 | SPIx Slave Mode (CKE = 0) Requirements.....                                                              | 254      |
| Input Capture (CAPx).....                                                                            | 250 | SPIx Slave Mode (CKE = 1) Requirements.....                                                              | 256      |
| OC/PWM.....                                                                                          | 251 | Timer1 External Clock Requirements.....                                                                  | 248      |
| Output Compare (OCx).....                                                                            | 250 | Timer2 External Clock Requirements.....                                                                  | 249      |
| Reset, Watchdog Timer, Oscillator Start-up Timer and Power-up Timer.....                             | 246 | Timer3 External Clock Requirements.....                                                                  | 249      |
| SPIx Master Mode (CKE = 0).....                                                                      | 252 |                                                                                                          |          |
| SPIx Master Mode (CKE = 1).....                                                                      | 253 | <b>U</b>                                                                                                 |          |
| SPIx Slave Mode (CKE = 0).....                                                                       | 254 | UART Module                                                                                              |          |
| SPIx Slave Mode (CKE = 1).....                                                                       | 255 | UART1 Register Map.....                                                                                  | 36       |
| Timer1, 2 and 3 External Clock.....                                                                  | 248 | UART2 Register Map.....                                                                                  | 37       |
| <b>Timing Requirements</b>                                                                           |     | <b>V</b>                                                                                                 |          |
| CLKO and I/O.....                                                                                    | 245 | Voltage Regulator (On-Chip).....                                                                         | 218      |
| External Clock.....                                                                                  | 243 | <b>W</b>                                                                                                 |          |
| Input Capture.....                                                                                   | 250 | Watchdog Timer (WDT).....                                                                                | 213, 219 |
| <b>Timing Specifications</b>                                                                         |     | Programming Considerations.....                                                                          | 219      |
| 10-bit Analog-to-Digital Conversion Requirements...                                                  | 268 | WWW Address.....                                                                                         | 287      |
| CAN I/O Requirements.....                                                                            | 261 | WWW, On-Line Support.....                                                                                | 10       |

## THE MICROCHIP WEB SITE

Microchip provides online support via our WWW site at [www.microchip.com](http://www.microchip.com). This web site is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the web site contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

## CUSTOMER CHANGE NOTIFICATION SERVICE

Microchip's customer notification service helps keep customers current on Microchip products. Subscribers will receive e-mail notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, access the Microchip web site at [www.microchip.com](http://www.microchip.com), click on Customer Change Notification and follow the registration instructions.

## CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or field application engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

**Technical support is available through the web site at: <http://support.microchip.com>**

# PIC24HJXXXGPX06/X08/X10

---

## READER RESPONSE

It is our intention to provide you with the best documentation possible to ensure successful use of your Microchip product. If you wish to provide your comments on organization, clarity, subject matter, and ways in which our documentation can better serve you, please FAX your comments to the Technical Publications Manager at (480) 792-4150.

Please list the following information, and use this outline to provide us with your comments about this document.

To: Technical Publications Manager  
RE: Reader Response  
From: Name \_\_\_\_\_  
Company \_\_\_\_\_  
Address \_\_\_\_\_  
City / State / ZIP / Country \_\_\_\_\_  
Telephone: (\_\_\_\_) \_\_\_\_\_ - \_\_\_\_\_ FAX: (\_\_\_\_) \_\_\_\_\_ - \_\_\_\_\_

Application (optional):

Would you like a reply? \_\_\_Y \_\_\_N

Device: PIC24HJXXXGPX06/X08/X10

Literature Number: DS70175H

Questions:

1. What are the best features of this document?

---

---

2. How does this document meet your hardware and software development needs?

---

---

3. Do you find the organization of this document easy to follow? If not, why?

---

---

4. What additions to the document do you think would enhance the structure and subject?

---

---

5. What deletions from the document could be made without affecting the overall usefulness?

---

---

6. Is there any incorrect or misleading information (what and where)?

---

---

7. How would you improve this document?

---

---

# PIC24HJXXXGPX06/X08/X10

## PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

|                                    | PIC   | 24    | HJ    | 256   | GP    | 6     | 10    | T     | I/PT  | -     | XXX   |
|------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Microchip Trademark                | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| Architecture                       | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| Flash Memory Family                | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| Program Memory Size (KB)           | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| Product Group                      | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| Pin Count                          | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| Tape and Reel Flag (if applicable) | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| Temperature Range                  | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| Package                            | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| Pattern                            | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |

|                      |                                                                       |   |                                              |
|----------------------|-----------------------------------------------------------------------|---|----------------------------------------------|
| Architecture:        | 24                                                                    | = | 16-bit Microcontroller                       |
| Flash Memory Family: | HJ                                                                    | = | Flash program memory, 3.3V, High-speed       |
| Product Group:       | GP2                                                                   | = | General purpose family                       |
|                      | GP3                                                                   | = | General purpose family                       |
|                      | GP5                                                                   | = | General purpose family                       |
|                      | GP6                                                                   | = | General purpose family                       |
| Pin Count:           | 06                                                                    | = | 64-pin                                       |
|                      | 10                                                                    | = | 100-pin                                      |
| Temperature Range:   | I                                                                     | = | -40°C to +85°C (Industrial)                  |
| Package:             | PT                                                                    | = | 10x10 or 12x12 mm TQFP (Thin Quad Flat-pack) |
|                      | PF                                                                    | = | 14x14 mm TQFP (Thin Quad Flatpack)           |
| Pattern:             | Three-digit QTP, SQTP, Code or Special Requirements (blank otherwise) |   |                                              |
|                      | ES                                                                    | = | Engineering Sample                           |

**Examples:**  
a) PIC24HJ256GP210I/PT:  
General-purpose PIC24H, 256 KB program memory, 100-pin, Industrial temp., TQFP package.  
b) PIC24HJ64GP506I/PT-ES:  
General-purpose PIC24H, 64 KB program memory, 64-pin, Industrial temp., TQFP package, Engineering Sample.



## Worldwide Sales and Service

### AMERICAS

#### Corporate Office

2355 West Chandler Blvd.  
Chandler, AZ 85224-6199  
Tel: 480-792-7200  
Fax: 480-792-7277  
Technical Support:  
<http://support.microchip.com>  
Web Address:  
[www.microchip.com](http://www.microchip.com)

#### Atlanta

Duluth, GA  
Tel: 678-957-9614  
Fax: 678-957-1455

#### Boston

Westborough, MA  
Tel: 774-760-0087  
Fax: 774-760-0088

#### Chicago

Itasca, IL  
Tel: 630-285-0071  
Fax: 630-285-0075

#### Cleveland

Independence, OH  
Tel: 216-447-0464  
Fax: 216-447-0643

#### Dallas

Addison, TX  
Tel: 972-818-7423  
Fax: 972-818-2924

#### Detroit

Farmington Hills, MI  
Tel: 248-538-2250  
Fax: 248-538-2260

#### Kokomo

Kokomo, IN  
Tel: 765-864-8360  
Fax: 765-864-8387

#### Los Angeles

Mission Viejo, CA  
Tel: 949-462-9523  
Fax: 949-462-9608

#### Santa Clara

Santa Clara, CA  
Tel: 408-961-6444  
Fax: 408-961-6445

#### Toronto

Mississauga, Ontario,  
Canada  
Tel: 905-673-0699  
Fax: 905-673-6509

### ASIA/PACIFIC

#### Asia Pacific Office

Suites 3707-14, 37th Floor  
Tower 6, The Gateway  
Harbour City, Kowloon  
Hong Kong  
Tel: 852-2401-1200  
Fax: 852-2401-3431

#### Australia - Sydney

Tel: 61-2-9868-6733  
Fax: 61-2-9868-6755

#### China - Beijing

Tel: 86-10-8528-2100  
Fax: 86-10-8528-2104

#### China - Chengdu

Tel: 86-28-8665-5511  
Fax: 86-28-8665-7889

#### China - Hong Kong SAR

Tel: 852-2401-1200  
Fax: 852-2401-3431

#### China - Nanjing

Tel: 86-25-8473-2460  
Fax: 86-25-8473-2470

#### China - Qingdao

Tel: 86-532-8502-7355  
Fax: 86-532-8502-7205

#### China - Shanghai

Tel: 86-21-5407-5533  
Fax: 86-21-5407-5066

#### China - Shenyang

Tel: 86-24-2334-2829  
Fax: 86-24-2334-2393

#### China - Shenzhen

Tel: 86-755-8203-2660  
Fax: 86-755-8203-1760

#### China - Wuhan

Tel: 86-27-5980-5300  
Fax: 86-27-5980-5118

#### China - Xiamen

Tel: 86-592-2388138  
Fax: 86-592-2388130

#### China - Xian

Tel: 86-29-8833-7252  
Fax: 86-29-8833-7256

#### China - Zhuhai

Tel: 86-756-3210040  
Fax: 86-756-3210049

### ASIA/PACIFIC

#### India - Bangalore

Tel: 91-80-3090-4444  
Fax: 91-80-3090-4080

#### India - New Delhi

Tel: 91-11-4160-8631  
Fax: 91-11-4160-8632

#### India - Pune

Tel: 91-20-2566-1512  
Fax: 91-20-2566-1513

#### Japan - Yokohama

Tel: 81-45-471- 6166  
Fax: 81-45-471-6122

#### Korea - Daegu

Tel: 82-53-744-4301  
Fax: 82-53-744-4302

#### Korea - Seoul

Tel: 82-2-554-7200  
Fax: 82-2-558-5932 or  
82-2-558-5934

#### Malaysia - Kuala Lumpur

Tel: 60-3-6201-9857  
Fax: 60-3-6201-9859

#### Malaysia - Penang

Tel: 60-4-227-8870  
Fax: 60-4-227-4068

#### Philippines - Manila

Tel: 63-2-634-9065  
Fax: 63-2-634-9069

#### Singapore

Tel: 65-6334-8870  
Fax: 65-6334-8850

#### Taiwan - Hsin Chu

Tel: 886-3-572-9526  
Fax: 886-3-572-6459

#### Taiwan - Kaohsiung

Tel: 886-7-536-4818  
Fax: 886-7-536-4803

#### Taiwan - Taipei

Tel: 886-2-2500-6610  
Fax: 886-2-2508-0102

#### Thailand - Bangkok

Tel: 66-2-694-1351  
Fax: 66-2-694-1350

### EUROPE

#### Austria - Wels

Tel: 43-7242-2244-39  
Fax: 43-7242-2244-393

#### Denmark - Copenhagen

Tel: 45-4450-2828  
Fax: 45-4485-2829

#### France - Paris

Tel: 33-1-69-53-63-20  
Fax: 33-1-69-30-90-79

#### Germany - Munich

Tel: 49-89-627-144-0  
Fax: 49-89-627-144-44

#### Italy - Milan

Tel: 39-0331-742611  
Fax: 39-0331-466781

#### Netherlands - Druenen

Tel: 31-416-690399  
Fax: 31-416-690340

#### Spain - Madrid

Tel: 34-91-708-08-90  
Fax: 34-91-708-08-91

#### UK - Wokingham

Tel: 44-118-921-5869  
Fax: 44-118-921-5820

02/04/09