

■Absolute Maximum Ratings (Ta = 25°C)


Item		Symbol	G3VM-62J1	G3VM-202J1	G3VM-355JR	G3VM-352J	G3VM-354J	G3VM-402J	Unit	Measurement conditions
Input	LED forward current	I _F	50						mA	
	LED forward current reduction rate	ΔI _F /°C	-0.5						mA/°C	Ta ≥ 25°C
	LED reverse voltage	V _R	5						V	
	Connection temperature	T _J	125						°C	
Output	Load voltage (AC peak/DC)	V _{OFF}	60	200	350			400	V	
	Continuous load current (AC peak/DC)	I _o	400	200	120	110	120		mA	
	ON current reduction rate	ΔI _o /°C	-4.0	-2.0	-1.2	-1.1	-1.2		mA/°C	Ta ≥ 25°C
	Pulse ON current	I _{op}	1,200	600	360	330	360		mA	t=100 ms, Duty=1/10
	Connection temperature	T _J	125						°C	
Dielectric strength between I/O *		V _{I-o}	1500						V _{rms}	AC for 1 min
Ambient operating temperature		T _a	-40 to +85						°C	With no icing or condensation
Ambient storage temperature		T _{stg}	-55 to +125						°C	
Soldering temperature		—	260						°C	10 s

* The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.


■Electrical Characteristics (Ta = 25°C)

Item		Symbol		G3VM-62J1	G3VM-202J1	G3VM-355JR	G3VM-352J	G3VM-354J	G3VM-402J	Unit	Measurement conditions
Input	LED forward voltage	V _F	Minimum	1.0						V	I _F =10 mA
			Typical	1.15							
			Maximum	1.3							
	Reverse current	I _R	Maximum	10						μA	V _R =5 V
	Capacitance between terminals	C _T	Typical	30						pF	V=0, f=1 MHz
	Trigger LED forward current	I _{FT} (I _{FC}) *2	Typical	1.6	1					mA	G3VM-62J1/202J1/352J/402J : I _o =Continuous load current ratings G3VM-355JR : 1a : I _o =120 mA, 1b : I _{OFF} =10 μA G3VM-354J : I _{OFF} =10 μA
Maximum			3								
Release LED forward current	I _{FC} (I _{FT}) *2	Minimum	0.1						mA	G3VM-62J1/202J1/352J/402J : I _{OFF} =100 μA G3VM-355JR : 1a : I _{OFF} =10 μA, 1b : I _o =120 mA G3VM-354J : I _o =120 mA	
Output	Maximum resistance with output ON	R _{ON}	Typical	1	5	15	35 (25)	15	17	Ω	G3VM-62J1/202J1/352J/402J : I _F =5 mA, I _o =Continuous load current ratings G3VM-355JR : 1a : I _F =5 mA, I _o =120 mA, 1b : I _F =0, I _o =120 mA G3VM-352J : I _F =5 mA, I _o =110 mA, Values in parentheses are for t < 1 s. G3VM-354J : I _o =120 mA
			Maximum	2	8	25	50 (35)	25	35		
	Current leakage when the relay is open	I _{LEAK}	Maximum	1						μA	G3VM-62J1/202J1/352J/402J : V _{OFF} =Load voltage ratings G3VM-355JR : 1a : V _{OFF} =350 V, 1b : V _{OFF} =350 V, I _F =5 mA G3VM-354J : V _{OFF} =350 V, I _F =5 mA
	Capacitance between terminals	C _{OFF}	Typical	130	100	65	30	65	70	pF	G3VM-62J1/202J1/352J/402J : V=0, f=1 MHz G3VM-355JR : 1a : V=0, f=1 MHz, 1b : V=0, f=1 MHz, F=5 mA G3VM-354J : V=0, f=1 MHz, I _F =5 mA
Capacitance between I/O terminals		C _{I-O}	Typical	0.8						pF	f=1 MHz, V _S =0 V
Insulation resistance between I/O terminals		R _{I-O}	Minimum	1000						MΩ	V _{I-O} =500 VDC, RoH≤60%
			Typical	10 ⁸							
Turn-ON time		t _{ON}	Typical	0.8	0.6	—	0.3	—	0.3	ms	I _F =0.5 mA, R _L =200 Ω, V _{DD} =20 V *1
			Maximum	2	1.5	1a : 1 1b : 1	1				
Turn-OFF time		t _{OFF}	Typical	0.1		—	0.1	—	0.1		
			Maximum	0.5	1	1a : 1 1b : 3	1	3	1		

*1. Turn-ON and Turn-OFF Times

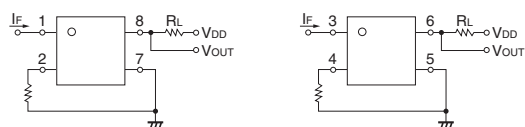

*2. These values are for Relays with NC contacts

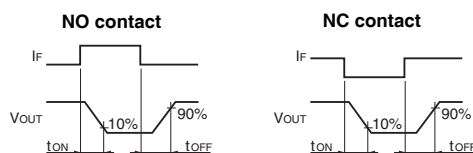

■Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


Item	Symbol		G3VM-62J1	G3VM-202J1	G3VM-355JR	G3VM-352J	G3VM-354J	G3VM-402J	Unit
Load voltage (AC peak/DC)	V _{DD}	Maximum	48	200	280			320	V
Operating LED forward current	I _F	Minimum	5						mA
		Typical	7.5		—	10	—	7.5	
		Maximum	25						
Continuous load current (AC peak/DC)	I _o	Maximum	400	130	120	100	120		
Ambient operating temperature	T _a	Minimum	-20						°C
		Maximum	65						

■Spacing and Insulation


Item	Minimum	Unit
Creepage distances	4.0	mm
Clearance distances	4.0	
Internal isolation thickness	0.1	

■Engineering Data


● LED forward current vs. Ambient temperature

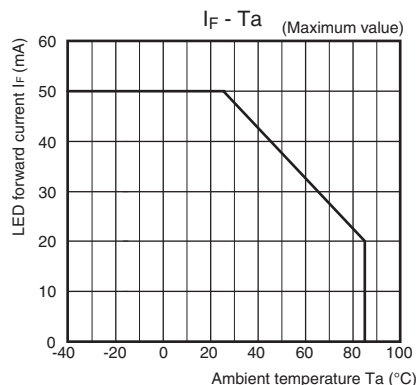

● Continuous load current vs. Ambient temperature

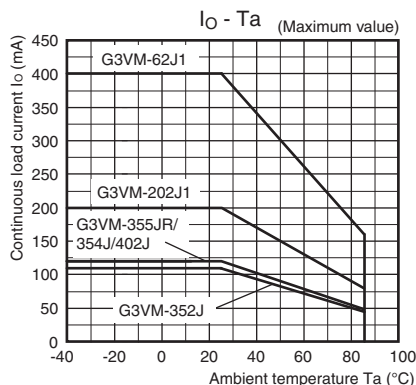


● LED forward current vs. LED forward voltage

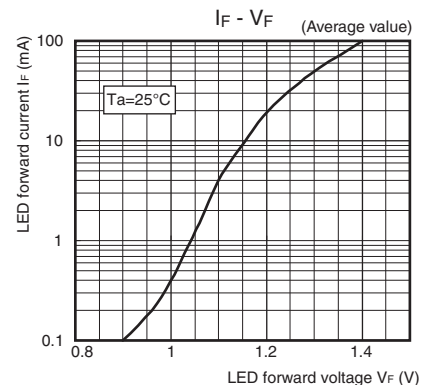


● Continuous load current vs. On-state voltage

G3VM-62J1/202J1

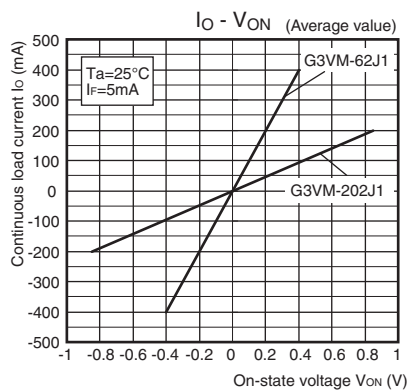


G3VM-355JR/352J/354J/402J

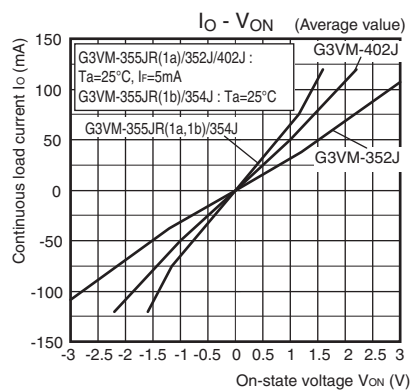


● On-state resistance vs. Ambient temperature


G3VM-62J1/202J1

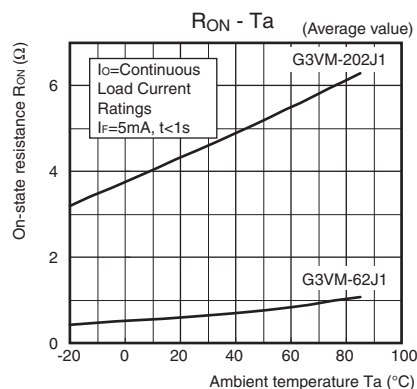

G3VM-355JR/352J/354J/402J

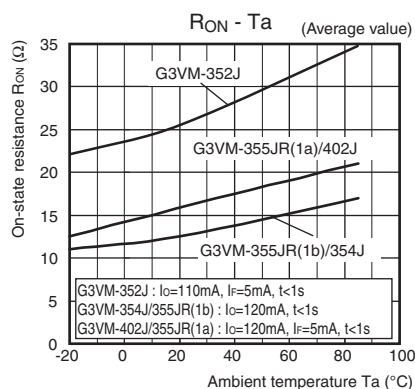


● Trigger LED forward current vs. Ambient temperature

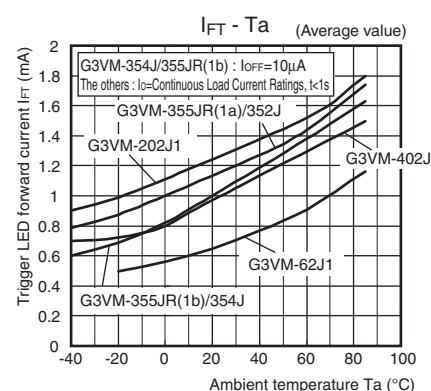


■Engineering Data


● Turn ON, Turn OFF time vs.
LED forward current
G3VM-62J1/202J1

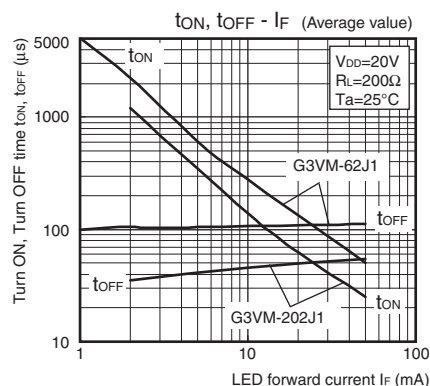


G3VM-355JR

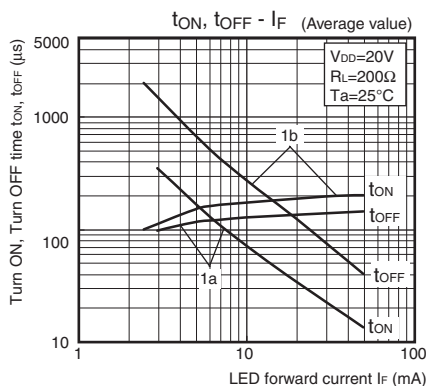


G3VM-352J/354J/402J

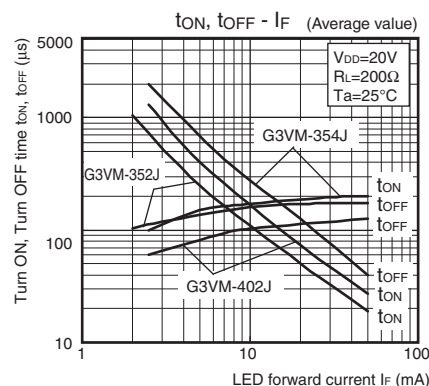


● Turn ON, Turn OFF time vs.
Ambient temperature
G3VM-62J1/202J1

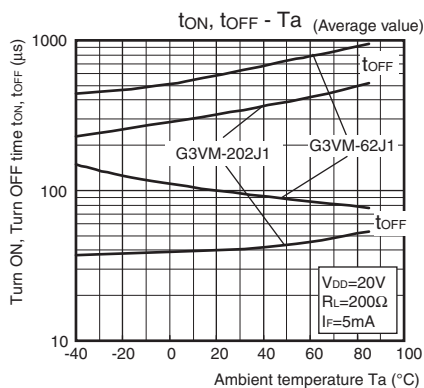


G3VM-355JR

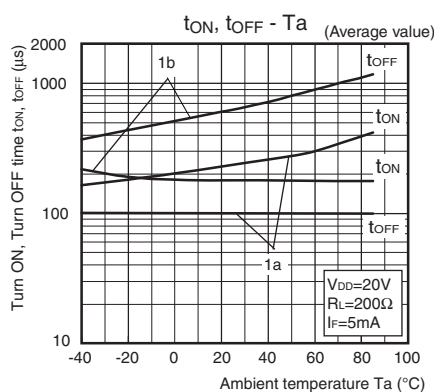

G3VM-352J/354J/402J

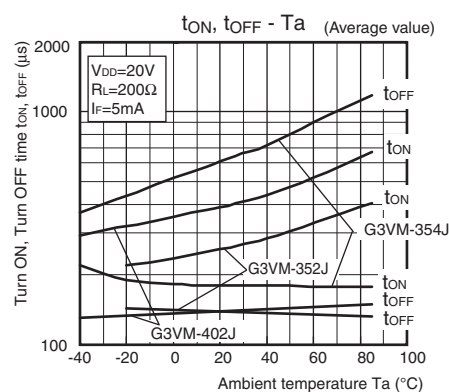

● Current leakage vs.
Ambient temperature

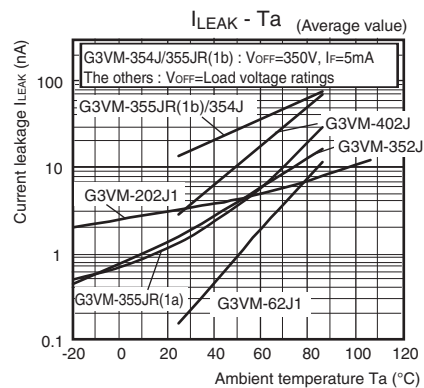


■Appearance / Terminal Arrangement / Internal Connections

●Appearance

SOP (Small Outline Package)


SOP 8-pin

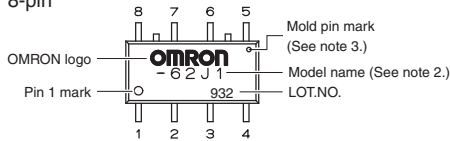


- Note:** 1. The actual product is marked differently from the image shown here.
Note: 2. “G3VM” does not appear in the model number on the Relay.
Note: 3. The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

●Terminal Arrangement/Internal Connections
(Top View)


G3VM-62J1/202J1/352J/402J




G3VM-355JR



G3VM-354J




■Dimensions (Unit: mm)




Surface-mounting Terminals

Weight: 0.2 g

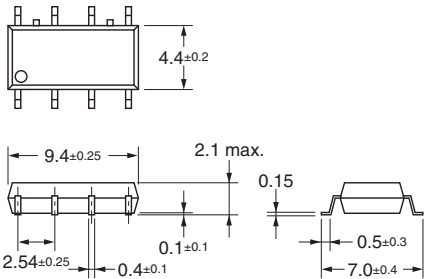

Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Note: The actual product is marked differently from the image shown here.

■Approved Standards

UL recognized

Model	Approved Standards	Contact form	File No.
G3VM-62J1	UL (recognized)	2a (DPST-NO)	E80555
G3VM-202J1		1a1b (SPST-NO/SPST-NC)	
G3VM-355JR		2a (DPST-NO)	
G3VM-352J		2b (DPST-NC)	
G3VM-354J		2a (DPST-NO)	
G3VM-402J		2a (DPST-NO)	

Models Certified by SEMKO for EN/IEC Standards

Model	Approved Standards	Contact form	File No.
G3VM-402J	EN62368-1 (SEMKO certified)	2a (DPST-NO)	SE-S-2001018

■Safety Precautions

- Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.

SOP

G3VM-□J□

Please check each region's Terms & Conditions by region website.

OMRON Corporation
Electronic and Mechanical Components Company

Regional Contact	
Americas https://www.components.omron.com/	Europe http://components.omron.eu/
Asia-Pacific https://ecb.omron.com.sg/	China https://www.ecb.omron.com.cn/
Korea https://www.omron-ecb.co.kr/	Japan https://www.omron.co.jp/ecb/