


SMD Power Inductor
CDH53



Electrical Characteristics

Part Name	Stamp	Inductance (μH) [within] ※1	D.C.R. (Ω) Max. (Typ.) (at 20°C)	Rated Current (A) ※2
CDH53NP-2R2MC	2R2	$2.2 \pm 20\%$	66m (51m)	2.03
CDH53NP-3R3MC	3R3	$3.3 \pm 20\%$	88m (68m)	1.88
CDH53NP-4R7MC	4R7	$4.7 \pm 20\%$	96m (74m)	1.68
CDH53NP-100LC	100	$10 \pm 15\%$	0.16(0.13)	1.23
CDH53NP-120LC	120	$12 \pm 15\%$	0.18(0.14)	1.12
CDH53NP-150KC	150	$15 \pm 10\%$	0.25(0.20)	1.00
CDH53NP-180KC	180	$18 \pm 10\%$	0.28(0.21)	0.88
CDH53NP-220KC	220	$22 \pm 10\%$	0.39(0.30)	0.80
CDH53NP-270KC	270	$27 \pm 10\%$	0.42(0.32)	0.72
CDH53NP-330KC	330	$33 \pm 10\%$	0.49(0.38)	0.67
CDH53NP-390KC	390	$39 \pm 10\%$	0.55(0.43)	0.64
CDH53NP-470KC	470	$47 \pm 10\%$	0.77(0.59)	0.53
CDH53NP-560KC	560	$56 \pm 10\%$	0.87(0.67)	0.50
CDH53NP-680JC	680	$68 \pm 5\%$	1.21(0.96)	0.45
CDH53NP-820JC	820	$82 \pm 5\%$	1.34(1.07)	0.39
CDH53NP-101JC	101	$100 \pm 5\%$	1.57(1.25)	0.37
CDH53NP-121JC	121	$120 \pm 5\%$	1.80(1.44)	0.34
CDH53NP-151JC	151	$150 \pm 5\%$	2.40(1.92)	0.31
CDH53NP-181JC	181	$180 \pm 5\%$	2.66(2.13)	0.30
CDH53NP-221JC	221	$220 \pm 5\%$	3.73(2.99)	0.26

※1. Inductance measuring frequency: 2.2 μH ~ 4.7 μH at 7.96 MHz;
10 μH ~ 220 μH at 1kHz.

※2. Rated current: The DC current at which the inductance decreases to 90% of it's initial value or when $\Delta t=40^{\circ}\text{C}$,
whichever is lower ($T_a=20^{\circ}\text{C}$).


SMD Power Inductor

CDH53



Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) — ΔT

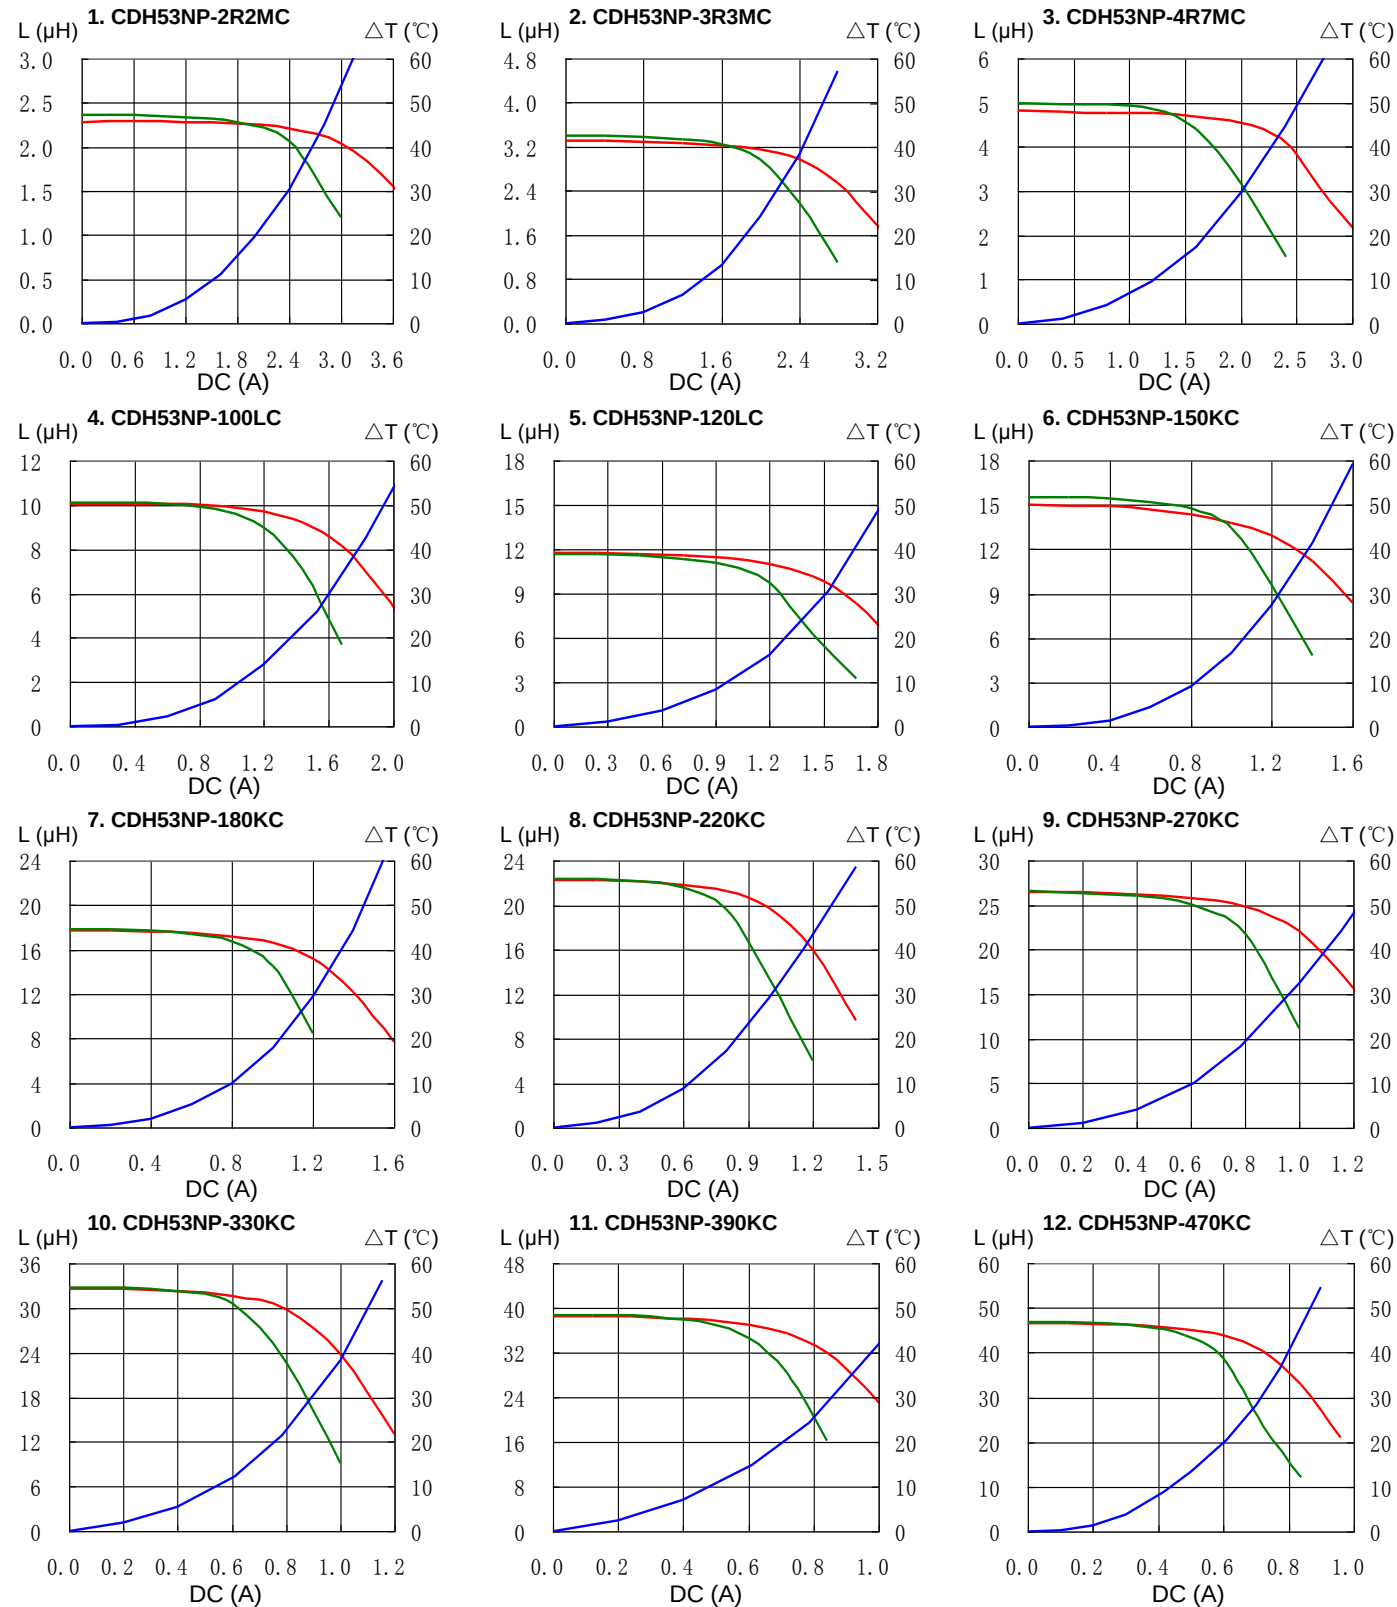









SMD Power Inductor

CDH53



Saturation Current & Temperature Rise Graph



— L (20°C) — L (100°C) — ΔT

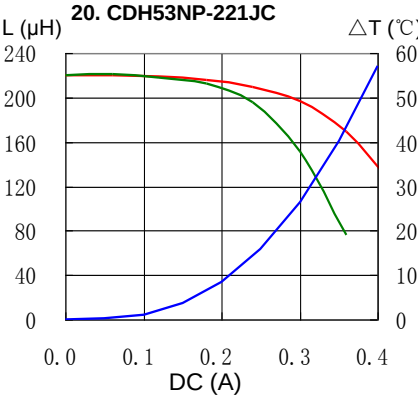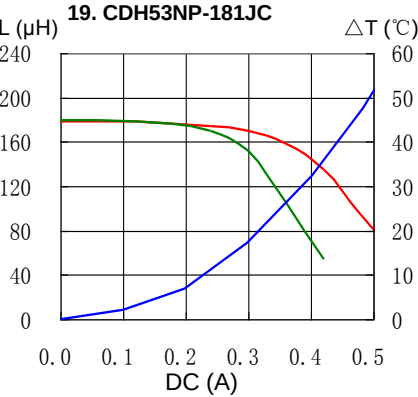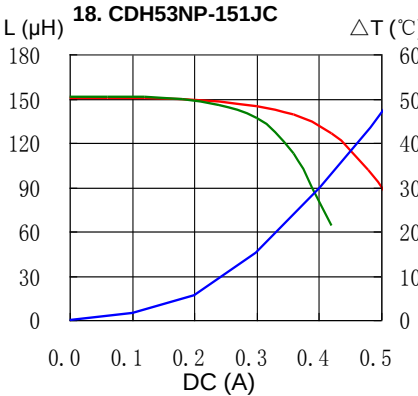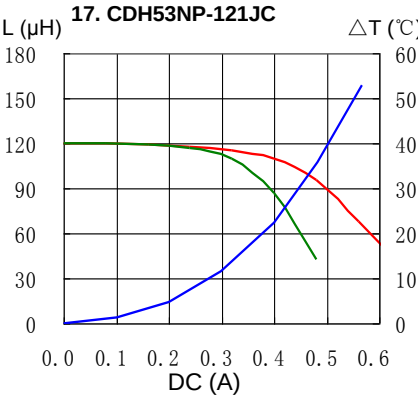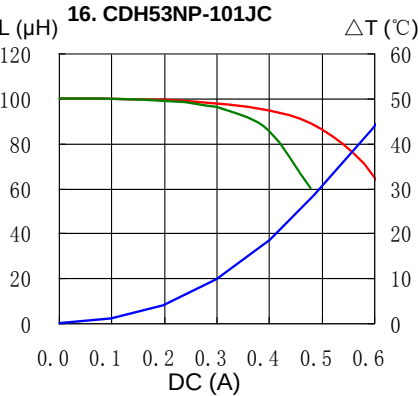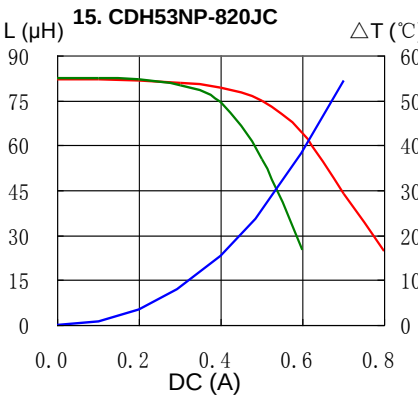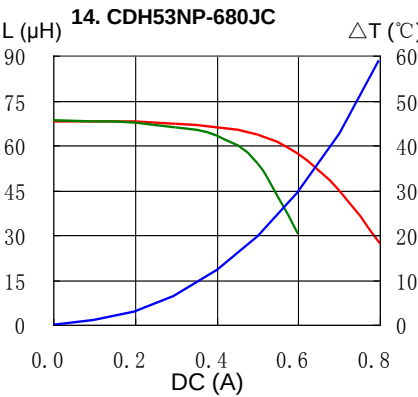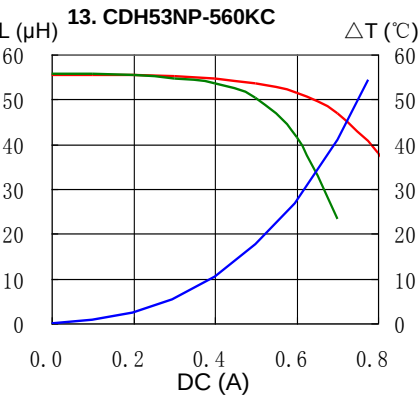

SMD Power Inductor CDH53



Solder Reflow Condition

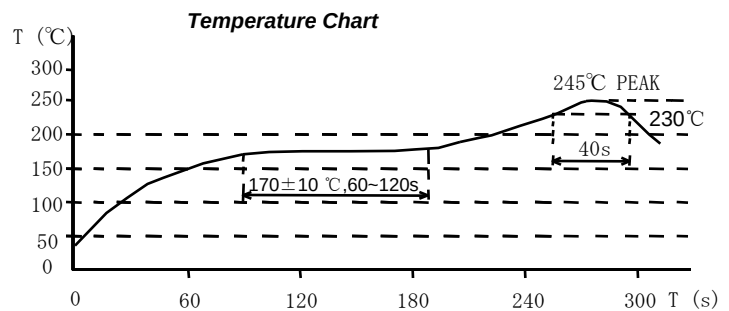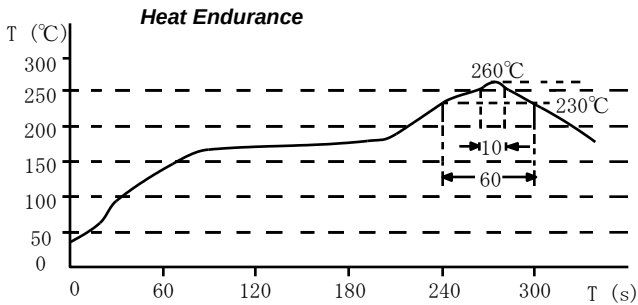

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Chicago

Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com