
CPH3461

Continued from preceding page.

Parameter	0	0 - 10	Value			Linit
	Symbol	Conditions	min	typ	max	Unit
Input Capacitance	Ciss			140		pF
Output Capacitance	Coss	V _{DS} =20V, f=1MHz		8		pF
Reverse Transfer Capacitance	Crss			3		pF
Turn-ON Delay Time	t _d (on)			7.5		ns
Rise Time	t _r	0		7.3		ns
Turn-OFF Delay Time	t _d (off)	See specified Test Circuit		23		ns
Fall Time	tf			43		ns
Total Gate Charge	Qg			2.1		nC
Gate to Source Charge	Qgs	V _{DS} =125V, V _{GS} =4.5V, I _D =350mA		0.3		nC
Gate to Drain "Miller" Charge	Qgd			0.7		nC
Forward Diode Voltage	V _{SD}	I _S =350mA, V _{GS} =0V		0.79	1.2	V


Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

Packing Type : TL Marking






Electrical Connection




Switching Time Test Circuit




ORDERING INFORMATION

Device	Package	Shipping	Note		
CPH3461-TL-H	CPH3,SC-59	2 000 / Toro & Dool	Dh. Fasa and Halaman Fasa		
CPH3461-TL-W	SOT-23,TO-236	3,000pcs. / Tape & Reel	Pb-Free and Halogen Free		

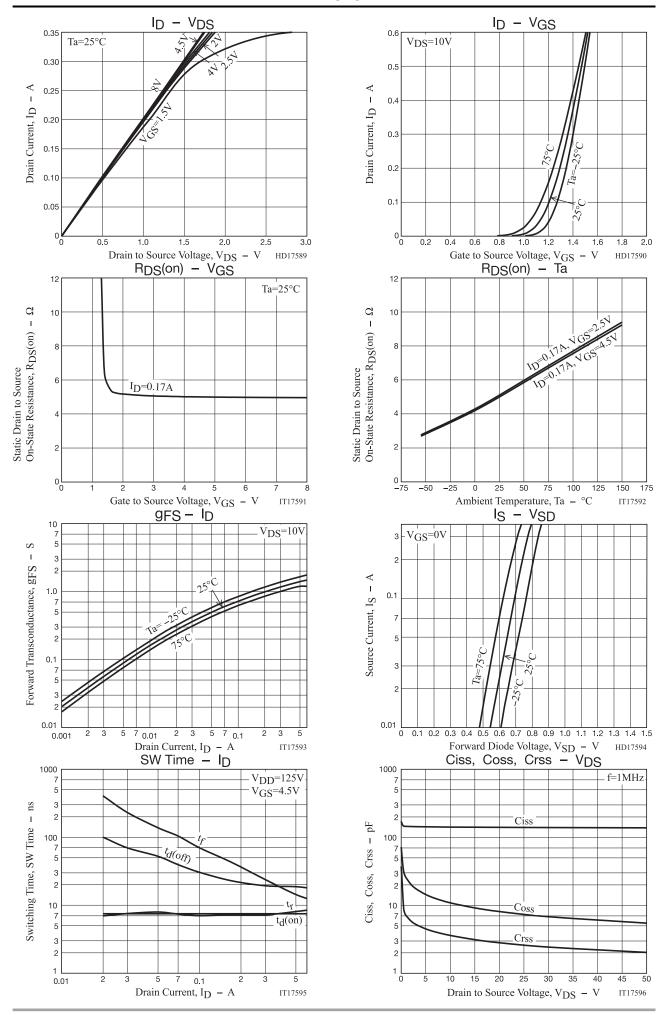

CPH3461

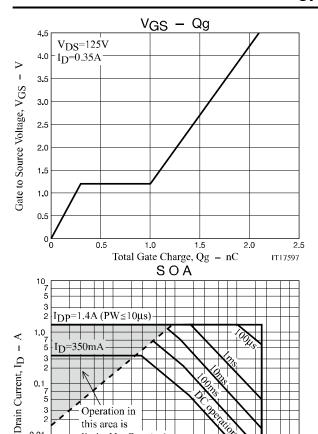

0.1 7 5


0.01


3 2

Operation in this area is

Ta=25°C Single pulse

limited by R_{DS}(on).



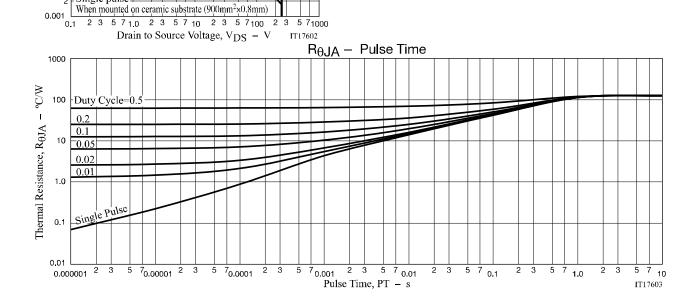

Package Dimensions

CPH3461-TL-H, CPH3461-TL-W

CPH3


CASE 318BA ISSUE O

unit: mm

1: Gate

2: Source

3: Drain

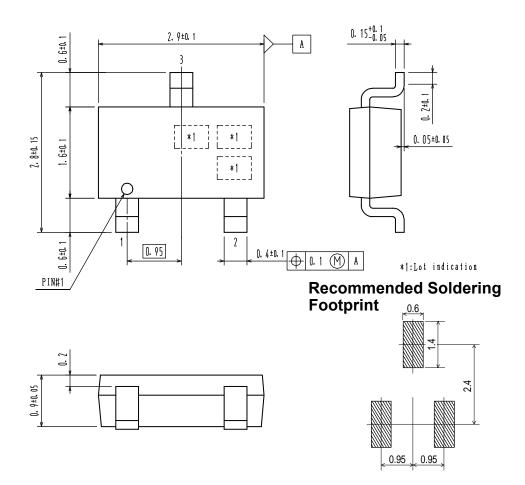

Note on usage : Since the CPH3461 is a MOSFET product, please avoid using this device in the vicinity of highly charged objects.

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent re