


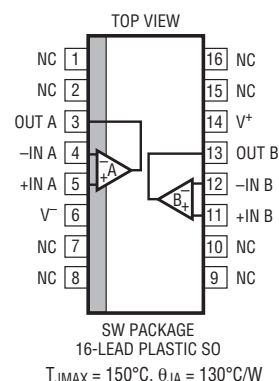


LT1017/LT1018

ABSOLUTE MAXIMUM RATINGS (Note 1)

Supply Voltage	40V	Operating Temperature Range	
Differential Input Voltage.....	40V	LT1017M/LT1018M	–55°C to 125°C
Input Voltage.....	–0.3V to 40V	LT1017C/LT1018C.....	0°C to 70°C
Short-Circuit Duration	Indefinite	LT1017I/LT1018I.....	–40°C to 85°C
Storage Temperature Range.....	–65°C to 150°C	Lead Temperature (Soldering, 10 sec)	300°C

PACKAGE/ORDER INFORMATION

 S8 PACKAGE 8-LEAD PLASTIC SO $T_{JMAX} = 150^{\circ}C, \theta_{JA} = 190^{\circ}C/W$		 N8 PACKAGE 8-LEAD PDIP $T_{JMAX} = 150^{\circ}C, \theta_{JA} = 140^{\circ}C/W$	
ORDER PART NUMBER	S8 PART MARKING	ORDER PART NUMBER	PART MARKING
LT1017CS8 LT1017IS8 LT1018CS8 LT1018IS8	1017 1017I 1018 1018I	LT1017CN8 LT1017IN8 LT1018CN8	
 H PACKAGE 8-LEAD TO-5 METAL CAN $T_{JMAX} = 150^{\circ}C, \theta_{JA} = 150^{\circ}C/W, \theta_{JC} = 45^{\circ}C/W$ OBSELETE PACKAGE Consider the 8-Lead Plastic Dip Package For Alternate Source		 SW PACKAGE 16-LEAD PLASTIC SO $T_{JMAX} = 150^{\circ}C, \theta_{JA} = 130^{\circ}C/W$	
ORDER PART NUMBER	PART MARKING	ORDER PART NUMBER	PART MARKING
LT1017MH LT1017CH LT1018MH LT1018CH		LT1017CSW LT1018CSW	
Order Options Tape and Reel: Add #TR Lead Free: Add #PBF Lead Free Tape and Reel: Add #TRPBF Lead Free Part Marking: http://www.linear.com/leadfree/			

*The temperature grade is identified by a label on the shipping container. Consult LTC Marketing for parts specified with wider operating temperature ranges.

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range of –55°C to 85°C for M grade parts, –40°C to 85°C for I grade parts and 0°C to 70°C for C grade parts.

PARAMETER	CONDITIONS		LT1017			LT1018			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Offset Voltage (Note 2)	$\pm 0.75V \leq V_S \leq \pm 20V$	25°C		0.4	1		0.4	1	mV
		●		0.5	1.4		0.5	1.4	mV
		125°C			5		0.7	1.5	mV
Bias Current	$\pm 0.75V \leq V_S \leq \pm 20V$	25°C		5	15		15	75	nA
		●		7	25		18	100	nA
		125°C		10	60			110	nA
Offset Current	$\pm 0.75V \leq V_S \leq \pm 20V$	25°C		0.4	2		1	8	nA
		●		0.5	3		1.6	12	nA
		125°C			20			20	nA
Common Mode Rejection Ratio	$V_S = \pm 20V, -20V \leq V_{CM} \leq 19.1V$	25°C	105	115		105	115		dB
		●	100	115		100	115		dB
		125°C	82	100		95	110		dB
Power Supply Rejection Ratio	$\pm 0.75V \leq V_S \leq \pm 20V$	25°C	96	110		96	110		dB
		●	95	105		95	105		dB
		125°C	82			86	100		dB
Gain	No Load, $V_{OUT} = \pm 19.9V$ (Note 3)	25°C	110	115		110	125		dB
		●	105	115		105	120		dB
		125°C	100			100			dB
	$R_L = 4k, V_{OUT} = \pm 19V$	25°C	100	110		100	110		dB
		●	94			94			dB
Output Sink Current	$V^+ = 4.5V, V^- = 0V$ Overdrive > 30mV	25°C	30	65		35	70		mA
		●	25	50		25	50		mA
		125°C	10	20		10	30		mA
Output Source Current	$V^+ = 40V, V^- = 0V$ $V_{IN} = 5mV, V_{OUT} = 0.4V$	25°C	30	75		75	250		μA
		●	25	70		50	220		μA
		125°C	25	75		50	200		μA
	$V^+ = 1.2V, V^- = 0V$ $V_{IN} = 5mV, V_{OUT} = 0.4V$	25°C	25	35		70	140		μA
		●	15	20		45	120		μA
		125°C	25	40		40	110		μA
Negative Output Saturation	$I_{OUT} = 0mA$ = 0.1mA = 1mA = 10mA = 30mA	$V^+ = 4.5V, V^- = 0V$ $V_{IN} = -10mV$	25°C	5	20	5	15		mV
			25°C	35	60	35	60		mV
			25°C	60	120	60	120		mV
			25°C	120	200	120	250		mV
			25°C	350	600	350	700		mV
	$I_{OUT} = 0mA$ = 0.1mA = 1mA = 10mA = 30mA	$V^+ = 4.5V, V^- = 0V$ $V_{IN} = -10mV$	●	5	20	8	20		mV
			●	40	75	35	70		mV
			●	75	150	70	150		mV
			●	150	300	150	300		mV
			●	600	900	500	900		mV
	$I_{OUT} = 0mA$ = 0.1mA = 1mA = 10mA = 30mA	$V^+ = 4.5V, V^- = 0V$ $V_{IN} = -10mV$	125°C	25	50	10	40		mV
			125°C	60	100	60	100		mV
			125°C	100	200	110	200		mV
		125°C	300	600	300	400		mV	
		125°C			900			mV	
Positive Output Saturation	$I_{OUT} = 0\mu A$ = 10μA = 0μA = 10μA = 0μA = 10μA	25°C	40	80	35	80		mV	
		25°C	175	250	175	250		mV	
		●	45	90	45	90		mV	
		●	190	300	190	300		mV	
		125°C	50	100	50	100		mV	
		125°C		300		300		mV	

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range of -55°C to 85°C for M grade parts, -40°C to 85°C for I grade parts and 0°C to 70°C for C grade parts.

PARAMETER	CONDITIONS		LT1017			LT1018			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Leakage Current	$V_S = 5\text{V}$, $V_{OUT} = 40\text{V}$ $V_{IN} \geq 100\text{mV}$	25°C		0.5	3		1	8	μA
		● 125°C		0.6	3		1.8	10	μA
					5			15	μA
Supply Current	$V_S = 5\text{V}$	25°C		30	60		110	250	μA
		● 125°C		40	80		110	250	μA
					80			300	μA
	$V_S = 40\text{V}$	25°C		40	90		130	250	μA
		● 125°C		55	100		140	270	μA
					100			300	μA
Minimum Operating Voltage	$I_{OUT} = 1\text{mA}$	25°C			1.15			1.2	V
		● 125°C			1.15			1.2	V
					1.15			1.2	V


Note 1: Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

Note 2: Offset voltage is guaranteed over a common mode voltage range of $V^- \leq V_{IN} \leq (V^+ - 0.9\text{V})$.

Note 3: No load gain is guaranteed but not tested (LT1017 only).


TYPICAL PERFORMANCE CHARACTERISTICS

Input Bias Current

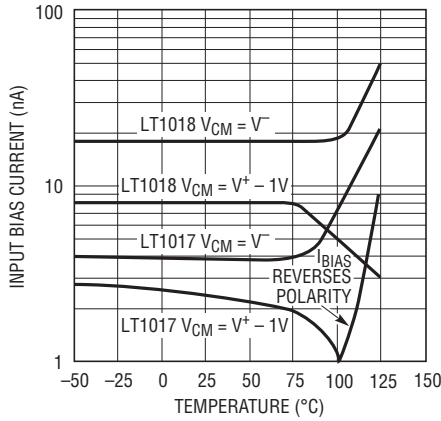


1017/18 G01

Input Offset Current

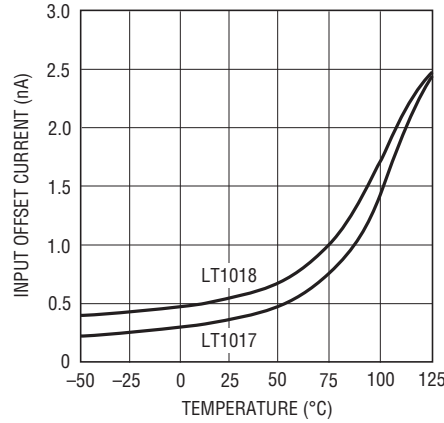


1017/18 G02

Bias Current vs Differential Input

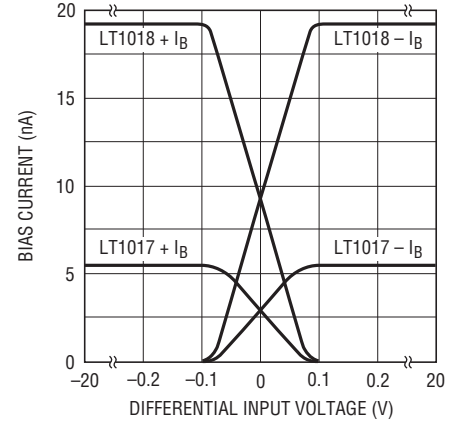


1017/18 G03

Input Bias Current with Inputs Driven Below the Supply

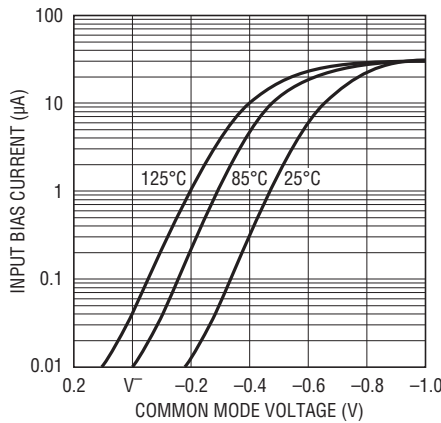


1017/18 G04

Common Mode Limits

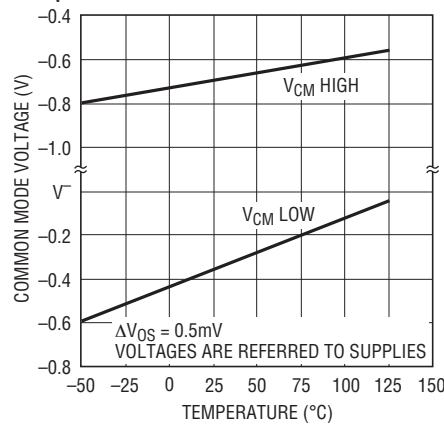


1017/18 G05

Supply Current

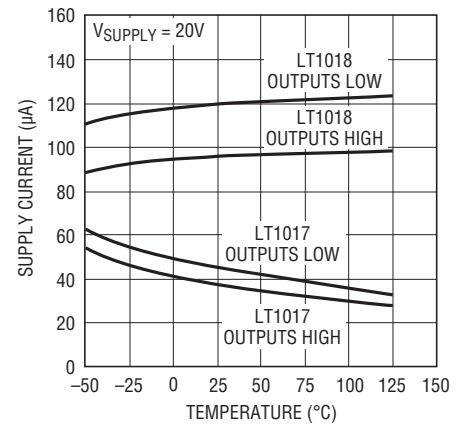


1017/18 G06

Positive Supply Current

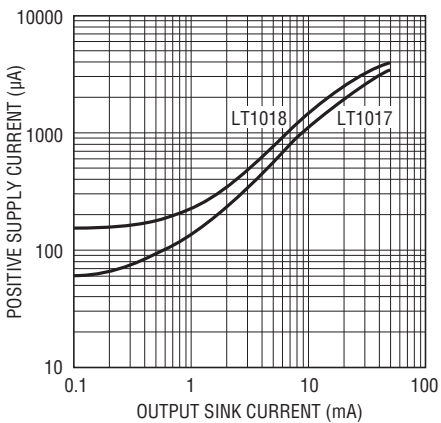


1017/18 G07

NPN Output Saturation Voltage

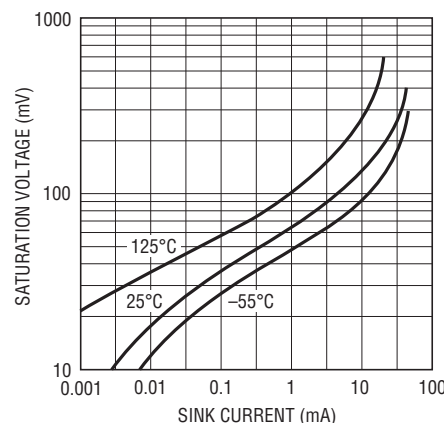

1017/18 G08

Output Sinking Current Limit

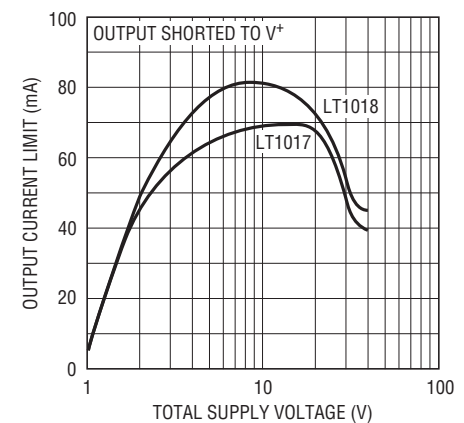


1017/18 G09


LT1017/LT1018

TYPICAL PERFORMANCE CHARACTERISTICS


Output Sinking Current Limit

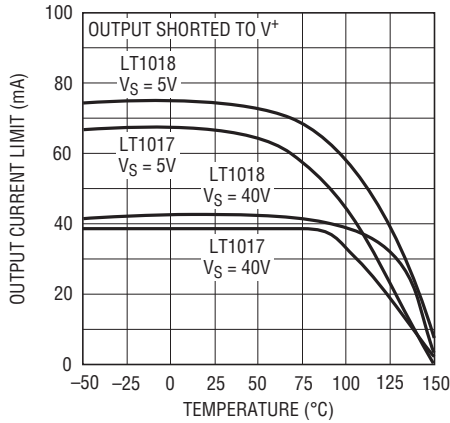


Total Switching Time

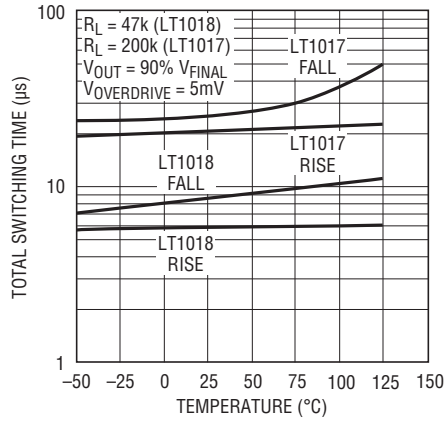


Output Delay

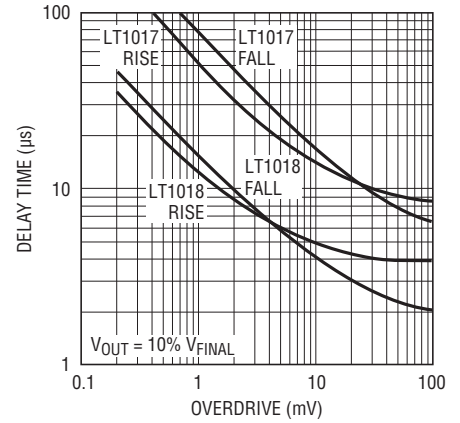


Transition Time

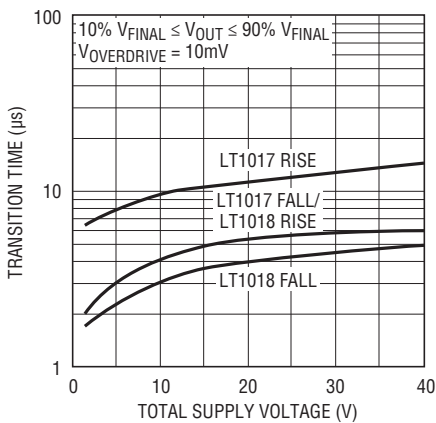


Positive Transition Time

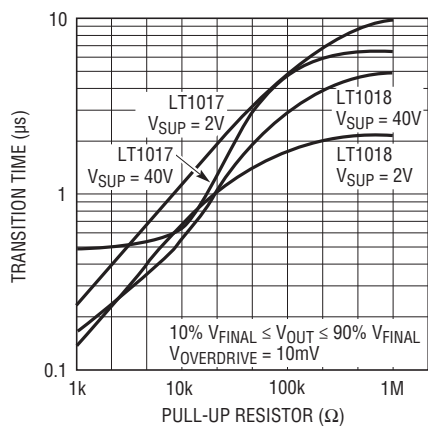


LT1017 Response Time

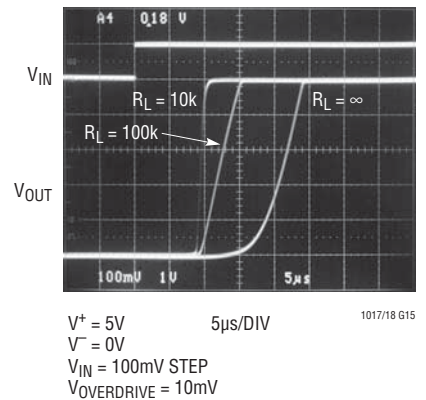


LT1017 Response Time

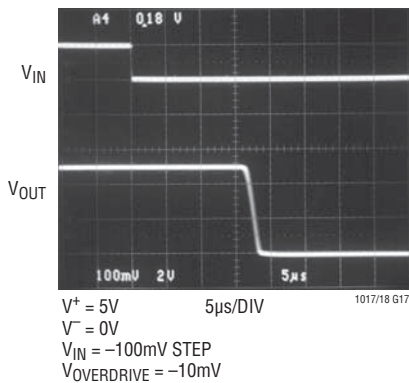

LT1018 Response Time

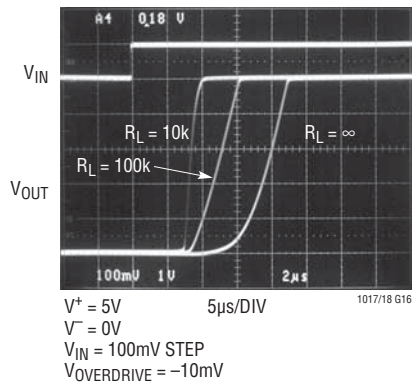


LT1018 Response Time

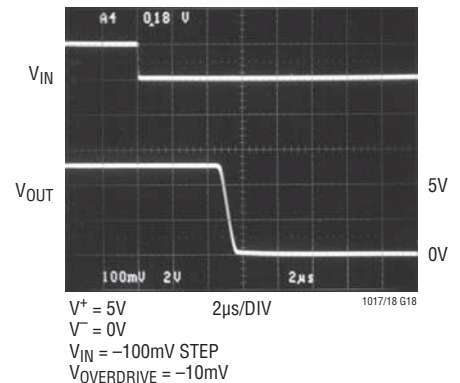


TYPICAL APPLICATIONS


Driving Relays




Increasing Positive Output Current

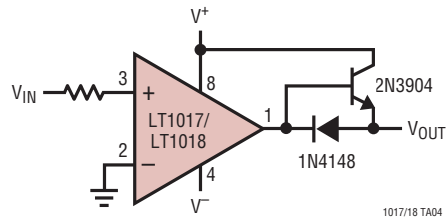


Delay On Power Up



LT1018 Op Amp, $A_V = 100$

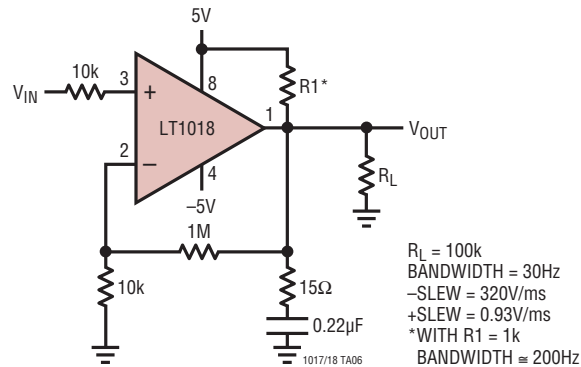


LT1017 Op Amp, $A_V = 100$

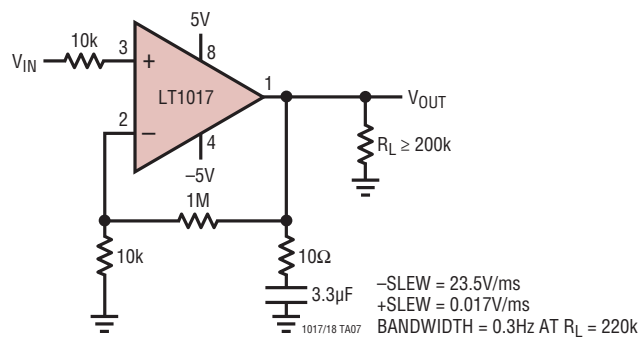


TYPICAL APPLICATIONS

Negative Voltage Regulator

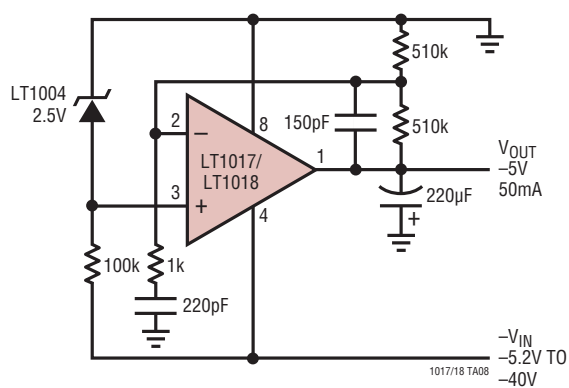


2-Wire Comparator

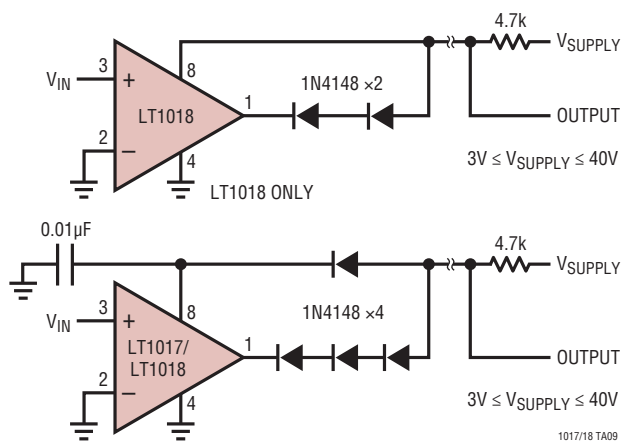


TYPICAL APPLICATIONS

5V Power Supply Monitor

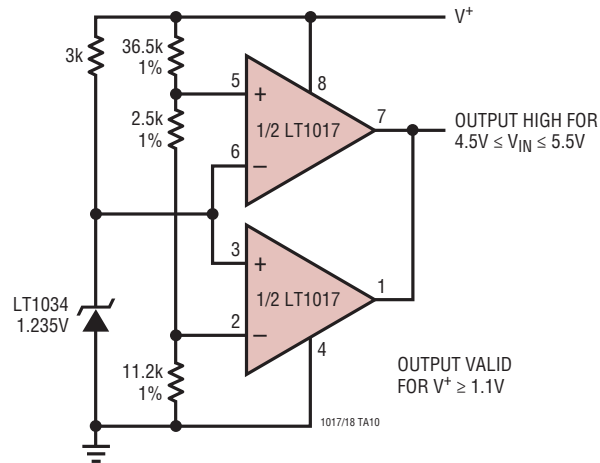


Precise Tri-Wave Generator

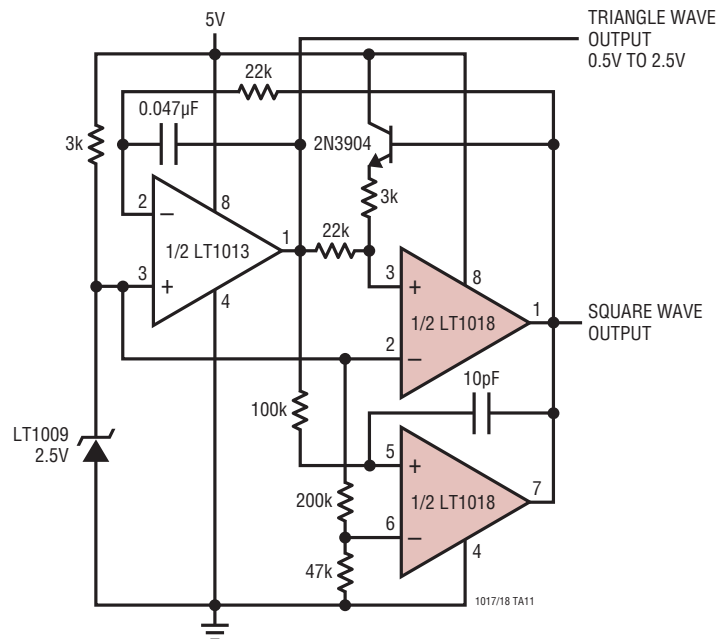


TYPICAL APPLICATIONS

Power Supply Monitor

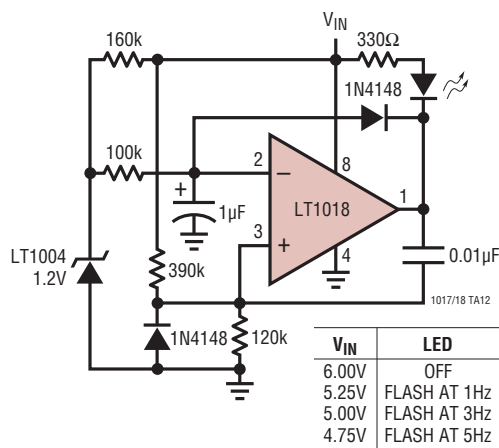

1.5V Input Flyback Regulator

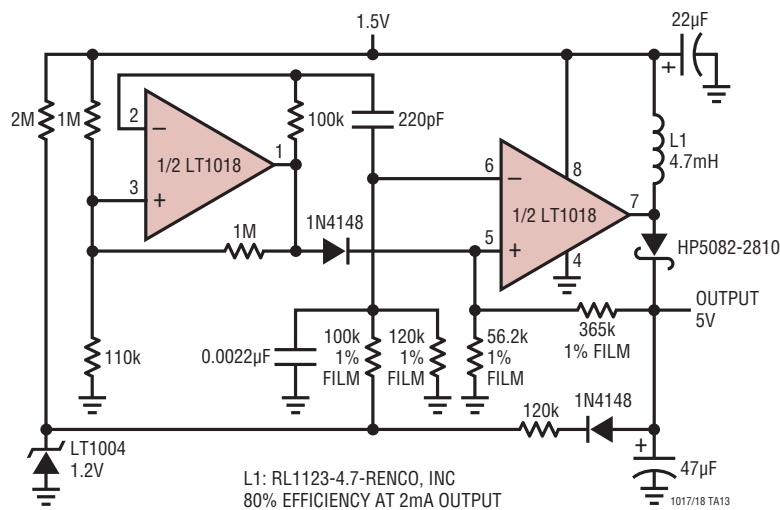

The circuit diagram shows a two-stage op-amp configuration. The first stage is a non-inverting amplifier with an input impedance of 100k and a feedback network consisting of a 200k resistor and a 100pF capacitor. The input is connected to a 5V supply through a 100k resistor. The output of the first stage is connected to the non-inverting input of the second stage, which is configured as a voltage follower. The second stage's output is connected to a 10V output terminal through a 100pF capacitor. The output terminal is also connected to a 100k resistor (R1) and a 120k resistor (R2) to ground. The output current is 2mA. The circuit is powered by a 5V supply and includes a 400mH inductor (400mH**) and a 1N4148 diode.


$$*V_{OUT} = 1.2 \left(1 + \frac{R_1}{R_2} \right)$$

****DALE TE-5/Q3/400mH**

1017/18 TA14


The circuit diagram illustrates a precision sine wave generator. It features two LT1018 operational amplifiers. The first op-amp (top) is configured as a voltage follower with a feedback network consisting of a 3MΩ resistor and a 0.001μF POLYSTYRENE capacitor. Its non-inverting input is connected to a 9V supply through a 220kΩ resistor and a 2.2μF capacitor, and to ground through a 1N4148 diode. The output of this op-amp is connected to the non-inverting input of the second op-amp (bottom) through a 220pF capacitor. The second op-amp is configured as a voltage follower with a feedback network of a 330kΩ resistor and a 0.1μF capacitor. Its non-inverting input is connected to a 9V supply through a 220kΩ resistor and a 2.2μF capacitor, and to ground through a 1N4148 diode. The output of the second op-amp is connected to the non-inverting input of the first op-amp through a 220pF capacitor. The circuit also includes a 100kΩ resistor and a 1N4148 diode connected to the 9V supply, and a 10kΩ resistor connected to ground. The output of the circuit is labeled 'OUTPUT 0kHz to 1kHz'. The current $I_Q \approx 350\mu A$ is indicated at the bottom left. The part number 1017/18 TA15 is at the bottom right.

PACKAGE DESCRIPTION

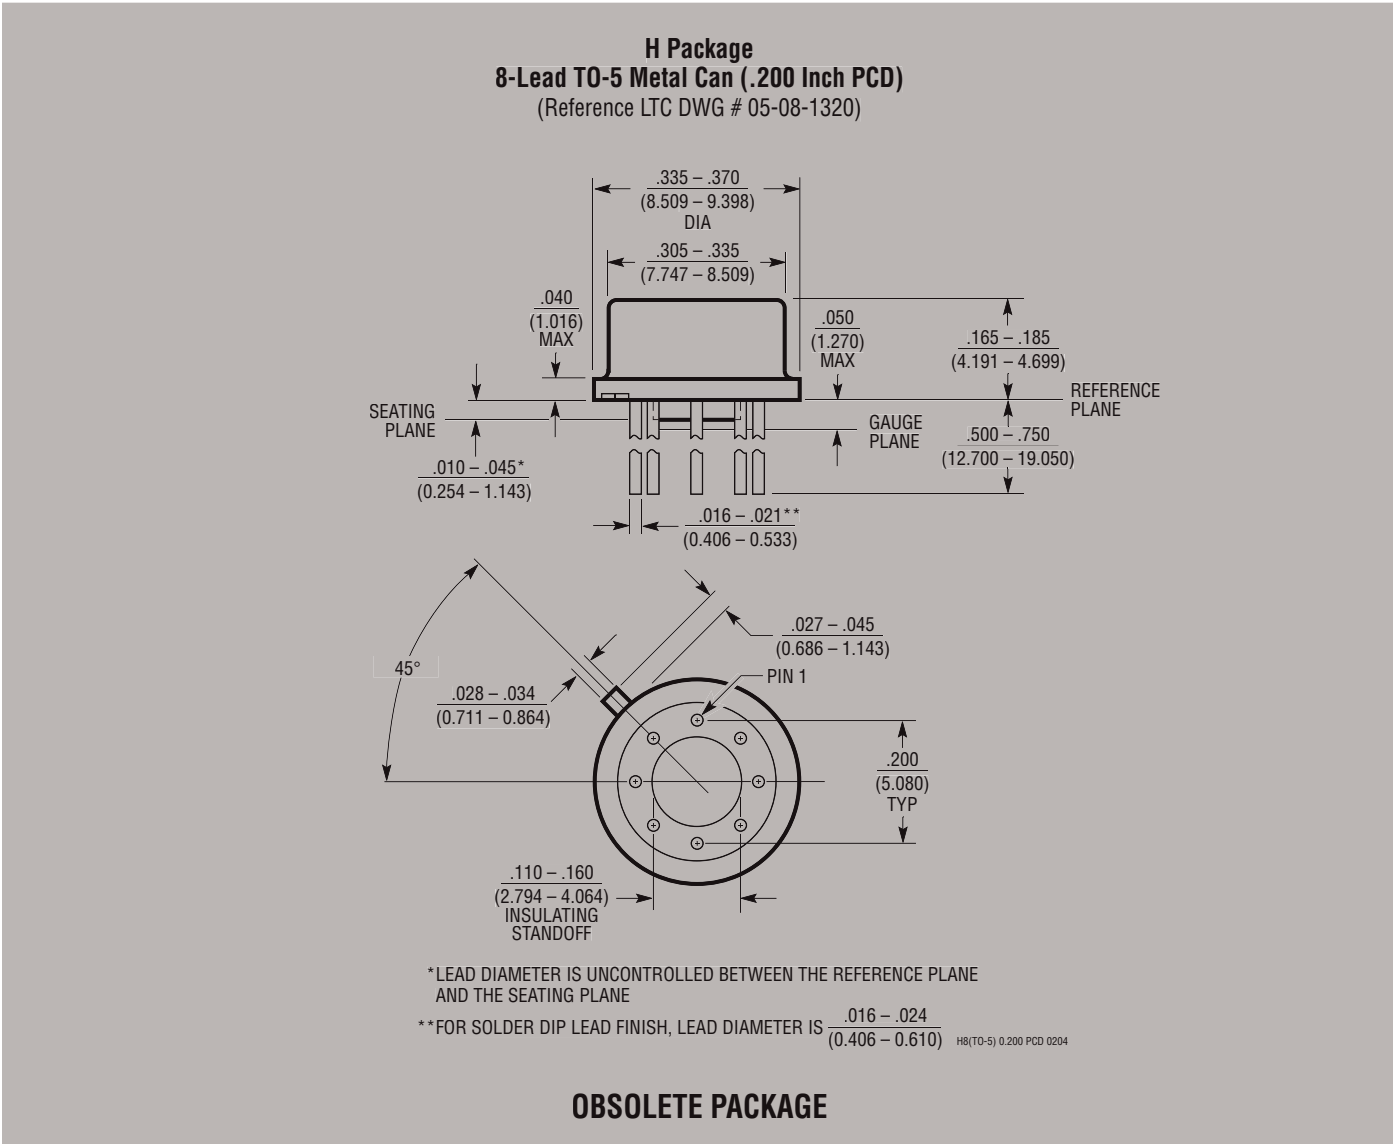

PACKAGE DESCRIPTION

N8 Package
8-Lead PDIP (Narrow .300 Inch)
 (Reference LTC DWG # 05-08-1510)

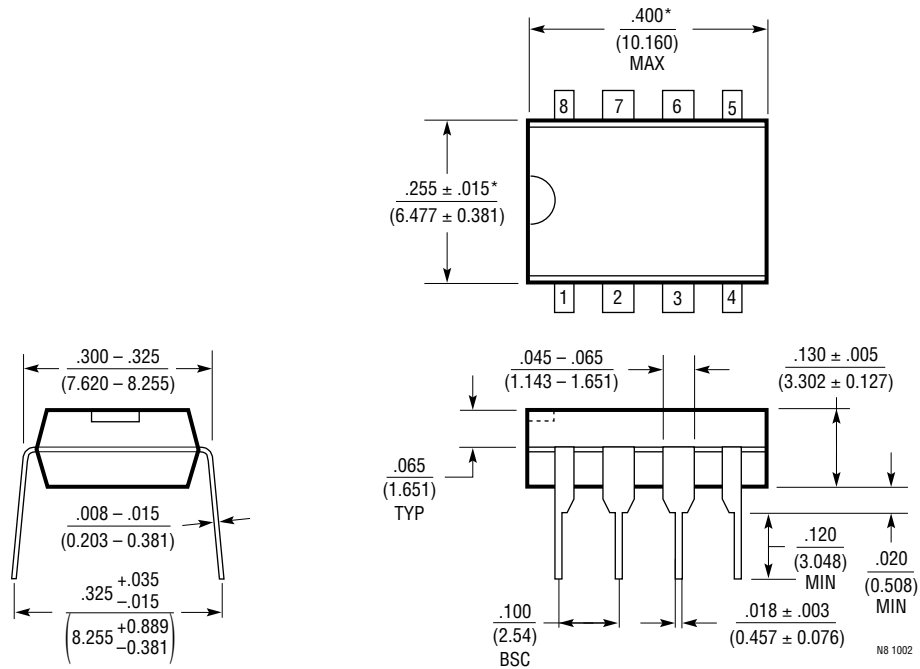


NOTE:
 1. DIMENSIONS ARE $\frac{\text{INCHES}}{\text{MILLIMETERS}}$

*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
 MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .010 INCH (0.254mm)

PACKAGE DESCRIPTION

S8 Package 8-Lead Plastic Small Outline (Narrow .150 Inch) (Reference LTC DWG # 05-08-1610)




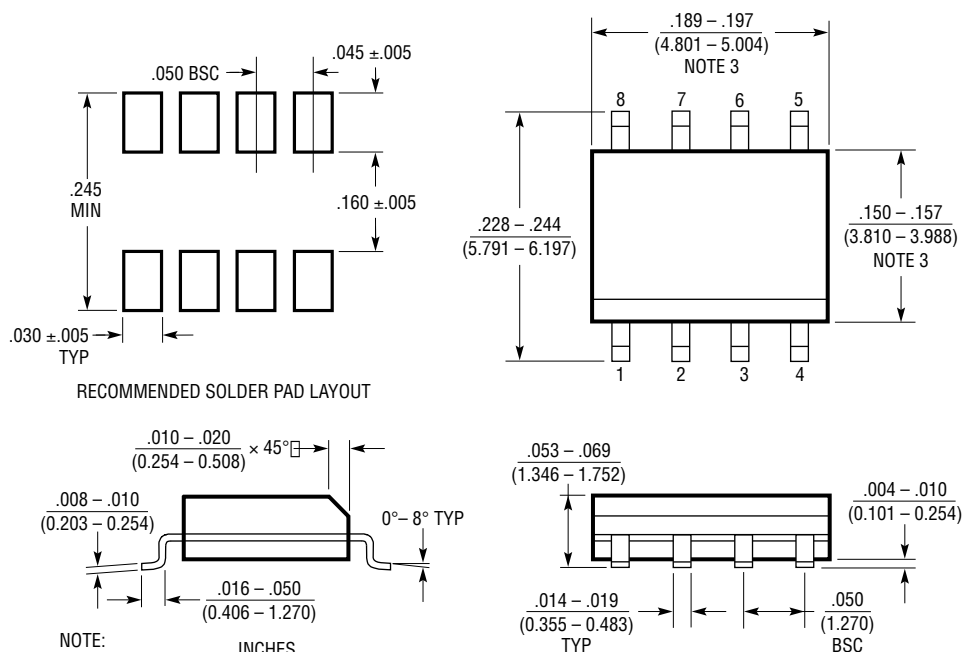


- NOTE:
1. DIMENSIONS IN $\frac{\text{INCHES}}{\text{MILLIMETERS}}$
 2. DRAWING NOT TO SCALE
 3. THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .006" (0.15mm)

S08 0303

PACKAGE DESCRIPTION

SW Package 16-Lead Plastic Small Outline (Wide .300 Inch) (Reference LTC DWG # 05-08-1620)

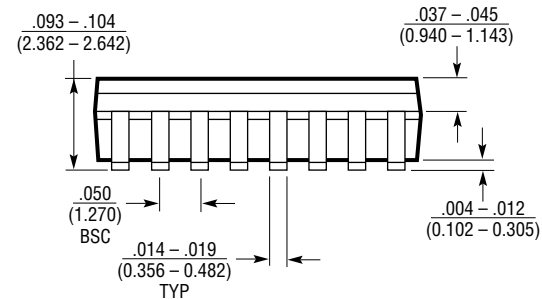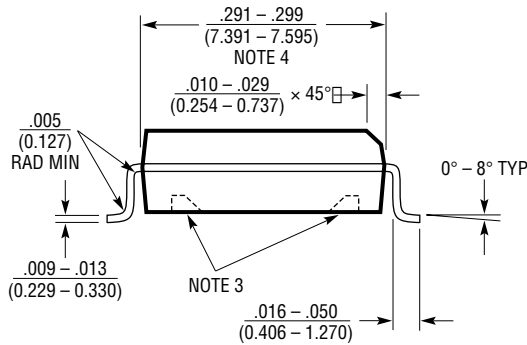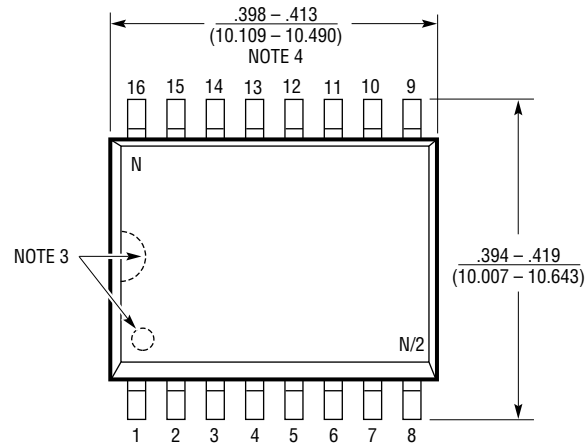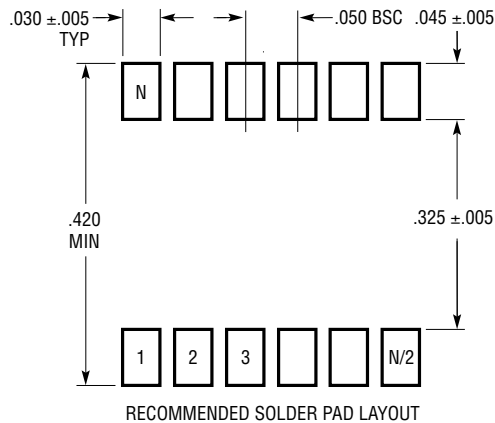

- NOTE:
1. DIMENSIONS IN INCHES (MILLIMETERS)
 2. DRAWING NOT TO SCALE
 3. PIN 1 IDENT, NOTCH ON TOP AND CAVITIES ON THE BOTTOM OF PACKAGES ARE THE MANUFACTURING OPTIONS. THE PART MAY BE SUPPLIED WITH OR WITHOUT ANY OF THE OPTIONS
 4. THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .006" (0.15mm)

S16 (WIDE) 0502

