


■Absolute Maximum Ratings (Ta = 25°C)

Item			Symbol	G3VM-61H1	G3VM-201H1	G3VM-351H	G3VM-353H	G3VM-401H	Unit	Measurement conditions
Input	LED forward current		IF	50					mA	
	LED forward current reduction rate		ΔIF/°C	-0.5					mA/°C	Ta ≥ 25°C
	LED reverse voltage		VR	5					V	
	Connection temperature		TJ	125					°C	
Output	Load voltage (AC peak/DC)		VOFF	60	200	350		400	V	
	Continuous load current	Connection A	Io	400	200	110	120		mA	Connection A: AC peak/DC Connection B and C: DC
		Connection B								
		Connection C		800	400	220	240			
	ON current reduction rate	Connection A	ΔIo/°C	-4.0	-2.0	-1.1	-1.2		mA/°C	Ta ≥ 25°C
		Connection B								
		Connection C		-8.0	-4.0	-2.2	-2.4			
	Pulse ON current		Iop	1200	600	330	360		mA	t=100 ms, Duty=1/10
	Connection temperature		TJ	125					°C	
Dielectric strength between I/O *		VI-o	1500					Vrms	AC for 1 min	
Ambient operating temperature		Ta	-40 to +85					°C	With no icing or condensation	
Ambient storage temperature		Tstg	-55 to +125					°C		
Soldering temperature		—	260					°C	10 s	

\* The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Connection Diagram

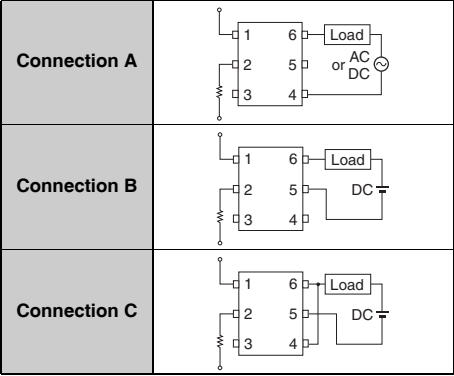


SOP

G3VM-□H□

## ■Electrical Characteristics (Ta = 25°C)

Item			Symbol	G3VM-61H1		G3VM-201H1	G3VM-351H	G3VM-353H	G3VM-401H	Unit	Measurement conditions
Input	LED forward voltage		V <sub>F</sub>	Minimum	1.0					V	I <sub>F</sub> =10 mA
				Typical	1.15						
				Maximum	1.3						
	Reverse current	I <sub>R</sub>	Maximum	10					μA	V <sub>R</sub> =5 V	
	Capacitance between terminals	C <sub>T</sub>	Typical	30					pF	V=0, f=1 MHz	
	Trigger LED forward current	I <sub>FT</sub> (I <sub>FC</sub> ) *2	Typical	1.6	1				mA	G3VM-61H1/201H1/351H/401H : I <sub>o</sub> =Continuous load current ratings G3VM-353H : I <sub>OFF</sub> =10 μA	
Maximum			3								
Release LED forward current	I <sub>FC</sub> (I <sub>FT</sub> ) *2	Minimum	0.1					mA	G3VM-61H1/201H1/351H/401H : I <sub>OFF</sub> =100 μA G3VM-353H : I <sub>o</sub> =120 mA		
Output	Maximum resistance with output ON	Connection A	R <sub>ON</sub>	Typical	1	5	35 (25)	15	17	Ω	G3VM-61H1/201H1/351H/401H : I <sub>F</sub> =5 mA, I <sub>o</sub> =Continuous load current ratings Values in parentheses are for t < 1 s. G3VM-353H : I <sub>o</sub> =Continuous load current ratings
		Connection B			0.5	3	28	8	11		
		Connection C			0.25	1.5	14	4	6		
		Connection A	Maximum	2	8	50 (35)	25	35			
		Connection B		1	5	40	14	20			
		Connection C		—		20	—				
	Current leakage when the relay is open	I <sub>LEAK</sub>	Maximum	1					μA	G3VM-61H1/201H1/351H/401H : V <sub>OFF</sub> =Load voltage ratings G3VM-353H : V <sub>OFF</sub> =350 V, I <sub>F</sub> =5 mA	
	Capacitance between terminals	C <sub>OFF</sub>	Typical	130	100	30	65	70	pF	G3VM-61H1/201H1/351H/401H : V=0, f=1 MHz G3VM-353H : V=0, f=1 MHz, I <sub>F</sub> =5 mA	
	Capacitance between I/O terminals		C <sub>I-O</sub>	Typical	0.8					pF	f=1 MHz, V <sub>S</sub> =0 V
Insulation resistance between I/O terminals		R <sub>I-O</sub>	Minimum	1000					MΩ	V <sub>I-O</sub> =500 VDC, R <sub>oH</sub> ≤60%	
			Typical	10 <sup>8</sup>							
Turn-ON time		t <sub>ON</sub>	Typical	0.8	0.6	0.3	—	0.3	ms	I <sub>F</sub> =5 mA, R <sub>L</sub> =200 Ω, V <sub>DD</sub> =20 V *1	
			Maximum	2	1.5	1					
Turn-OFF time		t <sub>OFF</sub>	Typical	0.1			—	0.1			
			Maximum	0.5	1		3	1			

\*1. Turn-ON and Turn-OFF Times

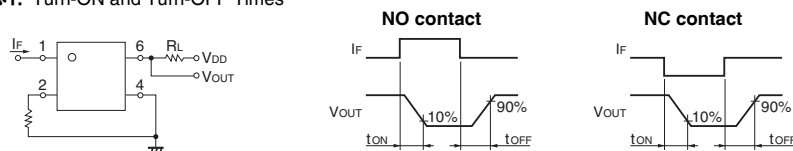

\*2. These values are for Relays with NC contacts

## ■Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


Item	Symbol		G3VM-61H1	G3VM-201H1	G3VM-351H	G3VM-353H	G3VM-401H	Unit
Load voltage (AC peak/DC)	V <sub>DD</sub>	Maximum	48	160	280		320	V
Operating LED forward current	I <sub>F</sub>	Minimum	5					mA
		Typical	7.5		10	—	7.5	
		Maximum	25					
Continuous load current (AC peak/DC)	I <sub>O</sub>	Maximum	400	130	100	120		
Ambient operating temperature	T <sub>a</sub>	Minimum	-20					°C
		Maximum	65	60	65			

## ■Spacing and Insulation


Item	Minimum	Unit
Creepage distances	4.0	mm
Clearance distances	4.0	
Internal isolation thickness	0.1	

## Engineering Data


### LED forward current vs. Ambient temperature

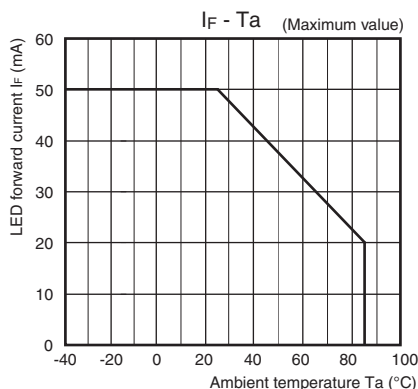


### LED forward current vs. LED forward voltage

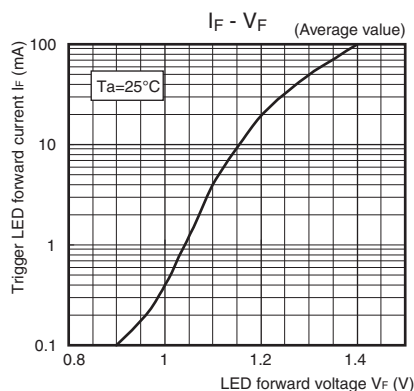


### On-state resistance vs. Ambient temperature

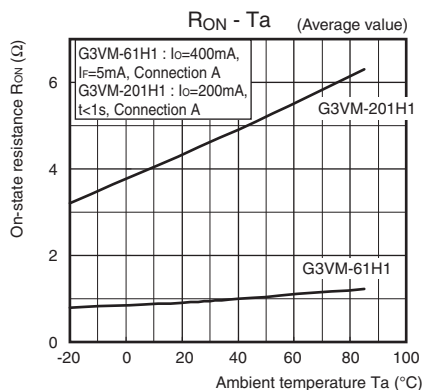


### Continuous load current vs. Ambient temperature

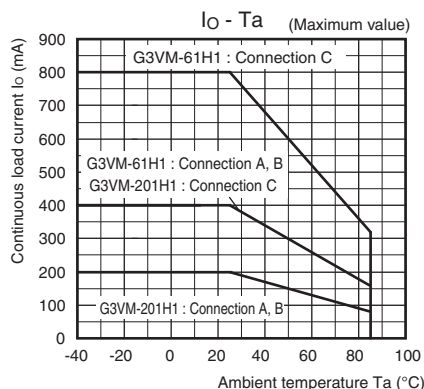


### Continuous load current vs. On-state voltage

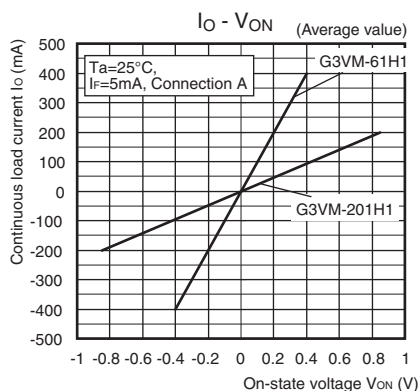


### G3VM-351H/353H/401H

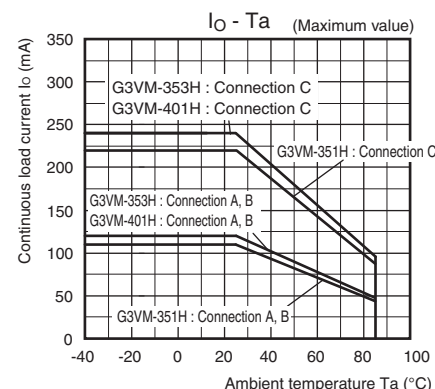

### G3VM-351H/353H/401H

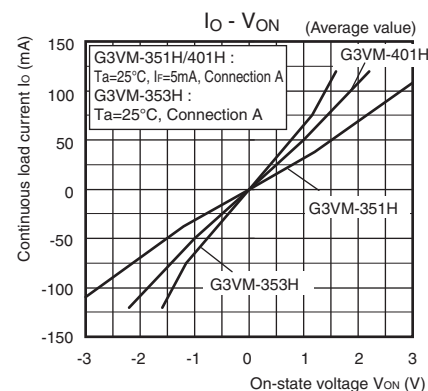

### Trigger LED forward current vs. Ambient temperature

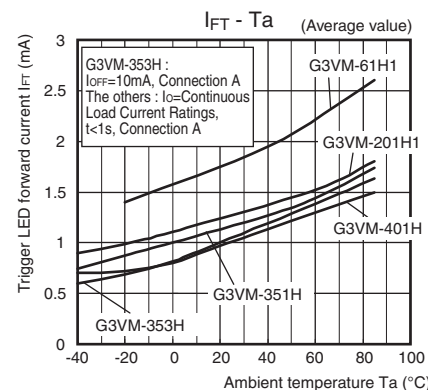


SOP


G3VM-□H□

## Engineering Data


### ● Turn ON, Turn OFF time vs. LED forward current G3VM-61H1/201H1

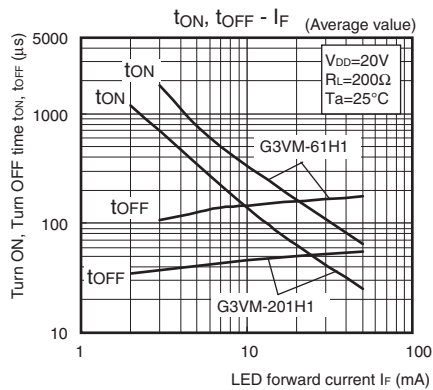


### G3VM-351H/353H/401H

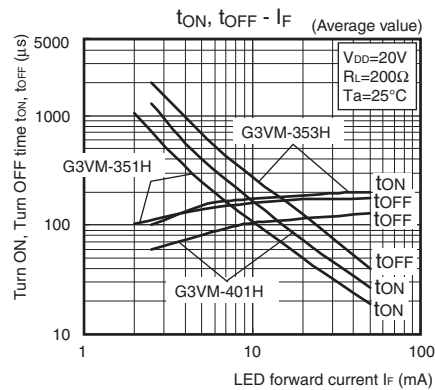


### ● Turn ON, Turn OFF time vs. Ambient temperature G3VM-61H1/201H1

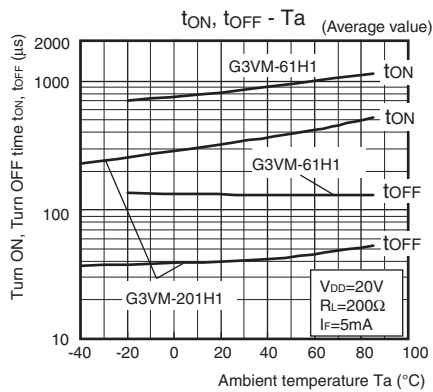

### G3VM-351H/353H/401H

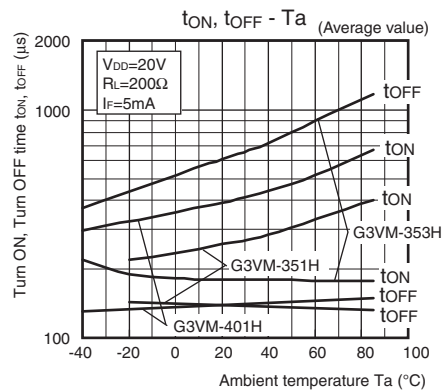

### ● Current leakage vs. Ambient temperature

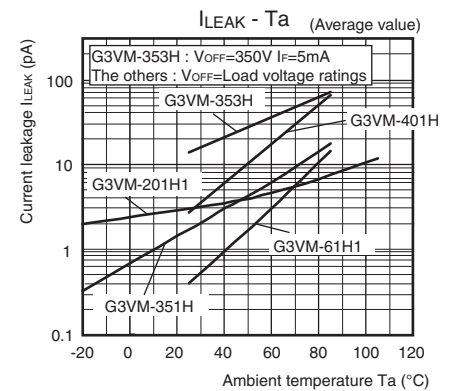


■Appearance / Terminal Arrangement / Internal Connections

●Appearance

SOP (Small Outline Package)


SOP 6-pin

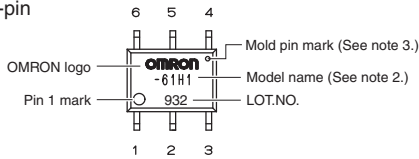


- Note: 1.** The actual product is marked differently from the image shown here.  
**Note: 2.** “G3VM” does not appear in the model number on the Relay.  
**Note: 3.** The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

●Terminal Arrangement/Internal Connections (Top View)


G3VM-61H1/201H1/351H/401H



G3VM-353H




■Dimensions (Unit: mm)




Surface-mounting Terminals

Weight: 0.13 g

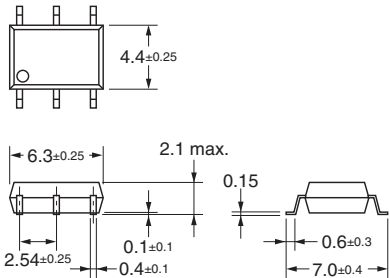


Actual Mounting Pad Dimensions

(Recommended Value, Top View)



**Note:** The actual product is marked differently from the image shown here.

■Approved Standards

UL recognized 

Model	Approved Standards	Contact form	File No.
G3VM-61H1 G3VM-201H1 G3VM-351H	UL (recognized)	1a (SPST-NO)	E80555
G3VM-353H		1b (SPST-NC)	
G3VM-401H		1a (SPST-NO)	

Models Certified by SEMKO for EN/IEC Standards

Model	Approved Standards	Contact form	File No.
G3VM-401H	EN62368-1 (SEMKO certified)	1a (SPST-NO)	SE-S-2001018

■Safety Precautions

Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.

SOP

G3VM-□H□

SOP

G3VM-□H□

Please check each region's Terms & Conditions by region website.

OMRON Corporation  
Electronic and Mechanical Components Company

Regional Contact	
Americas <a href="https://www.components.omron.com/">https://www.components.omron.com/</a>	Europe <a href="http://components.omron.eu/">http://components.omron.eu/</a>
Asia-Pacific <a href="https://ecb.omron.com.sg/">https://ecb.omron.com.sg/</a>	China <a href="https://www.ecb.omron.com.cn/">https://www.ecb.omron.com.cn/</a>
Korea <a href="https://www.omron-ecb.co.kr/">https://www.omron-ecb.co.kr/</a>	Japan <a href="https://www.omron.co.jp/ecb/">https://www.omron.co.jp/ecb/</a>