

**MULTIPLE RS-232 DRIVERS AND RECEIVERS****AZ75232****Pin Configuration**

M/GS/G Package
(SOIC-20/SSOP-20/TSSOP-20)

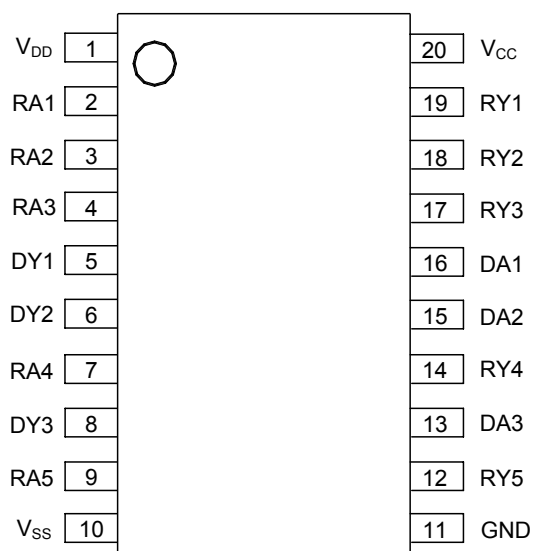


Figure 2. Pin Configuration of AZ75232 (Top View)

Pin Description

Pin Number	Pin Name	Function	Pin Number	Pin Name	Function
1	V _{DD}	Positive Supply Voltage for Driver	11	GND	Ground
2	RA1	Receiver Input	12	RY5	Receiver Output
3	RA2	Receiver Input	13	DA3	Driver Input
4	RA3	Receiver Input	14	RY4	Receiver Output
5	DY1	Driver Output	15	DA2	Driver Input
6	DY2	Driver Output	16	DA1	Driver Input
7	RA4	Receiver Input	17	RY3	Receiver Output
8	DY3	Driver Output	18	RY2	Receiver Output
9	RA5	Receiver Input	19	RY1	Receiver Output
10	V _{SS}	Negative Supply Voltage for Driver	20	V _{CC}	Supply Voltage for Receiver

MULTIPLE RS-232 DRIVERS AND RECEIVERS

AZ75232

Functional Block Diagram


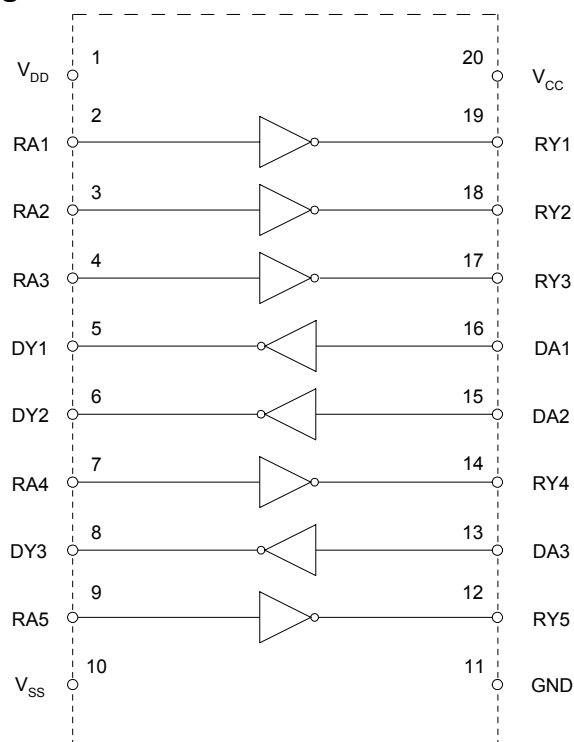


Figure 3. Functional Block Diagram of AZ75232

Ordering Information

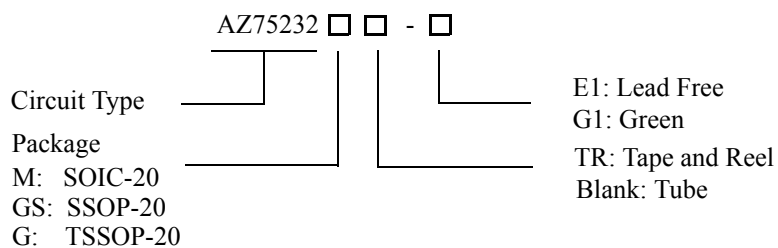

Package	Temperature Range	Part Number		Marking ID		Packing Type
		Lead Free	Green	Lead Free	Green	
SOIC-20	-40 to 85°C	AZ75232M-E1	AZ75232M-G1	AZ75232M-E1	AZ75232M-G1	Tube
		AZ75232MTR-E1	AZ75232MTR-G1	AZ75232M-E1	AZ75232M-G1	Tape & Reel
SSOP-20	-40 to 85°C	AZ75232GS-E1	AZ75232GS-G1	AZ75232GS-E1	AZ75232GS-G1	Tube
		AZ75232GSTR-E1	AZ75232GSTR-G1	AZ75232GS-E1	AZ75232GS-G1	Tape & Reel
TSSOP-20	-40 to 85°C	AZ75232G-E1	AZ75232G-G1	232GE	232GG	Tube
		AZ75232GTR-E1	AZ75232GTR-G1	232GE	232GG	Tape & Reel

BCD Semiconductor's Pb-free products, as designated with "E1" suffix in the part number, are RoHS compliant. Products with "G1" suffix are available in green packages.


MULTIPLE RS-232 DRIVERS AND RECEIVERS
AZ75232
Absolute Maximum Ratings (Note 1)

Parameter	Symbol	Value		Unit
Supply Voltage	V _{DD}	15		V
	V _{SS}	-15		
	V _{CC}	7		
Input Voltage Range	V _I	Driver	-15 to 7	V
		Receiver	-30 to 30	
Power Dissipation (T _A =25°C)	P _D	SOIC-20	1340	mW
		SSOP-20	1210	
		TSSOP-20	1100	
Driver Output Voltage Range	V _O	-15 to 15		V
Receiver Low-Level Output Current	I _{OL}	20		mA
Operating Junction Temperature	T _J	150		°C
Storage Temperature Range	T _{STG}	-65 to 150		°C
Lead Temperature (Soldering, 10sec)	T _{LEAD}	260		°C

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Recommended Operating Conditions

Parameter		Symbol	Min	Max	Unit
Supply Voltage		V_{DD}	7.5	15	V
		V_{SS}	-15	-7.5	
		V_{CC}	4.5	5.5	
High-Level Input Voltage (Driver Only)		V_{IH}	1.9		V
Low-Level Input Voltage (Driver Only)		V_{IL}		0.8	V
High-Level Output Current	Driver	I_{OH}		-6	mA
	Receiver			-0.5	
Low-Level Output Current	Driver	I_{OL}		6	mA
	Receiver			16	
Operating Temperature Range		T_A	-40	85	$^{\circ}\text{C}$

**MULTIPLE RS-232 DRIVERS AND RECEIVERS****AZ75232****Electrical Characteristics**(T_A=25°C, unless otherwise specified.)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
VOLTAGE SUPPLY SECTION (V_{CC}=5V, V_{DD}=9V, V_{SS}=-9V, unless otherwise specified)						
Supply Current from V _{DD}	I _{DD}	All inputs at 1.9V, no load	V _{DD} =9V, V _{SS} =-9V		15	mA
			V _{DD} =12V, V _{SS} =-12V		19	
			V _{DD} =15V, V _{SS} =-15V		25	
		All inputs at 0.8V, no load	V _{DD} =9V, V _{SS} =-9V		4.5	
			V _{DD} =12V, V _{SS} =-12V		5.5	
			V _{DD} =15V, V _{SS} =-15V		9	
Supply Current from V _{SS}	I _{SS}	All inputs at 1.9V, no load	V _{DD} =9V, V _{SS} =-9V		-15	mA
			V _{DD} =12V, V _{SS} =-12V		-19	
			V _{DD} =15V, V _{SS} =-15V		-25	
		All inputs at 0.8V, no load	V _{DD} =9V, V _{SS} =-9V		-3.2	
			V _{DD} =12V, V _{SS} =-12V		-3.2	
			V _{DD} =15V, V _{SS} =-15V		-3.2	
Supply Current from V _{CC}	I _{CC}	All inputs at 5V, no load, V _{CC} =5V			30	mA
DRIVER SECTION (V_{CC}=5V, V_{DD}=9V, V_{SS}=-9V, unless otherwise specified)						
High-Level Output Voltage	V _{OH}	V _{IL} =0.8V, R _L =3kΩ	6	7.5		V
Low-Level Output Voltage	V _{OL}	V _{IH} =1.9V, R _L =3kΩ		-7.5	-6	V
High-Level Input Current	I _{IH}	V _I =5V			10	μA
Low-Level Input Current	I _{IL}	V _I =0V			-1.6	mA
High-Level Short-Circuit Output Current	I _{OS(H)}	V _{IL} =0.8V, V _O =0V	-4.5	-12	-19.5	mA
Low-Level Short-Circuit Output Current	I _{OS(L)}	V _{IH} =2V, V _O =0V	4.5	12	19.5	mA
Output Resistance	r _O	V _{CC} =V _{DD} =V _{SS} =0, V _O =-2V to 2V	300			Ω
DRIVER SECTION (V_{CC}=5V, V_{DD}=12V, V_{SS}=-12V, unless otherwise specified)						
Propagation Delay Time Low to High Level Output	t _{PLH}	R _L =3kΩ to 7kΩ, C _L =15pF		315	500	ns
Propagation Delay Time High to Low Level Output	t _{PHL}	R _L =3kΩ to 7kΩ, C _L =15pF		75	175	ns
Transition Time Low to High Level Output	t _{TLH}	R _L =3kΩ to 7kΩ	C _L =15pF	60	100	ns
			C _L =2500pF (Note 2)	1.7	2.5	μs
Transition Time High to Low Level Output	t _{THL}	R _L =3kΩ to 7kΩ	C _L =15pF	40	75	ns
			C _L =2500pF (Note 2)	1.5	2.5	μs



MULTIPLE RS-232 DRIVERS AND RECEIVERS

AZ75232

Electrical Characteristics (Continued)

($T_A=25^{\circ}\text{C}$, unless otherwise specified.)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
RECEIVER SECTION ($V_{CC}=5\text{V}$, $V_{DD}=9\text{V}$, $V_{SS}=-9\text{V}$, unless otherwise specified)						
Positive-Going Input Threshold Voltage	V_{IT+}		1.75	1.9	2.3	V
		$T_A = -40 \text{ to } 85^{\circ}\text{C}$	1.55		2.3	V
Negative-Going Input Threshold Voltage	V_{IT-}		0.75	0.97	1.25	V
Input Hysteresis Voltage	V_{HYS}		0.5			V
High-Level Output Voltage	V_{OH}	$I_{OH}=-0.5\text{mA}$				V
		$V_{IH}=0.75\text{V}$ Input Open	2.6 2.6	4	5	
Low-Level Output Voltage	V_{OL}	$I_{OL}=10\text{mA}$, $V_I=3\text{V}$		0.2	0.45	V
High-Level Input Current	I_{IH}	$V_I=25\text{V}$	3.6		8.3	mA
		$V_I=3\text{V}$	0.43			
Low-Level Input Current	I_{IL}	$V_I=-25\text{V}$	-3.6		-8.3	mA
		$V_I=-3\text{V}$	-0.43			
Short-Circuit Output Current	I_{OS}	$V_I=0.8\text{V}$		-3.4	-12	mA
RECEIVER SECTION ($V_{CC}=5\text{V}$, $V_{DD}=12\text{V}$, $V_{SS}=-12\text{V}$, unless otherwise specified)						
Propagation Delay Time Low to High Level Output	t_{PLH}	$R_L=5\text{k}\Omega$, $C_L=50\text{pF}$		105	250	ns
		$R_L=1.5\text{k}\Omega$, $C_L=15\text{pF}$		100	160	
Propagation Delay Time High to Low Level Output	t_{PHL}	$R_L=5\text{k}\Omega$, $C_L=50\text{pF}$		60	150	ns
		$R_L=1.5\text{k}\Omega$, $C_L=15\text{pF}$		42	100	
Transition Time Low to High Level Output	t_{TLH}	$R_L=5\text{k}\Omega$, $C_L=50\text{pF}$		170	350	ns
		$R_L=1.5\text{k}\Omega$, $C_L=15\text{pF}$		90	175	
Transition Time High to Low Level Output	t_{THL}	$R_L=5\text{k}\Omega$, $C_L=50\text{pF}$		16	60	ns
		$R_L=1.5\text{k}\Omega$, $C_L=15\text{pF}$		15	50	

Note 2: Measured between -3V and 3V points of the output waveform (EIA/TIA-232-F conditions); all unused inputs are tied either high or low.

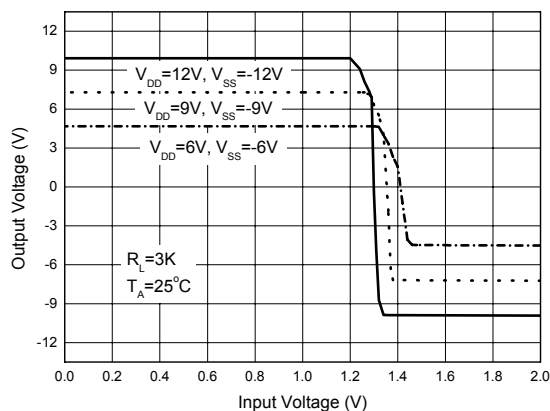
**MULTIPLE RS-232 DRIVERS AND RECEIVERS****AZ75232****Typical Performance Characteristics****Driver Section**

Figure 4. Voltage Transfer Characteristics

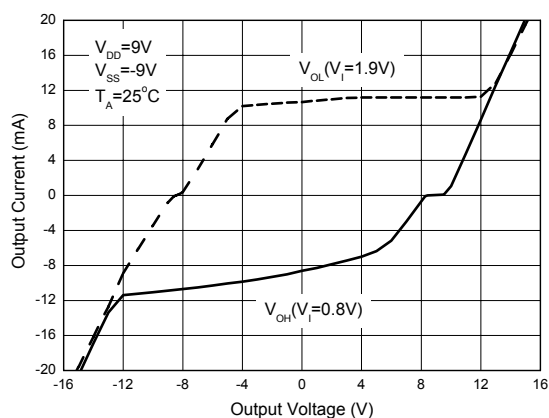


Figure 5. Output Current vs. Output Voltage

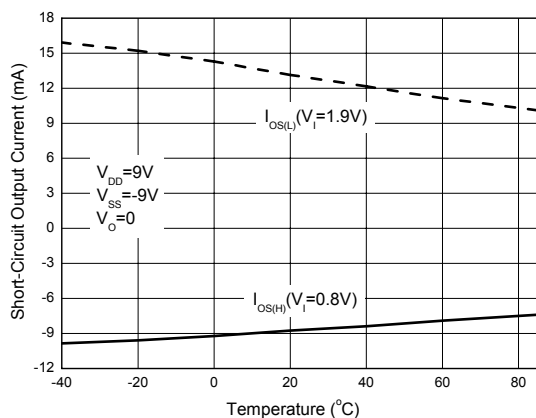


Figure 6. Short-Circuit Output Current vs. Temperature

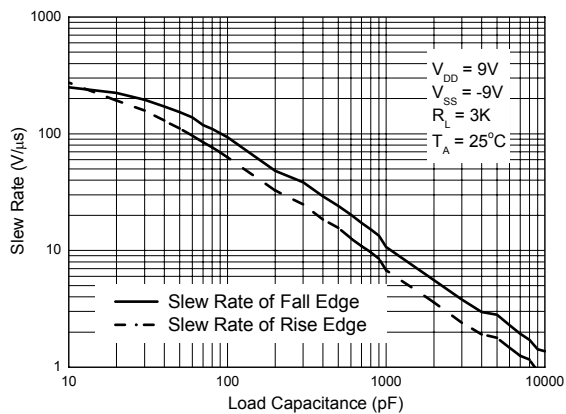


Figure 7. Slew Rate vs. Load Capacitance



Typical Performance Characteristics (Continued)

Receiver Section

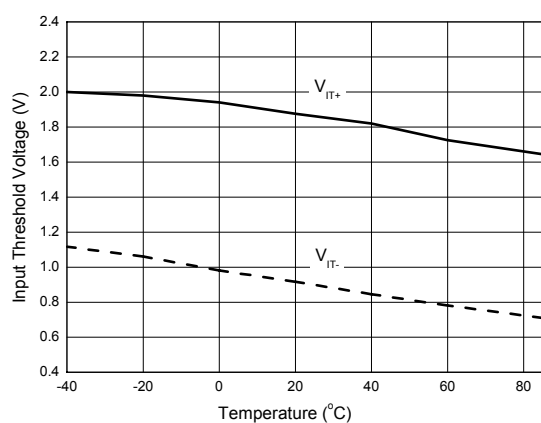


Figure 8. Input Threshold Voltage vs. Temperature

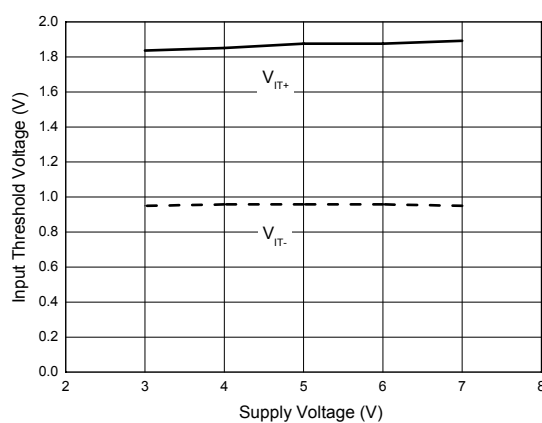


Figure 9. Input Threshold Voltage vs. Supply Voltage

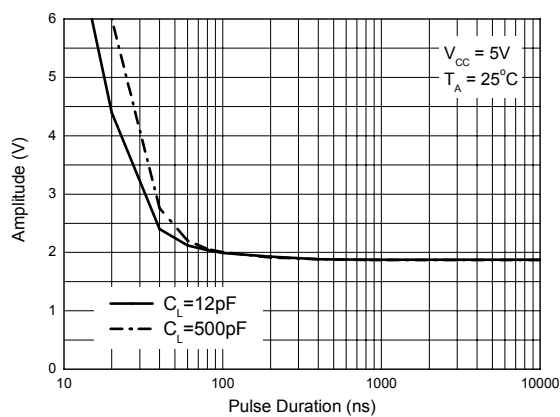


Figure 10. Noise Rejection

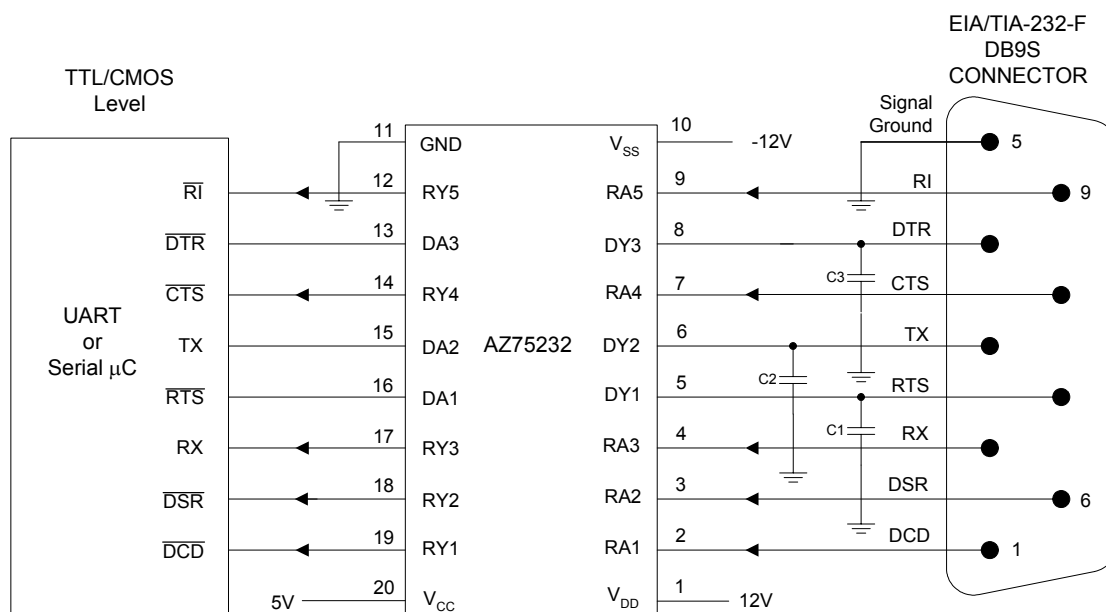
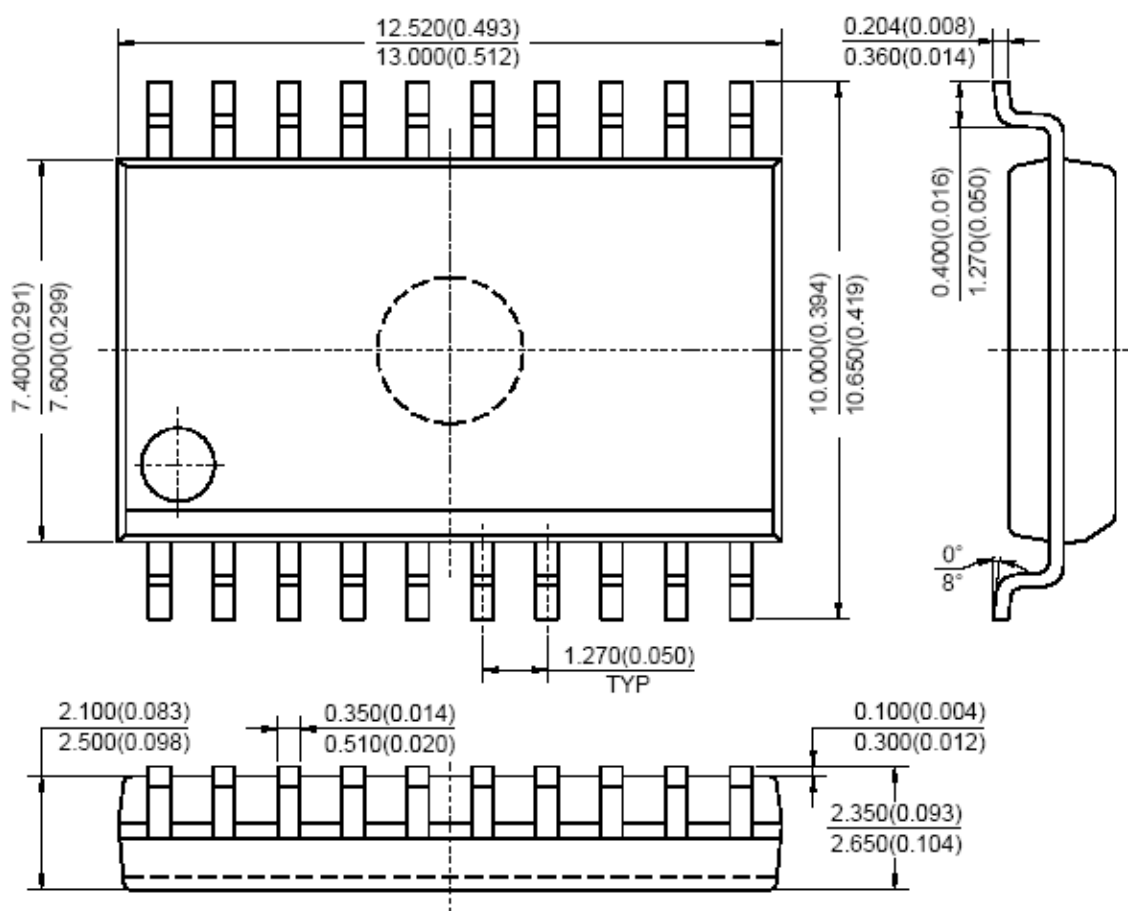
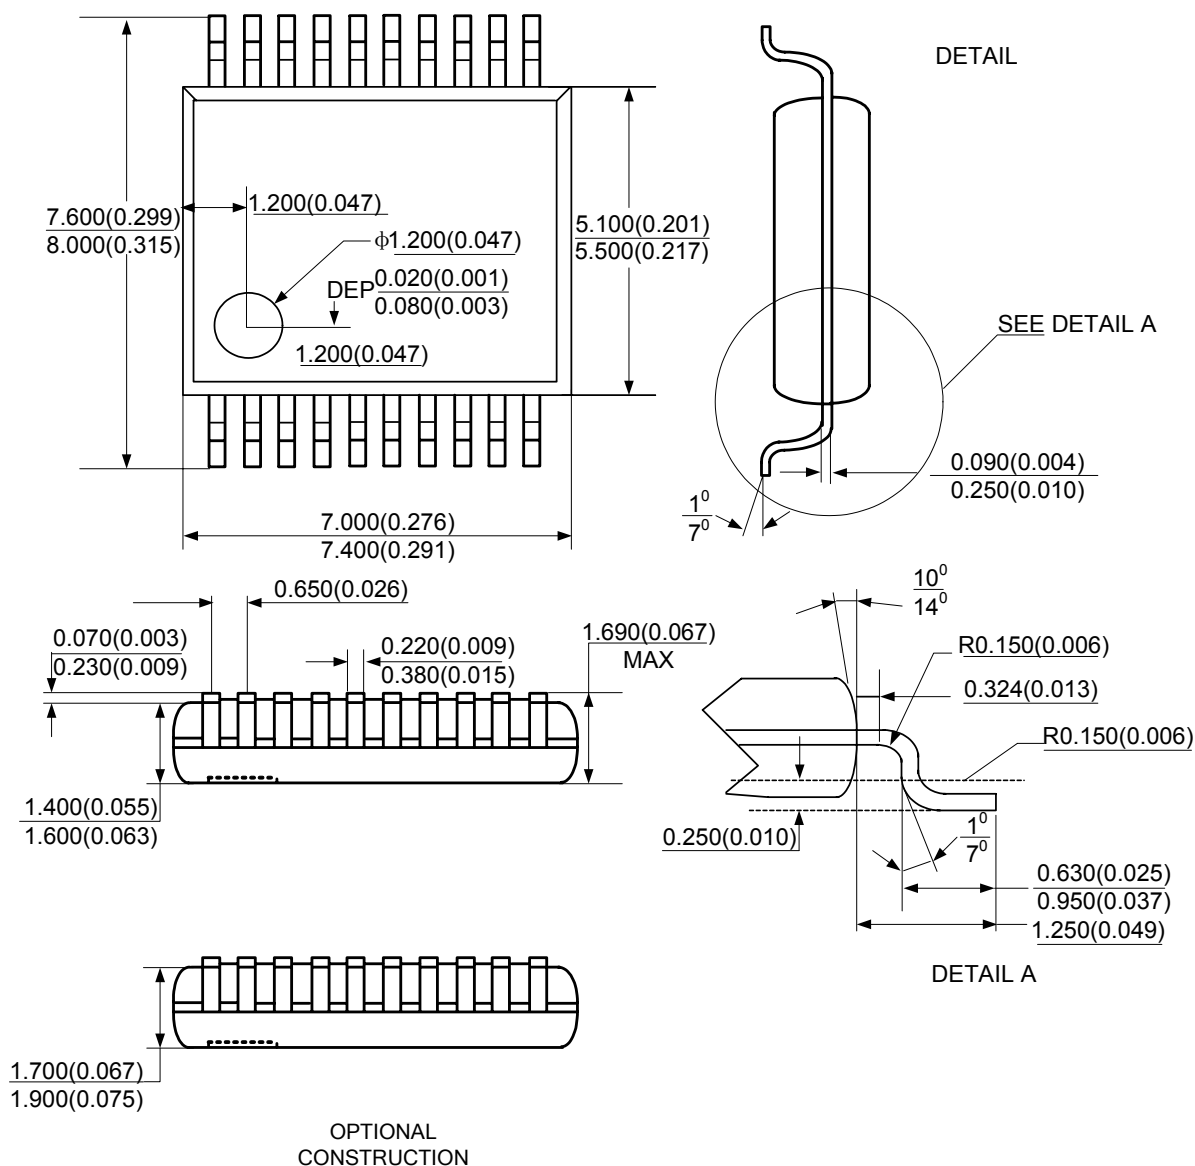
**MULTIPLE RS-232 DRIVERS AND RECEIVERS****AZ75232****Typical Application**


Figure 11. Typical Application of AZ75232

**MULTIPLE RS-232 DRIVERS AND RECEIVERS****AZ75232****Mechanical Dimensions****SOIC-20****Unit: mm(inch)**

Note: Eject hole, oriented hole and mold mark is optional.

**MULTIPLE RS-232 DRIVERS AND RECEIVERS****AZ75232****Mechanical Dimensions (Continued)****SSOP-20****Unit: mm(inch)**

Note: Eject hole, oriented hole and mold mark is optional

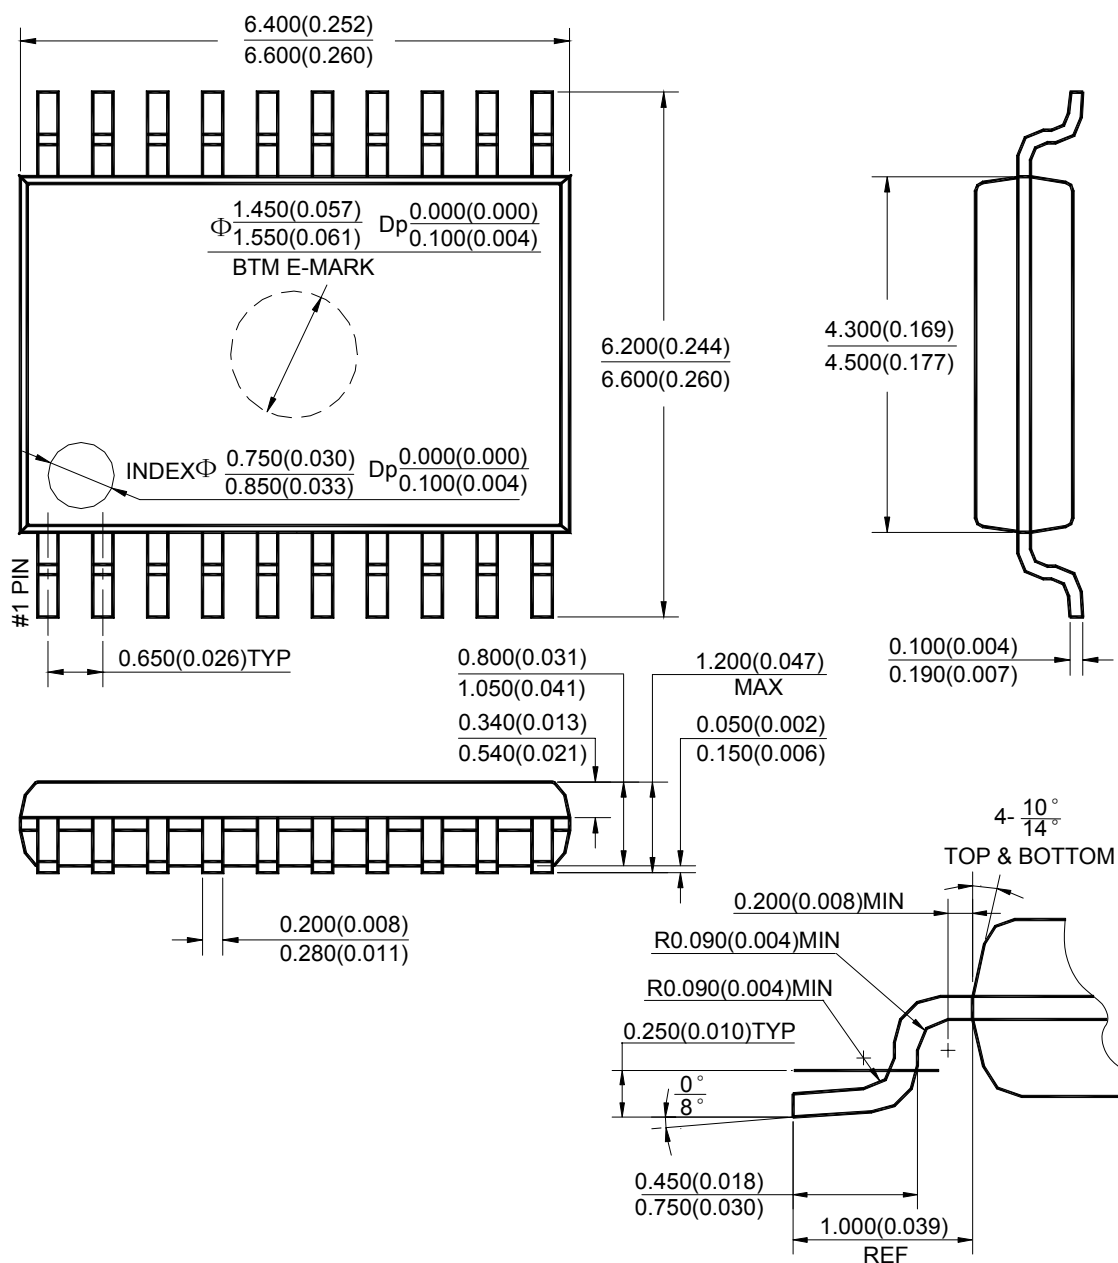**MULTIPLE RS-232 DRIVERS AND RECEIVERS****AZ75232****Mechanical Dimensions****TSSOP-20****Unit: mm(inch)**

Note: Eject hole, oriented hole and mold mark is optional.



BCD Semiconductor Manufacturing Limited

<http://www.bcdsemi.com>

IMPORTANT NOTICE

BCD Semiconductor Manufacturing Limited reserves the right to make changes without further notice to any products or specifications herein. BCD Semiconductor Manufacturing Limited does not assume any responsibility for use of any its products for any particular purpose, nor does BCD Semiconductor Manufacturing Limited assume any liability arising out of the application or use of any its products or circuits. BCD Semiconductor Manufacturing Limited does not convey any license under its patent rights or other rights nor the rights of others.

MAIN SITE

- Headquarters

BCD Semiconductor Manufacturing Limited

No. 1600, Zi Xing Road, Shanghai ZiZhu Science-based Industrial Park, 200241, China
Tel: +86-21-24162266, Fax: +86-21-24162277

- Wafer Fab

Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd.

800 Yi Shan Road, Shanghai 200233, China
Tel: +86-21-6485 1491, Fax: +86-21-5450 0008

REGIONAL SALES OFFICE

Shenzhen Office

Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd., Shenzhen Office

Unit A Room 1203, Skyworth Bldg., Gaoxin Ave. I.S., Nanshan District, Shenzhen, China
Tel: +86-755-8826 7951
Fax: +86-755-8826 7865

Taiwan Office

BCD Semiconductor (Taiwan) Company Limited

4F, 298-1, Rui Guang Road, Nei-Hu District, Taipei, Taiwan
Tel: +886-2-2656 2808
Fax: +886-2-2656 2806

USA Office

BCD Semiconductor Corp.

30920 Huntwood Ave. Hayward, CA 94544, USA
Tel : +1-510-324-2988
Fax: +1-510-324-2788